


HAMPSHIRE COUNTY LANDFILL

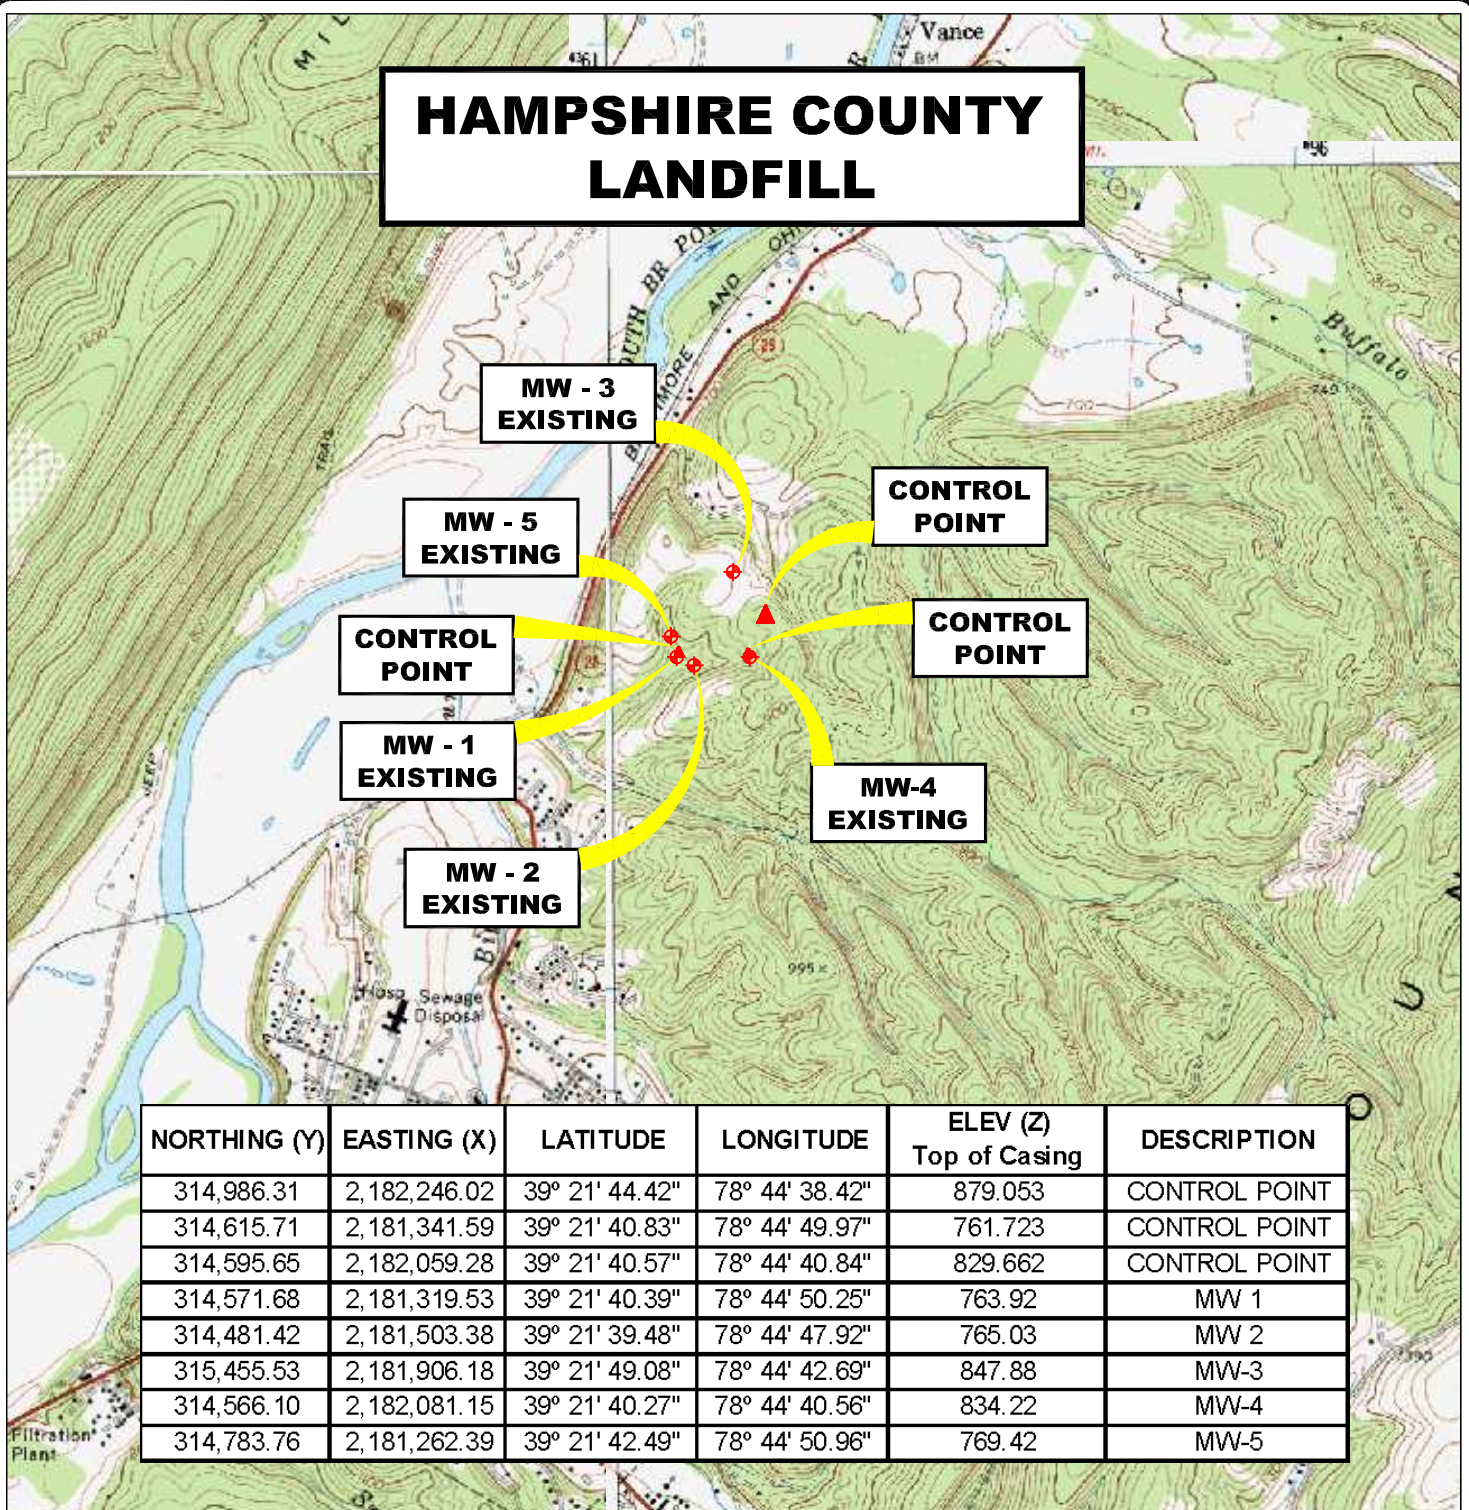

NORTHING (Y)	EASTING (X)	LATITUDE	LONGITUDE	ELEV (Z) Top of Casing	DESCRIPTION
314,986.31	2,182,246.02	39° 21' 44.42"	78° 44' 38.42"	879.053	CONTROL POINT
314,615.71	2,181,341.59	39° 21' 40.83"	78° 44' 49.97"	761.723	CONTROL POINT
314,595.65	2,182,059.28	39° 21' 40.57"	78° 44' 40.84"	829.662	CONTROL POINT
314,571.68	2,181,319.53	39° 21' 40.39"	78° 44' 50.25"	763.92	MW 1
314,481.42	2,181,503.38	39° 21' 39.48"	78° 44' 47.92"	765.03	MW 2
315,455.53	2,181,906.18	39° 21' 49.08"	78° 44' 42.69"	847.88	MW-3
314,566.10	2,182,081.15	39° 21' 40.27"	78° 44' 40.56"	834.22	MW-4
314,783.76	2,181,262.39	39° 21' 42.49"	78° 44' 50.96"	769.42	MW-5

LOCATION MAP

AUGUSTA 7.5' U.S.G.S. QUADRANGLE

0' 2,000' 4,000' 6,000'



SCALE: 1 INCH = 2,000 FEET



Stantec Consulting Services Inc.

1 Moore Avenue
Buckhannon WV 26201
Tel. 304.472.7140
Fax. 304.472.6239
www.stantec.com

PROJECT NO.	173611044
SURVEYED BY:	JB
DRAWN BY:	JMS
CHECKED BY:	DEM
APPROVED BY:	JHL
DATE:	APRIL 2010

NOTE:
HORIZONTAL DATUM:
WEST VIRGINIA STATE PLANE COORDINATES
NAD 83 NORTH ZONE (CORS 96).

VERTICAL DATUM : NAVD 88 GEOID 09 (CONUS)

COORDINATE UNITS : US SURVEY FOOT
DISTANCE UNITS : US SURVEY FOOT
HEIGHT UNITS : US SURVEY FOOT

SHT. NO.
1
TOTAL
2