



625 Liberty Ave, Suite 1700  
Pittsburgh PA 15222  
www.eqt.com

TEL: (412) 395-3699

FAX: (412) 395-2156

Alex Bosiljevac  
Environmental Coordinator

April 26, 2016

**CERTIFIED MAIL # 7015 1660 0000 9399 6116**

Mr. William F. Durham, Director  
West Virginia Department of Environmental Protection  
Division of Air Quality  
601 57<sup>th</sup> Street, SE  
Charleston, West Virginia, 25304

**RE: G70B Permit Application  
EQT Production Company  
WEU-2 Natural Gas Production Site  
Facility ID No. 017-00050**

Dear Mr. Durham,

Enclosed are two electronic copies and one original hard copy of a proposed application for a G70-B General Air Permit for the WEU-2 Natural Gas Production Well Site. The site currently operates under a G70-A General Air Permit (G70-A170). Please note that this application satisfies a requirement in Consent Order CO-R13-E-2016-04, in which EQT Production Company is required to submit an application with the equipment specified in the consent order. A legal advertisement will be published in the next few days and proof of publication will be forwarded as soon as it is received. Please contact me for payment of the application fee by credit card.

If you have any questions concerning this permit application, please contact me at (412) 395-3699 or by email at [abosiljevac@eqt.com](mailto:abosiljevac@eqt.com).

Sincerely,

A handwritten signature in blue ink, appearing to read 'RAB' with a large flourish extending from the end.

Alex Bosiljevac  
EQT Corporation

Enclosures



## PROJECT REPORT

**EQT Production  
WEU-2 Pad**

### G70-B Permit Application



**Where energy meets innovation.**

TRINITY CONSULTANTS  
4500 Brooktree Drive  
Suite 103  
Wexford, PA 15090  
(724) 935-2611

March 2016



*Environmental solutions delivered uncommonly well*

# TABLE OF CONTENTS

<b>1. INTRODUCTION</b>	<b>4</b>
<b>1.1. FACILITY AND PROJECT DESCRIPTION</b>	<b>4</b>
<b>1.2. SOURCE STATUS</b>	<b>5</b>
<b>1.3. G70-B APPLICATION ORGANIZATION</b>	<b>5</b>
<b>2. SAMPLE EMISSION SOURCE CALCULATIONS</b>	<b>6</b>
<b>3. REGULATORY DISCUSSION</b>	<b>8</b>
<b>3.1. Prevention of Significant Deterioration Source Classification</b>	<b>8</b>
<b>3.2. Title V Operating Permit Program</b>	<b>8</b>
<b>3.3. New Source Performance Standards</b>	<b>8</b>
3.3.1. NSPS Subparts D, Da, Db, and Dc – Steam Generating Units	9
3.3.2. NSPS Subparts K, Ka, and Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids	9
3.3.3. NSPS Subpart JJJJ – Stationary Spark Ignition Internal Combustion Engines	9
3.3.4. NSPS Subpart OOOO - Crude Oil and Natural Gas Production, Transmission, and Distribution	9
3.3.5. NSPS Subpart OOOOa—Crude Oil and Natural Gas Facilities	10
3.3.6. Non-Applicability of All Other NSPS	11
<b>3.4. National Emission Standards for Hazardous Air Pollutants</b>	<b>11</b>
3.4.1. 40 CFR 63 Subpart HH – Oil and Natural Gas Production Facilities	11
3.4.2. 40 CFR 63 Subpart ZZZZ – Stationary Reciprocating Internal Engines	11
3.4.3. 40 CFR 63 Subpart JJJJJ – Industrial, Commercial, and Institutional Boilers	11
<b>3.5. West Virginia SIP Regulations</b>	<b>12</b>
3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers	12
3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor	12
3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse	12
3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources	12
3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter	12
3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks	13
3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants	13
3.5.8. Non-Applicability of Other SIP Rules	13
<b>4. G70-B APPLICATION FORMS</b>	<b>14</b>
<b>ATTACHMENT A: SINGLE SOURCE DETERMINATION</b>	
<b>ATTACHMENT B: SITING CRITERIA WAIVER (NOT APPLICABLE)</b>	
<b>ATTACHMENT C: BUSINESS CERTIFICATE</b>	
<b>ATTACHMENT D: PROCESS FLOW DIAGRAM</b>	

ATTACHMENT E: PROCESS DESCRIPTION  
ATTACHMENT F: PLOT PLAN  
ATTACHMENT G: AREA MAP  
ATTACHMENT H: APPLICABILITY FORM  
ATTACHMENT I: EMISSION UNITS TABLE  
ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET  
ATTACHMENT K: GAS WELL DATA SHEET  
ATTACHMENT L: STORAGE VESSEL DATA SHEET  
ATTACHMENT M: HEATERS DATA SHEET  
ATTACHMENT N: ENGINES DATA SHEET  
ATTACHMENT O: TRUCK LOADING DATA SHEET  
ATTACHMENT P: GLYCOL DEHYDRATOR DATA SHEET (NOT APPLICABLE)  
ATTACHMENT Q: PNEUMATIC CONTROLLER DATA SHEET (NOT APPLICABLE)  
ATTACHMENT R: AIR POLLUTION CONTROL DEVICE DATA SHEET  
ATTACHMENT S: EMISSION CALCULATIONS  
ATTACHMENT T: EMISSION SUMMARY SHEET  
ATTACHMENT U: CLASS I LEGAL ADVERTISEMENT  
ATTACHMENT V: GENERAL PERMIT REGISTRATION APPLICATION FEE

# 1. INTRODUCTION

EQT Production Company (EQT) is submitting this Class II General Permit (G70-B) application to the West Virginia Department of Environmental Protection (WVDEP) for the construction and operation of new equipment at an existing natural gas production well pad, WEU-2, located in Doddridge County, West Virginia. The WEU-2 pad is currently operating under G70-A permit number G70-A170.

## 1.1. FACILITY AND PROJECT DESCRIPTION

The WEU-2 pad is a natural gas production facility that consists of eleven (11) natural gas wells. Natural gas and liquids (including water and condensate) are extracted from deposits underneath the surface. Natural gas is transported from the well to a gas line for additional processing and compression, as necessary. The liquids produced are stored in storage vessels.

The WEU-2 pad currently consists of the following equipment:

- > Twelve (12) 400 barrel (bbl) storage tanks for condensate/water (produced fluids) controlled by two (2) existing combustors rated at 11.66 MMBtu/hr each;
- > One (1) 140 bbl storage tank for sand and produced fluids from the sand separator (vapors from this tank may be controlled by combustors but are not represented as controlled in this application);
- > Five (5) line heaters rated at 1.54 MMBtu/hr (heat input);
- > Five (5) line heaters rated at 0.77 MMBtu/hr (heat input);
- > One (1) line heater rated at 1.15 MMBtu/hr (heat input);
- > Three (3) thermoelectric generators (TEGs), each rated at 0.013 MMBtu/hr (heat input);
- > Produced fluid truck loading; and
- > Associated piping and components.

This application seeks to permit the following equipment at the WEU-2 pad:

- > One low pressure separator and associated 1.15 MMbtu/hr line heater; and
- > One vapor recovery unit (VRU) powered by a natural gas fired 110 horsepower (hp) engine.

A process flow diagram is included as Attachment D. A comparison of the potential emissions of the proposed and existing equipment at the wellpad in comparison with G70-B emission limits is provided in Table 1. Facility emissions are well below the permit limits. Note that in accordance with condition 1.1.1. of the G70-B permit, fugitive emissions are not considered in determining eligibility of the permit for non-HAP pollutants.

**Table 1 - Comparison of Wellpad Potential Emissions to G70-B Permit Emission Limits**

<b>Pollutant</b>	<b>Wellpad Potential Annual Emissions (tpy)</b>	<b>G70-B Maximum Annual Emission Limits (tpy)</b>
Nitrogen Oxides	16.91	50
Carbon Monoxide	15.44	80
Volatile Organic Compounds	13.35	80
Particulate Matter – 10/2.5	1.27	20
Sulfur Dioxide	0.10	20
Highest Single HAP (n-hexane) <sup>1</sup>	1.76	8
Total HAPs <sup>1</sup>	2.88	20

<sup>1</sup> Emissions include fugitives.

## 1.2. SOURCE STATUS

WVDEP must make stationary source determinations on a case-by-case basis using the guidance under the Clean Air Act (CAA) and EPA's and WVDEP's implementing regulations. The definition of stationary source in 40 CFR 51.166(b) includes the following:

*“(6) Building, structure, facility, or installation means all of the pollutant emitting activities which belong to the same industrial grouping, are located on or more contiguous or adjacent properties, and are under control of the same person (or persons under common control).”*

Other additional pollutant emitting facilities should be aggregated with the WEU-2 Pad for air permitting purposes if, and only if, all three elements of the “stationary source” definition above are fulfilled.

WVDEP determined that the WEU-2 pad is a separate stationary source when the current permit was issued. There are no Marcellus facilities within a quarter-mile radius of the WEU-2 Pad. The nearest wellpad, WEU-1, is located approximately 3,200 feet southwest of WEU-2. Therefore, the WEU-2 pad should continue to be considered a separate stationary source with respect to permitting programs, including Title V and Prevention of Significant Deterioration (PSD). As discussed in this application, the facility is a minor source of air emissions with respect to New Source Review (NSR) and Title V permitting.

## 1.3. G70-B APPLICATION ORGANIZATION

This West Virginia Code of State Regulations, Title 45 (CSR) Series 13 (45 CSR 13) G70-B permit application is organized as follows:

- > Section 2: Sample Emission Source Calculations;
- > Section 3: Regulatory Discussion;
- > Section 4: G70-B Application Form;
- > Attachment A: Single Source Determination;
- > Attachment B: Siting Criteria Waiver **(Not Applicable)**;
- > Attachment C: Business Certificate;
- > Attachment D: Process Flow Diagram;
- > Attachment E: Process Description;
- > Attachment F: Plot Plan;
- > Attachment G: Area Map;
- > Attachment H: Applicability Form;
- > Attachment I: Emission Units Table;
- > Attachment J: Fugitive Emissions Summary Sheet;
- > Attachment K: Gas Well Data Sheet;
- > Attachment L: Storage Vessel Data Sheet;
- > Attachment M: Heaters Data Sheet;
- > Attachment N: Engines Data Sheet;
- > Attachment O: Truck Loading Data Sheet;
- > Attachment P: Glycol Dehydrator Data Sheet **(Not Applicable)**;
- > Attachment Q: Pneumatic Controller Data Sheet **(Not Applicable)**;
- > Attachment R: Air Pollution Control Device Data Sheet;
- > Attachment S: Emission Calculations;
- > Attachment T: Emission Summary Sheet;
- > Attachment U: Class I Legal Advertisement; and
- > Attachment V: General Permit Registration Application Fee.

## 2. SAMPLE EMISSION SOURCE CALCULATIONS

The characteristics of air emissions from the natural gas production operations, along with the methodology for calculating emissions, are briefly described in this section of the application. Detailed emission calculations are presented in Attachment S of this application.

Emissions from this project will result from natural gas combustion in the line heaters, combustors and TEGs, as well as storage of organic liquids in storage tanks and loading of organic liquids into tank trucks. In addition, fugitive emissions will result from component leaks from the operation of the station. The methods by which emissions from each of these source types, as well as the existing source types, are calculated are summarized below.

- > **Line Heaters, Enclosed Combustors and TEGs:** Potential emissions of criteria pollutants and hazardous air pollutants (HAPs) are calculated using U.S. EPA's AP-42 factors for natural gas external combustion.<sup>1</sup> These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.<sup>2</sup>
- > **VRU Engine:** Potential emissions of oxides of nitrogen (NO<sub>x</sub>), carbon monoxide (CO), and volatile organic compounds (VOC) are calculated using vendor emission factors. Remaining criteria pollutants and HAPs are calculated using U.S. EPA's AP-42 factors for natural gas fired engines.<sup>3</sup> These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.<sup>4</sup>
- > **Fugitive Equipment Leaks:** Emissions of VOC and HAPs from leaking equipment components have been estimated using facility estimated component counts and types along with emission factors from the *Protocol for Equipment Leak Emission Estimates, EPA 453/R-95-017, November 1995*. Emission factors used are based on average measured TOC from component types indicated. Greenhouse gas emissions from component leaks are calculated according to the procedures in 40 CFR 98 Subpart W.<sup>5</sup> Pneumatic devices at the wellpad are intermittent bleed and are assumed to be in operation 1/3 of the year.
- > **Storage Tanks:** Working, breathing and flashing emissions of VOC and HAPs from the storage tanks at the facility are calculated using Bryan Research & Engineering ProMax® Software. Controlled calculations assume an overall control efficiency (capture and destruction) of 95%. The throughput for the produced fluids tanks are based on the maximum annualized monthly condensate and produced water at the WEU-2 well pad (i.e., the maximum monthly throughput for the pad times 12), and includes a safety factor of ~13. Note that production data was based on the production of seven (7) wells, so throughput was scaled up based on the total numbers of wells at the pad. The composition for the analysis was from a sample taken at WEU-6. Emissions of VOC and HAPs from the sand separator tank are calculated using E&P TANK v2.0. The produced fluids throughput is calculated as follows:

$$\text{Throughput} \left( \frac{\text{bbl}}{\text{day}} \right) = \left( \text{Condensate Throughput} \left( \frac{\text{bbl}}{\text{month}} \right) + \left( \text{Produced Water Throughput} \left( \frac{\text{bbl}}{\text{month}} \right) \right) \right) * \frac{12 \left( \frac{\text{months}}{\text{year}} \right)}{365 \left( \frac{\text{days}}{\text{year}} \right)} * \frac{11 \text{ total wells}}{7 \text{ existing wells}} * 13$$

<sup>1</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 1.4, Natural Gas Combustion, Supplement D, July 1998.

<sup>2</sup> 40 CFR 98 Subpart C, *General Stationary Fuel combustion Sources*, Tables C-1 and C-2.

<sup>3</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 3.2, Natural Gas-fired Reciprocating Engines, Supplement D, August 2000.

<sup>4</sup> 40 CFR 98 Subpart C, *General Stationary Fuel combustion Sources*, Tables C-1 and C-2.

<sup>5</sup> 40 CFR 98 Subpart W, *Petroleum and Natural Gas Systems*, Section 98.233(r), *Population Count and Emission Factors*.

- > **Tank Truck Loading:** Uncontrolled emissions of VOC and HAPs from the loading of organic liquids from storage tanks to tank truck are calculated using Bryan Research Engineering ProMax® Software. Truck loading is controlled by the enclosed combustors. U.S. EPA's AP-42 Chapter 5 Section 2 factors were used for capture efficiency.<sup>6</sup>
- > **Haul Roads:** Fugitive dust emitted from facility roadways has been estimated using projected vehicle miles traveled along with U.S. EPA's AP-42 factors for unpaved haul roads.<sup>7</sup>

---

<sup>6</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 5.2, Transportation And Marketing Of Petroleum Liquids, June 2008.

<sup>7</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Section 13.2.2, Unpaved Roads, November 2006.



## 3. REGULATORY DISCUSSION

---

This section documents the applicability determinations made for Federal and State air quality regulations. In this section, applicability or non-applicability of the following regulatory programs is addressed:

- > Prevention of Significant Deterioration permitting;
- > Title V of the 1990 Clean Air Act Amendments;
- > New Source Performance Standards (NSPS);
- > National Emission Standards for Hazardous Air Pollutants (NESHAP); and
- > West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-B permit application forms.

In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the wellpad. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the wellpad. Regulations that are categorically non-applicable are not discussed (e.g., NSPS Subpart J, Standards of Performance for Petroleum Refineries).

### 3.1. PREVENTION OF SIGNIFICANT DETERIORATION SOURCE CLASSIFICATION

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration. PSD regulations apply when a major source makes a change, such as installing new equipment or modifying existing equipment, and a significant increase in emissions results from the change. The wellpad is not a major source with respect to the PSD program since its potential emissions are below all the PSD thresholds. As such, PSD permitting is not triggered by this construction activity. EQT will monitor future construction activities at the site closely and will compare any future increase in emissions with the PSD thresholds to ensure these activities will not trigger this program.

### 3.2. TITLE V OPERATING PERMIT PROGRAM

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in West Virginia CSR 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP and 100 tpy of all other regulated pollutants.<sup>8</sup> The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility after the proposed project. Therefore, the wellpad is not a major source for Title V purposes.

### 3.3. NEW SOURCE PERFORMANCE STANDARDS

New Source Performance Standards, located in 40 CFR 60, require new, modified, or reconstructed sources to control emissions to the level achievable by the best demonstrated technology as specified in the applicable provisions.

---

<sup>8</sup> On June 23, 2014, the U.S Supreme Court decision in the case of *Utility Air Regulatory Group v. EPA* effectively changed the permitting procedures for GHGs under the PSD and Title V programs.

Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability and non-applicability determinations for NSPS regulations of relevance to the wellpad. The following NSPS could potentially apply to the wellpad:

- > 40 CFR Part 60 Subparts D/Da/Db/Dc – Steam Generating Units
- > 40 CFR Part 60 Subpart K/Ka/Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids
- > 40 CFR Part 60 Subpart JJJJ – Stationary Spark Ignition Internal Combustion Engines
- > 40 CFR Part 60 Subpart OOOO – Crude Oil and Natural Gas Production, Transmission, and Distribution
- > 40 CFR Part 60 Subpart OOOOa – Crude Oil and Natural Gas Facilities

### **3.3.1. NSPS Subparts D, Da, Db, and Dc - Steam Generating Units**

These subparts apply to steam generating units of various sizes, all greater than 10 MMBtu/hr. The proposed project does not include any steam generating units with a heat input greater than 10 MMBtu/hr, therefore the requirements of these subparts do not apply.

### **3.3.2. NSPS Subparts K, Ka, and Kb - Storage Vessels for Petroleum Liquids/Volatile Organic Liquids**

These subparts apply to storage tanks of certain sizes constructed, reconstructed, or modified during various time periods. Subpart K applies to storage tanks constructed, reconstructed, or modified prior to 1978, and Subpart Ka applies to those constructed, reconstructed, or modified prior to 1984. Both Subparts K and Ka apply to storage tanks with a capacity greater than 40,000 gallons. Subpart Kb applies to volatile organic liquid (VOL) storage tanks constructed, reconstructed, or modified after July 23, 1984 with a capacity equal to or greater than 75 m<sup>3</sup> (~19,813 gallons). All of the tanks at the wellpad have a capacity of 19,813 gallons or less. As such, Subparts K, Ka, and Kb do not apply to the storage tanks at the wellpad.

### **3.3.3. NSPS Subpart JJJJ - Stationary Spark Ignition Internal Combustion Engines**

New Source Performance Standards 40 CFR Part 60 Subpart JJJJ (NSPS JJJJ) affects owners and operators of stationary spark ignition internal combustion engines (SI ICE) that commence construction, reconstruction or modification after June 12, 2006. Applicability dates are based on the date the engine was ordered by the operator. The proposed engine (VRU engine) at the well pad is a 4-stroke rich burn, spark ignition engine manufactured after July 1, 2008, and is subject to this subpart. EQT will operate the engine according to the manufacturer's recommended practices and demonstrate compliance with the requirements specified in 40 CFR §60.4244 (testing methods) and 40 CFR §60.4243(b)(2) (maintenance plan/records and performance testing frequency) for noncertified affected SI ICE at the facility or by purchasing a certified engine. At this time, EQT intends to purchase a certified engine

### **3.3.4. NSPS Subpart OOOO - Crude Oil and Natural Gas Production, Transmission, and Distribution**

Subpart OOOO, Standards of Performance for Crude Oil and Natural Gas Production, Transmission, and Distribution, applies to affected facilities that commenced construction, reconstruction, or modification after August 23, 2011 (see clarification below regarding dates). This NSPS was published in the Federal Register on August 16, 2012, and subsequently amended. Although there are sources proposed to be installed that could potentially be subject to this regulation, due to the anticipated installation dates, they will not be subject to the rule. This is due to the most recent proposed developments related to the rule, which are the inclusion of an end date for applicability to Subpart OOOO

(September 18, 2015) and the promulgation of 40 CFR 60 Subpart 0000a.<sup>9</sup> The potential applicability of Subpart 0000a is discussed in the following section.

### 3.3.5. NSPS Subpart 0000a—Crude Oil and Natural Gas Facilities

Subpart 0000a, Standards of Performance for Crude Oil and Natural Gas Facilities, will apply to affected facilities that commenced construction, reconstruction, or modification after September 18, 2015. This regulation has yet to be finalized. The currently proposed version of the rule includes provisions for the following facilities:

- > Hydraulically fractured wells;
- > Centrifugal compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;
- > Reciprocating compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;
- > Continuous bleed natural gas-driven pneumatic controllers with a bleed rate of > 6 scfh located in the production, gathering, processing, or transmission and storage segments (excluding natural gas processing plants);
- > Continuous bleed natural gas-driven pneumatic controllers located at natural gas processing plants;
- > Pneumatic pumps located in the production, gathering, processing, or transmission and storage segments;
- > Storage vessels located in the production, gathering, processing, or transmission and storage segments;
- > The collection of fugitive emissions components at a well site;
- > The collection of fugitive emissions components at a compressor station; and
- > Sweetening units located onshore that process natural gas produced from either onshore or offshore wells.

Based on the current version of the proposed rule, the following paragraphs describe the potential applicability of the facilities to be located at the proposed facility.

40 CFR 60.5385 requires owners and operators of affected reciprocating compressors to change the rod packing prior to operating 26,000 hours or prior to 36 months since start up or the last packing replacement. However, according to §60.5365a, compressors located at well sites are not affected facilities under Subpart 0000a.

There are twelve (12) produced fluid storage vessels and one (1) sand separator storage vessel at the wellpad. The storage vessels at the facility each have potential VOC emissions less than 6 tpy based on the permit application materials and enforceable limits to be included in the G70-B permit. As such, per 60.5365a(e), the tanks will not be storage vessel affected facilities under the rule.

Note that the proposed changes to the well pad meet the definition of modification under 60.5365a(i)(3)(i). Therefore, EQT will be required to monitor all fugitive emission components (ex. connectors, flanges, etc.) with an optical gas imaging (OGI) device, and repair all sources of fugitive emissions in accordance with the rule. EQT must also develop a corporate-wide monitoring plan and a site specific monitoring plan (or one plan that incorporates all required elements), and conduct surveys on a semi-annual basis. EQT is also subject to the applicable recordkeeping and reporting requirements of the rule.

The pneumatic controllers will potentially subject to NSPS 0000a. Per 60.5365a(d)(1), a pneumatic controller affected facility is a single continuous bleed natural gas driven pneumatic controller operating at a natural gas bleed

---

<sup>9</sup> September 18, 2015 publication in Federal Register: <https://www.federalregister.gov/articles/2015/09/18/2015-21023/oil-and-natural-gas-sector-emission-standards-for-new-and-modified-sources>

rate greater than 6 scfh. No pneumatic controllers installed will meet the definition of a pneumatic controller affected facility. Therefore, these units are not subject to the requirements of Subpart 0000a.

### 3.3.6. Non-Applicability of All Other NSPS

NSPS are developed for particular industrial source categories. Other than NSPS developed for natural gas processing plants (Subparts 0000) and associated equipment (Subparts D-Dc and K-Kb), the applicability of a particular NSPS to the wellpad can be readily ascertained based on the industrial source category covered. All other NSPS are categorically not applicable to the proposed project.

## 3.4. NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad is an Area (minor) source of HAP since its potential emissions of HAP are less than the 10/25 major source thresholds. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type. Besides 40 CFR 63 Subpart A (NESHAP Subpart A), which is similar to 40 CFR 60 Subpart A (NSPS Subpart A), the following NESHAP could potentially apply to the wellpad:

- > 40 CFR Part 63 Subpart HH – Oil and Natural Gas Production Facilities
- > 40 CFR Part 63 Subpart ZZZZ – Stationary Reciprocating Internal Combustion Engines
- > 40 CFR Part 63 Subpart JJJJJJ – Industrial, Commercial, and Institutional Boilers

The applicability of these NESHAP Subparts is discussed in the following sections.

### 3.4.1. 40 CFR 63 Subpart HH - Oil and Natural Gas Production Facilities

This standard contains requirements for both major and area sources of HAP. At area sources, the only affected source is a triethylene glycol dehydration unit (§63.760(b)(2)). The wellpad does not include a triethylene glycol dehydration unit; therefore the requirements of this subpart do not apply.

### 3.4.2. 40 CFR 63 Subpart ZZZZ - Stationary Reciprocating Internal Engines

This rule affects reciprocating internal combustion engines (RICE) located at a major and area sources of HAP. 40 CFR §63.6590(c) states that a new or reconstructed stationary RICE located at an area HAP source must meet the requirements of NESHAP Subpart ZZZZ by meeting the requirements of NSPS Subpart JJJJ. No further requirements apply for such engines under NESHAP Subpart ZZZZ. The WEU-2 well pad is a minor (area) source of hazardous air pollutants and the VRU engine is considered a new stationary RICE. Therefore, the requirements contained in §63.6590(c) are applicable. EQT will be in compliance with applicable requirements of 40 CFR 63 Subpart ZZZZ by meeting the applicable requirements of 40 CFR 60 Subpart JJJJ.

### 3.4.3. 40 CFR 63 Subpart JJJJJJ - Industrial, Commercial, and Institutional Boilers

This MACT standard applies to industrial, commercial, and institutional boilers of various sizes and fuel types at area sources. The proposed line heater will be natural gas-fired and is specifically exempt from this subpart. Therefore, no sources at the wellpad are subject to any requirements under 40 CFR 63 Subpart JJJJJJ.

## 3.5. WEST VIRGINIA SIP REGULATIONS

The wellpad is potentially subject to regulations contained in the West Virginia Code of State Regulations, Chapter 45 (Code of State Regulations). The Code of State Regulations fall under two main categories, those regulations that are generally applicable (e.g., permitting requirements), and those that have specific applicability (e.g., PM standards for manufacturing equipment).

### 3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers

45 CSR 2 applies to fuel burning units, defined as equipment burning fuel “for the primary purpose of producing heat or power by indirect heat transfer”. The TEGs and line heaters are fuel burning units and therefore must comply with this regulation. Per 45 CSR 2-3, opacity of emissions from units shall not exceed 10 percent.

### 3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor

According to 45 CSR 4-3:

*No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.*

The wellpad is generally subject to this requirement. However, due to the nature of the process at the wellpad, production of objectionable odor from the wellpad during normal operation is unlikely.

### 3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse

45 CSR 6 applies to activities involving incineration of refuse, defined as “the destruction of combustible refuse by burning in a furnace designed for that purpose. For the purposes of this rule, the destruction of any combustible liquid or gaseous material by burning in a flare or flare stack, thermal oxidizer or thermal catalytic oxidizer stack shall be considered incineration.” The enclosed combustors are incinerators and therefore must comply with this regulation. Per 45 CSR 6-4.3, opacity of emissions from this unit shall not exceed 20 percent, except as provided by 4.4. PM emissions from this unit will not exceed the levels calculated in accordance with 6-4.1.

### 3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources

45 CSR 16-1 incorporates the federal Clean Air Act (CAA) standards of performance for new stationary sources set forth in 40 CFR Part 60 by reference. As such, by complying with all applicable requirements of 40 CFR Part 60 at the wellpad, EQT will be complying with 45 CSR 16.

### 3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter

According to 45 CSR 17-3.1:

*No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property lines of the property on which the discharge originates or at any public or residential location, which causes or contributes to statutory air pollution.*

Due to the nature of the activities at the wellpad, it is unlikely that fugitive particulate matter emissions will be emitted under normal operating conditions. However, EQT will take measures to ensure any fugitive particulate matter emissions will not cross the property boundary should any such emissions occur.

### **3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks**

45 CSR 21-28 applies to any fixed roof petroleum liquid storage tank with a capacity greater than 40,000 gallons. The capacity of each storage tank proposed for the wellpad is less than 40,000 gallons; therefore, 45 CSR 21-28 will not apply to the petroleum liquid storage tanks at this wellpad.

### **3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants**

45 CSR 34-1 incorporates the federal Clean Air Act (CAA) national emissions standards for hazardous air pollutants (NESHAPs) as set forth in 40 CFR Parts 61 and 63 by reference. As such, by complying with all applicable requirements of 40 CFR Parts 61 and 63 at the wellpad, EQT will be complying with 45 CSR 34. Note that there are no applicable requirements under 40 CFR Parts 61 and 63 for the wellpad.

### **3.5.8. Non-Applicability of Other SIP Rules**

A thorough examination of the West Virginia SIP rules with respect to applicability at the wellpad reveals many SIP regulations that do not apply or impose additional requirements on operations. Such SIP rules include those specific to a particular type of industrial operation that is categorically not applicable to the wellpad.

## 4. G70-B APPLICATION FORMS

---

The WVDEP permit application forms contained in this application include all applicable G70-B application forms including the required attachments.





West Virginia Department of Environmental Protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25304
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-B GENERAL PERMIT REGISTRATION APPLICATION

PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION, RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- CONSTRUCTION
MODIFICATION
RELOCATION
CLASS I ADMINISTRATIVE UPDATE
CLASS II ADMINISTRATIVE UPDATE

SECTION I. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office) EQT Production Company

Federal Employer ID No. (FEIN) 25-0724685

Applicant's Mailing Address: 625 Liberty Avenue, Suite 1700

City: Pittsburgh

State: PA

ZIP Code: 15222

Facility Name: WEU-2 Pad

Operating Site Physical Address: Bulldog Drive, West Union, WV
If none available, list road, city or town and zip of facility.

City: West Union

Zip Code: 26456

County: Doddridge

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):

Latitude: 39.27255 N

Longitude: -80.77145 W

SIC Code: 1311

DAQ Facility ID No. (For existing facilities) 017-00050

NAICS Code: 211111

CERTIFICATION OF INFORMATION

This G70-B General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. Any administratively incomplete or improperly signed or unsigned G70-B Registration Application will be returned to the applicant. Furthermore, if the G70-B forms are not utilized, the application will be returned to the applicant. No substitution of forms is allowed.

I hereby certify that Kenneth Kirk is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-B General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: [Signature]
Name and Title: Kenneth Kirk, Executive Vice President
Phone:
Fax:
Email: KKirk@eqt.com
Date:

If applicable
Authorized Representative Signature:
Name and Title:
Phone:
Fax:
Email:
Date:

If applicable
Environmental Contact
Name and Title: Alex Bosiljevac, Environmental Coordinator
Phone: 412-395-3699
Fax: 412-395-7027
Email: ABosiljevac@eqt.com
Date:



**OPERATING SITE INFORMATION**

Briefly describe the proposed new operation and/or any change(s) to the facility:

General permit application for an existing natural gas production well pad.

Directions to the facility:

From I-79, take exit 119 to Clarksburg and travel West on US Route 50 for 27.8 miles. Take a left at Doddridge County High School onto Bulldog Drive. After 0.3 miles, take the first left and stay left at the first fork. The pad will be 0.8 miles at the end of the road.

**ATTACHMENTS AND SUPPORTING DOCUMENTS**

**I have enclosed the following required documents:**

Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22).

- Check attached to front of application.
- I wish to pay by electronic transfer. Contact for payment (incl. name and email address):
- I wish to pay by credit card. Contact for payment (incl. name and email address): R. Alex Bosiljevac,  
abosiljevac@eqt.com
- \$500 (Construction, Modification, and Relocation)                       \$300 (Class II Administrative Update)
- \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ and/or OOOO <sup>1</sup>
- \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH <sup>2</sup>

<sup>1</sup> Only one NSPS fee will apply.  
<sup>2</sup> Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ.  
*NSPS and NESHAP fees apply to new construction or if the source is being modified.*

- Responsible Official or Authorized Representative Signature (if applicable)
- Single Source Determination Form (**must be completed in its entirety**) – Attachment A
- Siting Criteria Waiver (if applicable) – Attachment B                       Current Business Certificate – Attachment C
- Process Flow Diagram – Attachment D                                       Process Description – Attachment E
- Plot Plan – Attachment F     Area Map – Attachment G
- G70-B Section Applicability Form – Attachment H                       Emission Units/ERD Table – Attachment I
- Fugitive Emissions Summary Sheet – Attachment J
- Gas Well Affected Facility Data Sheet (if applicable) – Attachment K
- Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L
- Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPUs, Heater Treaters, In-Line Heaters if applicable) – Attachment M
- Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N
- Tanker Truck Loading Data Sheet (if applicable) – Attachment O
- Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P
- Pneumatic Controllers Data Sheet – Attachment Q
- Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment R
- Emission Calculations (please be specific and include all calculation methodologies used) – Attachment S
- Facility-wide Emission Summary Sheet(s) – Attachment T
- Class I Legal Advertisement – Attachment U
- One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments

**All attachments must be identified by name, divided into sections, and submitted in order.**

ATTACHMENT A

**Single Source Determination**

**ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM**

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

*“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL 3).*

Is there a facility owned by or associated with the natural gas industry located within one (1) mile of the proposed facility? Yes  No

*If Yes, please complete the questionnaire on the following page (Attachment A).*

Please provide a source aggregation analysis for the proposed facility below:

Please see discussion in the Application Report.


## ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Answer each question with a detailed explanation to determine contiguous or adjacent properties which are under a common control and any support facilities. This section must be completed in its entirety.

Provide a map of contiguous or adjacent facilities (production facilities, compressor stations, dehydration facilities, etc.) which are under common control and those facilities that are not under common control but are support facilities. Please indicate the SIC code, permit number (if applicable), and the distance between facilities in question on the map.

Are the facilities owned by the same parent company or a subsidiary of the parent company? Provide the owners identity and the percentage of ownership of each facility.	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
WEU-1 wellpad is owned by EQT Production Company.		
Does an entity such as a corporation have decision making authority over the operation of a second entity through a contractual agreement or voting interest? Please explain.	Yes <input type="checkbox"/> N/A	No <input type="checkbox"/>
Is there a contract for service relationship between the two (2) companies or, a support/dependency relationship that exists between the two (2) companies? Please explain.	Yes <input type="checkbox"/> N/A	No <input type="checkbox"/>
Do the facilities share common workforces, plant managers, security forces, corporate executive officers or board executives?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Will managers or other workers frequently shuttle back and forth to be involved actively at both facilities?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Do the facilities share common payroll activities, employee benefits, health plans, retirement funds, insurance coverage, or other administrative functions? Please explain.	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Does one (1) facility operation support the operation of the other facility?	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Is one (1) facility dependent on the other? If one (1) facility shuts down, what are the limitations on the other to pursue outside business? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Are there any financial arrangements between the two (2) entities?	Yes <input type="checkbox"/> N/A	No <input type="checkbox"/>
Are there any legal or lease agreements between the two (2) facilities?	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Do the facilities share products, byproducts, equipment, or other manufacturing or air pollution control device equipment? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Do all the pollutant-emitting activities at the facilities belong to the same SIC Code? Please provide the SIC Codes. 1311	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Was the location of the new facility chosen primarily because of its proximity to the existing facility to integrate the operation of the two (2) facilities? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Will materials be routinely transferred between the two (2) facilities? Please explain the amount of transfer and how often the transfers take place and what percentages go to the various entities.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Does the facility influence production levels or compliance with environmental regulations at other facilities? Who accepts the responsibility for compliance with air quality requirements? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>

**ATTACHMENT A: SINGLE SOURCE DETERMINATION MAP**

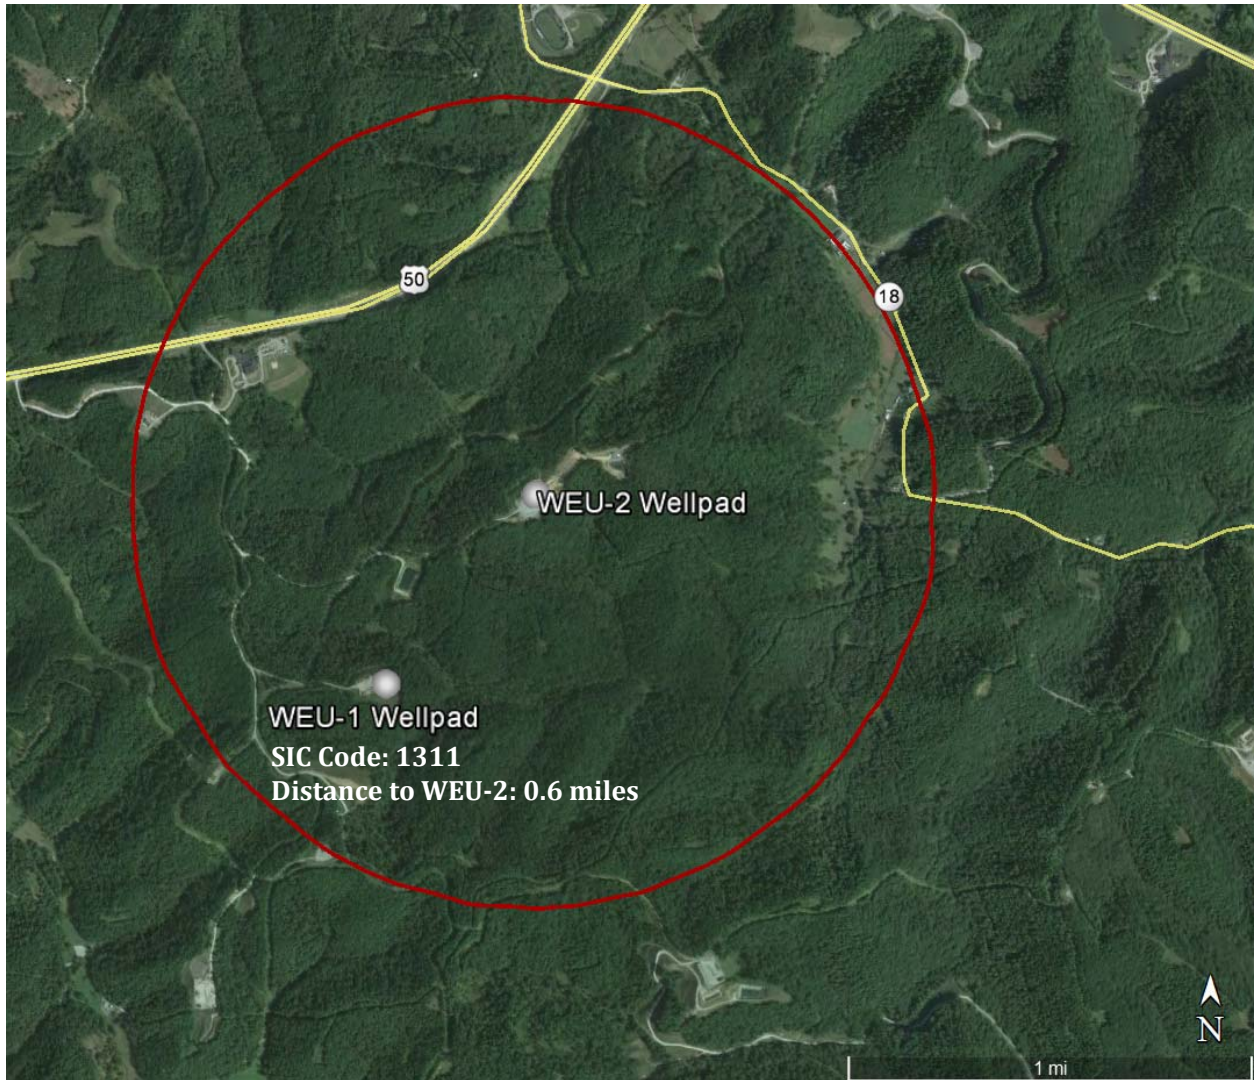

ATTACHMENT B

Siting Criteria Waiver *(Not Applicable)*

**ATTACHMENT B - SITING CRITERIA WAIVER – NOT APPLICABLE**

If applicable, please complete this form and it must be notarized.

**G70-B General Permit  
Siting Criteria Waiver**

**WV Division of Air Quality 300' Waiver**

I \_\_\_\_\_ hereby  
Print Name  
acknowledge and agree that \_\_\_\_\_ will  
General Permit Applicant's Name

construct an emission unit(s) at a natural gas production facility  
that will be located within 300' of my dwelling and/or business.

I hereby offer this waiver of siting criteria to the West Virginia Department of Environmental Protection  
Division of Air Quality as permission to construct, install and operate in such location.

Signed:

\_\_\_\_\_  
Signature Date

\_\_\_\_\_  
Signature Date

**Taken, subscribed and sworn before me this \_\_\_\_ day of**

\_\_\_\_\_, 20\_\_\_\_.

My commission expires: \_\_\_\_\_

SEAL \_\_\_\_\_  
Notary Public

ATTACHMENT C

**Business Certificate**



**WEST VIRGINIA  
STATE TAX DEPARTMENT  
BUSINESS REGISTRATION  
CERTIFICATE**

ISSUED TO:  
**EQT PRODUCTION COMPANY  
625 LIBERTY AVE 1700  
PITTSBURGH, PA 15222-3114**

**BUSINESS REGISTRATION ACCOUNT NUMBER: 1022-8081**

This certificate is issued on: 08/4/2010

*This certificate is issued by  
the West Virginia State Tax Commissioner  
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered  
to conduct business in the State of West Virginia at the location above.*


This certificate is not transferrable and must be displayed at the location for which issued.  
This certificate shall be permanent until cessation of the business for which the certificate of registration  
was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new  
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.  
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of  
this certificate displayed at every job site within West Virginia.

## ATTACHMENT D

### Process Flow Diagram

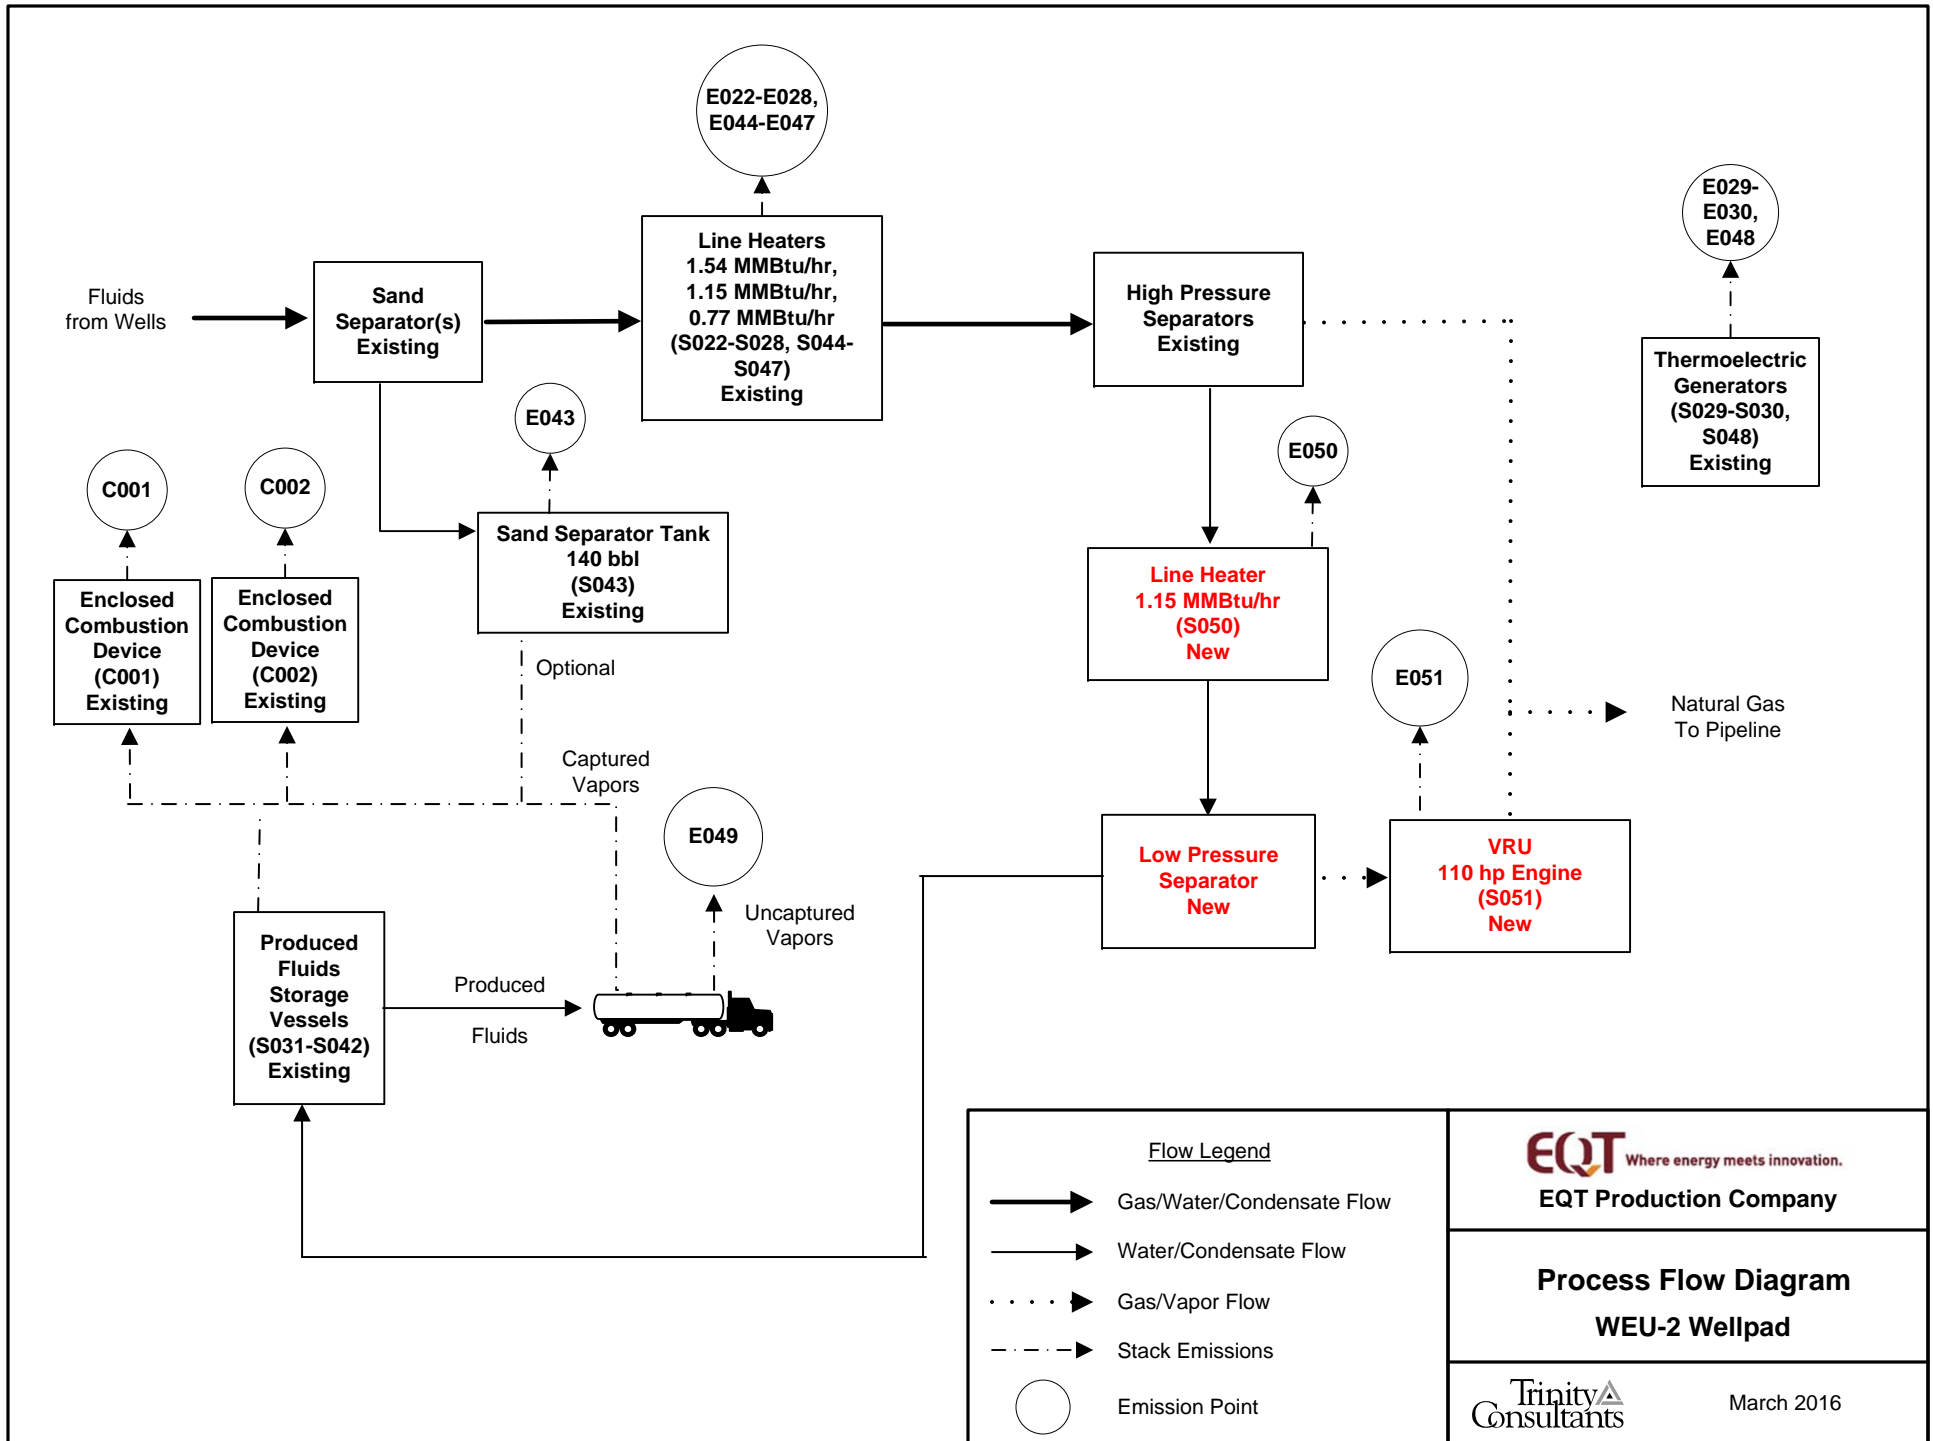

Flow Legend	
	Gas/Water/Condensate Flow
	Water/Condensate Flow
	Gas/Vapor Flow
	Stack Emissions
	Emission Point

<b>EQT</b> <small>Where energy meets innovation.</small> <b>EQT Production Company</b>	
<b>Process Flow Diagram</b> <b>WEU-2 Wellpad</b>	
<b>Trinity Consultants</b>	March 2016

ATTACHMENT E

**Process Description**

## ATTACHMENT E: PROCESS DESCRIPTION

This G70-B Permit Application involves the permitting of a low pressure tower and associated heater (S050) and a vapor recovery unit (S051) at an existing natural gas production wellpad (WEU-2). The wellpad consists of eleven (11) wells, each with the same basic operation.


The incoming gas/liquid stream from the underground well will pass through a sand separator, where sand, water, and residual solids are displaced and transferred to the sand separator tank (S043). The gas stream will then pass through a line heater (S022-S028, S044-S047) to raise/maintain temperature. The stream will then pass through a high pressure separator, which will separate gas (natural gas from the separator is sent to the sales line) from liquids (condensate and produced water). The liquids stream will then pass through a low pressure separator, where it is heated (S050) to volatilize (flash off) lighter hydrocarbons and separate condensate from water in the combined liquid stream. The flash gas from the condensate stream is recovered by the vapor recovery unit (S051), which utilizes a natural gas-fired engine driven compressor to raise the pressure of the flash gas and route it back into the natural gas pipeline. The condensate is then transferred to the produced fluid storage vessels (S031-S042).

Emissions from the storage vessels are controlled by an enclosed combustor (C001-C002). Once the tanks are filled, the contents are loaded into trucks for transport. EQT utilizes vapor balancing in the truck loading operations, which means the vapors displaced by the filling of tanker trucks (S049) are routed back into the battery of tanks and ultimately to the combustor. Facility electricity is provided by thermoelectric generators (S029-S30, S048).

A process flow diagram is included as Attachment D.

# ATTACHMENT F

## Plot Plan

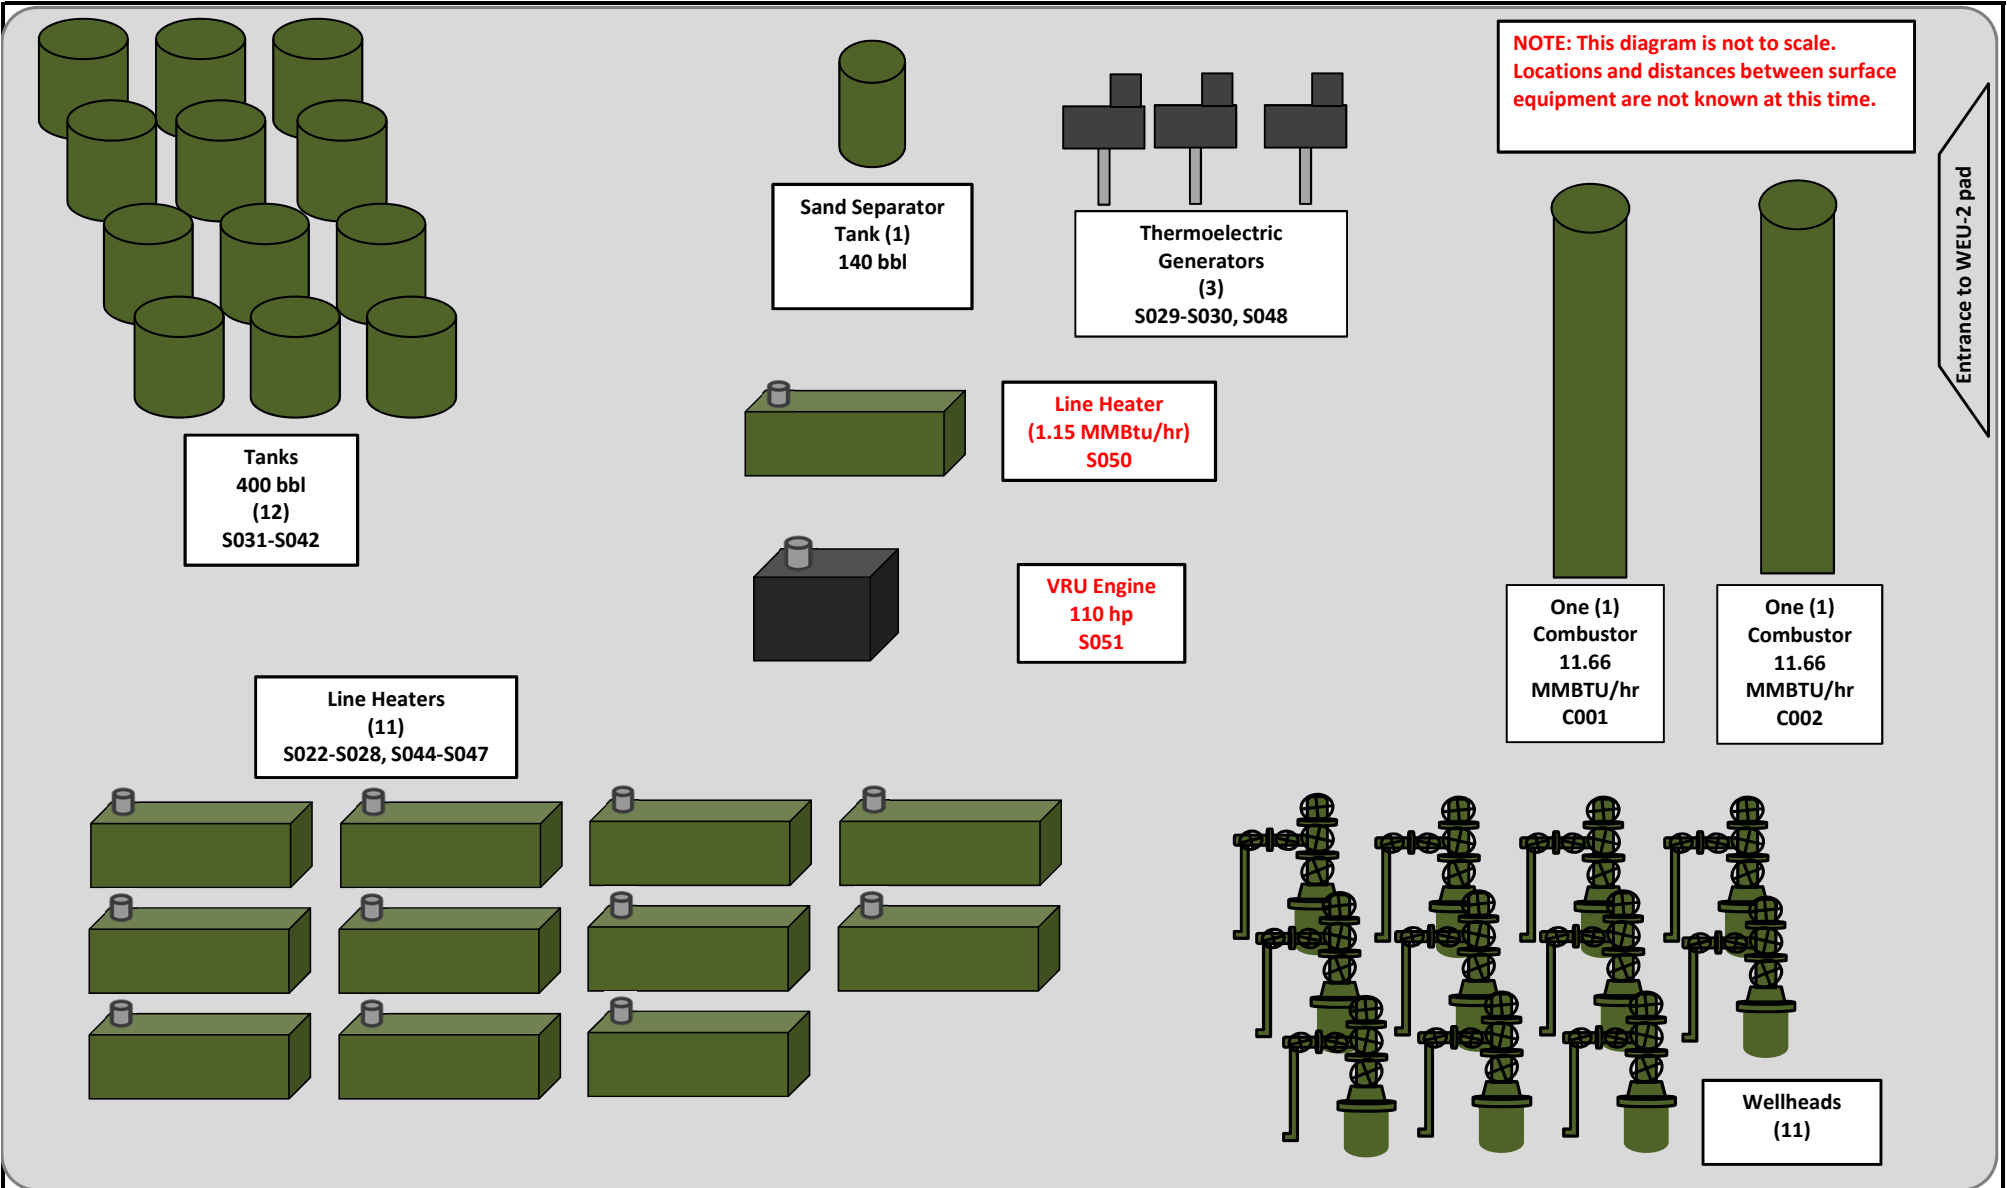

**Attachment F**  
WEU-2 Well Pad Plot Plan

# ATTACHMENT G

## Area Map



## ATTACHMENT G: AREA MAP



**Figure 1 - Map of WEU-2 Location**

UTM Northing (KM): 4,347.047  
UTM Easting (KM): 519.715  
Elevation: ~1,180 ft

ATTACHMENT H  
**Applicability Form**

**ATTACHMENT H – G70-B SECTION APPLICABILITY FORM**

**General Permit G70-B Registration  
Section Applicability Form**

General Permit G70-B was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, centrifugal compressors, reciprocating compressors, reciprocating internal combustion engines (RICES), tank truck loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-B allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

<b>GENERAL PERMIT G70-B APPLICABLE SECTIONS</b>	
<input checked="" type="checkbox"/> Section 5.0	Gas Well Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water <sup>1</sup>
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO)
<input type="checkbox"/> Section 11.0	Centrifugal Compressor Affected Facility (NSPS, Subpart OOOO) <sup>2</sup>
<input type="checkbox"/> Section 12.0	Reciprocating Compressor Affected Facility (NSPS, Subpart OOOO) <sup>2</sup>
<input checked="" type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines, Microturbines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck Loading <sup>3</sup>
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units <sup>4</sup>

- 1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subpart OOOO control requirements or the applicable control device requirements of Section 8.
- 2 Applicants that are subject to Section 11 and 12 may also be subject to the applicable RICE requirements of Section 13.
- 3 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.
- 4 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

ATTACHMENT I

Emission Units Table

**ATTACHMENT I – EMISSION UNITS / EMISSION REDUCTION DEVICES (ERD) TABLE**

Include ALL emission units and air pollution control devices/ERDs that will be part of this permit application review. Do not include fugitive emission sources in this table. Deminimis storage tanks shall be listed in the Attachment L table. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

<b>Emission Unit ID<sup>1</sup></b>	<b>Emission Point ID<sup>2</sup></b>	<b>Emission Unit Description</b>	<b>Year Installed</b>	<b>Manufac. Date<sup>3</sup></b>	<b>Design Capacity</b>	<b>Type<sup>4</sup> and Date of Change</b>	<b>Control Device(s)<sup>5</sup></b>	<b>ERD(s)<sup>6</sup></b>
S022	E022	Line Heater	2011	2011	1.54 MMBtu/hr	Existing; No change	None	---
S023	E023	Line Heater	2011	2011	1.15 MMBtu/hr	Existing; No change	None	---
S024	E024	Line Heater	2011	2011	0.77 MMBtu/hr	Existing; No change	None	---
S025	E025	Line Heater	2011	2011	0.77 MMBtu/hr	Existing; No change	None	---
S026	E026	Line Heater	2011	2011	0.77 MMBtu/hr	Existing; No change	None	---
S027	E027	Line Heater	2011	2011	0.77 MMBtu/hr	Existing; No change	None	---
S028	E028	Line Heater	2011	2011	0.77 MMBtu/hr	Existing; No change	None	---
S029	E029	Thermoelectric Generator	2011	2011	0.013 MMBtu/hr	Existing; No change	None	---
S030	E030	Thermoelectric Generator	2011	2011	0.013 MMBtu/hr	Existing; No change	None	---
S031	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S032	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S033	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S034	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S035	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---

S036	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S037	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S038	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S039	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S040	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S041	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S042	C001 – C002	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C001 – C002	---
S043	E043	Sand Separator Storage Tank	2015	2015	140 bbl	Existing; No change	C001 – C002 (Optional)	---
S044	E044	Line Heater	2015	2015	1.54 MMBtu/hr	Existing; No change	None	---
S045	E045	Line Heater	2015	2015	1.54 MMBtu/hr	Existing; No change	None	---
S046	E046	Line Heater	2015	2015	1.54 MMBtu/hr	Existing; No change	None	---
S047	E047	Line Heater	2015	2015	1.54 MMBtu/hr	Existing; No change	None	---
S048	E048	Thermoelectric Generator	2015	2015	0.013 MMBtu/hr	Existing; No change	None	---
S049	E049 (Uncaptured) C001–C002 (Controlled, Captured)	Liquid Loading	2011	2011	51,678,693 gal/yr	Modified; Increase throughput	C001 – C002	---
S050	E050	Line Heater	TBD	TBD	1.15 MMBtu/hr	New	None	---
S051	E051	VRU Engine	TBD	TBD	110 hp	New	None	---

C001	C001	Tank Combustor	2011	2011	11.66 MMBtu/hr	Existing; No change	NA	---
C002	C002	Tank Combustor	2015	2015	11.66 MMBtu/hr	Existing; No change	NA	---
<sup>1</sup> For Emission Units (or Sources) use the following numbering system:1S, 2S, 3S,... or other appropriate designation. <sup>2</sup> For Emission Points use the following numbering system:1E, 2E, 3E, ... or other appropriate designation. When required by rule <sup>4</sup> New, modification, removal, existing <sup>5</sup> For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation. <sup>6</sup> For ERDs use the following numbering system: 1D, 2D, 3D,... or other appropriate designation.								

3

ATTACHMENT J

**Fugitive Emissions Summary Sheet**



## ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions, etc.  
Use extra pages for each associated source or equipment if necessary.

Source/Equipment: Fugitive Emissions

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections	<input type="checkbox"/> Infrared (FLIR) cameras	<input checked="" type="checkbox"/> Other (please describe) Will satisfy condition 4.1.4. of the G70-B	<input type="checkbox"/> None required		
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)		
					VOC	HAP	GHG (CO <sub>2</sub> e)
Pumps	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	20	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input checked="" type="checkbox"/> Liquid <input type="checkbox"/> Both	3.75	0.16	0.73
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	597	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	4.91	0.20	60.25
Safety Relief Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	43	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	6.09	0.25	6.35
Open Ended Lines	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	42	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	0.10	<0.01	9.58
Sampling Connections	<input type="checkbox"/> Yes <input type="checkbox"/> No	0	N/A	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	---	---	---
Connections (Not sampling)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	2,636	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	6.64	0.28	29.55
Compressors	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1	(included in other component counts)	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.31	0.01	15.59
Flanges	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	(included in connections)	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	---	---	---
Other <sup>1</sup>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	55	40 CFR 98 Subpart W	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	8.16	0.34	925.08

<sup>1</sup> Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e.g. pigging operations, equipment blowdowns, pneumatic controllers, etc.):  
Pneumatic Controller count is 'Other' category. An estimate of Miscellaneous Gas Venting emissions are included in the Emission Calculations and serve to include such sources as compressor venting, pigging, vessel blowdowns and other sources.

Please indicate if there are any closed vent bypasses (include component): N/A

Specify all equipment used in the closed vent system (e.g. VRU, ERD, thief hatches, tanker truck loading, etc.) N/A

ATTACHMENT K

**Gas Well Data Sheet**

## ATTACHMENT K – GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

API Number	Date of Flowback	Date of Well Completion	Green Completion and/or Combustion Device
047-017-05912	June 2011	June 2011	Green
047-017-05913	June 2011	June 2011	Green
047-017-05917	June 2011	June 2011	Green
047-017-05914	May 2011	May 2011	Green
047-017-05915	June 2011	June 2011	Green
047-017-05916	June 2011	June 2011	Green
047-017-05957	May 2011	May 2011	Green
PLANNED	PLANNED 2016	PLANNED 2016	Green
PLANNED	PLANNED 2016	PLANNED 2016	Green
PLANNED	PLANNED 2016	PLANNED 2016	Green
PLANNED	PLANNED 2016	PLANNED 2016	Green

*Note: If future wells are planned and no API number is available please list as PLANNED. If there are existing wells that commenced construction prior to August 23, 2011, please acknowledge as existing.*

*This is the same API (American Petroleum Institute) well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).*

*Every oil and gas well permitted in West Virginia since 1929 has been issued an API number. This API is used by agencies to identify and track oil and gas wells.*

*The API number has the following format: 047-001-00001*

*Where,*

*047 = State code. The state code for WV is 047.*

*001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).*

*00001= Well number. Each well will have a unique well number.*

ATTACHMENT L

**Storage Vessel Data Sheet**

## ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water . (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

**The following information is REQUIRED:**

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
  - Temperature and pressure (inlet and outlet from separator(s))
  - Simulation-predicted composition
  - Molecular weight
  - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

*Additional information may be requested if necessary.*

**GENERAL INFORMATION (REQUIRED)**

1. Bulk Storage Area Name WEU-2 Pad	2. Tank Name Produced Fluid Tanks (water and condensate)
3. Emission Unit ID number S031-S042	4. Emission Point ID number C001-C002
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> Was the tank manufactured after August 23, 2011? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: N/A <input type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other (Low Pressure Tower) <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<b><i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i></b>	

**TANK INFORMATION**

8. Design Capacity (*specify barrels or gallons*). Use the internal cross-sectional area multiplied by internal height. 400 bbls

9A. Tank Internal Diameter (ft.) 12	9B. Tank Internal Height (ft.) 20
10A. Maximum Liquid Height (ft.) 20	10B. Average Liquid Height (ft.) 10
11A. Maximum Vapor Space Height (ft.) 20	11B. Average Vapor Space Height (ft.) 10

12. Nominal Capacity (*specify barrels or gallons*). This is also known as “working volume”. 400 bbls

13A. Maximum annual throughput (gal/yr) <b>See attached emissions calculations for all throughput values</b>	13B. Maximum daily throughput (gal/day) <b>See attached emissions calculations for all throughput values</b>
14. Number of tank turnovers per year <b>See attached emissions calculations for all throughput values</b>	15. Maximum tank fill rate (gal/min) <b>See attached emissions calculations for all throughput values</b>

16. Tank fill method    Submerged        Splash        Bottom Loading

17. Is the tank system a variable vapor space system?    Yes    No  
 If yes, (A) What is the volume expansion capacity of the system (gal)?  
                   (B) What are the number of transfers into the system per year?

18. Type of tank (check all that apply):

Fixed Roof        vertical     horizontal     flat roof     cone roof     dome roof     other (describe)

External Floating Roof        pontoon roof     double deck roof

Domed External (or Covered) Floating Roof

Internal Floating Roof        vertical column support     self-supporting

Variable Vapor Space        lifter roof     diaphragm

Pressurized                       spherical     cylindrical

Other (describe)

**PRESSURE/VACUUM CONTROL DATA**

19. Check as many as apply:

Does Not Apply     Rupture Disc (psig)

Inert Gas Blanket of \_\_\_\_\_                       Carbon Adsorption<sup>1</sup>

Vent to Vapor Combustion Device<sup>1</sup> (vapor combustors, flares, thermal oxidizers, enclosed combustors)

Conservation Vent (psig)                                       Condenser<sup>1</sup>

0.5 oz Vacuum Setting       14.4 oz Pressure Setting

Emergency Relief Valve (psig)

                  Vacuum Setting       14.4 oz Pressure Setting

Thief Hatch Weighted    Yes    No – Cashco Lockdown Hatch

<sup>1</sup> Complete appropriate Air Pollution Control Device Sheet

---

20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).

Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method <sup>1</sup>
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
<b>See attached Emissions Calculation for all values</b>									

<sup>1</sup> EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)

Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded or riveted			
21A. Shell Color: Green	21B. Roof Color: Green	21C. Year Last Painted: New	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): <b>Must be listed for tanks using VRUs with closed vent system.</b>			
24. Is the tank a <b>Vertical Fixed Roof Tank</b> ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft): 0.06	
25. Complete item 25 for <b>Floating Roof Tanks</b> <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type ( <i>check one</i> ): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? ( <i>check one</i> ) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for <b>Internal Floating Roof Tanks</b> <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft <sup>2</sup> ):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
<b>SITE INFORMATION - Not Applicable: Tank calculations performed using ProMax software</b>			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft <sup>2</sup> -day):		35. Atmospheric Pressure (psia):	
<b>LIQUID INFORMATION - Not Applicable: Tank calculations performed using ProMax software</b>			
36. Avg. daily temperature range of bulk liquid (°F):	36A. Minimum (°F):	36B. Maximum (°F):	
37. Avg. operating pressure range of tank (psig):	37A. Minimum (psig):	37B. Maximum (psig):	
38A. Minimum liquid surface temperature (°F):		38B. Corresponding vapor pressure (psia):	
39A. Avg. liquid surface temperature (°F):		39B. Corresponding vapor pressure (psia):	
40A. Maximum liquid surface temperature (°F):		40B. Corresponding vapor pressure (psia):	
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From:                      To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

### GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name WEU-2 Pad	2. Tank Name Sand Separator Tank
3. Emission Unit ID number S043	4. Emission Point ID number E043
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> Was the tank manufactured after August 23, 2011? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other (Low Pressure Tower) <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <b><i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i></b>	

### TANK INFORMATION

8. Design Capacity <i>(specify barrels or gallons)</i> . Use the internal cross-sectional area multiplied by internal height. 140 bbls	
9A. Tank Internal Diameter (ft.) 10	9B. Tank Internal Height (ft.) 10
10A. Maximum Liquid Height (ft.) 10	10B. Average Liquid Height (ft.) 5
11A. Maximum Vapor Space Height (ft.) 10	11B. Average Vapor Space Height (ft.) 5
12. Nominal Capacity <i>(specify barrels or gallons)</i> . This is also known as “working volume”. 140 bbls	
13A. Maximum annual throughput (gal/yr) <b>See attached emissions calculations for all throughput values</b>	13B. Maximum daily throughput (gal/day) <b>See attached emissions calculations for all throughput values</b>
14. Number of tank turnovers per year <b>See attached emissions calculations for all throughput values</b>	15. Maximum tank fill rate (gal/min) <b>See attached emissions calculations for all throughput values</b>
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input type="checkbox"/> vertical <input checked="" type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe)  <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical	

### PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply:	
<input checked="" type="checkbox"/> Does Not Apply	<input type="checkbox"/> Rupture Disc (psig)
<input type="checkbox"/> Inert Gas Blanket of _____	<input type="checkbox"/> Carbon Adsorption <sup>1</sup>
<input type="checkbox"/> Vent to Vapor Combustion Device <sup>1</sup> (vapor combustors, flares, thermal oxidizers, enclosed combustors)	
<input type="checkbox"/> Conservation Vent (psig)	<input type="checkbox"/> Condenser <sup>1</sup>
Vacuum Setting      Pressure Setting	
<input type="checkbox"/> Emergency Relief Valve (psig)	
Vacuum Setting      Pressure Setting	
<input type="checkbox"/> Thief Hatch Weighted <input type="checkbox"/> Yes <input type="checkbox"/> No	



<sup>1</sup> Complete appropriate Air Pollution Control Device Sheet									
20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method <sup>1</sup>
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See attached Emissions Calculation for all values									

<sup>1</sup> EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)  
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

<b>TANK CONSTRUCTION AND OPERATION INFORMATION</b>			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunit lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded			
21A. Shell Color: Gray	21B. Roof Color: Gray	21C. Year Last Painted: New	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): <b>Must be listed for tanks using VRUs with closed vent system.</b>			
24. Is the tank a <b>Vertical Fixed Roof Tank</b> ? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft):	
25. Complete item 25 for <b>Floating Roof Tanks</b> <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type ( <i>check one</i> ): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? ( <i>check one</i> ) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for <b>Internal Floating Roof Tanks</b> <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft <sup>2</sup> ):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
<b>SITE INFORMATION - Not Applicable: Tank calculations performed using E&amp;P Tank software</b>			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft <sup>2</sup> -day):		35. Atmospheric Pressure (psia):	
<b>LIQUID INFORMATION - Not Applicable: Tank calculations performed using E&amp;P Tank software</b>			

36. Avg. daily temperature range of bulk liquid (°F):	36A. Minimum (°F):	36B. Maximum (°F):	
37. Avg. operating pressure range of tank (psig):	37A. Minimum (psig):	37B. Maximum (psig):	
38A. Minimum liquid surface temperature (°F):	38B. Corresponding vapor pressure (psia):		
39A. Avg. liquid surface temperature (°F):	39B. Corresponding vapor pressure (psia):		
40A. Maximum liquid surface temperature (°F):	40B. Corresponding vapor pressure (psia):		
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From:                      To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

## STORAGE TANK DATA TABLE

List all deminimis storage tanks (i.e. lube oil, glycol, diesel etc.)

Source ID # <sup>1</sup>	Status <sup>2</sup>	Content <sup>3</sup>	Volume <sup>4</sup>
Not Applicable			

1. Enter the appropriate Source Identification Numbers (Source ID #) for each storage tank located at the compressor station. Tanks should be designated T01, T02, T03, etc.
2. Enter storage tank Status using the following:
  - EXIST Existing Equipment
  - NEW Installation of New Equipment
  - REM Equipment Removed
3. Enter storage tank content such as condensate, pipeline liquids, glycol (DEG or TEG), lube oil, diesel, mercaptan etc.
4. Enter the maximum design storage tank volume in gallons.

ATTACHMENT M

**Heaters Data Sheet**

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO  
40CFR60 SUBPART DC  
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID# <sup>1</sup>	Emission Point ID# <sup>2</sup>	Emission Unit Description (manufacturer, model #)	Year Installed/Modified	Type <sup>3</sup> and Date of Change	Maximum Design Heat Input (MMBTU/hr) <sup>4</sup>	Fuel Heating Value (BTU/scf) <sup>5</sup>
S022	E022	Line Heater	2011	Existing; No change	1.54	~1,217
S023	E023	Line Heater	2011	Existing; No change	1.15	~1,217
S024	E024	Line Heater	2011	Existing; No change	0.77	~1,217
S025	E025	Line Heater	2011	Existing; No change	0.77	~1,217
S026	E026	Line Heater	2011	Existing; No change	0.77	~1,217
S027	E027	Line Heater	2011	Existing; No change	0.77	~1,217
S028	E028	Line Heater	2011	Existing; No change	0.77	~1,217
S029	E029	Thermoelectric Generator	2011	Existing; No change	0.013	~1,217
S030	E030	Thermoelectric Generator	2011	Existing; No change	0.013	~1,217
S044	E044	Line Heater	2015	Existing; No change	1.54	~1,217
S045	E045	Line Heater	2015	Existing; No change	1.54	~1,217
S046	E046	Line Heater	2015	Existing; No change	1.54	~1,217
S047	E047	Line Heater	2015	Existing; No change	1.54	~1,217
S048	E048	Thermoelectric Generator	2015	Existing; No change	0.013	~1,217
S050	E050	Line Heater	TBD	New	1.15	~1,217

<sup>1</sup> Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.

<sup>2</sup> Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

<sup>3</sup> New, modification, removal

<sup>4</sup> Enter design heat input capacity in MMBtu/hr.

<sup>5</sup> Enter the fuel heating value in BTU/standard cubic foot.

ATTACHMENT N

**Engines Data Sheet**

## ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*

Emission Unit ID# <sup>1</sup>		S051							
Engine Manufacturer/Model		Ford CSG-637							
Manufacturers Rated bhp/rpm		110							
Source Status <sup>2</sup>		NS							
Date Installed/ Modified/Removed/Relocated <sup>3</sup>		TBD							
Engine Manufactured /Reconstruction Date <sup>4</sup>		> July 2010							
Check all applicable Federal Rules for the engine (include EPA Certificate of Conformity if applicable) <sup>5</sup>		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJ <input checked="" type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJ <input type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJ <input type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources			
Engine Type <sup>6</sup>		4SRB							
APCD Type <sup>7</sup>		NSCR							
Fuel Type <sup>8</sup>		PQNG							
H <sub>2</sub> S (gr/100 scf)		0							
Operating bhp/rpm		110							
BSFC (BTU/bhp-hr)		7,000							
Hourly Fuel Throughput		733 NA	ft <sup>3</sup> /hr gal/hr		ft <sup>3</sup> /hr gal/hr		ft <sup>3</sup> /hr gal/hr		
Annual Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)		6.4 NA	MMft <sup>3</sup> /yr gal/yr		MMft <sup>3</sup> /yr gal/yr		MMft <sup>3</sup> /yr gal/yr		
Fuel Usage or Hours of Operation Metered		Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	Yes <input type="checkbox"/>	No <input type="checkbox"/>	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
Calculation Methodology <sup>9</sup>	Pollutant <sup>10</sup>	Hourly PTE (lb/hr) <sup>11</sup>		Annual PTE (tons/year) <sup>11</sup>		Hourly PTE (lb/hr) <sup>11</sup>		Annual PTE (tons/year) <sup>11</sup>	
	NO <sub>x</sub>	0.24		1.06					
	CO	0.49		2.12					
	VOC	0.18		0.81					
	SO <sub>2</sub>	<0.01		<0.01					
	PM <sub>10</sub>	0.01		0.07					
	Formaldehyde	0.02		0.07					
	Total HAPs	0.02		0.11					
	GHG (CO <sub>2</sub> e)	90		395					

1 Enter the appropriate Source Identification Number for each natural gas-fueled reciprocating internal combustion compressor/generator engine located at the compressor station. Multiple compressor engines should be designated CE-1, CE-2, CE-3 etc. Generator engines should be designated GE-1, GE-2, GE-3 etc. Microturbine generator engines should be designated MT-1, MT-2, MT-3 etc. If more than three (3) engines exist, please use additional sheets.

2 Enter the Source Status using the following codes:

NS	Construction of New Source (installation)	ES	Existing Source
MS	Modification of Existing Source	RS	Relocated Source

REM Removal of Source

- 3 Enter the date (or anticipated date) of the engine's installation (construction of source), modification, relocation or removal.
- 4 Enter the date that the engine was manufactured, modified or reconstructed.
- 5 Is the engine a certified stationary spark ignition internal combustion engine according to 40CFR60 Subpart IIII/JJJJ? If so, the engine and control device must be operated and maintained in accordance with the manufacturer's emission-related written instructions. You must keep records of conducted maintenance to demonstrate compliance, but no performance testing is required. If the certified engine is not operated and maintained in accordance with the manufacturer's emission-related written instructions, the engine will be considered a non-certified engine and you must demonstrate compliance as appropriate.

**Provide a manufacturer's data sheet for all engines being registered.**

- 6 Enter the Engine Type designation(s) using the following codes:  
2SLB Two Stroke Lean Burn    4SRB Four Stroke Rich Burn  
4SLB Four Stroke Lean Burn
  
- 7 Enter the Air Pollution Control Device (APCD) type designation(s) using the following codes:  
A/F Air/Fuel Ratio    IR Ignition Retard  
HEIS High Energy Ignition System    SIPC Screw-in Precombustion Chambers  
PSC Prestratified Charge    LEC Low Emission Combustion  
NSCR Rich Burn & Non-Selective Catalytic Reduction    OxCat Oxidation Catalyst  
SCR Lean Burn & Selective Catalytic Reduction
  
- 8 Enter the Fuel Type using the following codes:  
PQ Pipeline Quality Natural Gas    RG Raw Natural Gas /Production Gas    D Diesel
  
- 9 Enter the Potential Emissions Data Reference designation using the following codes. Attach all reference data used.  
MD Manufacturer's Data    AP AP-42  
GR GRI-HAPCalc™    OT Other (please list)
  
- 10 Enter each engine's Potential to Emit (PTE) for the listed regulated pollutants in pounds per hour and tons per year. PTE shall be calculated at manufacturer's rated brake horsepower and may reflect reduction efficiencies of listed Air Pollution Control Devices. Emergency generator engines may use 500 hours of operation when calculating PTE. PTE data from this data sheet shall be incorporated in the *Emissions Summary Sheet*.
  
- 11 PTE for engines shall be calculated from manufacturer's data unless unavailable.



**Engine Air Pollution Control Device  
(Emission Unit ID# S051, use extra pages as necessary)**

Air Pollution Control Device Manufacturer's Data Sheet included?  
Yes  No   
*See attached certification*

NSCR                                       SCR                                       Oxidation Catalyst

Provide details of process control used for proper mixing/control of reducing agent with gas stream:  
Sequential multi-part fuel injection

Manufacturer: Ford	Model #: CSG-637
--------------------	------------------

Design Operating Temperature: 1,600 °F	Design gas volume:        scfm
--	--------------------------------

Service life of catalyst: 5,000 hours	Provide manufacturer data? <input type="checkbox"/> Yes <input type="checkbox"/> No
---------------------------------------	---

Volume of gas handled: 444.9 acfm at 1,600 °F	Operating temperature range for NSCR/Ox Cat: From        °F to        °F
---	---

Reducing agent used, if any:	Ammonia slip (ppm):
------------------------------	---------------------

Pressure drop against catalyst bed (delta P): 6 inches of H<sub>2</sub>O

Provide description of warning/alarm system that protects unit when operation is not meeting design conditions:


Is temperature and pressure drop of catalyst required to be monitored per 40CFR63 Subpart ZZZZ?  
 Yes  No

How often is catalyst recommended or required to be replaced (hours of operation)?  
5,000 hours


How often is performance test required?  
 Initial  
 Annual  
 Every 8,760 hours of operation  
 Field Testing Required  
 No performance test required. If so, why (please list any maintenance required and the applicable sections in NSPS/GACT  
 Per 40 CFR §60.4243(a)(1), EQT must maintain the certified engine and control device according to the manufacturer's emission related written instructions and keep records of conducted maintenance to demonstrate compliance, but no performance testing is required.

# Installation Drawings


Front End View

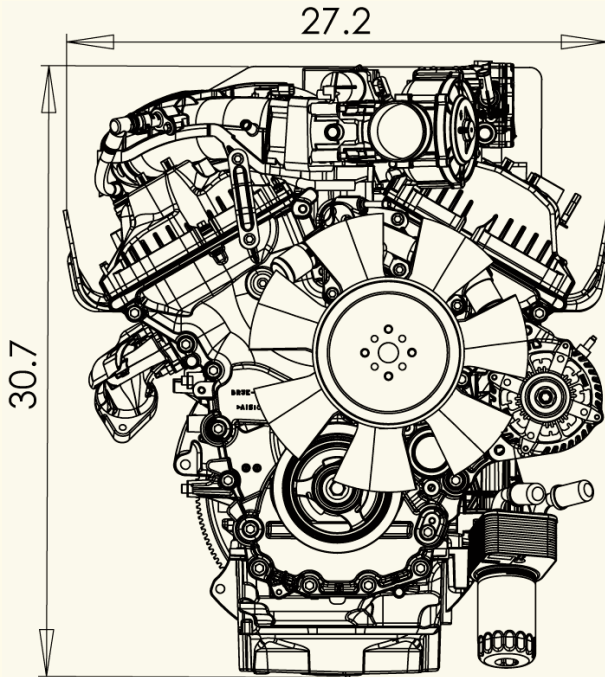

Left Side View

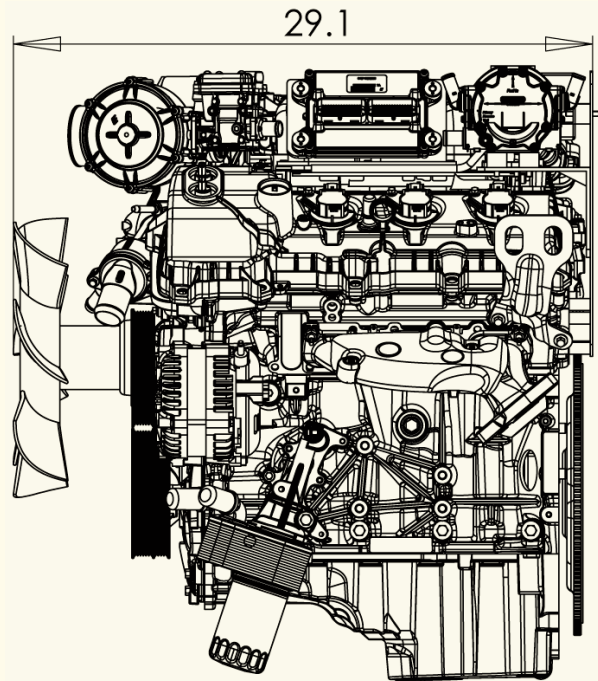

## Power Curves (corrected per SAE J1349)

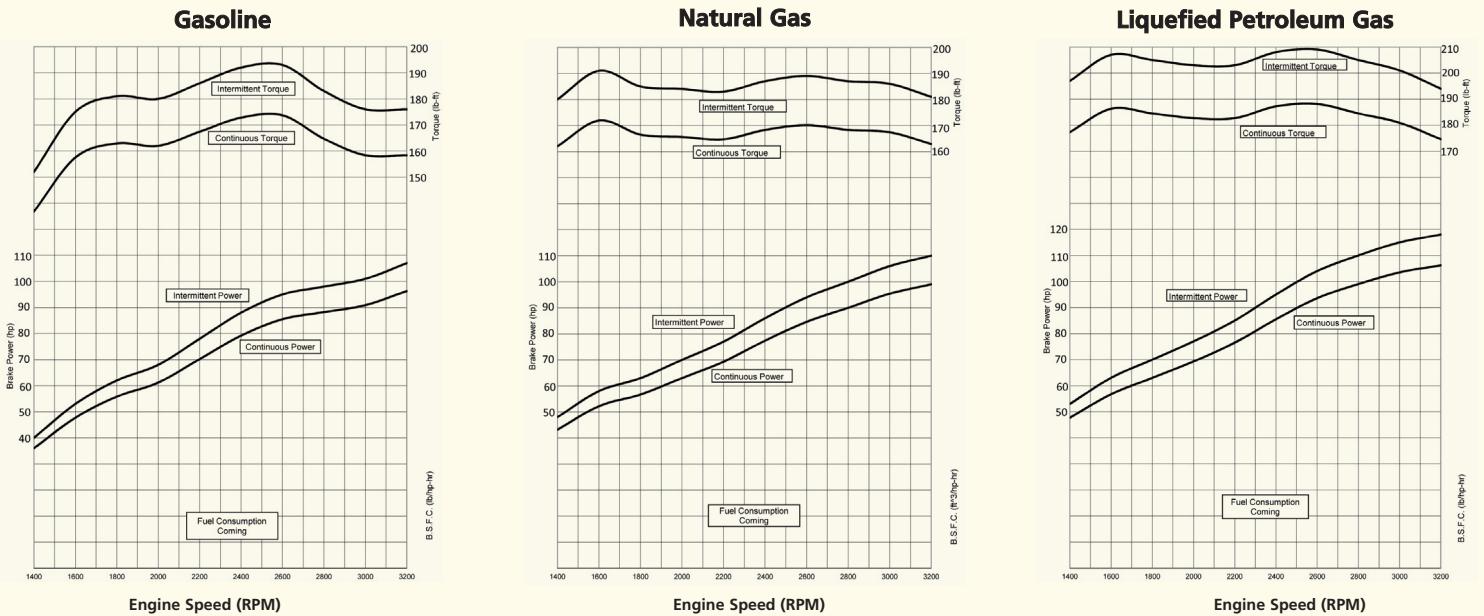

Powertrain Assemblies  
& Components  
Provided By Ford  
Component Sales

For additional information Contact:


**ENGINE  
DISTRIBUTORS  
INC.**



400 University Ct • Blackwood NJ 08012  
856/228-7298 • Fax:856/228-5531  
[www.edi-dist.com](http://www.edi-dist.com)

# CSG-637 EFI

## 3.7 Liter 6-Cylinder

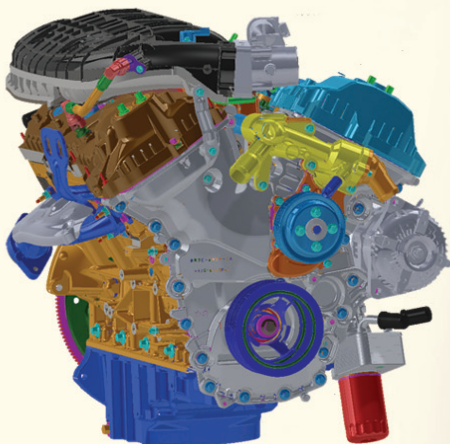

### Options

#### Engine Cooling Fans

- 14" (355mm) diameter suction
- 14" (355mm) diameter pusher

#### Flywheels

- 11.5" (292mm) SAE over-center clutch
- flat face flywheel

#### Flywheel Housings

- SAE #3

#### Exhaust Manifold

- rear dump down

#### Power Steering Pump

#### Air Conditioning

#### Wiring Harnesses

#### Discrete Speed Switch

#### Variable Speed Hand Throttle

#### Variable Speed Foot Pedal

#### Engine Mounts

- Automotive with insulators
- Open power unit

#### Electronic Instrument Panel, Gauges

#### Three Way Catalyst / Muffler Standard

### Transmissions

6R80 electronic shift

### Emissions Information

California Air Resources Board (CARB)  
Environmental Protection Agency (EPA)  
Emission Certified Packages

### Warranty

Contact Engine Distributors, Inc  
for warranty details.



Powertrain Assemblies  
& Components  
Provided By Ford  
Component Sales

### Specifications

Engine Type .....	V-6
Bore and Stroke .....	3.7" x 3.4" (94mm x 86mm)
Displacement .....	3.7L Liter (225.7 CID)
Compression Ratio .....	10.5:1
Oil Capacity.....	6 qts. including filter
Net Weight .....	355 Lbs. with accessories (161 Kgs.)
Dimensions .....	L 25.4" x W 29.5" x H 29.4" (646 mm x 751 mm x 748 mm)

### Gasoline (corrected per SAE J1349)

Unleaded 87 or 89 octane		
Intermittent Power .....	107 [HP] @ 3200rpm	(80 [kW] @ 3200rpm)
Continuous Power .....	96 [HP] @ 3200rpm	(72 [kW] @ 3200rpm)
Intermittent Torque .....	193 [ft-lbs] @ 2600rpm	(261 [N-m] @ 2600rpm)
Continuous Torque .....	173 [ft-lbs] @ 2600rpm	(235 [N-m] @ 3200rpm)

### Natural Gas (corrected per SAE J1349)

Fuel Specification .....	1050 BTU/FT3	
Intermittent Power .....	110 [HP] @ 3200rpm	(82 [kW] @ 3200rpm)
Continuous Power .....	99 [HP] @ 3200rpm	(74 [kW] @ 3200rpm)
Intermittent Torque .....	191 [ft-lbs] @ 1600rpm	(259 [N-m] @ 1600rpm)
Continuous Torque .....	172 [ft-lbs] @ 1600rpm	(233 [N-m] @ 1600rpm)

### Liquefied Petroleum Gas (corrected per SAE J1349)

Fuel Specification .....	HD-5	
Intermittent Power .....	118 [HP] @ 3200rpm	(88 [kW] @ 3200rpm)
Continuous Power .....	106 [HP] @ 3200rpm	(79 [kW] @ 3200rpm)
Intermittent Torque .....	209 [ft-lbs] @ 2600rpm	(284 [N-m] @ 2600rpm)
Continuous Torque .....	188 [ft-lbs] @ 2600rpm	(255 [N-m] @ 2600rpm)

### Standard Features / Benefits

Set-for-life valvetrain

Deep skirted, ribbed cylinder block casting for rigidity

150 AMP Alternator

Aluminum cylinder block and heads.

Chain driven dual camshafts with automatic tensioning system

Structural front cover and deep sump oil pan

Alternate fuel ready valvetrain components

Individual coil on plug electronic ignition

Four main bolts with side bolts through block for strength  
and durability

Gasoline Sequential Port Fuel Injection

Closed loop fuel control for all fuels

Electronic engine management system with built-in engine  
protection against detonation, high coolant temperature, low oil  
pressure, over speed shutdown and starter lockout

Next generation governing – discrete speeds, variable speeds,  
drive by wire – using the highest quality components.

Variable CAM Timing for intake camshafts - advances or retards  
timing to maximize engine power and fuel efficiency

Forged steel crankshaft




**UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
2015 MODEL YEAR  
CERTIFICATE OF CONFORMITY  
WITH THE CLEAN AIR ACT**

**OFFICE OF TRANSPORTATION  
AND AIR QUALITY  
ANN ARBOR, MICHIGAN 48105**

**Certificate Issued To:** Engine Distributors, Inc.  
(U.S. Manufacturer or Importer)  
**Certificate Number:** FEDIB03.7CSG-006

**Effective Date:**  
06/08/2015

**Expiration Date:**  
12/31/2015

  
Byron J. Bunker, Division Director  
Compliance Division

**Issue Date:**  
06/08/2015  
**Revision Date:**  
N/A

**Manufacturer:** Engine Distributors, Inc.  
**Engine Family:** FEDIB03.7CSG  
**Mobile/Stationary Certification Type:** Mobile and Stationary  
**Fuel :** LPG/Propane  
Gasoline (up to and including 10% Ethanol)  
Natural Gas (CNG/LNG)  
**Emission Standards :**  
Mobile Part 1048  
HC + NOx ( g/kW-hr ) : 0.8  
NMHC + NOx ( g/kW-hr ) : 0.8  
CO ( g/kW-hr ) : 20.6  
Part 60 Subpart JJJJ Table 1  
NOx ( g/kW-hr ) : 1.3  
HC + NOx ( g/kW-hr ) : 0.8  
CO ( g/kW-hr ) : 2.7  
CO ( g/kW-hr ) : 20.6  
VOC ( g/kW-hr ) : 0.9  
**Emergency Use Only :** N

Pursuant to Section 213 of the Clean Air Act (42 U.S.C. section 7547) and 40 CFR Part 60, 40 CFR Part 1048, 1065, 1068, and 60 ( stationary only and combined stationary and mobile ) and subject to the terms and conditions prescribed in those provisions, this certificate of conformity is hereby issued with respect to the test engines which have been found to conform to applicable requirements and which represent the following nonroad engines, by engine family, more fully described in the documentation required by 40 CFR Part 60, 40 CFR Part 1048 and produced in the stated model year.

This certificate of conformity covers only those new nonroad spark-ignition engines which conform in all material respects to the design specifications that applied to those engines described in the documentation required by 40 CFR Part 60, 40 CFR Part 1048 and which are produced during the model year stated on this certificate of the said manufacturer, as defined in 40 CFR Part 60, 40 CFR Part 1048. This certificate of conformity does not cover nonroad engines imported prior to the effective date of the certificate.

It is a term of this certificate that the manufacturer shall consent to all inspections described in 40 CFR 1068.20 and authorized in a warrant or court order. Failure to comply with the requirements of such a warrant or court order may lead to revocation or suspension of this certificate for reasons specified in 40 CFR Part 60, 40 CFR Part 1048. It is also a term of this certificate that this certificate may be revoked or suspended or rendered void *ab initio* for other reasons specified in 40 CFR Part 60, 40 CFR Part 1048.

This certificate does not cover large nonroad engines sold, offered for sale, or introduced, or delivered for introduction, into commerce in the U.S. prior to the effective date of the certificate.

ATTACHMENT O

**Truck Loading Data Sheet**

**ATTACHMENT O – TANKER TRUCK LOADING DATA SHEET**

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks. Use extra pages if necessary.

***Truck Loadout Collection Efficiencies***

The following applicable capture efficiencies of a truck loadout are allowed:

- For tanker trucks passing the MACT level annual leak test – 99.2%
- For tanker trucks passing the NSPS level annual leak test – 98.7%
- For tanker trucks not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: S049	Emission Point ID#: C001-C002, E049	Year Installed/Modified: N/A		
Emission Unit Description: Uncaptured losses from loading of produced fluids into tanker trucks				
<b>Loading Area Data</b>				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks loading at one (1) time: 1		
Are tanker trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. Trucks utilize vapor recovery lines to route displaced vapors back into battery of tanks.				
Are any of the following truck loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck passing a NSPS level annual leak test? <input checked="" type="checkbox"/> Closed System to tanker truck not passing an annual leak test and has vapor return?				
<b>Projected Maximum Operating Schedule (for rack or transfer point as a whole)</b>				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	Varies	Varies	Varies	Varies
Days/week	7	7	7	7
<b>Bulk Liquid Data (use extra pages as necessary)</b>				
Liquid Name	Produced Fluids			
Max. Daily Throughput (1000 gal/day)	See attached emissions calculations for all throughput values			
Max. Annual Throughput (1000 gal/yr)	See attached emissions calculations for all throughput values			
Loading Method <sup>1</sup>	SP			
Max. Fill Rate (gal/min)	Varies			
Average Fill Time (min/loading)	Varies			
Max. Bulk Liquid Temperature (°F)	See ProMax results			
True Vapor Pressure <sup>2</sup>	See ProMax results			
Cargo Vessel Condition <sup>3</sup>	U			
Control Equipment or Method <sup>4</sup>	VB, ECD (captured loading losses)			

Max. Collection Efficiency (%)		70		
Max. Control Efficiency (%)		95		
Max.VOC Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Max.HAP Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Estimation Method <sup>5</sup>		AP-42 Section 5.2 Methodology (via ProMax)		

- 1 BF Bottom Fill SP Splash Fill SUB Submerged Fill
- 2 At maximum bulk liquid temperature
- 3 B Ballasted Vessel C Cleaned U Uncleaned (dedicated service)
- O Other (describe)
- 4 List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)
- CA Carbon Adsorption VB Dedicated Vapor Balance (closed system)
- ECD Enclosed Combustion Device F Flare
- TO Thermal Oxidization or Incineration
- 5 EPA EPA Emission Factor in AP-42 MB Material Balance
- TM Test Measurement based upon test data submittal O Other (describe)

ATTACHMENT P

Glycol Dehydrator Data Sheet *(Not Applicable)*



**ATTACHMENT P – GLYCOL DEHYDRATION UNIT  
DATA SHEET – NOT APPLICABLE**

Complete this data sheet for each Glycol Dehydration Unit, Reboiler, Flash Tank and/or Regenerator at the facility. Include gas sample analysis and GRI- GLYCalc™ input and aggregate report. Use extra pages if necessary.

Manufacturer:		Model:			
Max. Dry Gas Flow Rate:		Reboiler Design Heat Input			
Design Type: <input type="checkbox"/> TEG <input type="checkbox"/> DEG <input type="checkbox"/> EG		Source Status <sup>1</sup> :			
Date Installed/Modified/Removed <sup>2</sup> :		Regenerator Still Vent APCD/ERD <sup>3</sup> :			
Control Device/ERD ID# <sup>3</sup> :		Fuel HV (BTU/scf):			
H <sub>2</sub> S Content (gr/100 scf):		Operation (hours/year):			
Pump Rate (gpm):					
Water Content (wt %) in:    Wet Gas:    Dry Gas:					
Is the glycol dehydration unit exempt from 40CFR63 Section 764(d)? <input type="checkbox"/> Yes <input type="checkbox"/> No: If Yes, answer the following:					
The actual annual average flowrate of natural gas to the glycol dehydration unit is less than 85 thousand standard cubic meters per day, as determined by the procedures specified in §63.772(b)(1) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
The actual average emissions of benzene from the glycol dehydration unit process vent to the atmosphere are less than 0.90 megagram per year (1 ton per year), as determined by the procedures specified in §63.772(b)(2) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is the glycol dehydration unit located within an Urbanized Area (UA) or Urban Cluster (UC)? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is a lean glycol pump optimization plan being utilized? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler and mixed with fuel. <input type="checkbox"/> Yes <input type="checkbox"/> No					
What happens when temperature controller shuts off fuel to the reboiler? <input type="checkbox"/> Still vent emissions to the atmosphere. <input type="checkbox"/> Still vent emissions stopped with valve. <input type="checkbox"/> Still vent emissions to glow plug. <input type="checkbox"/> None of the above: Still vent emissions are controlled by an enclosed combustor					
Please indicate if the following equipment is present. <input type="checkbox"/> Flash Tank <input type="checkbox"/> Burner management system that continuously burns condenser or flash tank vapors					
Control Device Technical Data					
Pollutants Controlled		Manufacturer's Guaranteed Control Efficiency (%)			
Emissions Data					
Emission Unit ID / Emission Point ID <sup>4</sup>	Description	Calculation Methodology <sup>5</sup>	PTE <sup>6</sup>	Controlled Maximum Hourly Emissions (lb/hr)	Controlled Maximum Annual Emissions (tpy)


- 1 Enter the Source Status using the following codes:  
NS Construction of New Source ES Existing Source  
MS Modification of Existing Source
- 2 Enter the date (or anticipated date) of the glycol dehydration unit’s installation (construction of source), modification or removal.
- 3 Enter the Air Pollution Control Device (APCD)/Emission Reduction Device (ERD) type designation using the following codes and the device ID number:  
NA None CD Condenser FL Flare  
CC Condenser/Combustion Combination TO Thermal Oxidizer O Other (please list)
- 4 Enter the appropriate Emission Unit ID Numbers and Emission Point ID Numbers for the glycol dehydration unit reboiler vent and glycol regenerator still vent. The glycol dehydration unit reboiler vent and glycol regenerator still vent should be designated RBV-1 and RSV-1, respectively. If the compressor station incorporates multiple glycol dehydration units, a Glycol Dehydration Emission Unit Data Sheet shall be completed for each, using Source Identification RBV-2 and RSV-2, RBV-3 and RSV-3, etc.
- 5 Enter the Potential Emissions Data Reference designation using the following codes:  
MD Manufacturer’s Data AP AP-42  
GR GRI-GLYCalc™ OT Other (please list)
- 6 Enter the Reboiler Vent and Glycol Regenerator Still Vent Potential to Emit (PTE) for the listed regulated pollutants in lbs per hour and tons per year. The Glycol Regenerator Still Vent potential emissions may be determined using the most recent version of the thermodynamic software model GRI-GLYCalc™ (Radian International LLC & Gas Research Institute). **Attach all referenced Potential Emissions Data (or calculations) and the GRI-GLYCalc™ Aggregate Calculations Report (shall include emissions reports, equipment reports, and stream reports) to this Glycol Dehydration Emission Unit Data Sheet(s). Backup pumps do not have to be considered as operating for purposes of PTE.** This PTE data shall be incorporated in the Emissions Summary Sheet.

ATTACHMENT Q

Pneumatic Controller Data Sheet *(Not Applicable)*

**ATTACHMENT Q – PNEUMATIC CONTROLLERS  
DATA SHEET**

**Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011?**

Yes     No

Please list approximate number.

**Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011?**

Yes     No

Please list approximate number.

ATTACHMENT R

**Air Pollution Control Device Data Sheet**

**ATTACHMENT R – AIR POLLUTION CONTROL DEVICE /  
EMISSION REDUCTION DEVICE SHEETS**

Complete the applicable air pollution control device sheets for each flare, vapor combustor, thermal oxidizer, condenser, adsorption system, vapor recovery unit, BTEX Eliminator, Reboiler with and without Glow Plug, etc. at the facility. Use extra pages if necessary.

Emissions calculations must be performed using the most conservative control device efficiency.

*The following five (5) rows are only to be completed if registering an alternative air pollution control device.*

Emission Unit ID: <b>Not Applicable</b>	Make/Model:
Primary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No
Secondary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No

## VAPOR COMBUSTION (Including Enclosed Combustors)

### General Information

Control Device ID#: <b>C001-C002 (existing; no change)</b>	Installation Date: 2011 (C001) & 2015 (C002) <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Maximum Rated Total Flow Capacity ~7,849 scfh                      188,380 scfd	Maximum Design Heat Input (from mfg. spec sheet) 11.66 MMBTU/hr	Design Heat Content 1,500 BTU/scf

### Control Device Information

Type of Vapor Combustion Control?		
<input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Thermal Oxidizer	<input type="checkbox"/> Elevated Flare	<input type="checkbox"/> Ground Flare
Manufacturer: LEED Fabrication Model: Enclosed Combustor 48"	Hours of operation per year? 8,760	

List the emission units whose emissions are controlled by this vapor control device:  
Emission Point ID# S031-S042, S049, S043 (optional)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
S031-S042	Produced Fluid Tanks		
S049	Liquid Loading		
S043	Sand Separator Tank (optional)		

*If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.*

Assist Type (Flares only)	Flare Height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input checked="" type="checkbox"/> Non	~25 feet	4 feet	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Provide determination.

### Waste Gas Information

Maximum Waste Gas Flow Rate 130 (scfm)	Heat Value of Waste Gas Stream Varies BTU/ft <sup>3</sup>	Exit Velocity of the Emissions Stream Varies (ft/s)
---	--	--

*Provide an attachment with the characteristics of the waste gas stream to be burned.*

### Pilot Gas Information

Number of Pilot Lights 1	Fuel Flow Rate to Pilot Flame per Pilot ~50 scfh	Heat Input per Pilot 0.05 MMBTU/hr	Will automatic re-ignition be used? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
-----------------------------	---	---------------------------------------	--

If automatic re-ignition is used, please describe the method.

Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	If Yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input type="checkbox"/> Other:
---	---

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate).* See attached information on unit

Additional information attached?  Yes     No  
Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11(b) and performance testing.

**CONDENSER – Not Applicable**

**General Information**

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Manufacturer:	Model:	Control Device Name:
Control Efficiency (%):		
Manufacturer's required temperature range for control efficiency.      °F		
Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:		
Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.		
Additional information attached? <input type="checkbox"/> Yes <input type="checkbox"/> No Please attach copies of manufacturer's data sheets.		
Is condenser routed to a secondary APCD or ERD? <input type="checkbox"/> Yes <input type="checkbox"/> No		



## ADSORPTION SYSTEM – Not Applicable

### General Information

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Manufacturer:	Model:	Control Device Name:
Design Inlet Volume:      scfm	Adsorbent charge per adsorber vessel and number of adsorber vessels:	
Length of Mass Transfer Zone supplied by the manufacturer:	Adsorber diameter:      ft	Adsorber area:      ft <sup>2</sup>
Adsorbent type and physical properties:	Overall Control Efficiency (%):	
Working Capacity of Adsorbent (%):		

### Operating Parameters

Inlet volume:      scfm @      °F	
Adsorption time per adsorption bed (life expectancy):	Breakthrough Capacity (lbs of VOC/100 lbs of adsorbent):
Temperature range of carbon bed adsorber. °F -      °F	

### Control Device Technical Data

Pollutants Controlled	Manufacturer's Guaranteed Control Efficiency (%)

Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:

Has the control device been tested by the manufacturer and certified?

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.

Additional information attached?  Yes       No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

## VAPOR RECOVERY UNIT

### General Information

Emission Unit ID#: S051

Installation Date: TBD

New       Modified       Relocated

### Device Information

Manufacturer: Ford  
Model: CSG-637

List the emission units whose emissions are controlled by this vapor recovery unit (Emission Point ID# NA)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
NA	Low Pressure Separator		

*If this vapor recovery unit controls emissions from more than six (6) emission units, please attach additional pages.*

Additional information attached?  Yes       No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

The registrant may claim a capture and control efficiency of 95 % (which accounts for 5% downtime) for the vapor recovery unit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup flare that meet the requirements of Section 8.1.2 of this general permit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup VRU.

§ MMBTU/hr values are calculated based on 1500 BTU/scf gas

Flare Size	# of Orifices (N)	Pressure (OZ/in <sup>2</sup> )	m <sup>3</sup> /s	mSCFD	MMBTU/hr
18	2	1	0.0021	6.34	0.39
18	2	2	0.0029	8.97	0.56
18	2	3	0.0036	10.99	0.68
18	2	4	0.0042	12.69	0.78
18	2	5	0.0046	14.18	0.88
18	2	6	0.0051	15.54	0.96
18	2	7	0.0055	16.78	1.04
18	2	8	0.0059	17.94	1.11
18	2	9	0.0062	19.03	1.18
18	2	10	0.0066	20.06	1.24
18	2	11	0.0069	21.04	1.30
18	2	12	0.0072	21.97	1.36
18	2	13	0.0075	22.87	1.42
18	2	14	0.0078	23.73	1.47
18	2	15	0.0081	24.57	1.52
18	2	16	0.0083	25.37	1.57
18	2	17	0.0086	26.15	1.62
18	2	18	0.0088	26.91	1.67
24	4	1	0.0042	12.69	0.78
24	4	2	0.0059	17.94	1.11
24	4	3	0.0072	21.97	1.36
24	4	4	0.0083	25.37	1.57
24	4	5	0.0093	28.37	1.76
24	4	6	0.0102	31.08	1.92
24	4	7	0.0110	33.56	2.08
24	4	8	0.0118	35.88	2.22
24	4	9	0.0125	38.06	2.35
24	4	10	0.0131	40.12	2.48
24	4	11	0.0138	42.08	2.60
24	4	12	0.0144	43.95	2.72
24	4	13	0.0150	45.74	2.83
24	4	14	0.0156	47.47	2.94
24	4	15	0.0161	49.13	3.04
24	4	16	0.0166	50.75	3.14
24	4	17	0.0171	52.31	3.24
24	4	18	0.0176	53.82	3.33
36	10	1	0.0104	31.72	1.96
36	10	2	0.0147	44.85	2.78
36	10	3	0.0180	54.93	3.40

36	10	4	0.0208	63.43	3.92
36	10	5	0.0232	70.92	4.39
36	10	6	0.0255	77.69	4.81
36	10	7	0.0275	83.91	5.19
36	10	8	0.0294	89.71	5.55
36	10	9	0.0312	95.15	5.89
36	10	10	0.0329	100.29	6.21
36	10	11	0.0345	105.19	6.51
36	10	12	0.0360	109.87	6.80
36	10	13	0.0375	114.35	7.08
36	10	14	0.0389	118.67	7.34
36	10	15	0.0403	122.83	7.60
36	10	16	0.0416	126.86	7.85
36	10	17	0.0429	130.77	8.09
36	10	18	0.0441	134.56	8.33
48	14	1	0.0146	44.40	2.75
48	14	2	0.0206	62.79	3.89
48	14	3	0.0252	76.91	4.76
48	14	4	0.0291	88.80	5.49
48	14	5	0.0325	99.29	6.14
48	14	6	0.0356	108.76	6.73
48	14	7	0.0385	117.48	7.27
48	14	8	0.0412	125.59	7.77
48	14	9	0.0437	133.21	8.24
48	14	10	0.0460	140.41	8.69
48	14	11	0.0483	147.27	9.11
48	14	12	0.0504	153.81	9.52
48	14	13	0.0525	160.09	9.91
48	14	14	0.0545	166.14	10.28
48	14	15	0.0564	171.97	10.64
48	14	16	0.0582	177.61	10.99
48	14	17	0.0600	183.07	11.33
48	14	18	0.0617	188.38	11.66



**Environmental Control Equipment  
Data Sheet**

Item/Tag No.:		Page	1	of	2
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Client:		Supplier:	LEED FABRICATION		
Site:		Model No.:	L30-0011-00		
Unit/Lease:		Remarks:			

**GENERAL**

1 Design Code:		NDE:	LEED Fabrication Standards		
2 Service:		Customer Specs:	<input type="checkbox"/> Yes		
3 Description:	Standard Dual Stage 48 High Efficiency Combustor		<input checked="" type="checkbox"/> No		

**PROCESS DATA**

Gas Composition:	mol %	Process Conditions:		
		Variable	Value	Units
4 Methane		Flow Rate	Up to 140	Mscfd
5 Ethane		Pressure	Up to 12	oz/in2
6 Propane		Temperature		°F
7 I-Butane		Molecular Weight		
8 n-Butane		Process/Waste Stream	<input checked="" type="checkbox"/> Gas	<input type="checkbox"/> Liquid
9 I-Pentane		Detailed Process Description / Process Notes:		
10 n-Pentane		1. Turndown 10:1. Based on an expected normal operating rate indicated above.		
11 n-Hexane		2. DRE: 98 % operating at design conditions		
12 CO2		3. Burner Pressure Drop: Min. 0.10 oz/in2		
13 N2				
14 Helium				
15 H2O				
16 C7				
17 C8				
18 C9				
19 C10				
20 C11+				
21 TOTAL				
Other Components:	PPMV	Available Utilities:		
22 H2S		Fuel / Pilot Gas	Min. 30psig Natural Gas /Propane 40-50 SCFH	
23 Benzene		Instrument Air	NA	
24 Toluene		Power	120 V / 60 Hz or Solar Power	
25 E-Benzene		Steam	NA	
26 Xylene		Purge Gas		

**DESIGN DATA**

27 Ambient Temperatures:		Noise Performance Requirements:	Under 85 dBA	
28 Low, °F	-20	Structural Design Code:		
29 High, °F	120	Wind Design Code:	ASCE	
30 Design Conditions:	Pressure/Temperature			
31 Max. Relative Humidity, %	90	Pressure/Speed	100 mph	
32 Elevation (ASL), ft		Category		
33 Area Classification:	Class I Div 2	Seismic Design Code:		
34 Electrical Design Code:	NEC	Location		

**EQUIPMENT SPECIFICATION**

35 Type:	<input type="checkbox"/> Elevated <input checked="" type="checkbox"/> Enclosed	Equipment Design:		
36	<input type="checkbox"/> Above Ground	Component	Material / Size / Rating / Other	
37	<input checked="" type="checkbox"/> Stack <input type="checkbox"/> Multiple Stack	Burner		
38	<input type="checkbox"/> Portable / Trailer	Burner Tip / Assist Gas Burner	304 SS	
39		Burner Body	Carbon Steel	
40 Smokeless By:	<input type="checkbox"/> Steam <input type="checkbox"/> Assist Air	Pilot		
41	<input type="checkbox"/> Gas Assist <input checked="" type="checkbox"/> Staging	Pilot Tip	304 SS	
42		Pilot Line(s)	Carbon Steel	
43 Stack:	<input checked="" type="checkbox"/> Self Supporting	Firebox / Stack		
44 Flare Burner:	<input type="checkbox"/> Non-Smokeless <input checked="" type="checkbox"/> Smokeless <input type="checkbox"/> Gas Assist	Shell	Carbon Steel	
45 Pilot:	<input checked="" type="checkbox"/> Intermittent <input type="checkbox"/> Continuous	Piping	Carbon Steel	
46 Pilot Air Inspirator:	<input checked="" type="checkbox"/> Local <input type="checkbox"/> Remote	Nozzles	Carbon Steel	
47 Pilot Flame Control:	<input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (Thermocouple)	Flanges	Carbon Steel	
48		Insulation	Blanket	
49 Pilot Ignition:	<input type="checkbox"/> Flamefront Generator <input checked="" type="checkbox"/> Inspiring Ignitor	Insulation Pins	304 SS	
50	<input type="checkbox"/> Electronic <input checked="" type="checkbox"/> Automatic <input type="checkbox"/> Manual	Refractory	NA	
51	<input type="checkbox"/> With Pilot Flame Control	Refractory Anchors	NA	
52	<input type="checkbox"/> With Auto Pilot Re-Ignition	Ladders and Platforms	NA	
53		Stack Sample Connections	Per EPA requirements	
54 Pilot Ignition Backup:	<input type="checkbox"/> Manual Specify: i.e Piezo-Electric	Sight Glass	2	
55	<input type="checkbox"/> Battery Pack	Other		




**Environmental Control Equipment  
Data Sheet**

Item/Tag No.:		Page	2	of	3
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Remarks:	-	Supplier:	LEED FABRICATION		
		Model No.:	L30-0011-00		

Client:	
Site:	
Unit/Lease:	

**EQUIPMENT SPECIFICATION**

56	<b>Flame Detection:</b>	<input type="checkbox"/> Thermocouple	<input checked="" type="checkbox"/> Ionization Rod	<b>Auxiliary Equipment</b>	
57		<input type="checkbox"/> UV Scanner		Valves	NA
58	<b>General Configuration:</b>			Blowers	NA
59				Dampers	NA
60				Inlet KO / Liquid Seal	NA
61				Flame / Detonation Arrestor	Yes
62				<b>Instrumentation &amp; Controls</b>	
63				Solenoids / Shut-Off Valves	Check with Sales for available config.
64				Flow Meters	NA
65				Calorimeter	NA
66				Pressure Switches/Transmitters	NA
67				Thermocouples	Check with Sales for available config.
68				Temperature Switches/Transmitters	NA
69				BMS	Check with Sales for available config.
70		CEMS	NA		
71		Other	NA		
72					
73					
74					
75					

**FABRICATION AND INSPECTION**

76	<b>Special requirements</b>	<input type="checkbox"/> Skid Mounted	<input checked="" type="checkbox"/> Concrete Pad	<b>Equipment Info</b>	
77		<input type="checkbox"/> Other		<b>Component</b>	<b>Weight / Dimensions</b>
78				<b>Burner</b>	
79	<b>Inspection</b>	<input checked="" type="checkbox"/> Vendor Standard		Burner Assembly	
80		<input type="checkbox"/> Other. Specify:		<b>Stack</b>	
81	<b>Material Certification</b>	<input checked="" type="checkbox"/> Vendor Standard		Stack Assembly	48" OD x 25' H
82		<input type="checkbox"/> MTR		Pilot Tip	
83		<input type="checkbox"/> Certificate of Compliance		Pilot Line(s)	
84		<input type="checkbox"/> Other (Specify):		Stack Assembly	
85	<b>NDE</b>	<input checked="" type="checkbox"/> Vendor Standard		<b>Auxiliary Equipment</b>	
86		<input type="checkbox"/> Radiography. Specify:		Blowers	
87		<input type="checkbox"/> Ultrasonic. Specify:		Inlet KO / Liquid Seal	
88		<input type="checkbox"/> Liquid Penetrant.		Flame / Detonation Arrestor	
89		<input type="checkbox"/> Magnetic Particles.		Skid	
90		<input type="checkbox"/> PMI. Specify:		<b>Instrumentation &amp; Controls</b>	
91		<input type="checkbox"/> Other. Specify:		BMS	
92	<b>Surface Preparation</b>	<input checked="" type="checkbox"/> Vendor Standard		Control Panel	
93		<input type="checkbox"/> Other. Specify:			
94	<b>Paint System</b>	<input checked="" type="checkbox"/> Vendor Standard			
95		<input type="checkbox"/> Other. Specify:			
96	<b>Finished Color</b>	<input checked="" type="checkbox"/> Vendor Standard			
97		<input type="checkbox"/> Other. Specify:			
98					
99					

**Additional Notes:**




Environmental Control Equipment  
Data Sheet

Item/Tag No.:		Page	3	of	3
Project No.:		Revision:	B		
		Date:	27 February 2014		
Project:		By:	JS		
P.O. No.:	-	Checked:	SG		
RFQ No.:	-	Approved:	MS		
Ref. P&ID:	-	Supplier:	LEED FABRICATION		
Remarks:	-	Model No.:	L30-0011-00		

Client:	
Site:	
Unit/Lease:	

GENERAL ARRANGEMENT

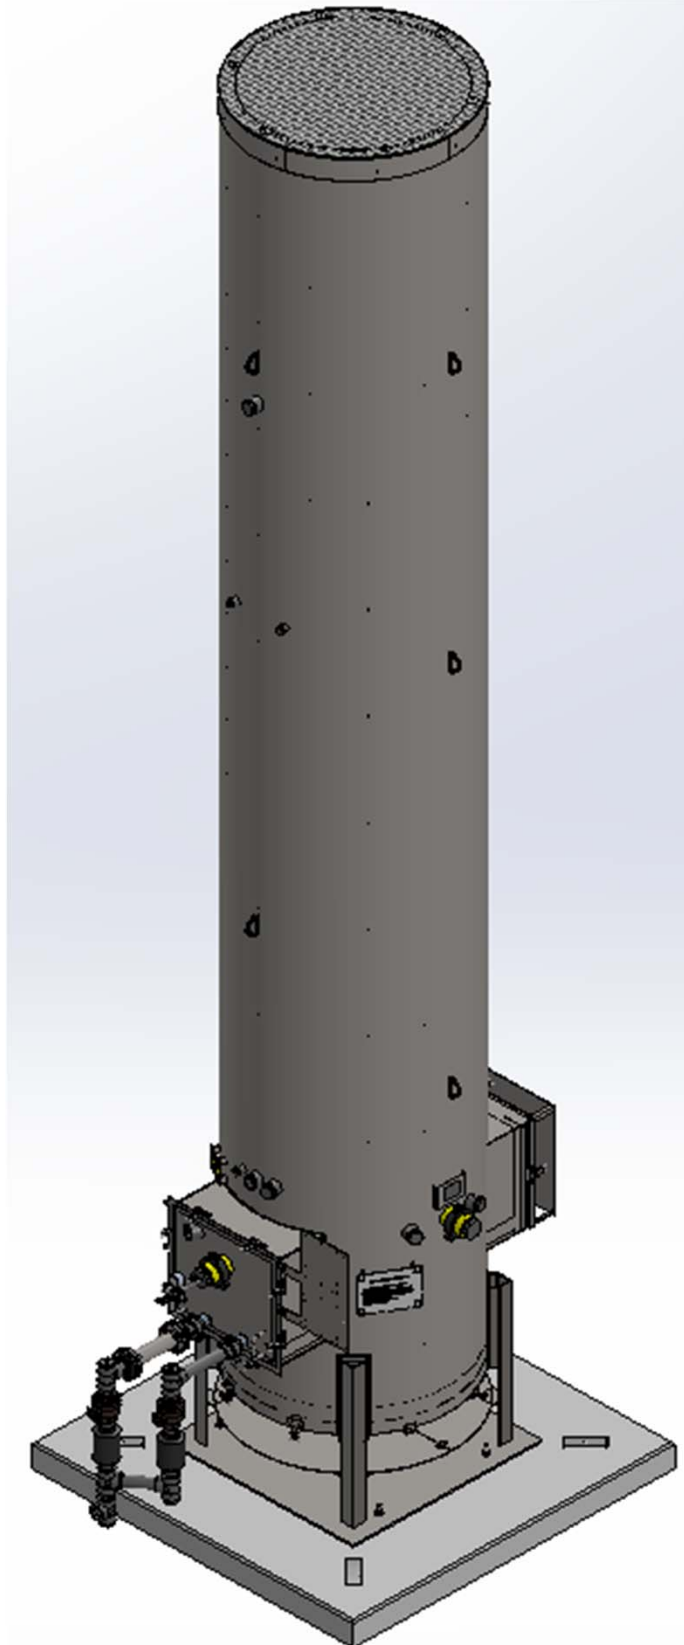

ATTACHMENT S

**Emission Calculations**



Company Name: EOT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Facility-Wide Emission Summary - Controlled**

Wells	11	per pad	Carbon equivalent emissions (CO <sub>2</sub> e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:
Storage Tanks	12	per pad	CO <sub>2</sub> 1
Sand Separator Tank	1	per pad	CH <sub>4</sub> 25
Line Heaters	11	per pad	N <sub>2</sub> O 298
TEGs	3	per pad	
Dehy Reboiler	0	per pad	
Glycol Dehy	0	per pad	
Dehy Drip Tank	0	per pad	
Dehy Combustor	0	per pad	
Compressor	1	per pad	
High Pressure Separator	11	per pad	
Low Pressure Separator	1	per pad	
Vapor Recovery Unit	1	per pad	
Tank Combustor	2	per pad	
Length of lease road	3,990	feet	

Emission Point ID #	Emission Source ID#s	Emission Source Description	NO <sub>x</sub>		CO		VOC		SO <sub>2</sub>		PM <sub>10</sub>		PM <sub>2.5</sub>		CO <sub>2</sub> e	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001-C002	S031-S042	Storage Vessels	---	---	---	---	1.87	8.18	---	---	---	---	---	---	29.17	127.78
C001-C002	S049	Captured Liquid Loading	---	---	---	---	14.81	3.85	---	---	---	---	---	---	---	---
C001	C001	Tank Combustor	1.15	5.03	0.96	4.22	2.8E-04	1.2E-03	0.01	0.03	0.09	0.38	0.09	0.38	1,371.10	6,005.43
C002	C002	Tank Combustor	1.15	5.03	0.96	4.22	2.8E-04	1.2E-03	0.01	0.03	0.09	0.38	0.09	0.38	1,371.10	6,005.43
<b>C001</b>	<b>S031-S042, S049, C001</b>	---	<b>1.15</b>	<b>5.03</b>	<b>0.96</b>	<b>4.22</b>	<b>8.34</b>	<b>6.02</b>	<b>0.01</b>	<b>0.03</b>	<b>0.09</b>	<b>0.38</b>	<b>0.09</b>	<b>0.38</b>	<b>1,385.69</b>	<b>6,069.32</b>
<b>C002</b>	<b>S031-S042, S049, C002</b>	---	<b>1.15</b>	<b>5.03</b>	<b>0.96</b>	<b>4.22</b>	<b>8.34</b>	<b>6.02</b>	<b>0.01</b>	<b>0.03</b>	<b>0.09</b>	<b>0.38</b>	<b>0.09</b>	<b>0.38</b>	<b>1,385.69</b>	<b>6,069.32</b>
E022	S022	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E023	S023	Line Heater	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	134.69	589.92
E024	S024	Line Heater	0.07	0.32	0.06	0.27	4.0E-03	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
E025	S025	Line Heater	0.07	0.32	0.06	0.27	4.0E-03	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
E026	S026	Line Heater	0.07	0.32	0.06	0.27	4.0E-03	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
E027	S027	Line Heater	0.07	0.32	0.06	0.27	4.0E-03	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
E028	S028	Line Heater	0.07	0.32	0.06	0.27	4.0E-03	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
E044	S044	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E045	S045	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E046	S046	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E047	S047	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E050	S050	Line Heater	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	135.14	591.90
E029	S029	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E030	S030	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E048	S048	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E043	S043	Sand Separator Tank	---	---	---	---	0.04	0.18	---	---	---	---	---	---	1.15	5.08
E051	S051	VRU Engine	0.24	1.06	0.49	2.12	0.19	0.81	4.5E-04	2.0E-03	0.01	0.07	0.01	0.07	90.18	394.99
E049	S049	Uncaptured Liquid Loading	---	---	---	---	126.96	33.01	---	---	---	---	---	---	---	---
---	---	Fugitives	---	---	---	---	---	29.95	---	---	---	---	---	---	---	1,047.13
---	---	Haul Roads	---	---	---	---	---	---	---	---	10.72	---	---	1.07	---	---
Facility Total			3.86	16.91	3.52	15.44	143.94	76.31	0.02	0.10	0.29	11.99	0.29	2.34	4,488.45	20,706.56
Facility Total (excluding fugitive emissions)			3.86	16.91	3.52	15.44	16.98	13.35	0.02	0.10	0.29	1.27	0.29	1.27	4,488.45	19,659.43

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name:  
 Facility Name:  
 Project Description:

EOT Production, LLC  
WEU2 Wellpad  
G70-B Application

**Facility-Wide Emission Summary - Controlled**

Emission Point ID #	Emission Source ID#s	Emission Source Description	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		n-Hexane		Total HAP	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001-C002	S031-S042	Storage Vessels	---	---	2.8E-03	0.01	0.01	0.03	2.6E-04	1.2E-03	4.6E-04	2.0E-03	0.05	0.23	0.06	0.28
C001-C002	S049	Captured Liquid Loading	---	---	1.2E-02	3.1E-03	1.9E-02	5.1E-03	8.9E-04	2.3E-04	1.5E-03	3.9E-04	0.39	0.10	0.45	0.12
C001	C001	Tank Combustor	---	---	---	---	---	---	---	---	---	---	---	---	---	---
C002	C002	Tank Combustor	---	---	---	---	---	---	---	---	---	---	---	---	---	---
<b>C001</b>	<b>S031-S042, S049, C001</b>	---	---	---	<b>0.01</b>	<b>0.01</b>	<b>0.01</b>	<b>0.02</b>	<b>5.8E-04</b>	<b>6.9E-04</b>	<b>9.8E-04</b>	<b>1.2E-03</b>	<b>0.22</b>	<b>0.16</b>	<b>0.26</b>	<b>0.20</b>
<b>C002</b>	<b>S031-S042, S049, C002</b>	---	---	---	<b>0.01</b>	<b>0.01</b>	<b>0.01</b>	<b>0.02</b>	<b>5.8E-04</b>	<b>6.9E-04</b>	<b>9.8E-04</b>	<b>1.2E-03</b>	<b>0.22</b>	<b>0.16</b>	<b>0.26</b>	<b>0.20</b>
E022	S022	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E023	S023	Line Heater	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	2.1E-03	0.01
E024	S024	Line Heater	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
E025	S025	Line Heater	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
E026	S026	Line Heater	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
E027	S027	Line Heater	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
E028	S028	Line Heater	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
E044	S044	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E045	S045	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E046	S046	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E047	S047	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E050	S050	Line Heater	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	2.1E-03	0.01
E029	S029	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E030	S030	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E048	S048	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E043	S043	Sand Separator Tank	---	---	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	1.0E-03	<0.01	2.0E-03	1.0E-02
E051	S051	VRU Engine	0.02	0.07	1.2E-03	5.3E-03	4.3E-04	1.9E-03	1.9E-05	8.4E-05	1.5E-04	6.6E-04	---	---	0.02	0.11
E049	S049	Uncaptured Liquid Loading	---	---	0.10	0.03	0.17	0.04	7.6E-03	2.0E-03	0.01	3.4E-03	3.38	0.88	3.88	1.01
---	---	Fugitives	---	---	---	0.01	---	0.04	---	<0.01	---	0.05	---	0.44	---	1.24
---	---	Haul Roads	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Facility Total			0.02	0.07	0.12	0.06	0.19	0.12	0.01	3.5E-03	0.02	0.06	3.85	1.76	4.44	2.88
Facility Total (excluding fugitive emissions)			0.02	0.07	0.02	0.02	0.03	0.03	1.2E-03	1.5E-03	2.1E-03	3.1E-03	0.47	0.43	0.57	0.63

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name: EOT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Produced Fluids Storage Vessels**

**Potential Throughput**

Operational Hours 8,760 hrs/yr  
 Maximum Condensate Throughput<sup>1</sup> 20,034 bbl/month  
 Maximum Produced Water Throughput<sup>2</sup> 82,428 bbl/month

<sup>1</sup> Based on the highest monthly throughput recorded at the site (July 2015). Includes a safety multiplier of approximately 13.  
<sup>2</sup> Based on the highest monthly throughput recorded at the site (May 2013). Includes a safety multiplier of approximately 13.  
 Overall Control Efficiency of Combustor 95%

**Storage Tanks - Uncontrolled**

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	23.338	102.222	23.338	102.222
Ethane	<0.001	<0.001	<0.001	<0.001	20.610	90.271	20.610	90.271
Propane	0.101	0.440	1.851	8.105	15.484	67.818	17.435	76.364
Isobutane	0.020	0.089	0.343	1.501	3.062	13.414	3.426	15.004
n-Butane	0.039	0.170	0.660	2.893	6.100	26.720	6.800	29.783
Isopentane	0.015	0.064	0.248	1.086	2.296	10.055	2.558	11.205
n-Pentane	0.014	0.059	0.229	1.002	2.146	9.399	2.388	10.461
n-Hexane	0.006	0.025	0.097	0.426	0.927	4.061	1.030	4.513
Cyclohexane	8.5E-05	3.7E-04	0.001	0.006	0.018	0.081	0.020	0.087
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	0.006	0.028	0.109	0.479	1.109	4.860	1.225	5.367
n-Octane	0.002	0.010	0.040	0.176	0.417	1.826	0.459	2.012
n-Nonane	4.2E-04	0.002	0.007	0.031	0.077	0.337	0.084	0.370
n-Decane	1.8E-04	0.001	0.003	0.013	0.034	0.149	0.037	0.162
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	0.009	0.041	0.157	0.687	1.476	6.465	1.642	7.193
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	1.1E-04	5.0E-04	0.005	0.020	0.050	0.221	0.055	0.242
Toluene	2.5E-04	0.001	0.006	0.025	0.111	0.487	0.117	0.513
Ethylbenzene	1.3E-05	5.5E-05	2.3E-04	0.001	0.005	0.022	0.005	0.023
m-Xylene	2.1E-05	9.4E-05	3.9E-04	0.002	0.009	0.039	0.009	0.040
Isooctane	3.5E-04	0.002	0.006	0.026	0.060	0.262	0.066	0.289
<b>Total VOC Emissions:</b>	0.21	0.93	3.76	16.48	33.38	146.21	37.36	163.63
<b>Total HAP Emissions:</b>	6.5E-03	0.03	0.11	0.50	1.16	5.09	1.28	5.62

<sup>1</sup> Uncontrolled emissions calculation using Promax (sum of produced water and condensate). Non-methane emissions are taken from the tank emissions stencil. Methane emissions are taken from the flash stream composition.  
<sup>2</sup> Composition of condensate from WEU-6 sample from 12/12/2014.

Company Name: EOT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Produced Fluids Storage Vessels**

**Storage Tanks - Controlled**

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy			lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	1.167	5.111	1.167	5.111
Ethane	<0.001	<0.001	<0.001	<0.001	1.030	4.514	1.030	4.514
Propane	0.005	0.022	0.093	0.405	0.774	3.391	0.872	3.818
Isobutane	0.001	0.004	0.017	0.075	0.153	0.671	0.171	0.750
n-Butane	0.002	0.009	0.033	0.145	0.305	1.336	0.340	1.489
Isopentane	0.001	0.003	0.012	0.054	0.115	0.503	0.128	0.560
n-Pentane	0.001	0.003	0.011	0.050	0.107	0.470	0.119	0.523
n-Hexane	2.9E-04	0.001	0.005	0.021	0.046	0.203	0.052	0.226
Cyclohexane	4.3E-06	1.9E-05	7.2E-05	3.2E-04	0.001	0.004	0.001	0.004
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	3.2E-04	0.001	0.005	0.024	0.055	0.243	0.061	0.268
n-Octane	1.2E-04	0.001	0.002	0.009	0.021	0.091	0.023	0.101
n-Nonane	2.1E-05	9.2E-05	3.5E-04	0.002	0.004	0.017	0.004	0.018
n-Decane	8.8E-06	3.9E-05	1.5E-04	0.001	0.002	0.007	0.002	0.008
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	4.7E-04	0.002	0.008	0.034	0.074	0.323	0.082	0.360
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	5.7E-06	2.5E-05	2.3E-04	0.001	0.003	0.011	0.003	0.012
Toluene	1.3E-05	5.6E-05	2.8E-04	0.001	0.006	0.024	0.006	0.026
Ethylbenzene	6.3E-07	2.8E-06	1.2E-05	5.1E-05	2.5E-04	0.001	2.6E-04	0.001
m-Xylene	1.1E-06	4.7E-06	2.0E-05	8.6E-05	4.4E-04	0.002	4.6E-04	0.002
Isooctane	1.8E-05	7.8E-05	3.0E-04	0.001	0.003	0.013	0.003	0.014
<b>Total VOC Emissions:</b>	1.1E-02	0.05	0.19	0.82	1.67	7.31	1.87	8.18
<b>Total HAP Emissions:</b>	3.3E-04	1.4E-03	5.7E-03	2.5E-02	5.8E-02	0.25	0.06	0.28

Company Name: EOT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**VRU Engine**

**Engine Information:**

Manufacturer:	Ford
Model No.:	CSG-637
Engine ID	S051
Stroke Cycle:	4-stroke
Type of Burn:	Rich
Rated Horsepower (bhp):	110

**Engine Fuel Information:**

Fuel Type:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Specific Fuel Consumption (Btu/bhp-hr):	7,000
Maximum Fuel Consumption at 100% Load (scf/hr):	733
Heat Input (MMBtu/hr):	0.77
Potential Fuel Consumption (MMBtu/yr):	6,745
Max. Fuel Consumption at 100%(MMscf/hr):	0.0007
Max. Fuel Consumption (MMscf/yr):	6.4
Max. Annual Hours of Operation (hr/yr):	8,760

**Engine Emissions Data:**

Pollutant	Emission Factor	Units	Maximum Potential Emissions		Estimation Basis / Emission Factor Source
			lbs/hr	tpy	
NO <sub>x</sub>	1.0	g/bhp-hr	0.24	1.06	Manufacturer
VOC (excludes HCHO)	0.7	g/bhp-hr	0.17	0.74	Manufacturer
VOC (includes HCHO)	---	---	0.19	0.81	VOC + HCHO
CO	2.0	g/bhp-hr	0.49	2.12	Manufacturer
SO <sub>x</sub>	0.001	lb/MMBtu	0.00	0.00	AP-42, Table 3.2-3 (Aug-2000)
PM <sub>10</sub>	0.02	lb/MMBtu	0.01	0.07	AP-42, Table 3.2-3 (Aug-2000)
PM <sub>2.5</sub>	0.02	lb/MMBtu	0.01	0.07	AP-42, Table 3.2-3 (Aug-2000)
Formaldehyde (HCHO)	0.02	lb/MMBtu	0.02	0.07	AP-42, Table 3.2-3 (Aug-2000)
GHG (CO <sub>2</sub> e)	See Table Below		90	395	40 CFR 98, Tables C-1 & C-2
Other (Total HAP)	See Table Below		0.02	0.11	AP-42, Table 3.2-3 (Aug-2000)

**Notes:**

1. PM<sub>10</sub> and PM<sub>2.5</sub> are total values (filterable + condensable).
2. GHG (CO<sub>2</sub>e) is carbon dioxide equivalent, which is the summation of CO<sub>2</sub> (GWP = 1) + CH<sub>4</sub> (GWP = 25) + N<sub>2</sub>O (GWP = 298).
3. Total HAP is the summation of all hazardous air pollutants for which there is a published emission factor for this source type.

Company Name:  
 Facility Name:  
 Project Description:

EOT Production, LLC  
WEU2 Wellpad  
G70-B Application

**VRU Engine**

**Greenhouse Gas (GHG) & Hazardous Air Pollutant (HAP) Emissions Calculations:**

Pollutant	Emission Factor	Units	Maximum Potential Emissions		Estimation Basis / Emission Factor Source
			lbs/hr	tpy	
<b>GHGs:</b>					
CO <sub>2</sub>	53.06	kg/MMBtu	90.09	394.59	40 CFR 98, Table C-1
CH <sub>4</sub>	0.001	kg/MMBtu	1.7E-03	7.4E-03	40 CFR 98, Table C-2
N <sub>2</sub> O	0.0001	kg/MMBtu	1.7E-04	7.4E-04	40 CFR 98, Table C-2
<b>GHG (CO<sub>2</sub>e)</b>			<b>90</b>	<b>395</b>	
<b>Organic HAPs:</b>					
1,1,2,2-Tetrachloroethane	2.53E-05	lb/MMBtu	1.9E-05	8.5E-05	AP-42, Table 3.2-3 (Aug-2000)
1,1,2-Trichloroethane	1.53E-05	lb/MMBtu	1.2E-05	5.2E-05	AP-42, Table 3.2-3 (Aug-2000)
1,3-Butadiene	6.63E-04	lb/MMBtu	5.1E-04	2.2E-03	AP-42, Table 3.2-3 (Aug-2000)
1,3-Dichloropropene	1.27E-05	lb/MMBtu	9.8E-06	4.3E-05	AP-42, Table 3.2-3 (Aug-2000)
Acetaldehyde	2.79E-03	lb/MMBtu	2.1E-03	9.4E-03	AP-42, Table 3.2-3 (Aug-2000)
Acrolein	2.63E-03	lb/MMBtu	2.0E-03	8.9E-03	AP-42, Table 3.2-3 (Aug-2000)
Benzene	1.58E-03	lb/MMBtu	1.2E-03	5.3E-03	AP-42, Table 3.2-3 (Aug-2000)
Carbon Tetrachloride	1.77E-05	lb/MMBtu	1.4E-05	6.0E-05	AP-42, Table 3.2-3 (Aug-2000)
Chlorobenzene	1.29E-05	lb/MMBtu	9.9E-06	4.4E-05	AP-42, Table 3.2-3 (Aug-2000)
Chloroform	1.37E-05	lb/MMBtu	1.1E-05	4.6E-05	AP-42, Table 3.2-3 (Aug-2000)
Ethylbenzene	2.48E-05	lb/MMBtu	1.9E-05	8.4E-05	AP-42, Table 3.2-3 (Aug-2000)
Ethylene Dibromide	2.13E-05	lb/MMBtu	1.6E-05	7.2E-05	AP-42, Table 3.2-3 (Aug-2000)
Methanol	3.06E-03	lb/MMBtu	2.4E-03	1.0E-02	AP-42, Table 3.2-3 (Aug-2000)
Methylene Chloride	4.12E-05	lb/MMBtu	3.2E-05	1.4E-04	AP-42, Table 3.2-3 (Aug-2000)
Naphthalene	9.71E-05	lb/MMBtu	7.5E-05	3.3E-04	AP-42, Table 3.2-3 (Aug-2000)
PAH	1.41E-04	lb/MMBtu	1.1E-04	4.8E-04	AP-42, Table 3.2-3 (Aug-2000)
Styrene	1.19E-05	lb/MMBtu	9.2E-06	4.0E-05	AP-42, Table 3.2-3 (Aug-2000)
Toluene	5.58E-04	lb/MMBtu	4.3E-04	1.9E-03	AP-42, Table 3.2-3 (Aug-2000)
Vinyl Chloride	7.18E-06	lb/MMBtu	5.5E-06	2.4E-05	AP-42, Table 3.2-3 (Aug-2000)
Xylene	1.95E-04	lb/MMBtu	1.5E-04	6.6E-04	AP-42, Table 3.2-3 (Aug-2000)
<b>Total HAP</b>			<b>0.02</b>	<b>0.11</b>	

Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Sand Separator Tank**

Throughput Parameter	Value	Units
Tank Capacity	5,880	gallons
Operational Hours	8,760	hrs/yr
Throughput	280	bbl/month
Percent Produced Water	50%	
Total Produced Water Throughput	140	bbl/month

<sup>1</sup> Conservatively assumes 2 turnovers/month of sand and produced water.

Description	Potential Throughput (gal/yr)
Produced Water and Sand	141,120

**Sand Separator Tank (140 bbl) - Uncontrolled (Per tank) <sup>2,3</sup>**

Constituent	Total Emissions <sup>1</sup>	
	lb/hr	tpy
Methane	0.046	0.203
Ethane	0.025	0.109
Propane	0.013	0.057
Isobutane	0.004	0.017
n-Butane	0.009	0.041
Isopentane	0.004	0.019
n-Pentane	0.004	0.018
Hexanes	0.002	0.009
Heptanes	0.002	0.009
Octane	0.001	0.003
Nonane	<0.001	0.001
Decane	<0.001	<0.001
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
n-Hexane	0.001	0.006
2,2,4-Trimethylpentane	<0.001	<0.001
<b>Total HC Emissions:</b>	0.113	0.493
<b>Total VOC Emissions:</b>	0.041	0.181
<b>Total HAP Emissions:</b>	0.002	0.010

<sup>2</sup> E&P TANK 2.0 calculates working, breathing and flashing losses and reports the sum as one total.

<sup>3</sup> E&P TANK v2.0 emission calculations are based on WEU-6 sample from 12/12/2014.

**Company Name:** EQT Production, LLC  
**Facility Name:** WEU2 Wellpad  
**Project Description:** G70-B Application

**Sand Separator Tank**

**Sand Separator Tank (140 bbl) - Controlled (Per tank)**

Constituent	Total Emissions	
	lb/hr	tpy
Methane	0.046	0.203
Ethane	0.025	0.109
Propane	0.013	0.057
Isobutane	0.004	0.017
n-Butane	0.009	0.041
Isopentane	0.004	0.019
n-Pentane	0.004	0.018
Hexanes	0.002	0.009
Heptanes	0.002	0.009
Octane	0.001	0.003
Nonane	<0.001	0.001
Decane	<0.001	<0.001
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
n-Hexane	0.001	0.006
2,2,4-Trimethylpentane	<0.001	<0.001
<b>Total Emissions:</b>	0.113	0.495
<b>Total VOC Emissions:</b>	0.041	0.181
<b>Total HAP Emissions:</b>	0.002	0.010



Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Tank Combustors**

<b>Source Designation:</b>	<b>C001 &amp; C002</b>
Pilot Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Pilot Rating (MMBtu/hr)	0.05
Combustor Rating (MMBtu/hr) <sup>1</sup>	11.66
Combustor Rating (Mscfd) <sup>1</sup>	188.380
Combustor Rating (scf/hr)	7,849
Pilot Fuel Consumption (scf/hr):	50.00
Potential Annual Hours of Operation (hr/yr):	8,760

<sup>1</sup> Maximum heat input for 48" model from Leed Enclosed Combustor Operations Manual

**Enclosed Combustor Emissions**

Pollutant	Emission Factors <sup>2</sup>	Combustor		Pilot		Total	
	(lb/MMBtu)	(lb/hr)	(tpy)	(lb/hr)	(tpy)	(lb/hr)	(tpy)
NO <sub>x</sub>	0.10	1.14	5.01	5.1E-03	0.02	1.15	5.03
CO	0.08	0.96	4.21	4.3E-03	0.02	0.96	4.22
VOC	5.4E-03	---	---	2.8E-04	1.2E-03	0.00	0.00
SO <sub>2</sub>	5.9E-04	0.01	0.03	3.1E-05	1.4E-04	0.01	0.03
PM/PM <sub>10</sub>	0.01	0.09	0.38	3.9E-04	1.7E-03	0.09	0.38
CO <sub>2</sub>	117.00	1364.189	5975.146	6.14	26.90	1370.33	6002.05
CH <sub>4</sub>	2.2E-03	---	---	1.2E-04	5.1E-04	0.00	0.00
N <sub>2</sub> O	2.2E-04	2.6E-03	0.01	1.2E-05	5.1E-05	2.6E-03	0.01

<sup>2</sup> Emission factors from AP-42 Ch. 1.4 for natural gas combustion were used as they were determined to be most representative of the process. Ch. 5.3 (Natural Gas Processing) was consulted, however, factors contained there are appropriate for amine gas sweetening processes, which is not the case at the wellpad. Also, Ch. 13.5 (Industrial Flares) was consulted, but since the control device in this case is an enclosed combustor vs. an elevated flare, these factors were also determined to be inappropriate.

Combustor Maximum Loading:  $\frac{7849.17 \text{ scf}}{\text{hr}} \times \frac{\text{lb-mol}}{379.5 \text{ scf}} \times \frac{20.01 \text{ lb}}{\text{lb-mol}} = 413.81 \text{ lb/hr}$

**Company Name:** EQT Production, LLC  
**Facility Name:** WEU2 Wellpad  
**Project Description:** G70-B Application

<b>Line Heaters</b>
---------------------

<b>Source Designation:</b>	<b>S022, S044-S047</b>
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.54
Fuel Consumption (MMscf/hr):	1.47E-03
Potential Annual Hours of Operation (hr/yr):	8,760

**Criteria and Manufacturer Specific Pollutant Emission Rates:**

Pollutant	Emission Factor (lb/MMscf) <sup>1, 4</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
NO <sub>x</sub>	100	0.15	0.64
CO	84	0.12	0.54
VOC	5.5	0.01	0.04
SO <sub>2</sub>	0.6	8.8E-04	3.9E-03
PM Total	7.6	0.01	0.05
PM Condensable	5.7	0.01	0.04
PM <sub>10</sub> (Filterable)	1.9	2.8E-03	0.01
PM <sub>2.5</sub> (Filterable)	1.9	2.8E-03	0.01
Lead	5.00E-04	7.3E-07	3.2E-06
CO <sub>2</sub>	117.0	180.00	788.38
CH <sub>4</sub>	2.21E-03	3.4E-03	1.5E-02
N <sub>2</sub> O	2.21E-04	3.4E-04	1.5E-03

Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Line Heaters**

**Hazardous Air Pollutant (HAP) Potential Emissions:**

Pollutant	Emission Factor (lb/MMscf) <sup>1</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
<b>HAPs:</b>			
2-Methylnaphthalene	2.4E-05	3.5E-08	1.5E-07
3-Methylchloranthrene	1.8E-06	2.6E-09	1.2E-08
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.3E-08	1.0E-07
Acenaphthene	1.8E-06	2.6E-09	1.2E-08
Acenaphthylene	1.8E-06	2.6E-09	1.2E-08
Anthracene	2.4E-06	3.5E-09	1.5E-08
Benz(a)anthracene	1.8E-06	2.6E-09	1.2E-08
Benzene	2.1E-03	3.1E-06	1.3E-05
Benzo(a)pyrene	1.2E-06	1.8E-09	7.7E-09
Benzo(b)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Benzo(g,h,i)perylene	1.2E-06	1.8E-09	7.7E-09
Benzo(k)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Chrysene	1.8E-06	2.6E-09	1.2E-08
Dibenzo(a,h) anthracene	1.2E-06	1.8E-09	7.7E-09
Dichlorobenzene	1.2E-03	1.8E-06	7.7E-06
Fluoranthene	3.0E-06	4.4E-09	1.9E-08
Fluorene	2.8E-06	4.1E-09	1.8E-08
Formaldehyde	7.5E-02	1.1E-04	4.8E-04
Hexane	1.8E+00	2.6E-03	1.2E-02
Indo(1,2,3-cd)pyrene	1.8E-06	2.6E-09	1.2E-08
Naphthalene	6.1E-04	8.9E-07	3.9E-06
Phenanthrene	1.7E-05	2.5E-08	1.1E-07
Pyrene	5.0E-06	7.3E-09	3.2E-08
Toluene	3.4E-03	5.0E-06	2.2E-05
Arsenic	2.0E-04	2.9E-07	1.3E-06
Beryllium	1.2E-05	1.8E-08	7.7E-08
Cadmium	1.1E-03	1.6E-06	7.1E-06
Chromium	1.4E-03	2.1E-06	9.0E-06
Cobalt	8.4E-05	1.2E-07	5.4E-07
Manganese	3.8E-04	5.6E-07	2.4E-06
Mercury	2.6E-04	3.8E-07	1.7E-06
Nickel	2.1E-03	3.1E-06	1.3E-05
Selenium	2.4E-05	3.5E-08	1.5E-07
<b>Total HAP</b>		<b>2.8E-03</b>	<b>1.2E-02</b>

<sup>1</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

<sup>2</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

<sup>3</sup> Annual Emissions (tons/yr)<sub>Potential</sub> = (lb/hr)<sub>Emissions</sub> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

<sup>4</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

**Company Name:** EQT Production, LLC  
**Facility Name:** WEU2 Wellpad  
**Project Description:** G70-B Application

<b>Line Heaters</b>
---------------------

<b>Source Designation:</b>	<b>S024-S028</b>
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	0.77
Fuel Consumption (MMscf/hr):	7.33E-04
Potential Annual Hours of Operation (hr/yr):	8,760

**Criteria and Manufacturer Specific Pollutant Emission Rates:**

Pollutant	Emission Factor (lb/MMscf) <sup>1, 4</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
NO <sub>x</sub>	100	0.07	0.32
CO	84	0.06	0.27
VOC	5.5	4.0E-03	0.02
SO <sub>2</sub>	0.6	4.4E-04	1.9E-03
PM Total	7.6	0.01	0.02
PM Condensable	5.7	4.2E-03	0.02
PM <sub>10</sub> (Filterable)	1.9	1.4E-03	0.01
PM <sub>2.5</sub> (Filterable)	1.9	1.4E-03	0.01
Lead	5.00E-04	3.7E-07	1.6E-06
CO <sub>2</sub>	117.0	90.00	394.19
CH <sub>4</sub>	2.21E-03	1.7E-03	7.4E-03
N <sub>2</sub> O	2.21E-04	1.7E-04	7.4E-04

Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

<b>Line Heaters</b>
---------------------

**Hazardous Air Pollutant (HAP) Potential Emissions:**

Pollutant	Emission Factor (lb/MMscf) <sup>1</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
<b>HAPs:</b>			
2-Methylnaphthalene	2.4E-05	1.8E-08	7.7E-08
3-Methylchloranthrene	1.8E-06	1.3E-09	5.8E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.2E-08	5.1E-08
Acenaphthene	1.8E-06	1.3E-09	5.8E-09
Acenaphthylene	1.8E-06	1.3E-09	5.8E-09
Anthracene	2.4E-06	1.8E-09	7.7E-09
Benz(a)anthracene	1.8E-06	1.3E-09	5.8E-09
Benzene	2.1E-03	1.5E-06	6.7E-06
Benzo(a)pyrene	1.2E-06	8.8E-10	3.9E-09
Benzo(b)fluoranthene	1.8E-06	1.3E-09	5.8E-09
Benzo(g,h,i)perylene	1.2E-06	8.8E-10	3.9E-09
Benzo(k)fluoranthene	1.8E-06	1.3E-09	5.8E-09
Chrysene	1.8E-06	1.3E-09	5.8E-09
Dibenzo(a,h) anthracene	1.2E-06	8.8E-10	3.9E-09
Dichlorobenzene	1.2E-03	8.8E-07	3.9E-06
Fluoranthene	3.0E-06	2.2E-09	9.6E-09
Fluorene	2.8E-06	2.1E-09	9.0E-09
Formaldehyde	7.5E-02	5.5E-05	2.4E-04
Hexane	1.8E+00	1.3E-03	5.8E-03
Indo(1,2,3-cd)pyrene	1.8E-06	1.3E-09	5.8E-09
Naphthalene	6.1E-04	4.5E-07	2.0E-06
Phenanthrene	1.7E-05	1.2E-08	5.5E-08
Pyrene	5.0E-06	3.7E-09	1.6E-08
Toluene	3.4E-03	2.5E-06	1.1E-05
Arsenic	2.0E-04	1.5E-07	6.4E-07
Beryllium	1.2E-05	8.8E-09	3.9E-08
Cadmium	1.1E-03	8.1E-07	3.5E-06
Chromium	1.4E-03	1.0E-06	4.5E-06
Cobalt	8.4E-05	6.2E-08	2.7E-07
Manganese	3.8E-04	2.8E-07	1.2E-06
Mercury	2.6E-04	1.9E-07	8.3E-07
Nickel	2.1E-03	1.5E-06	6.7E-06
Selenium	2.4E-05	1.8E-08	7.7E-08
<b>Total HAP</b>		<b>1.4E-03</b>	<b>6.1E-03</b>

<sup>1</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

<sup>2</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

<sup>3</sup> Annual Emissions (tons/yr)<sub>Potential</sub> = (lb/hr)<sub>Emissions</sub> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

<sup>4</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

**Company Name:** EQT Production, LLC  
**Facility Name:** WEU2 Wellpad  
**Project Description:** G70-B Application

<b>Line Heater</b>
--------------------

<b>Source Designation:</b>	<b>S023</b>
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.15
Fuel Consumption (MMscf/hr):	1.10E-03
Potential Annual Hours of Operation (hr/yr):	8,760

**Criteria and Manufacturer Specific Pollutant Emission Rates:**

Pollutant	Emission Factor (lb/MMscf) <sup>1, 4</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
NO <sub>x</sub>	100	0.11	0.48
CO	84	0.09	0.40
VOC	5.5	0.01	0.03
SO <sub>2</sub>	0.6	6.6E-04	2.9E-03
PM Total	7.6	0.01	0.04
PM Condensable	5.7	0.01	0.03
PM <sub>10</sub> (Filterable)	1.9	2.1E-03	0.01
PM <sub>2.5</sub> (Filterable)	1.9	2.1E-03	0.01
Lead	5.00E-04	5.5E-07	2.4E-06
CO <sub>2</sub>	117.0	134.55	589.32
CH <sub>4</sub>	2.21E-03	2.5E-03	1.1E-02
N <sub>2</sub> O	2.21E-04	2.5E-04	1.1E-03

Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Line Heater**

**Hazardous Air Pollutant (HAP) Potential Emissions:**

Pollutant	Emission Factor (lb/MMscf) <sup>1</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
<b>HAPs:</b>			
2-Methylnaphthalene	2.4E-05	2.6E-08	1.2E-07
3-Methylchloranthrene	1.8E-06	2.0E-09	8.6E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.8E-08	7.7E-08
Acenaphthene	1.8E-06	2.0E-09	8.6E-09
Acenaphthylene	1.8E-06	2.0E-09	8.6E-09
Anthracene	2.4E-06	2.6E-09	1.2E-08
Benz(a)anthracene	1.8E-06	2.0E-09	8.6E-09
Benzene	2.1E-03	2.3E-06	1.0E-05
Benzo(a)pyrene	1.2E-06	1.3E-09	5.8E-09
Benzo(b)fluoranthene	1.8E-06	2.0E-09	8.6E-09
Benzo(g,h,i)perylene	1.2E-06	1.3E-09	5.8E-09
Benzo(k)fluoranthene	1.8E-06	2.0E-09	8.6E-09
Chrysene	1.8E-06	2.0E-09	8.6E-09
Dibenzo(a,h)anthracene	1.2E-06	1.3E-09	5.8E-09
Dichlorobenzene	1.2E-03	1.3E-06	5.8E-06
Fluoranthene	3.0E-06	3.3E-09	1.4E-08
Fluorene	2.8E-06	3.1E-09	1.3E-08
Formaldehyde	7.5E-02	8.2E-05	3.6E-04
Hexane	1.8E+00	2.0E-03	8.6E-03
Indo(1,2,3-cd)pyrene	1.8E-06	2.0E-09	8.6E-09
Naphthalene	6.1E-04	6.7E-07	2.9E-06
Phenanthrene	1.7E-05	1.9E-08	8.2E-08
Pyrene	5.0E-06	5.5E-09	2.4E-08
Toluene	3.4E-03	3.7E-06	1.6E-05
Arsenic	2.0E-04	2.2E-07	9.6E-07
Beryllium	1.2E-05	1.3E-08	5.8E-08
Cadmium	1.1E-03	1.2E-06	5.3E-06
Chromium	1.4E-03	1.5E-06	6.7E-06
Cobalt	8.4E-05	9.2E-08	4.0E-07
Manganese	3.8E-04	4.2E-07	1.8E-06
Mercury	2.6E-04	2.8E-07	1.2E-06
Nickel	2.1E-03	2.3E-06	1.0E-05
Selenium	2.4E-05	2.6E-08	1.2E-07
<b>Total HAP</b>		<b>2.1E-03</b>	<b>9.1E-03</b>

<sup>1</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

<sup>2</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

<sup>3</sup> Annual Emissions (tons/yr)<sub>Potential</sub> = (lb/hr)<sub>Emissions</sub> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

<sup>4</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

**Company Name:** EQT Production, LLC  
**Facility Name:** WEU2 Wellpad  
**Project Description:** G70-B Application

<b>Line Heater</b>
--------------------

<b>Source Designation:</b>	<b>S050</b>
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.15
Fuel Consumption (MMscf/hr):	1.10E-03
Potential Annual Hours of Operation (hr/yr):	8,760

**Criteria and Manufacturer Specific Pollutant Emission Rates:**

Pollutant	Emission Factor (lb/MMscf) <sup>1, 4</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
NO <sub>x</sub>	100	0.11	0.48
CO	84	0.09	0.40
VOC	5.5	0.01	0.03
SO <sub>2</sub>	0.6	6.6E-04	2.9E-03
PM Total	7.6	0.01	0.04
PM Condensable	5.7	0.01	0.03
PM <sub>10</sub> (Filterable)	1.9	2.1E-03	0.01
PM <sub>2.5</sub> (Filterable)	1.9	2.1E-03	0.01
Lead	5.00E-04	5.5E-07	2.4E-06
CO <sub>2</sub>	117.0	135.00	591.29
CH <sub>4</sub>	2.21E-03	2.5E-03	1.1E-02
N <sub>2</sub> O	2.21E-04	2.5E-04	1.1E-03



Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Line Heater**

**Hazardous Air Pollutant (HAP) Potential Emissions:**

Pollutant	Emission Factor (lb/MMscf) <sup>1</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
<b>HAPs:</b>			
2-Methylnaphthalene	2.4E-05	2.6E-08	1.2E-07
3-Methylchloranthrene	1.8E-06	2.0E-09	8.7E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.8E-08	7.7E-08
Acenaphthene	1.8E-06	2.0E-09	8.7E-09
Acenaphthylene	1.8E-06	2.0E-09	8.7E-09
Anthracene	2.4E-06	2.6E-09	1.2E-08
Benz(a)anthracene	1.8E-06	2.0E-09	8.7E-09
Benzene	2.1E-03	2.3E-06	1.0E-05
Benzo(a)pyrene	1.2E-06	1.3E-09	5.8E-09
Benzo(b)fluoranthene	1.8E-06	2.0E-09	8.7E-09
Benzo(g,h,i)perylene	1.2E-06	1.3E-09	5.8E-09
Benzo(k)fluoranthene	1.8E-06	2.0E-09	8.7E-09
Chrysene	1.8E-06	2.0E-09	8.7E-09
Dibenzo(a,h)anthracene	1.2E-06	1.3E-09	5.8E-09
Dichlorobenzene	1.2E-03	1.3E-06	5.8E-06
Fluoranthene	3.0E-06	3.3E-09	1.4E-08
Fluorene	2.8E-06	3.1E-09	1.3E-08
Formaldehyde	7.5E-02	8.2E-05	3.6E-04
Hexane	1.8E+00	2.0E-03	8.7E-03
Indo(1,2,3-cd)pyrene	1.8E-06	2.0E-09	8.7E-09
Naphthalene	6.1E-04	6.7E-07	2.9E-06
Phenanthrene	1.7E-05	1.9E-08	8.2E-08
Pyrene	5.0E-06	5.5E-09	2.4E-08
Toluene	3.4E-03	3.7E-06	1.6E-05
Arsenic	2.0E-04	2.2E-07	9.6E-07
Beryllium	1.2E-05	1.3E-08	5.8E-08
Cadmium	1.1E-03	1.2E-06	5.3E-06
Chromium	1.4E-03	1.5E-06	6.7E-06
Cobalt	8.4E-05	9.2E-08	4.0E-07
Manganese	3.8E-04	4.2E-07	1.8E-06
Mercury	2.6E-04	2.9E-07	1.3E-06
Nickel	2.1E-03	2.3E-06	1.0E-05
Selenium	2.4E-05	2.6E-08	1.2E-07
<b>Total HAP</b>		<b>2.1E-03</b>	<b>9.1E-03</b>

<sup>1</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

<sup>2</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

<sup>3</sup> Annual Emissions (tons/yr)<sub>Potential</sub> = (lb/hr)<sub>Emissions</sub> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

<sup>4</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

**Company Name:** EQT Production, LLC  
**Facility Name:** WEU2 Wellpad  
**Project Description:** G70-B Application

**Thermoelectric Generators**

**Source Designation:** S029-S030, S048  
 Fuel Used: Natural Gas  
 Higher Heating Value (HHV) (Btu/scf): 1,050  
 Heat Input (MMBtu/hr)<sup>1</sup>: 0.013  
 Fuel Consumption (MMscf/hr): 1.23E-05  
 Potential Annual Hours of Operation (hr/yr): 8,760

<sup>1</sup> Global Thermoelectric specification sheet states 311 ft<sup>3</sup>/day at 1000 BTU/ft<sup>3</sup>.

**Criteria and Manufacturer Specific Pollutant Emission Rates:**

Pollutant	Emission Factor (lb/MMscf) <sup>2,5</sup>	Potential Emissions	
		(lb/hr) <sup>3</sup>	(tons/yr) <sup>4</sup>
NO <sub>x</sub>	100	1.2E-03	0.01
CO	84	1.0E-03	4.5E-03
VOC	5.5	6.8E-05	3.0E-04
SO <sub>2</sub>	0.6	7.4E-06	3.2E-05
PM Total	7.6	9.4E-05	4.1E-04
PM Condensable	5.7	7.0E-05	3.1E-04
PM <sub>10</sub> (Filterable)	1.9	2.3E-05	1.0E-04
PM <sub>2.5</sub> (Filterable)	1.9	2.3E-05	1.0E-04
Lead	5.00E-04	6.2E-09	2.7E-08
CO <sub>2</sub>	116.9	1.51	6.64
CH <sub>4</sub>	2.21E-03	2.9E-05	1.3E-04
N <sub>2</sub> O	2.21E-04	2.9E-06	1.3E-05

Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Thermoelectric Generators**

**Hazardous Air Pollutant (HAP) Potential Emissions:**

Pollutant	Emission Factor (lb/MMscf) <sup>2</sup>	Potential Emissions	
		(lb/hr) <sup>3</sup>	(tons/yr) <sup>4</sup>
<b>HAPs:</b>			
2-Methylnaphthalene	2.4E-05	3.0E-10	1.3E-09
3-Methylchloranthrene	1.8E-06	2.2E-11	9.7E-11
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.0E-10	8.6E-10
Acenaphthene	1.8E-06	2.2E-11	9.7E-11
Acenaphthylene	1.8E-06	2.2E-11	9.7E-11
Anthracene	2.4E-06	3.0E-11	1.3E-10
Benz(a)anthracene	1.8E-06	2.2E-11	9.7E-11
Benzene	2.1E-03	2.6E-08	1.1E-07
Benzo(a)pyrene	1.2E-06	1.5E-11	6.5E-11
Benzo(b)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Benzo(g,h,i)perylene	1.2E-06	1.5E-11	6.5E-11
Benzo(k)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Chrysene	1.8E-06	2.2E-11	9.7E-11
Dibenzo(a,h) anthracene	1.2E-06	1.5E-11	6.5E-11
Dichlorobenzene	1.2E-03	1.5E-08	6.5E-08
Fluoranthene	3.0E-06	3.7E-11	1.6E-10
Fluorene	2.8E-06	3.5E-11	1.5E-10
Formaldehyde	7.5E-02	9.3E-07	4.1E-06
Hexane	1.8E+00	2.2E-05	9.7E-05
Indo(1,2,3-cd)pyrene	1.8E-06	2.2E-11	9.7E-11
Naphthalene	6.1E-04	7.5E-09	3.3E-08
Phenanthrene	1.7E-05	2.1E-10	9.2E-10
Pyrene	5.0E-06	6.2E-11	2.7E-10
Toluene	3.4E-03	4.2E-08	1.8E-07
Arsenic	2.0E-04	2.5E-09	1.1E-08
Beryllium	1.2E-05	1.5E-10	6.5E-10
Cadmium	1.1E-03	1.4E-08	5.9E-08
Chromium	1.4E-03	1.7E-08	7.6E-08
Cobalt	8.4E-05	1.0E-09	4.5E-09
Manganese	3.8E-04	4.7E-09	2.1E-08
Mercury	2.6E-04	3.2E-09	1.4E-08
Nickel	2.1E-03	2.6E-08	1.1E-07
Selenium	2.4E-05	3.0E-10	1.3E-09
<b>Total HAP</b>		<b>2.3E-05</b>	<b>1.0E-04</b>

<sup>2</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

<sup>3</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

<sup>4</sup> Annual Emissions (tons/yr)<sup>potential</sup> = (lb/hr)<sup>Emissions</sup> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

<sup>5</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Liquid Loading**

Throughput 51,678,963 gal/yr  
 Capture Efficiency 70% non-tested tanker trucks  
 Control Efficiency 95% Combustor destruction efficiency

Liquid Loading Emissions

	Uncontrolled Emissions		Uncaptured Emissions		Controlled Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Propane	202.812	52.731	60.843	15.819	7.098	1.846
Isobutane	39.583	10.292	11.875	3.087	1.385	0.360
n-Butane	75.943	19.745	22.783	5.924	2.658	0.691
Isopentane	28.690	7.460	8.607	2.238	1.004	0.261
n-Pentane	26.463	6.880	7.939	2.064	0.926	0.241
n-Hexane	11.266	2.929	3.380	0.879	0.394	0.103
Cyclohexane	0.166	0.043	0.050	0.013	0.006	0.002
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	12.654	3.290	3.796	0.987	0.443	0.115
n-Octane	4.646	1.208	1.394	0.362	0.163	0.042
n-Nonane	0.815	0.212	0.245	0.064	0.029	0.007
n-Decane	0.344	0.089	0.103	0.027	0.012	0.003
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	18.162	4.722	5.449	1.417	0.636	0.165
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	0.338	0.088	0.102	0.026	0.012	0.003
Toluene	0.556	0.144	0.167	0.043	0.019	0.005
Ethylbenzene	0.025	0.007	0.008	0.002	0.001	0.000
m-Xylene	0.043	0.011	0.013	0.003	0.002	0.000
Isooctane	0.690	0.179	0.207	0.054	0.024	0.006
<b>Total VOC Emissions:</b>	423.196	110.031	126.959	33.009	14.812	3.851
<b>Total HAP Emissions:</b>	12.918	3.359	3.875	1.008	0.452	0.118

<sup>1</sup> Uncontrolled emissions calculation using Promax (sum of produced water and condensate).

<sup>2</sup> Hourly emissions assume two hours of loading per day, five days per week.

Company Name: EOT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

## Fugitive Emissions

### Fugitive Emissions from Component Leaks

Facility Equipment Type <sup>1</sup>	Valves	Connectors	Open-Ended Lines	Pressure Relief Devices
Wellhead	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line heaters	14	65	2	1
Dehydrators	24	90	2	2

<sup>1</sup> Table W-1B to Subpart W of Part 98 —Default Average Component Counts for Major Onshore Natural Gas Production

### Fugitive VOC/Total Emissions from Component Leaks

Equipment Type	Service	Emission Factors <sup>1</sup> (kg/hr/source)	Facility Equipment Count <sup>2</sup> (units)	TOC Annual Fugitive Emissions (tpy)	Weight Fraction VOC	Weight Fraction HAP	VOC Emissions <sup>3</sup> (tpy)	HAP Emissions <sup>3</sup> (tpy)
Pumps	Light Liquid	0.01990	20	3.75	1.00	0.04	3.75	0.16
Compressor	Gas	0.22800	1	2.20	0.14	0.01	0.31	0.01
Valves	Gas	0.00597	597	34.42	0.14	0.01	4.91	0.20
Pressure Relief Valves	Gas	0.10400	43	42.68	0.14	0.01	6.09	0.25
Open-Ended Lines	All	0.00170	42	0.69	0.14	0.01	0.10	4.1E-03
Connectors	All	0.00183	2,636	46.57	0.14	0.01	6.64	0.28
Intermittent Pneumatic Devices <sup>4</sup>	Gas	13.5	55	---	---	---	8.16	0.34
<b>Emission Totals:</b>				<b>130.30</b>	<b>---</b>	<b>---</b>	<b>29.95</b>	<b>1.24</b>

<sup>1</sup> U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCOMI factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A and is in scf/hr/component. Pneumatic assumes operation 1/3 of the year.

<sup>2</sup> Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

<sup>3</sup> Potential emissions VOC/HAP (tpy) = Emission factor (kg/hr/source) \* Number of Sources \* Weight % VOC/HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

<sup>4</sup> Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) \* Molar weight of natural gas (lb/lb-mol) \* Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Company Name: EOT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

## Fugitive Emissions

### Fugitive Specific HAP Emissions from Component Leaks

Equipment Type	Service	Emission Factors <sup>1</sup> (kg/hr/source)	Facility Equipment Count <sup>2</sup> (units)	TOC Annual Fugitive Emissions (tpy)	Benzene Emissions <sup>3</sup> (tpy)	Toluene Emissions <sup>3</sup> (tpy)	Ethylbenzene Emissions <sup>3</sup> (tpy)	Xylene Emissions <sup>3</sup> (tpy)	n-Hexane Emissions <sup>4</sup> (tpy)
Pumps	Light Liquid	0.01990	20	3.75	2.9E-04	8.6E-04	<0.01	9.9E-04	0.01
Compressor	Gas	0.22800	1	2.20	1.7E-04	5.1E-04	<0.01	5.8E-04	0.01
Valves	Gas	0.00597	597	34.42	2.7E-03	0.01	<0.01	0.01	0.08
Pressure Relief Valves	Gas	0.10400	43	42.68	3.3E-03	0.01	<0.01	0.01	0.10
Open-Ended Lines	All	0.00170	42	0.69	5.4E-05	1.6E-04	<0.01	1.8E-04	1.6E-03
Connectors	All	0.00183	2,636	46.57	3.6E-03	0.01	<0.01	0.01	0.11
Intermittent Pneumatic Devices <sup>4</sup>	Gas	13.5	55	---	4.5E-03	0.01	<0.01	0.02	0.14
<b>Emission Totals:</b>				<b>130.30</b>	<b>0.01</b>	<b>0.04</b>	<b>&lt;0.01</b>	<b>0.05</b>	<b>0.44</b>

<sup>1</sup> U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCOMI factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A and is in scf/hr/component. Pneumatic assumes operation 1/3 of the year.

<sup>2</sup> Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

<sup>3</sup> Potential emissions HAP (tpy) = Emission factor (kg/hr/source) \* Number of Sources \* Weight % HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

<sup>4</sup> Potential emissions HAP (tpy) = Gas volume vented (scf/yr) \* Molar weight of natural gas (lb/lb-mol) \* Weight % HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

### GHG Fugitive Emissions from Component Leaks

Component	Component Count	GHG Emission Factor <sup>1</sup> (scf/hr/component)	CH <sub>4</sub> Emissions <sup>2,3</sup> (tpy)	CO <sub>2</sub> Emissions <sup>2,3</sup> (tpy)	CO <sub>2</sub> e Emissions <sup>4</sup> (tpy)
Pumps	20	0.01	0.03	2.4E-04	0.73
Compressor	1	4.17	0.62	0.01	15.59
Valves	597	0.027	2.41	0.02	60.25
Pressure Relief Devices	43	0.04	0.25	2.1E-03	6.35
Open-Ended Lines	42	0.061	0.38	3.1E-03	9.58
Connectors	2,636	0.003	1.18	0.01	29.55
Intermittent Pneumatic Devices	55	13.5	36.99	0.30	925.08
<b>Total</b>			<b>41.87</b>	<b>0.34</b>	<b>1,047.13</b>

<sup>1</sup> Population emission factors for gas service in the Eastern U.S. from *Table W-1A of Subpart W - Default Whole Gas Emission Factors for Onshore Production*, 40 CFR 98, Subpart W (Table W-6 for VRU compressor). Pneumatics assume operation 1/3 of the year.

<sup>2</sup> Calculated in accordance with Equations W-32a, W-35 and W-36 in Subpart W of 40 CFR 98. See footnote 4 above for sample calculation.

<sup>3</sup> Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) \* Molar weight of natural gas (lb/lb-mol) \* Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Mole fractions of CH<sub>4</sub> and CO<sub>2</sub> based on gas analysis:

CH<sub>4</sub>: 81%                                      CO<sub>2</sub>: 0.24%

<sup>4</sup> Carbon equivalent emissions (CO<sub>2</sub>e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:

Carbon Dioxide (CO<sub>2</sub>): 1  
Methane (CH<sub>4</sub>): 25

Company Name: EQT Production, LLC  
 Facility Name: WEU2 Wellpad  
 Project Description: G70-B Application

**Haul Roads**

**Estimated Potential Road Fugitive Emissions**

**Unpaved Road Emissions**

Unpaved Roads:  $E \text{ (lb/VMT)} = k(s/12)^a(W/3)^b \cdot [(365-p)/365]$

	<b>PM</b>	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>	
k Factor (lb/VMT)	4.9	1.5	0.15	AP-42 Table 13.2.2-2 (Final, 11/06)
Silt content, s	4.8	%		AP-42 Table 13.2.2-1 (11/06), for Sand and Gravel Processing
Number of Rain Days, p	150			AP-42 Figure 13.2.1-2
a	0.7	0.9	0.9	AP-42 Table 13.2.2-2 (Final, 11/06)
b	0.45	0.45	0.45	AP-42 Table 13.2.2-2 (Final, 11/06)

Description	Weight of Empty Truck (tons)	Weight of Truck w/ Max Load (tons)	Mean Vehicle Weight (tons)	Length of Unpaved Road Traveled (mile)	Trips Per Year	Mileage Per Year	Control (%)	Emissions (tpy)		
								PM	PM <sub>10</sub>	PM <sub>2.5</sub>
Liquids Hauling	20	40	30	0.76	12,920	19,526	0	41.82	10.66	1.07
Employee Vehicles	3	3	3	0.76	200	302	0	0.23	0.06	0.01
<b>Total Potential Emissions</b>								<b>42.05</b>	<b>10.72</b>	<b>1.07</b>

**Company Name:** EQT Production, LLC  
**Facility Name:** WEU2 Wellpad  
**Project Description:** G70-B Application

<b>Gas Analysis</b>
---------------------

**Sample Location:** WEU-1 512507  
**Sample Date:** 5/20/2013  
**HHV (Btu/scf):** 1,217      Note: A conservatively low BTU content of 1,050 was used for calculations

Constituent	Natural Gas Stream Speciation (Mole %)	Molecular Weight	Molar Weight	Average Weight Fraction	Natural Gas Stream Speciation (Wt. %)
Carbon Dioxide	0.240	44.01	0.11	0.01	0.528
Nitrogen	0.428	28.01	0.12	0.01	0.599
Methane	80.616	16.04	12.93	0.65	64.630
Ethane	13.296	30.07	4.00	0.20	19.983
Propane	3.541	44.10	1.56	0.08	7.805
Isobutane	0.426	58.12	0.25	0.01	1.237
n-Butane	0.746	58.12	0.43	0.02	2.167
Isopentane	0.191	72.15	0.14	0.01	0.689
n-Pentane	0.164	72.15	0.12	0.01	0.591
Cyclopentane	<0.001	70.1	0.0	0.0	0.000
n-Hexane	0.055	86.18	0.05	0.00	0.237
Cyclohexane	0.009	84.16	0.01	0.00	0.038
Other Hexanes	0.091	86.18	0.08	0.00	0.392
Heptanes	0.079	100.21	0.08	0.00	0.396
Methylcyclohexane	<0.001	98.19	0.00	0.00	0.000
2,2,4-Trimethylpentane	0.052	114.23	0.06	0.00	0.297
Benzene*	0.002	78.11	0.00	0.00	0.008
Toluene*	0.005	92.14	0.00	0.00	0.023
Ethylbenzene*	<0.001	106.17	0.00	0.00	0.000
Xylenes*	0.005	106.16	0.01	0.00	0.027
C8 + Heavies	0.054	130.80	0.07	0.00	0.353
<b>Totals</b>	<b>100.000</b>		<b>20.01</b>	<b>1.00</b>	<b>100</b>

TOC (Total)	99.33	98.87
VOC (Total)	5.42	14.26
HAP (Total)	0.12	0.59



EQT Production  
WEU-2

Names	Units	LPT Gas to VRU	PW Tank Flash	Condensate Flash	Combined Flash Vapor
Temperature	°F	110	70°	70	69.822
Pressure	psig	30	0.6207	0.6207	0.6205
Mole Fraction Vapor	%	100	100	100	100
Std Vapor Volumetric Flow	MMSCFD	243.36	12.961	13.561	26.542
Net Ideal Gas Heating Value	Btu/ft³	1716.7	1003.6	2003.4	1515.2
Molecular Weight	(lb/mol)	32.363	19.215	38.077	20.003
Methane(Mole Fraction)	%	41.957	79.861	21.346	48.919
Ethane(Mole Fraction)	%	27.273	11.944	34.566	23.519
Propane(Mole Fraction)	%	19.199	2.0502	23.366	13.213
i-Butane(Mole Fraction)	%	2.9937	0.10052	3.9349	2.0625
n-Butane(Mole Fraction)	%	8.2244	0.43961	7.7113	4.1467
Isopentane(Mole Fraction)	%	1.9275	0.091311	2.4721	1.2972
n-Pentane(Mole Fraction)	%	1.7916	0.092431	2.3338	1.2247
n-Hexane(Mole Fraction)	%	0.78765	0.039671	0.88034	0.46015
Benzene(Mole Fraction)	%	0.026714	0.002212	0.030324	0.008262
n-Heptane(Mole Fraction)	%	0.067633	0.0037716	0.34771	0.48821
n-Octane(Mole Fraction)	%	0.23054	0.0026476	0.32563	0.16079
n-Nonane(Mole Fraction)	%	0.073951	0.0013452	0.053726	0.028148
n-Decane(Mole Fraction)	%	0.030098	0.0004303	0.022188	0.011964
Toluene(Mole Fraction)	%	0.006806	0.000437	0.006024	0.0054193
m-Xylene(Mole Fraction)	%	0.0048761	0.000425	0.0041171	0.003924
Ethylbenzene(Mole Fraction)	%	0.002797	0.0016971	0.0023651	0.0020482

Properties	Pipeline
Std Vapor Volumetric Flow (Total)	10 MMSCFD
Pressure(Total)	470 psig
Temperature(Total)	93 °F


Properties	Reservoir Gas
Std Vapor Volumetric Flow (Total)	10 <sup>4</sup> MMSCFD
Pressure(Total)	717 <sup>4</sup> psig
Temperature(Total)	75 <sup>4</sup> °F
Std Liquid Volumetric Flow (Light Liquid)	18.4 bbl/d

Properties	Reservoir Water
Pressure(Total)	717 <sup>4</sup> psig
Temperature(Total)	75 <sup>4</sup> °F
Std Liquid Volumetric Flow (Total)	2715 <sup>4</sup> bbl/d

Properties	Reservoir Oil
Pressure(Total)	717 <sup>4</sup> psig
Temperature(Total)	75 <sup>4</sup> °F
Std Liquid Volumetric Flow (Total)	782 <sup>4</sup> bbl/d

Properties	Produced Water
Std Liquid Volumetric Flow (Total)	2713.1 bbl/d
API Gravity(Total)	10.015

Properties	Sales Oil
Std Liquid Volumetric Flow (Total)	659 bbl/d
API Gravity(Total)	70.72

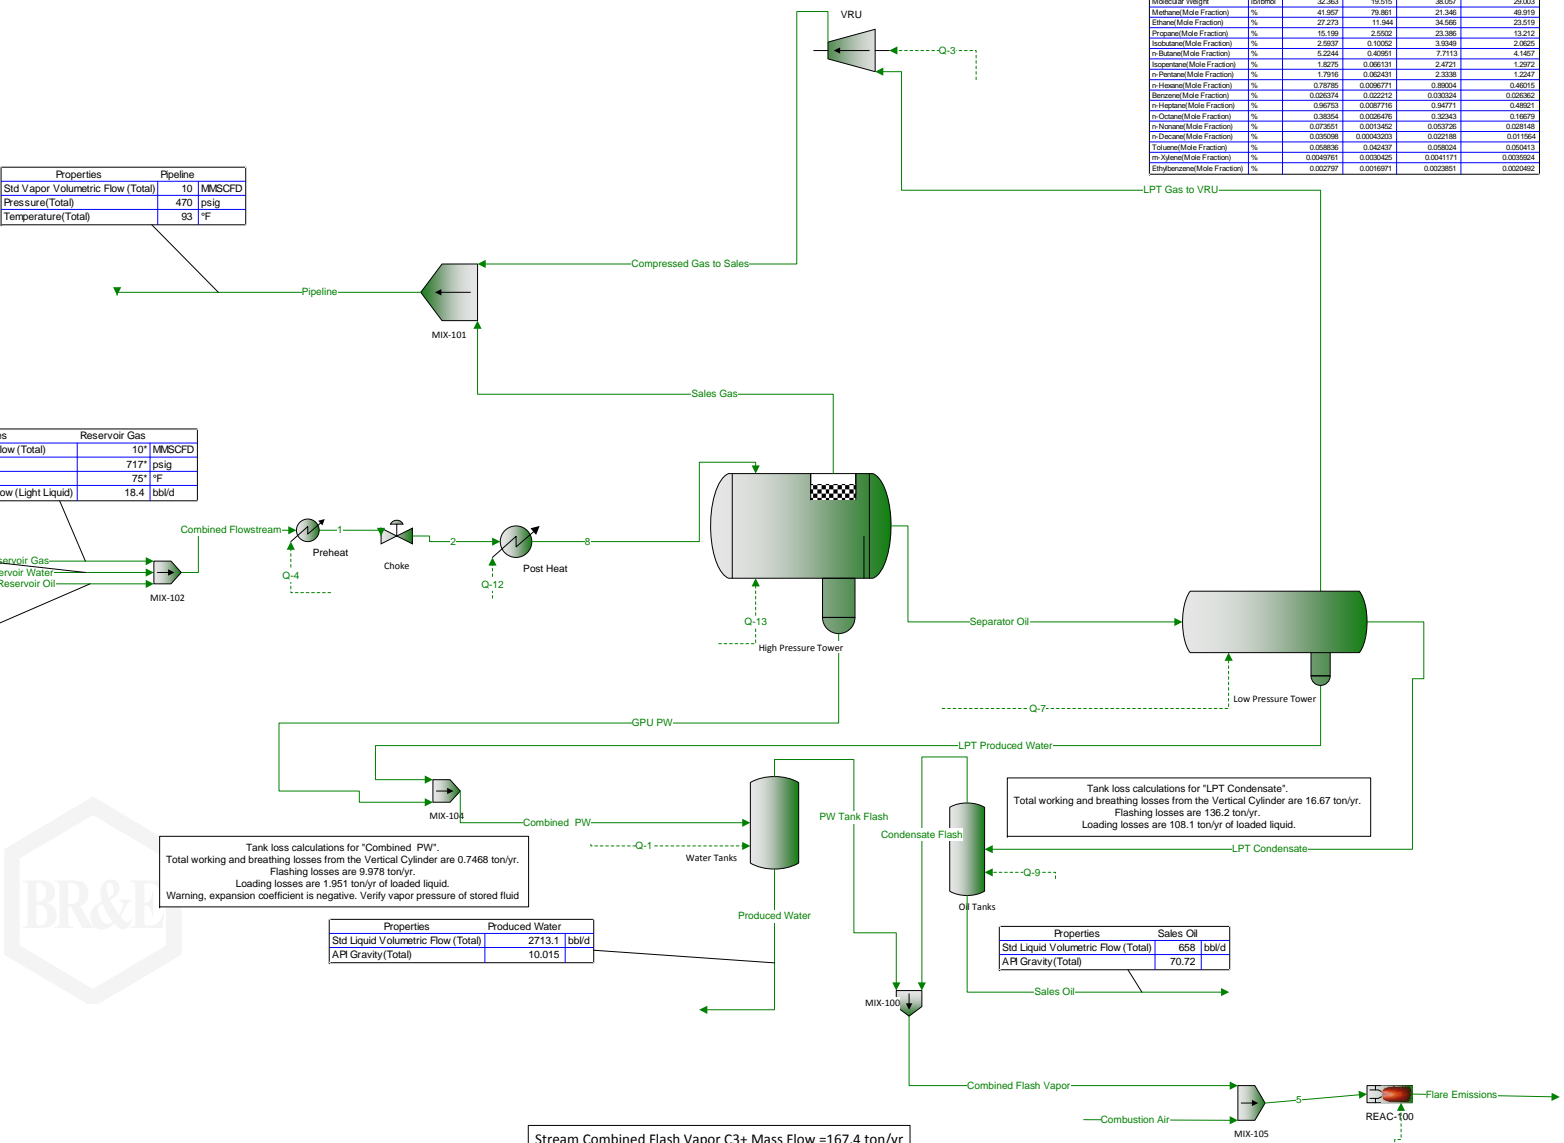

Tank loss calculations for "Combined PW".  
Total working and breathing losses from the Vertical Cylinder are 0.7468 ton/yr.  
Flashing losses are 9.978 ton/yr.  
Loading losses are 1.951 ton/yr of loaded liquid.  
Warning: expansion coefficient is negative. Verify vapor pressure of stored fluid


Tank loss calculations for "LPT Condensate".  
Total working and breathing losses from the Vertical Cylinder are 16.67 ton/yr.  
Flashing losses are 136.2 ton/yr.  
Loading losses are 108.1 ton/yr of loaded liquid.

Stream Combined Flash Vapor C3+ Mass Flow =167.4 ton/yr

Names	Units	Pilot Heat Input
Energy Rate	Btu/h	16/Rev-1000

# WEU-2 Plant Schematic

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

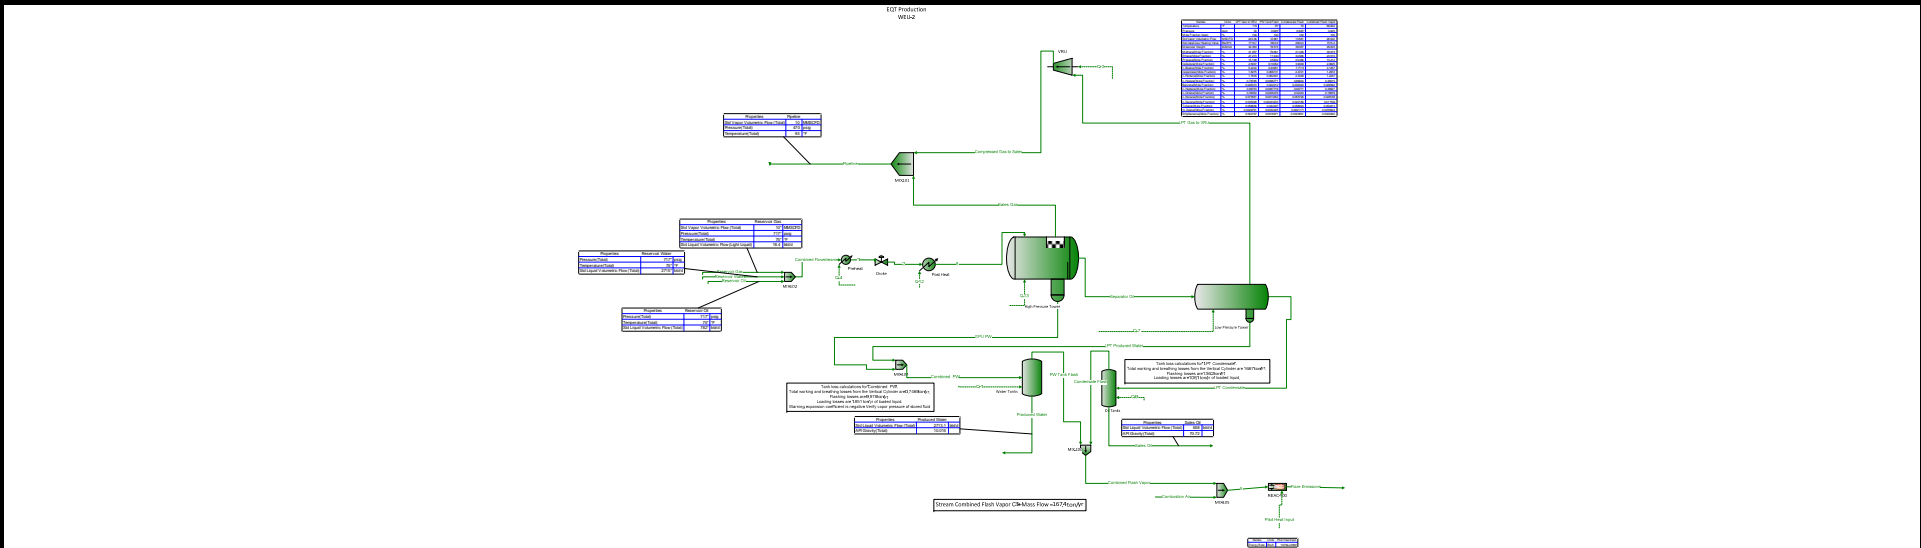

\* User Specified Values  
? Extrapolated or Approximate Values

**Process Streams Report**  
**All Streams**  
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

**Connections**

	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
From Block	MIX-104	MIX-100	MIX-101	Water Tanks	--
To Block	Water Tanks	MIX-105	--	--	MIX-102

**Stream Composition**

Mass Flow	Combined PW lb/h	Combined Flash Vapor lb/h	Pipeline lb/h	Produced Water lb/h	Reservoir Gas lb/h
Nitrogen	0.0946722	0.0992049	131.544	0.00184678	131.645 *
Methane	18.9688	23.3384	14463.5	0.736865	14200 *
CO2	2.62524	1.59083	116.906	1.19673	115.972 *
Ethane	5.35289	20.6098	4514.7	0.242169	4389.7 *
Propane	1.6868	16.9781	1730.08	0.0865251	1714.42 *
Isobutane	0.0847524	3.49361	274.156	0.00161289	271.861 *
n-Butane	0.354231	7.02222	504.151	0.0155191	476.075 *
Isopentane	0.0698873	2.72759	191.061	0.00198854	151.306 *
n-Pentane	0.0659321	2.57502	182.349	0.00183248	129.917 *
n-Hexane	0.0120087	1.15561	92.24	0.000141235	52.0404 *
Methylcyclopentane	0	0	0	0	0 *
Benzene	0.175434	0.0600114	2.72635	0.150744	1.71531 *
Cyclohexane	0.00296813	0.0223282	1.5746	0.00043794	8.31649 *
n-Heptane	0.0126811	1.42858	137.362	0.000173102	86.9156 *
n-Octane	0.0043419	0.555219	64.807	3.8071E-05	13.7963 *
n-Nonane	0.00252549	0.105209	14.5807	7.0351E-05	42.2465 *
n-Decane	0.00089358	0.0479509	8.3285	1.88235E-05	20.3089 *
n-Undecane	0	0	0	0	0 *
Dodecane	0	0	0	0	0 *
Water	39578.9	0.662849	33.0898	39578.3	0 *
Triethylene Glycol	0	0	0	0	0 *
Oxygen	0	0	0	0	0 *
Argon	0	0	0	0	0 *
Carbon Monoxide	0	0	0	0	0 *
Cyclopentane	0	0	0	0	0 *
Isohexane	0.0207857	1.81975	139.054	0.000265926	86.1032 *
3-Methylpentane	0	0	0	0	0 *
Neohexane	0	0	0	0	0 *
2,3-Dimethylbutane	0	0	0	0	0 *
Methylcyclohexane	0	0	0	0	0 *
Isooctane	0.000112657	0.0763405	7.23342	1.64552E-07	65.2188 *
Decane, 2-Methyl-	0	0	0	0	0 *
Toluene	0.345675	0.135368	7.41324	0.290031	5.05831 *
m-Xylene	0.0286963	0.0111146	0.754544	0.0240996	5.82836 *
Ethylbenzene	0.0152068	0.00633996	0.422687	0.0126428	0 *

	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
<b>Volumetric Fraction</b>					
Nitrogen	3.23081E-06	0.0012279	0.00477335	6.2245E-08	0.00541156
Methane	0.00118214	0.502437	0.840529	4.54473E-05	0.874982
CO2	5.22881E-05	0.012445	0.00228801	2.3623E-05	0.00223396
Ethane	0.000227439	0.234863	0.115554	1.02157E-05	0.0986924
Propane	6.12317E-05	0.131081	0.0251875	3.12301E-06	0.0168571
Isobutane	2.81136E-06	0.0203568	0.00259581	5.32349E-08	0.00123502
n-Butane	1.16004E-05	0.0408548	0.00440793	5.05797E-07	0.00149823
Isopentane	2.12981E-06	0.0127154	0.00107368	6.03407E-08	-1.83493E-06
n-Pentane	2.01299E-06	0.0119913	0.0009786	5.57135E-08	-5.64018E-05
n-Hexane	3.48357E-07	0.00447364	0.000279456	4.08142E-09	-0.000130938
Methylcyclopentane	0	0	0	0	0
Benzene	4.14093E-06	0.000257686	1.16077E-05	3.5477E-06	-2.42417E-06
Cyclohexane	7.59081E-08	8.87531E-05	5.42657E-06	1.11654E-08	-1.63215E-05

\* User Specified Values  
 ? Extrapolated or Approximate Values

ProMax 3.2.15289.0  
 Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

**Process Streams Report**  
**All Streams**  
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
<b>Volumetric Fraction</b>					
n-Heptane	3.55806E-07	0.00472572	0.000185174	4.83964E-09	-0.000282402
n-Octane	1.17965E-07	0.00160047	2.05604E-05	1.03085E-09	-3.06482E-05
n-Nonane	6.69832E-08	0.000268081	-6.07856E-06	1.85982E-09	-2.32123E-05
n-Decane	2.33232E-08	0.000109401	-4.47383E-06	4.89742E-10	1.7185E-05
n-Undecane	0	0	0	0	0
Dodecane	0	0	0	0	0
Water	0.99844	0.0126838	0.00162534	0.999906	0
Triethylene Glycol	0	0	0	0	0
Oxygen	0	0	0	0	0
Argon	0	0	0	0	0
Carbon Monoxide	0	0	0	0	0
Cyclopentane	0	0	0	0	0
Isohexane	6.03885E-07	0.00705473	0.000468553	7.69578E-09	-0.000178985
3-Methylpentane	0	0	0	0	0
Neohexane	0	0	0	0	0
2,3-Dimethylbutane	0	0	0	0	0
Methylcyclohexane	0	0	0	0	0
Isooctane	3.0298E-09	0.000221337	8.64417E-06	4.40975E-12	-0.000183802
Decane, 2-Methyl-	0	0	0	0	0
Toluene	8.07494E-06	0.00048926	1.63413E-05	6.75691E-06	-1.22514E-05
m-Xylene	6.64832E-07	3.46313E-05	6.97597E-07	5.56905E-07	-8.51476E-06
Ethylbenzene	3.50428E-07	1.97729E-05	4.46719E-07	2.90602E-07	0

	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
<b>Mole Fraction</b>					
Nitrogen	1.53724E-06	0.00121517	0.00417875	3.00065E-08	0.00428 *
Methane	0.00053784	0.499194	0.802319	2.09066E-05	0.80616 *
CO2	2.71336E-05	0.0124036	0.00236393	1.2377E-05	0.0024 *
Ethane	8.09755E-05	0.235192	0.133614	3.66576E-06	0.13296 *
Propane	1.74001E-05	0.132118	0.0349152	8.93125E-07	0.03541 *
Isobutane	6.63277E-07	0.0206254	0.00419757	1.26307E-08	0.00426 *
n-Butane	2.77223E-06	0.0414574	0.00771901	1.21532E-07	0.00746 *
Isopentane	4.4061E-07	0.0129724	0.0023566	1.2545E-08	0.00191 *
n-Pentane	4.15674E-07	0.0122468	0.00224914	1.15605E-08	0.00164 *
n-Hexane	6.33868E-08	0.00460147	0.000952531	7.45974E-10	0.00055 *
Methylcyclopentane	0	0	0	0	0 *
Benzene	1.0216E-06	0.000263625	3.10604E-05	8.78393E-07	2E-05 *
Cyclohexane	1.60422E-08	9.10374E-05	1.66499E-05	2.36852E-09	9E-05 *
n-Heptane	5.75657E-08	0.00489212	0.00121993	7.86306E-10	0.00079 *
n-Octane	1.72898E-08	0.00166786	0.000504883	1.517E-10	0.00011 *
n-Nonane	8.95687E-09	0.000281479	0.000101169	2.49667E-10	0.0003 *
n-Decane	2.85673E-09	0.000115642	5.20908E-05	6.02168E-11	0.00013 *
n-Undecane	0	0	0	0	0 *
Dodecane	0	0	0	0	0 *
Water	0.999328	0.0126253	0.00163454	0.999959	0 *
Triethylene Glycol	0	0	0	0	0 *
Oxygen	0	0	0	0	0 *
Argon	0	0	0	0	0 *
Carbon Monoxide	0	0	0	0	0 *
Cyclopentane	0	0	0	0	0 *
Isohexane	1.09715E-07	0.007246	0.00143596	1.40457E-09	0.00091 *
3-Methylpentane	0	0	0	0	0 *
Neohexane	0	0	0	0	0 *
2,3-Dimethylbutane	0	0	0	0	0 *
Methylcyclohexane	0	0	0	0	0 *
Isooctane	4.48608E-10	0.000229324	5.63524E-05	6.55685E-13	0.00052 *
Decane, 2-Methyl-	0	0	0	0	0 *
Toluene	1.70652E-06	0.000504131	7.15995E-05	1.43275E-06	5E-05 *
m-Xylene	1.2295E-07	3.59238E-05	6.32479E-06	1.03322E-07	5E-05 *

\* User Specified Values  
 ? Extrapolated or Approximate Values

ProMax 3.2.15289.0  
 Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

**Process Streams Report**  
**All Streams**  
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
<b>Mole Fraction</b>					
Ethylbenzene	6.51541E-08	2.04915E-05	3.54308E-06	5.42034E-08	0 *

**Stream Properties**

Property	Units	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
Temperature	°F	90	69.8216	93.2457	70	75 *
Pressure	psig	470	0.625	470	0.625	717 *
Mole Fraction Vapor		0	1	0.999772	0	0.997802
Mole Fraction Light Liquid		1	0	0.00022842	1	0.00219847
Mole Fraction Heavy Liquid		0	0	0	0	0
Molecular Weight	lb/lbmol	18.0168	29.0026	20.1279	18.0158	20.008
Mass Flow	lb/h	39608.9	84.5214	22618.1	39581.1	21968.4
Vapor Volumetric Flow	ft <sup>3</sup> /h	638.403	1073.4	12571.4	635.589	7373.53
Liquid Volumetric Flow	gpm	79.5931	133.827	1567.35	79.2423	919.298
Std Vapor Volumetric Flow	MMSCFD	20.0226	0.0265421	10.2344	20.0096	10 *
Std Liquid Volumetric Flow	sgpm	79.2944	0.412845	134.536	79.1307	131.273
Specific Gravity		0.994784	1.00138		0.998487	
API Gravity		10.065			10.0151	
Net Ideal Gas Heating Value	Btu/ft <sup>3</sup>	0.687198	1515.16	1101.22	0.0375931	1096.63
Net Liquid Heating Value	Btu/lb	-1044.52	19706.6	20706.4	-1058.9	20746.3

Remarks

**Process Streams Report**  
**All Streams**  
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

**Connections**

	Reservoir Oil	Sales Oil		
From Block	--	Oil Tanks		
To Block	MIX-102	--		

**Stream Composition**

Mass Flow	Reservoir Oil lb/h	Sales Oil lb/h		
Nitrogen	0 *	0.000416052		
Methane	288.853 *	1.1815		
CO2	3.82867 *	0.106767		
Ethane	168.48 *	22.6335		
Propane	118.561 *	85.8284		
Isobutane	55.884 *	50.0938		
n-Butane	176.817 *	141.703		
Isopentane	194.773 *	152.289		
n-Pentane	248.19 *	193.182		
n-Hexane	345.953 *	304.597		
Methylcyclopentane	0 *	0		
Benzene	10.7595 *	9.53766		
Cyclohexane	0 *	6.71912		
n-Heptane	1270.17 *	1218.29		
n-Octane	1642.27 *	1590.7		
n-Nonane	932.251 *	959.812		
n-Decane	1391.11 *	1403.04		
n-Undecane	0 *	0		
Dodecane	0 *	0		
Water	0 *	0.0359977		
Triethylene Glycol	0 *	0		
Oxygen	0 *	0		
Argon	0 *	0		
Carbon Monoxide	0 *	0		
Cyclopentane	0 *	0		
Isohexane	396.869 *	342.099		
3-Methylpentane	0 *	0		
Neohexane	0 *	0		
2,3-Dimethylbutane	0 *	0		
Methylcyclohexane	0 *	0		
Isooctane	2.38085 *	60.2899		
Decane, 2-Methyl-	0 *	0		
Toluene	83.0795 *	80.2991		
m-Xylene	20.5885 *	25.6271		
Ethylbenzene	12.7957 *	12.354		

Volumetric Fraction	Reservoir Oil	Sales Oil		
Nitrogen	0	6.85126E-08		
Methane	0.0863113	0.000353693		
CO2	0.000269055	6.50565E-06		
Ethane	0.0331312	0.00476904		
Propane	0.0201384	0.0162885		
Isobutane	0.00880376	0.00903636		
n-Butane	0.0270213	0.0248057		
Isopentane	0.0278476	0.0253211		
n-Pentane	0.0352213	0.0318627		
n-Hexane	0.0464601	0.0480082		
Methylcyclopentane	0	0		
Benzene	0.00106524	0.00110609		
Cyclohexane	0	0.000897123		
n-Heptane	0.1644	0.186336		
n-Octane	0.204889	0.235571		
n-Nonane	0.113081	0.138654		

\* User Specified Values

? Extrapolated or Approximate Values

ProMax 3.2.15289.0  
Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

**Process Streams Report**  
**All Streams**  
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

Volumetric Fraction	Reservoir Oil	Sales Oil			
n-Decane	0.165597	0.199416			
n-Undecane	0	0			
Dodecane	0	0			
Water	0	-2.75162E-06			
Triethylene Glycol	0	0			
Oxygen	0	0			
Argon	0	0			
Carbon Monoxide	0	0			
Cyclopentane	0	0			
Isohexane	0.0538609	0.0545099			
3-Methylpentane	0	0			
Neohexane	0	0			
2,3-Dimethylbutane	0	0			
Methylcyclohexane	0	0			
Isooctane	0.000300841	0.00906532			
Decane, 2-Methyl-	0	0			
Toluene	0.00827856	0.00948274			
m-Xylene	0.00205251	0.00304607			
Ethylbenzene	0.00127158	0.00146638			

Mole Fraction	Reservoir Oil	Sales Oil			
Nitrogen	0 *	2.32943E-07			
Methane	0.19869 *	0.00115513			
CO2	0.00096 *	3.80506E-05			
Ethane	0.06183 *	0.0118059			
Propane	0.02967 *	0.0305284			
Isobutane	0.01061 *	0.013518			
n-Butane	0.03357 *	0.038239			
Isopentane	0.02979 *	0.0331062			
n-Pentane	0.03796 *	0.041996			
n-Hexane	0.0443 *	0.0554386			
Methylcyclopentane	0 *	0			
Benzene	0.00152 *	0.00191511			
Cyclohexane	0 *	0.00125221			
n-Heptane	0.13988 *	0.190697			
n-Octane	0.15865 *	0.218416			
n-Nonane	0.08021 *	0.117376			
n-Decane	0.10789 *	0.154664			
n-Undecane	0 *	0			
Dodecane	0 *	0			
Water	0 *	3.13403E-05			
Triethylene Glycol	0 *	0			
Oxygen	0 *	0			
Argon	0 *	0			
Carbon Monoxide	0 *	0			
Cyclopentane	0 *	0			
Isohexane	0.05082 *	0.0622641			
3-Methylpentane	0 *	0			
Neohexane	0 *	0			
2,3-Dimethylbutane	0 *	0			
Methylcyclohexane	0 *	0			
Isooctane	0.00023 *	0.00827825			
Decane, 2-Methyl-	0 *	0			
Toluene	0.00995 *	0.0136691			
m-Xylene	0.00214 *	0.00378606			
Ethylbenzene	0.00133 *	0.00182513			

**Process Streams Report**  
**All Streams**  
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

**Stream Properties**

Property	Units	Reservoir Oil	Sales Oil			
Temperature	°F	75 *	70 *			
Pressure	psig	717 *	0.625			
Mole Fraction Vapor		0	0			
Mole Fraction Light Liquid		1	1			
Mole Fraction Heavy Liquid		0	0			
Molecular Weight	lb/lbmol	81.257	104.465			
Mass Flow	lb/h	7363.61	6660.43			
Vapor Volumetric Flow	ft <sup>3</sup> /h	179.08	153.665			
Liquid Volumetric Flow	gpm	22.3268	19.1582			
Std Vapor Volumetric Flow	MMSCFD	0.825344	0.580679			
Std Liquid Volumetric Flow	sgpm	22.8083 *	19.1893			
Specific Gravity		0.659288	0.694958			
API Gravity		80.4779	70.719			
Net Ideal Gas Heating Value	Btu/ft <sup>3</sup>	4147.74	5301.34			
Net Liquid Heating Value	Btu/lb	19218.5	19099.4			

**Remarks**



## Energy Stream Report

Client Name:	EQT	Job: V1.0
Location:	WEU-2	
Flowsheet:	WEU-2	

### Energy Streams

Energy Stream	Energy Rate	Power	From Block	To Block
Pilot Heat Input	1.67565E+06 * Btu/h	658.555 * hp	--	REAC-100

Remarks

<h2 style="margin: 0;">20160120_EQT_WEU 2.pmx Project Warnings Report</h2>		
--	--	--

Client Name:	EQT	Job: V1.0
Location:	WEU-2	

ProMax:ProMax!Project!Flowsheets!WEU-2!Blocks!VRU  
Warning: The change in entropy is negative.

<h2 style="margin: 0;">User Value Sets Report</h2>		
--	--	--

Client Name:	EQT	Job: V1.0
Location:	WEU-2	

<b>Tank Losses.53</b>		
-----------------------	--	--

<b>User Value [ShellLength]</b>		
---------------------------------	--	--

* Parameter	20 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

<b>User Value [ShellDiam]</b>		
-------------------------------	--	--

* Parameter	12 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

<b>User Value [BreatherVP]</b>		
--------------------------------	--	--

* Parameter	0.875 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

<b>User Value [BreatherVacP]</b>		
----------------------------------	--	--

* Parameter	-0.0375 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

<b>User Value [DomeRadius]</b>		
--------------------------------	--	--

Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

<b>User Value [OpPress]</b>		
-----------------------------	--	--

* Parameter	0 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

<b>User Value [AvgPercentLiq]</b>		
-----------------------------------	--	--

* Parameter	50 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

<b>User Value [MaxPercentLiq]</b>		
-----------------------------------	--	--

* Parameter	90 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

<b>User Value [AnnNetTP]</b>		
------------------------------	--	--

* Parameter	683.337 bbl/day	Upper Bound	bbl/day
* Lower Bound	0 bbl/day	* Enforce Bounds	False

<b>User Value [OREff]</b>		
---------------------------	--	--

* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

<b>User Value [AtmPressure]</b>		
---------------------------------	--	--

* Parameter	14.2535 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

\* User Specified Values  
? Extrapolated or Approximate Values

## User Value Sets Report

Client Name:	EQT	Job: V1.0
Location:	WEU-2	

### User Value [MaxLiqSurfaceT]

* Parameter	61.4758 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

### User Value [TotalLosses]

* Parameter	16.6683 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [WorkingLosses]

* Parameter	2.62231 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [StandingLosses]

* Parameter	0.155741 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [LoadingLosses]

* Parameter	108.085 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [FlashingLosses]

* Parameter	136.229 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [GasMoleWeight]

* Parameter	0.0538365 kg/mol	Upper Bound	kg/mol
Lower Bound	kg/mol	* Enforce Bounds	False

#### Remarks

This User Value Set was programmatically generated. GUID={5524AB8C-40B1-4354-9DD7-EED65770BF87}

### Tank Losses.331

#### User Value [ShellLength]

* Parameter	20 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

## User Value Sets Report

Client Name:	EQT	Job: V1.0
Location:	WEU-2	

### User Value [ShellDiam]

* Parameter	12 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

### User Value [BreatherVP]

* Parameter	0.875 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

### User Value [BreatherVacP]

* Parameter	-0.0375 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

### User Value [DomeRadius]

Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

### User Value [OpPress]

* Parameter	0 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

### User Value [AvgPercentLiq]

* Parameter	50 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

### User Value [MaxPercentLiq]

* Parameter	90 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

### User Value [AnnNetTP]

* Parameter	2728.91 bbl/day	Upper Bound	bbl/day
* Lower Bound	0 bbl/day	* Enforce Bounds	False

### User Value [OREff]

* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

### User Value [AtmPressure]

* Parameter	14.2535 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

### User Value [MaxLiqSurfaceT]

* Parameter	61.4758 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

### User Value [TotalLosses]

* Parameter	0.746818 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [WorkingLosses]

* Parameter	0.12447 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [StandingLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

## User Value Sets Report

Client Name:	EQT	Job: V1.0
Location:	WEU-2	

### User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [LoadingLosses]

* Parameter	1.95113 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [FlashingLosses]

* Parameter	9.97833 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [GasMoleWeight]

* Parameter	0.0451413 kg/mol	Upper Bound	kg/mol
Lower Bound	kg/mol	* Enforce Bounds	False

#### Remarks

This User Value Set was programmatically generated. GUID={23417019-6BCF-4B6A-8C2C-C51E3F9510A8}

20160126\_EQT\_WEU-2\_G70\_Sand Separator Tank. txt

\*\*\*\*\*  
\*\*\*\*\*

\* Project Setup Information

\*  
\*\*\*\*\*  
\*\*\*\*\*

Project File : \\tsclient\Z\client\EQT Corporation\West Virginia\WV  
Wells\153901.0056 WV Wells 2015\WEU 2\02 Draft\2016-0126\_EQT\_WEU-2\_G70-B  
Application\Att S Emission Calcs\01 E&P TANK\20160126\_EQT\_WEU-2\_G70\_Sand Separator  
Tank. ept  
Flowsheet Selection : Oil Tank with Separator  
Calculation Method : RVP Distillation  
Control Efficiency : 100.0%  
Known Separator Stream : Low Pressure Oil  
Entering Air Composition : No  
  
Filed Name : WEU-2 Wellpad - Sand Separator Tank  
Well Name : PTE for G70 Application  
Well ID : WEU-6 Condensate Sample 12/12/2014  
Date : 2015.05.13

\*\*\*\*\*  
\*\*\*\*\*

\* Data Input

\*  
\*\*\*\*\*  
\*\*\*\*\*

Separator Pressure : 470.00[psi g]  
Separator Temperature : 60.00[F]  
Ambient Pressure : 14.70[psi a]  
Ambient Temperature : 55.00[F]  
C10+ SG : 0.7740  
C10+ MW : 152.78

-- Low Pressure Oil

No.	Component	mol %
1	H2S	0.0000
2	O2	0.0000
3	CO2	0.0960
4	N2	0.0000
5	C1	19.8690
6	C2	6.1830
7	C3	2.9670
8	i-C4	1.0610
9	n-C4	3.3570
10	i-C5	2.9790
11	n-C5	3.7960
12	C6	5.0820
13	C7	13.9880
14	C8	15.8650
15	C9	8.0210
16	C10+	10.7890
17	Benzene	0.1520
18	Toluene	0.9950
19	E-Benzene	0.1330
20	Xylenes	0.2140
21	n-C6	4.4300
22	2,2,4-Triethyl p	0.0230

20160126\_EQT\_WEU-2\_G70\_Sand Separator Tank.txt

-- Sales Oil

```
-----
Production Rate      : 0.1[bbl/day]
Days of Annual Operati on : 365 [days/year]
API Gravity         : 59.11
Reid Vapor Pressure : 10.60[psi a]
```

```
*****
*****
*      Calculati on Resul ts
*
*****
*****
```

-- Emi ssi on Summary

```
-----
Item                Uncontrol led    Uncontrol led
                   [ton/yr]         [l b/hr]
Page 1-----
Total HAPs          0.010           0.002
Total HC            0.493           0.113
VOCs, C2+          0.290           0.066
VOCs, C3+          0.181           0.041
-----
E&P TANK
```

Uncontrol led Recovery Info.

```
Vapor      40.4100 x1E-3 [MSCFD]
HC Vapor   40.2900 x1E-3 [MSCFD]
GOR        404.10      [SCF/bbl ]
```

-- Emi ssi on Composi ti on

```
-----
No  Component      Uncontrol led    Uncontrol led
                   [ton/yr]         [l b/hr]
1   H2S            0.000           0.000
2   O2             0.000           0.000
3   CO2            0.003           0.001
4   N2            0.000           0.000
5   C1            0.203           0.046
6   C2            0.109           0.025
7   C3            0.057           0.013
8   i-C4          0.017           0.004
9   n-C4          0.041           0.009
10  i-C5          0.019           0.004
11  n-C5          0.018           0.004
12  C6            0.009           0.002
13  C7            0.009           0.002
14  C8            0.003           0.001
15  C9            0.001           0.000
16  C10+         0.000           0.000
17  Benzene       0.000           0.000
18  Tol uene      0.000           0.000
19  E-Benzene     0.000           0.000
20  Xyl enes      0.000           0.000
21  n-C6          0.006           0.001
22  224Tri methyl p 0.000           0.000
    Total         0.495           0.113
```

-- Stream Data

```
-----
No. Component      MW      LP Oil  Flash Oil  Sale Oil  Flash Gas  W&S Gas
Page 2
```

20160126\_EQT\_WEU-2\_G70\_Sand Separator Tank.txt

Total Emissions

		mol %	mol %	mol %	mol %	mol %
mol %						
1 H2S	34.80	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
2 O2	32.00	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
3 CO2	44.01	0.0960	0.0066	0.0051	0.3051	0.3328
0.3053						
4 N2	28.01	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
5 C1	16.04	19.8690	0.4389	0.2348	65.3006	41.4140
65.0693						
6 C2	30.07	6.1830	0.9135	0.8052	18.5042	24.6182
18.5634						
7 C3	44.10	2.9670	1.3987	1.3537	6.6339	11.5103
6.6811						
8 i-C4	58.12	1.0610	0.8894	0.8805	1.4623	2.9291
1.4765						
9 n-C4	58.12	3.3570	3.2729	3.2548	3.5536	7.5461
3.5923						
10 i-C5	72.15	2.9790	3.6673	3.6701	1.3695	3.2894
1.3881						
11 n-C5	72.15	3.7960	4.8763	4.8850	1.2701	3.2290
1.2891						
12 C6	86.16	5.0820	7.0121	7.0378	0.5690	1.6493
0.5795						
13 C7	100.20	13.9880	19.7739	19.8599	0.4595	1.5537
0.4700						
14 C8	114.23	15.8650	22.5895	22.6931	0.1417	0.5627
0.1457						
15 C9	128.28	8.0210	11.4423	11.4956	0.0213	0.0989
0.0221						
16 C10+	152.78	10.7890	15.4015	15.4738	0.0039	0.0231
0.0041						
17 Benzene	78.11	0.1520	0.2119	0.2128	0.0118	0.0356
0.0121						
18 Toluene	92.13	0.9950	1.4126	1.4189	0.0187	0.0667
0.0191						
19 E-Benzene	106.17	0.1330	0.1896	0.1905	0.0007	0.0030
0.0007						
20 Xylenes	106.17	0.2140	0.3051	0.3065	0.0010	0.0041
0.0010						
21 n-C6	86.18	4.4300	6.1653	6.1893	0.3726	1.1321
0.3799						
22 2,2,4-Trimethyl p	114.24	0.0230	0.0326	0.0327	0.0006	0.0020
0.0006						
MW		80.92	104.67	105.01	25.38	34.81
25.47						
Stream Mole Ratio		1.0000	0.7004	0.6972	0.2996	0.0029
0.3025						
Heating Value	[BTU/SCF]				1503.68	2005.07
1508.53						
Gas Gravity	[Gas/Air]				0.88	1.20
0.88						
Bubble Pt. @ 100F	[psi a]	692.52	25.67	19.05		

Page 2-----E&P TANK

RVP @ 100F [psi a] 153.75 12.00 10.69



20160126\_EQT\_WEU-2\_G70\_Sand Separator Tank.txt  
Spec. Gravity @ 100F      0.636      0.678      0.678



# Certificate of Analysis

Number: 2030-14120143-001A

Carencro Laboratory  
4790 NE Evangeline Thruway  
Carencro, LA 70520

Gary Vermillion  
Gas Analytical Services  
PO Box 1028  
Bridgeport, WV 26330

Dec. 22, 2014

Field: EQT  
Station Name: Lewis Maxwell 513347 Well 6 Pad  
Station Number:  
Sample Point: Submeter  
Analyzed: 12/17/2014 15:24:04 by GR

Sampled By: RM-GAS  
Sample Of: Condensate Spot  
Sample Date: 12/12/2014  
Sample Conditions: 470 psig  
Method: GPA-2186M/GPA-2103  
Cylinder No: GAS

## Analytical Data

Components	Mol. %	MW	Wt. %	Sp. Gravity	L.V. %
Nitrogen	NIL	28.013	NIL	0.807	NIL
Methane	19.869	16.043	3.935	0.300	8.672
Carbon Dioxide	0.096	44.010	0.052	0.817	0.042
Ethane	6.183	30.069	2.295	0.356	4.260
Propane	2.967	44.096	1.615	0.507	2.105
Iso-Butane	1.061	58.122	0.761	0.563	0.894
n-Butane	3.357	58.122	2.409	0.584	2.726
Iso-Pentane	2.979	72.149	2.653	0.625	2.806
n-Pentane	3.796	72.149	3.381	0.631	3.544
i-Hexanes	5.082	85.277	5.350	0.666	5.308
n-Hexane	4.430	86.175	4.713	0.664	4.693
2,2,4-Trimethylpentane	0.023	114.231	0.033	0.697	0.031
Benzene	0.152	78.114	0.147	0.885	0.110
Heptanes	13.988	97.962	16.915	0.702	15.938
Toluene	0.995	92.141	1.132	0.872	0.858
Octanes	15.865	109.580	21.463	0.734	19.328
Ethylbenzene	0.133	106.167	0.174	0.872	0.132
Xylenes	0.214	106.167	0.280	0.885	0.210
Nonanes	8.021	124.629	12.340	0.744	10.960
Decanes Plus	10.789	152.780	20.352	0.774	17.383
	<u>100.000</u>		<u>100.000</u>		<u>100.000</u>

### Physical Properties

	Total	C10+
Specific Gravity at 60°F	0.6612	0.7741
API Gravity at 60°F	82.504	51.293
Molecular Weight	81.003	152.780
Pounds per Gallon (in Vacuum)	5.512	6.454
Pounds per Gallon (in Air)	5.506	6.447
Cu. Ft. Vapor per Gallon @ 14.73 psia	25.765	15.993

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis  
 Number: 2030-14120143-001A

Carencro Laboratory  
 4790 NE Evangeline Thruway  
 Carencro, LA 70520

Gary Vermillion  
 Gas Analytical Services  
 PO Box 1028  
 Bridgeport, WV 26330

Dec. 22, 2014

Field: EQT  
 Station Name: Lewis Maxwell 513347 Well 6 Pad  
 Station Number:  
 Sample Point: Submeter  
 Analyzed: 12/17/2014 15:24:04 by GR

Sampled By: RM-GAS  
 Sample Of: Condensate Spot  
 Sample Date: 12/12/2014  
 Sample Conditions: 470 psig  
 Method: GPA-2186M/GPA-2103  
 Cylinder No: GAS

Analytical Data

Components	Mol. %	MW	Wt. %	Sp. Gravity	L.V. %
Nitrogen	NIL	28.013	NIL	0.807	NIL
Carbon Dioxide	0.096	44.010	0.052	0.817	0.042
Methane	19.869	16.043	3.935	0.300	8.672
Ethane	6.183	30.069	2.295	0.356	4.260
Propane	2.967	44.096	1.615	0.507	2.105
Iso-butane	1.061	58.122	0.761	0.563	0.894
n-Butane	3.357	58.122	2.409	0.584	2.726
Iso-pentane	2.979	72.149	2.653	0.625	2.806
n-Pentane	3.796	72.149	3.381	0.631	3.544
Hexanes	9.512	85.695	10.063	0.665	10.001
Heptanes Plus	50.180	117.573	72.836	0.741	64.950
	100.000		100.000		100.000

Physical Properties	Total	C7+
Specific Gravity at 60°F	0.6612	0.7414
API Gravity at 60°F	82.504	59.363
Molecular Weight	81.003	117.573
Pounds per Gallon (in Vacuum)	5.512	6.181
Pounds per Gallon (in Air)	5.506	6.174
Cu. Ft. Vapor per Gallon @ 14.73 psia	25.765	19.904

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



**Certificate of Analysis**  
 Number: 2030-14120143-001A

**Carencro Laboratory**  
 4790 NE Evangeline Thruway  
 Carencro, LA 70520

Gary Vermillion  
 Gas Analytical Services  
 PO Box 1028  
 Bridgeport, WV 26330

Dec. 22, 2014

Field: EQT  
 Station Name: Lewis Maxwell 513347 Well 6 Pad  
 Station Number:  
 Sample Point: Submeter

Sampled By: RM-GAS  
 Sample Of: Condensate Spot  
 Sample Date: 12/12/2014  
 Sample Conditions: 470 psig  
 Cylinder No: GAS

**Analytical Data**

Test	Method	Result	Units	Detection Limit	Lab Tech.	Analysis Date
Color Visual	Proprietary	Dark Straw			TC	12/18/2014
API Gravity @ 60° F	ASTM D-5002	65.59	°		CM	12/18/2014
Specific Gravity @ 60/60° F	ASTM D-5002	0.7179			CM	12/18/2014
Density @ 60° F	ASTM D-5002	0.7172	g/ml		CM	12/18/2014
Shrinkage Factor	Proprietary	0.8272			TC	12/18/2014
Flash Factor	Proprietary	386.2976	Cu. Ft./S.T. Bbl		TC	12/18/2014

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



**Certificate of Analysis**  
 Number: 2030-13050229-001A

**Carencro Laboratory**  
 4790 NE Evangeline Thruway  
 Carencro, LA 70520

Alan Ball  
 Gas Analytical Services  
 PO Box 1028  
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507  
 Station Location: EQT Production  
 Cylinder No: GAS  
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS  
 Sample Of: Gas Spot  
 Sample Date: 05/20/2013 12:00  
 Sample Conditions: 313 psig  
 Method: GPA 2286

**Analytical Data**

Components	Mol. %	Wt. %	GPM at 14.73 psia	
Nitrogen	0.428	0.599		
Carbon Dioxide	0.240	0.528		
Methane	80.616	64.659		
Ethane	13.296	19.989	3.567	
Propane	3.541	7.807	0.978	
Iso-Butane	0.426	1.238	0.140	
n-Butane	0.746	2.168	0.236	
Iso-Pentane	0.191	0.689	0.070	
n-Pentane	0.164	0.592	0.060	
i-Hexanes	0.091	0.381	0.037	
n-Hexane	0.055	0.232	0.022	
Benzene	0.002	0.009	0.001	
Cyclohexane	0.009	0.038	0.003	
i-Heptanes	0.056	0.267	0.024	
n-Heptane	0.023	0.114	0.011	
Toluene	0.005	0.023	0.002	
i-Octanes	0.052	0.284	0.024	
n-Octane	0.011	0.063	0.006	
Ethylbenzene	NIL	NIL	NIL	
Xylenes	0.005	0.026	0.002	
i-Nonanes	0.024	0.149	0.012	
n-Nonane	0.006	0.037	0.003	
Decane Plus	0.013	0.108	0.009	
	<u>100.000</u>	<u>100.000</u>	<u>5.207</u>	
				GPM TOTAL C2+ 5.207



**Certificate of Analysis**  
 Number: 2030-13050229-001A

**Carencro Laboratory**  
 4790 NE Evangeline Thruway  
 Carencro, LA 70520

Alan Ball  
 Gas Analytical Services  
 PO Box 1028  
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507  
 Station Location: EQT Production  
 Cylinder No: GAS  
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS  
 Sample Of: Gas Spot  
 Sample Date: 05/20/2013 12:00  
 Sample Conditions: 313 psig  
 Method: GPA 2286

---

<b>Physical Properties</b>	<b>Total</b>	<b>C10+</b>
Calculated Molecular Weight	20.00	141.68
<b>GPA 2172-09 Calculation:</b>		
<b>Calculated Gross BTU per ft<sup>3</sup> @ 14.73 psia &amp; 60°F</b>		
Real Gas Dry BTU	1216.5	7479.1
Water Sat. Gas Base BTU	1195.9	7349.0
Relative Density Real Gas	0.6926	4.8910
Compressibility Factor	0.9967	

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis  
 Number: 2030-13050229-001A

Carencro Laboratory  
 4790 NE Evangeline Thruway  
 Carencro, LA 70520

Alan Ball  
 Gas Analytical Services  
 PO Box 1028  
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507  
 Station Location: EQT Production  
 Cylinder No: GAS  
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS  
 Sample Of: Gas Spot  
 Sample Date: 05/20/2013 12:00  
 Sample Conditions: 313 psig  
 Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia		
Nitrogen	0.428	0.599		GPM TOTAL C2+	5.208
Carbon Dioxide	0.240	0.528		GPM TOTAL C3+	1.641
Methane	80.616	64.659		GPM TOTAL iC5+	0.286
Ethane	13.296	19.989	3.567		
Propane	3.541	7.807	0.979		
Iso-butane	0.426	1.238	0.140		
n-Butane	0.746	2.168	0.236		
Iso-pentane	0.191	0.689	0.070		
n-Pentane	0.164	0.592	0.060		
Hexanes Plus	0.352	1.731	0.156		
	100.000	100.000	5.208		

Physical Properties	Total	C6+
Relative Density Real Gas	0.6926	3.3957
Calculated Molecular Weight	20.00	98.35
Compressibility Factor	0.9967	

GPA 2172-09 Calculation:

Calculated Gross BTU per ft<sup>3</sup> @ 14.73 psia & 60°F

Real Gas Dry BTU	1216.6	5333.2
Water Sat. Gas Base BTU	1195.9	5240.3

Comments: H2O Mol% : 1.740 ; Wt% : 1.570

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



**Certificate of Analysis**  
 Number: 2030-13050229-001A

**Carencro Laboratory**  
 4790 NE Evangeline Thruway  
 Carencro, LA 70520

Alan Ball  
 Gas Analytical Services  
 PO Box 1028  
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507  
 Station Location: EQT Production  
 Cylinder No: GAS  
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS  
 Sample Of: Gas Spot  
 Sample Date: 05/20/2013 12:00  
 Sample Conditions: 313 psig  
 Method: GPA 2286

**Analytical Data**

Components	Mol. %	Wt. %	GPM at 14.73 psia		
Nitrogen	0.428	0.599		GPM TOTAL C2+	5.207
Carbon Dioxide	0.240	0.528		GPM TOTAL C3+	1.640
Methane	80.616	64.659		GPM TOTAL iC5+	0.286
Ethane	13.296	19.989	3.567		
Propane	3.541	7.807	0.978		
Iso-Butane	0.426	1.238	0.140		
n-Butane	0.746	2.168	0.236		
Iso-Pentane	0.191	0.689	0.070		
n-Pentane	0.164	0.592	0.060		
Hexanes	0.146	0.613	0.059		
Heptanes Plus	0.206	1.118	0.097		
	100.000	100.000	5.207		

Physical Properties	Total	C7+
Relative Density Real Gas	0.6926	3.7086
Calculated Molecular Weight	20.00	107.41
Compressibility Factor	0.9967	

**GPA 2172-09 Calculation:**

**Calculated Gross BTU per ft<sup>3</sup> @ 14.73 psia & 60°F**

Real Gas Dry BTU	1216.6	5765.9
Water Sat. Gas Base BTU	1195.9	5665.5

**Comments:** H2O Mol% : 1.740 ; Wt% : 1.570

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



ATTACHMENT T

Emission Summary Sheet

## ATTACHMENT T – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID# (Emission Source ID)	NO <sub>x</sub>		CO		VOC		SO <sub>2</sub>		PM <sub>10</sub>		PM <sub>2.5</sub>		GHG (CO <sub>2</sub> e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
<b>C001 (S031-S042, S049, C001)</b>	<b>1.15</b>	<b>5.03</b>	<b>0.96</b>	<b>4.22</b>	<b>8.34</b>	<b>6.02</b>	<b>0.01</b>	<b>0.03</b>	<b>0.09</b>	<b>0.38</b>	<b>0.09</b>	<b>0.38</b>	<b>1,385.69</b>	<b>6,069.32</b>
<b>C002 (S031-S042, S049, C002)</b>	<b>1.15</b>	<b>5.03</b>	<b>0.96</b>	<b>4.22</b>	<b>8.34</b>	<b>6.02</b>	<b>0.01</b>	<b>0.03</b>	<b>0.09</b>	<b>0.38</b>	<b>0.09</b>	<b>0.38</b>	<b>1,385.69</b>	<b>6,069.32</b>
<b>E022 (S022)</b>	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
<b>E023 (S023)</b>	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	134.69	589.92
<b>E024 (S024)</b>	0.07	0.32	0.06	0.27	0.00	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
<b>E025 (S025)</b>	0.07	0.32	0.06	0.27	0.00	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
<b>E026 (S026)</b>	0.07	0.32	0.06	0.27	0.00	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
<b>E027 (S027)</b>	0.07	0.32	0.06	0.27	0.00	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
<b>E028 (S028)</b>	0.07	0.32	0.06	0.27	0.00	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	90.09	394.60
<b>E029 (S029)</b>	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
<b>E030 (S030)</b>	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
<b>E043 (S043)</b>	---	---	---	---	0.04	0.18	---	---	---	---	---	---	1.15	5.08
<b>E044 (S044)</b>	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
<b>E045 (S045)</b>	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
<b>E046 (S046)</b>	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
<b>E047 (S047)</b>	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
<b>E048 (S048)</b>	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
<b>E049 (S049)</b>	---	---	---	---	126.96	33.01	---	---	---	---	---	---	---	---

<b>E050 (S050)</b>	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	135.14	591.90
<b>E051 (S051)</b>	0.24	1.06	0.49	2.12	0.19	0.81	0.00	0.00	0.01	0.07	0.01	0.07	90.18	394.99
<b>Fugitives</b>	---	---	---	---	---	29.95	---	---	---	---	---	---	---	1,047.13
<b>Haul Roads</b>	---	---	---	---	---	---	---	---	---	10.72	---	1.07	---	---
<b>Facility Total</b>	3.86	16.91	3.52	15.44	143.94	76.31	0.02	0.10	0.29	11.99	0.29	2.34	4,488.45	20,706.56
<b>Facility Total (excl. fugitives)</b>	3.86	16.91	3.52	15.44	16.98	13.35	0.02	0.10	0.29	1.27	0.29	1.27	4,488.45	19,659.43

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators. According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

## ATTACHMENT T – FACILITY-WIDE HAP CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
<b>C001 (S031-S042, S049, C001)</b>	---	---	<b>0.01</b>	<b>0.01</b>	<b>0.01</b>	<b>0.02</b>	<b>5.8E-04</b>	<b>6.9E-04</b>	<b>9.8E-04</b>	<b>1.2E-03</b>	<b>0.22</b>	<b>0.16</b>	<b>0.26</b>	<b>0.20</b>
<b>C002 (S031-S042, S049, C002)</b>	---	---	<b>0.01</b>	<b>0.01</b>	<b>0.01</b>	<b>0.02</b>	<b>5.8E-04</b>	<b>6.9E-04</b>	<b>9.8E-04</b>	<b>1.2E-03</b>	<b>0.22</b>	<b>0.16</b>	<b>0.26</b>	<b>0.20</b>
<b>E022 (S022)</b>	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
<b>E023 (S023)</b>	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	2.1E-03	0.01
<b>E024 (S024)</b>	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
<b>E025 (S025)</b>	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
<b>E026 (S026)</b>	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
<b>E027 (S027)</b>	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
<b>E028 (S028)</b>	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
<b>E029 (S029)</b>	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
<b>E030 (S030)</b>	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
<b>E043 (S043)</b>	---	---	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	1.0E-03	<0.01	2.0E-03	1.0E-02
<b>E044 (S044)</b>	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
<b>E045 (S045)</b>	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
<b>E046 (S046)</b>	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
<b>E047 (S047)</b>	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
<b>E048 (S048)</b>	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
<b>E049 (S049)</b>	---	---	0.10	0.03	0.17	0.04	7.6E-03	2.0E-03	0.01	3.4E-03	3.38	0.88	3.88	1.01

<b>E050 (S050)</b>	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	2.1E-03	0.01
<b>E051 (S051)</b>	0.02	0.07	1.2E-03	5.3E-03	4.3E-04	1.9E-03	1.9E-05	8.4E-05	1.5E-04	6.6E-04	---	---	0.02	0.11
<b>Fugitives</b>	---	---	---	0.01	---	0.04	---	<0.01	---	0.05	---	0.44	---	1.24
<b>Haul Roads</b>	---	---	---	---	---	---	---	---	---	---	---	---	---	---
<b>Facility Total</b>	0.02	0.07	0.12	0.06	0.19	0.13	0.01	3.53E-03	0.02	0.06	3.85	1.76	4.44	2.88
<b>Facility Total (excl. fugitives)</b>	0.02	0.07	0.02	0.02	0.03	0.03	1.2E-03	1.5E-03	2.1E-03	3.1E-03	0.47	0.43	0.57	0.63

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators. According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT U

**Class I Legal Advertisement**

# RECOMMENDED PUBLIC NOTICE TEMPLATE

## AIR QUALITY PERMIT NOTICE Notice of Application

Notice is given that EQT Production Company has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a G70-B General Permit Registration for an existing natural gas production facility WEU-2 located on Bulldog Drive, near West Union, in Doddridge County, West Virginia. The latitude and longitude coordinates are: 39.27255 N, -80.77145 W.

The applicant estimates the potential to discharge the following Regulated Air Pollutants will be:

Pollutant	Emissions in tpy (tons per year)
NO <sub>x</sub>	16.91
CO	15.44
VOC	13.35
SO <sub>2</sub>	0.10
PM	1.27
Total HAPs	2.88
Carbon Dioxide Equivalents (CO <sub>2</sub> e)	19,659.43

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57<sup>th</sup> Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the **(Day)** day of **(Month)**, 2016.

By: EQT Production Company  
Kenneth Kirk, Executive Vice President  
625 Liberty Ave Suite 1700  
Pittsburgh, PA 15222

ATTACHMENT V

**General Permit Registration Application Fee**