



625 Liberty Ave. Suite 1700
Pittsburgh PA 15222
www.eqt.com

TEL: (412) 395-3699
FAX: (412) 395-2156

Alex Bosiljevac
Environmental Coordinator

April 26, 2016

CERTIFIED MAIL # 7015 1660 0000 9399 6147

Mr. William F. Durham, Director
West Virginia Department of Environmental Protection
Division of Air Quality
601 57th Street, SE
Charleston, West Virginia, 25304

**RE: G70B Permit Application
EQT Production Company
WEU-8 Natural Gas Production Site
Facility ID No. 017-00066**

Dear Mr. Durham,

Enclosed are two electronic copies and one original hard copy of a proposed application for a G70-B General Air Permit for the WEU-8 Natural Gas Production Well Site. The site currently operates under a G70-A General Air Permit (G70-A137). Please note that this application satisfies a requirement in Consent Order CO-R13-E-2016-04, in which EQT Production Company is required to submit an application with the equipment specified in the consent order. A legal advertisement will be published in the next few days and proof of publication will be forwarded as soon as it is received. Please contact me for payment of the application fee by credit card.

If you have any questions concerning this permit application, please contact me at (412) 395-3699 or by email at abosiljevac@eqt.com.

Sincerely,

A handwritten signature in blue ink, appearing to read 'RAB' with a large flourish extending from the end.

Alex Bosiljevac
EQT Corporation

Enclosures



PROJECT REPORT

**EQT Production
WEU-8 Pad**

G70-B Permit Application



Where energy meets innovation.

TRINITY CONSULTANTS
4500 Brooktree Drive
Suite 103
Wexford, PA 15090
(724) 935-2611

March 2016



Environmental solutions delivered uncommonly well

TABLE OF CONTENTS

1. INTRODUCTION	4
1.1. FACILITY AND PROJECT DESCRIPTION	4
1.2. SOURCE STATUS	5
1.3. G70-B APPLICATION ORGANIZATION	5
2. SAMPLE EMISSION SOURCE CALCULATIONS	6
3. REGULATORY DISCUSSION	8
3.1. Prevention of Significant Deterioration Source Classification	8
3.2. Title V Operating Permit Program	8
3.3. New Source Performance Standards	8
3.3.1. NSPS Subparts D, Da, Db, and Dc – Steam Generating Units	9
3.3.2. NSPS Subparts K, Ka, and Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids	9
3.3.3. NSPS Subpart JJJJ – Stationary Spark Ignition Internal Combustion Engines	9
3.3.4. NSPS Subpart OOOO - Crude Oil and Natural Gas Production, Transmission, and Distribution	9
3.3.5. NSPS Subpart OOOOa—Crude Oil and Natural Gas Facilities	10
3.3.6. Non-Applicability of All Other NSPS	11
3.4. National Emission Standards for Hazardous Air Pollutants	11
3.4.1. 40 CFR 63 Subpart HH – Oil and Natural Gas Production Facilities	11
3.4.2. 40 CFR 63 Subpart ZZZZ – Stationary Reciprocating Internal Engines	11
3.4.3. 40 CFR 63 Subpart JJJJJ – Industrial, Commercial, and Institutional Boilers	11
3.5. West Virginia SIP Regulations	11
3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers	12
3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor	12
3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse	12
3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources	12
3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter	12
3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks	12
3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants	13
3.5.8. Non-Applicability of Other SIP Rules	13
4. G70-B APPLICATION FORMS	14
ATTACHMENT A: SINGLE SOURCE DETERMINATION	
ATTACHMENT B: SITING CRITERIA WAIVER (NOT APPLICABLE)	
ATTACHMENT C: BUSINESS CERTIFICATE	
ATTACHMENT D: PROCESS FLOW DIAGRAM	

ATTACHMENT E: PROCESS DESCRIPTION
ATTACHMENT F: PLOT PLAN
ATTACHMENT G: AREA MAP
ATTACHMENT H: APPLICABILITY FORM
ATTACHMENT I: EMISSION UNITS TABLE
ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET
ATTACHMENT K: GAS WELL DATA SHEET
ATTACHMENT L: STORAGE VESSEL DATA SHEET
ATTACHMENT M: HEATERS DATA SHEET
ATTACHMENT N: ENGINES DATA SHEET
ATTACHMENT O: TRUCK LOADING DATA SHEET
ATTACHMENT P: GLYCOL DEHYDRATOR DATA SHEET (NOT APPLICABLE)
ATTACHMENT Q: PNEUMATIC CONTROLLER DATA SHEET (NOT APPLICABLE)
ATTACHMENT R: AIR POLLUTION CONTROL DEVICE DATA SHEET
ATTACHMENT S: EMISSION CALCULATIONS
ATTACHMENT T: EMISSION SUMMARY SHEET
ATTACHMENT U: CLASS I LEGAL ADVERTISEMENT
ATTACHMENT V: GENERAL PERMIT REGISTRATION APPLICATION FEE

1. INTRODUCTION

EQT Production Company (EQT) is submitting this Class II General Permit (G70-B) application to the West Virginia Department of Environmental Protection (WVDEP) for the construction and operation of new equipment at an existing natural gas production well pad, WEU-8, located in Doddridge County, West Virginia. The WEU-8 pad is currently operating under G70-A permit number G70-A137.

1.1. FACILITY AND PROJECT DESCRIPTION

The WEU-8 pad is a natural gas production facility that consists of six (6) natural gas wells. Natural gas and liquids (including water and condensate) are extracted from deposits underneath the surface. Natural gas is transported from the well to a gas line for additional processing and compression, as necessary. The liquids produced are stored in storage vessels.

The WEU-8 pad currently consists of the following equipment:

- > Six (6) 400 barrel (bbl) storage tanks for condensate/water (produced fluids) controlled by one (1) existing combustor rated at 11.66 MMBtu/hr;
- > One (1) 140 bbl storage tank for sand and produced fluids from the sand separator (vapors from this tank may be controlled by combustors but are not represented as controlled in this application);
- > Six (6) line heaters rated at 1.54 MMBtu/hr each (heat input);
- > Two (2) thermoelectric generators (TEGs), each rated at 0.013 MMBtu/hr (heat input);
- > Produced fluid truck loading; and
- > Associated piping and components.

This application seeks to permit the following equipment at the WEU-8 pad:

- > One (1) low pressure separator and associated 1.15 MMbtu/hr line heater;
- > One (1) vapor recovery unit (VRU) powered by a natural gas fired 110 horsepower (hp) engine; and
- > One (1) new combustor rated at 11.66 MMBtu/hr.

A process flow diagram is included as Attachment D. A comparison of the potential emissions of the proposed and existing equipment at the wellpad in comparison with G70-B emission limits is provided in Table 1. Facility emissions are well below the permit limits. Note that in accordance with condition 1.1.1. of the G70-B permit, fugitive emissions are not considered in determining eligibility of the permit.

Table 1 - Comparison of Wellpad Potential Emissions to G70-B Permit Emission Limits

Pollutant	Wellpad Potential Annual Emissions (tpy)	G70-B Maximum Annual Emission Limits (tpy)
Nitrogen Oxides	15.46	50
Carbon Monoxide	14.22	80
Volatile Organic Compounds	4.26	80
Particulate Matter – 10/2.5	1.16	20
Sulfur Dioxide	0.09	20
Individual HAP (n-hexane) ¹	0.77	8
Total HAP ¹	1.81	20

1. Includes fugitive emissions.

1.2. SOURCE STATUS

WVDEP must make stationary source determinations on a case-by-case basis using the guidance under the Clean Air Act (CAA) and EPA's and WVDEP's implementing regulations. The definition of stationary source in 40 CFR 51.166(b) includes the following:

“(6) Building, structure, facility, or installation means all of the pollutant emitting activities which belong to the same industrial grouping, are located on or more contiguous or adjacent properties, and are under control of the same person (or persons under common control).”

Other additional pollutant emitting facilities should be aggregated with the WEU-8 Pad for air permitting purposes if, and only if, all three elements of the “stationary source” definition above are fulfilled.

WVDEP determined that the WEU-8 pad is a separate stationary source when the current permit was issued. There are no Marcellus facilities within a quarter-mile radius of the WEU-8 Pad. The nearest wellpad, WEU-1, is located approximately 1.70 miles east of WEU-8. Therefore, the WEU-8 pad should continue to be considered a separate stationary source with respect to permitting programs, including Title V and Prevention of Significant Deterioration (PSD). As discussed in this application, the facility is a minor source of air emissions with respect to New Source Review (NSR) and Title V permitting.

1.3. G70-B APPLICATION ORGANIZATION

This West Virginia Code of State Regulations, Title 45 (CSR) Series 13 (45 CSR 13) G70-B permit application is organized as follows:

- > Section 2: Sample Emission Source Calculations;
- > Section 3: Regulatory Discussion;
- > Section 4: G70-B Application Form;
- > Attachment A: Single Source Determination;
- > Attachment B: Siting Criteria Waiver **(Not Applicable)**;
- > Attachment C: Business Certificate;
- > Attachment D: Process Flow Diagram;
- > Attachment E: Process Description;
- > Attachment F: Plot Plan;
- > Attachment G: Area Map;
- > Attachment H: Applicability Form;
- > Attachment I: Emission Units Table;
- > Attachment J: Fugitive Emissions Summary Sheet;
- > Attachment K: Gas Well Data Sheet;
- > Attachment L: Storage Vessel Data Sheet;
- > Attachment M: Heaters Data Sheet;
- > Attachment N: Engines Data Sheet;
- > Attachment O: Truck Loading Data Sheet;
- > Attachment P: Glycol Dehydrator Data Sheet **(Not Applicable)**;
- > Attachment Q: Pneumatic Controller Data Sheet **(Not Applicable)**;
- > Attachment R: Air Pollution Control Device Data Sheet;
- > Attachment S: Emission Calculations;
- > Attachment T: Emission Summary Sheet;
- > Attachment U: Class I Legal Advertisement; and
- > Attachment V: General Permit Registration Application Fee.

2. SAMPLE EMISSION SOURCE CALCULATIONS

The characteristics of air emissions from the natural gas production operations, along with the methodology for calculating emissions, are briefly described in this section of the application. Detailed emission calculations are presented in Attachment S of this application.

Emissions from this project will result from natural gas combustion in the line heaters, combustors and TEGs, as well as storage of organic liquids in storage tanks and loading of organic liquids into tank trucks. In addition, fugitive emissions will result from component leaks from the operation of the station. The methods by which emissions from each of these source types, as well as the existing source types, are calculated are summarized below.

- > **Line Heaters, Enclosed Combustors and TEGs:** Potential emissions of criteria pollutants and hazardous air pollutants (HAPs) are calculated using U.S. EPA's AP-42 factors for natural gas external combustion.¹ These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.²
- > **VRU Engine:** Potential emissions of oxides of nitrogen (NO_x), carbon monoxide (CO), and volatile organic compounds (VOC) are calculated using vendor emission factors. Remaining criteria pollutants and HAPs are calculated using U.S. EPA's AP-42 factors for natural gas fired engines.³ These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.
- > **Fugitive Equipment Leaks:** Emissions of VOC and HAPs from leaking equipment components have been estimated using facility estimated component counts and types along with emission factors from the *Protocol for Equipment Leak Emission Estimates, EPA 453/R-95-017, November 1995*. Emission factors used are based on average measured TOC from component types indicated. Greenhouse gas emissions from component leaks are calculated according to the procedures in 40 CFR 98 Subpart W.⁴ Pneumatic devices at the wellpad are intermittent bleed and are assumed to be in operation 1/3 of the year.
- > **Storage Tanks:** Working, breathing and flashing emissions of VOC and HAPs from the storage tanks at the facility are calculated using Bryan Research & Engineering ProMax® Software. Controlled calculations assume an overall control efficiency (capture and destruction) of 98%. The throughput for the produced fluids tanks are based on the maximum annualized monthly condensate and produced water at the WEU-8 well pad (i.e., the maximum monthly throughput for the pad times 12), and includes a safety factor of 1.3. The composition for the analysis was from a sample taken at WEU-8. Emissions of VOC and HAPs from the sand separator tank are calculated using E&P TANK v2.0. The produced fluids throughput is calculated as follows:

$$\text{Throughput} \left(\frac{\text{bbl}}{\text{day}} \right) = \left(\text{Condensate Throughput} \left(\frac{\text{bbl}}{\text{month}} \right) + \left(\text{Produced Water Throughput} \left(\frac{\text{bbl}}{\text{month}} \right) \right) \right) * \frac{12 \left(\frac{\text{months}}{\text{year}} \right)}{365 \left(\frac{\text{days}}{\text{year}} \right)} * 1.3$$

- > **Tank Truck Loading:** Uncontrolled emissions of VOC and HAPs from the loading of organic liquids from storage tanks to tank truck are calculated using Bryan Research Engineering ProMax® Software. Truck

¹ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 1.4, Natural Gas Combustion, Supplement D, July 1998.

² 40 CFR 98 Subpart C, *General Stationary Fuel combustion Sources*, Tables C-1 and C-2.

³ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 3.2, Natural Gas-fired Reciprocating Engines, Supplement D, August 2000.

⁴ 40 CFR 98 Subpart W, *Petroleum and Natural Gas Systems*, Section 98.233(r), *Population Count and Emission Factors*.

loading is controlled by the enclosed combustors. U.S. EPA's AP-42 Chapter 5 Section 2 factors were used for capture efficiency.⁵

- > **Haul Roads:** Fugitive dust emitted from facility roadways has been estimated using projected vehicle miles traveled along with U.S. EPA's AP-42 factors for unpaved haul roads.⁶

⁵ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 5.2, Transportation And Marketing Of Petroleum Liquids, June 2008.

⁶ U.S. EPA, AP 42, Fifth Edition, Volume I, Section 13.2.2, Unpaved Roads, November 2006.

3. REGULATORY DISCUSSION

This section documents the applicability determinations made for Federal and State air quality regulations. In this section, applicability or non-applicability of the following regulatory programs is addressed:

- > Prevention of Significant Deterioration permitting;
- > Title V of the 1990 Clean Air Act Amendments;
- > New Source Performance Standards (NSPS);
- > National Emission Standards for Hazardous Air Pollutants (NESHAP); and
- > West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-B permit application forms.

In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the wellpad. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the wellpad. Regulations that are categorically non-applicable are not discussed (e.g., NSPS Subpart J, Standards of Performance for Petroleum Refineries).

3.1. PREVENTION OF SIGNIFICANT DETERIORATION SOURCE CLASSIFICATION

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration. PSD regulations apply when a major source makes a change, such as installing new equipment or modifying existing equipment, and a significant increase in emissions results from the change. The wellpad is not a major source with respect to the PSD program since its potential emissions are below all the PSD thresholds. As such, PSD permitting is not triggered by this construction activity. EQT will monitor future construction activities at the site closely and will compare any future increase in emissions with the PSD thresholds to ensure these activities will not trigger this program.

3.2. TITLE V OPERATING PERMIT PROGRAM

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in West Virginia CSR 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP and 100 tpy of all other regulated pollutants.⁷ The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility after the proposed project. Therefore, the wellpad is not a major source for Title V purposes.

3.3. NEW SOURCE PERFORMANCE STANDARDS

New Source Performance Standards, located in 40 CFR 60, require new, modified, or reconstructed sources to control emissions to the level achievable by the best demonstrated technology as specified in the applicable provisions.

⁷ On June 23, 2014, the U.S Supreme Court decision in the case of *Utility Air Regulatory Group v. EPA* effectively changed the permitting procedures for GHGs under the PSD and Title V programs.

Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability and non-applicability determinations for NSPS regulations of relevance to the wellpad. The following NSPS could potentially apply to the wellpad:

- > 40 CFR Part 60 Subparts D/Da/Db/Dc – Steam Generating Units
- > 40 CFR Part 60 Subpart K/Ka/Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids
- > 40 CFR Part 60 Subpart JJJJ – Stationary Spark Ignition Internal Combustion Engines
- > 40 CFR Part 60 Subpart OOOO – Crude Oil and Natural Gas Production, Transmission, and Distribution
- > 40 CFR Part 60 Subpart OOOOa – Crude Oil and Natural Gas Facilities

3.3.1. NSPS Subparts D, Da, Db, and Dc - Steam Generating Units

These subparts apply to steam generating units of various sizes, all greater than 10 MMBtu/hr. The proposed project does not include any steam generating units with a heat input greater than 10 MMbtu/hr, therefore the requirements of these subparts do not apply.

3.3.2. NSPS Subparts K, Ka, and Kb - Storage Vessels for Petroleum Liquids/Volatile Organic Liquids

These subparts apply to storage tanks of certain sizes constructed, reconstructed, or modified during various time periods. Subpart K applies to storage tanks constructed, reconstructed, or modified prior to 1978, and Subpart Ka applies to those constructed, reconstructed, or modified prior to 1984. Both Subparts K and Ka apply to storage tanks with a capacity greater than 40,000 gallons. Subpart Kb applies to volatile organic liquid (VOL) storage tanks constructed, reconstructed, or modified after July 23, 1984 with a capacity equal to or greater than 75 m³ (~19,813 gallons). All of the tanks at the wellpad have a capacity of 19,813 gallons or less. As such, Subparts K, Ka, and Kb do not apply to the storage tanks at the wellpad.

3.3.3. NSPS Subpart JJJJ - Stationary Spark Ignition Internal Combustion Engines

New Source Performance Standards 40 CFR Part 60 Subpart JJJJ (NSPS JJJJ) affects owners and operators of stationary spark ignition internal combustion engines (SI ICE) that commence construction, reconstruction or modification after June 12, 2006. Applicability dates are based on the date the engine was ordered by the operator. The proposed engine (VRU engine) at the well pad is a 4-stroke rich burn, spark ignition engine manufactured after July 1, 2008, and is subject to this subpart. EQT will operate the engine according to the manufacturer's recommended practices and demonstrate compliance with the requirements specified in 40 CFR §60.4244 (testing methods) and 40 CFR§60.4243(b)(2) (maintenance plan/records and performance testing frequency) for noncertified affected SI ICE at the facility or by purchasing a certified engine. At this time, EQT intends to purchase a certified engine.

3.3.4. NSPS Subpart OOOO - Crude Oil and Natural Gas Production, Transmission, and Distribution

Subpart OOOO, Standards of Performance for Crude Oil and Natural Gas Production, Transmission, and Distribution, applies to affected facilities that commenced construction, reconstruction, or modification after August 23, 2011 (see clarification below regarding dates). This NSPS was published in the Federal Register on August 16, 2012, and subsequently amended. Although there are sources proposed to be installed that could potentially be subject to this regulation, due to the anticipated installation dates, they will not be subject to the rule. This is due to the most recent proposed developments related to the rule, which are the inclusion of an end date for applicability to Subpart OOOO

(September 18, 2015) and the promulgation of 40 CFR 60 Subpart 0000a.⁸ The potential applicability of Subpart 0000a is discussed in the following section.

3.3.5. NSPS Subpart 0000a—Crude Oil and Natural Gas Facilities

Subpart 0000a, Standards of Performance for Crude Oil and Natural Gas Facilities, will apply to affected facilities that commenced construction, reconstruction, or modification after September 18, 2015. This regulation has yet to be finalized. The currently proposed version of the rule includes provisions for the following facilities:

- > Hydraulically fractured wells;
- > Centrifugal compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;
- > Reciprocating compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;
- > Continuous bleed natural gas-driven pneumatic controllers with a bleed rate of > 6 scfh located in the production, gathering, processing, or transmission and storage segments (excluding natural gas processing plants);
- > Continuous bleed natural gas-driven pneumatic controllers located at natural gas processing plants;
- > Pneumatic pumps located in the production, gathering, processing, or transmission and storage segments;
- > Storage vessels located in the production, gathering, processing, or transmission and storage segments;
- > The collection of fugitive emissions components at a well site;
- > The collection of fugitive emissions components at a compressor station; and
- > Sweetening units located onshore that process natural gas produced from either onshore or offshore wells.

Based on the current version of the proposed rule, the following paragraphs describe the potential applicability of the facilities to be located at the proposed facility.

40 CFR 60.5385 requires owners and operators of affected reciprocating compressors to change the rod packing prior to operating 26,000 hours or prior to 36 months since start up or the last packing replacement. However, according to §60.5365a, compressors located at well sites are not affected facilities under Subpart 0000a.

There are six (6) produced fluid storage vessels and one (1) sand separator storage vessel at the wellpad. The storage vessels at the facility each have potential VOC emissions less than 6 tpy based on the permit application materials and enforceable limits to be included in the G70-B permit. As such, per 60.5365a(e), the tanks will not be storage vessel affected facilities under the rule.

Note that the proposed changes to the well pad do not meet the definition of modification under 60.5365a(i)(3)(i). Therefore, EQT will be not be subject to the leak detection and repair program under 0000a.

The pneumatic controllers will potentially subject to NSPS 0000a. Per 60.5365a(d)(1), a pneumatic controller affected facility is a single continuous bleed natural gas driven pneumatic controller operating at a natural gas bleed rate greater than 6 scfh. No pneumatic controllers installed will meet the definition of a pneumatic controller affected facility. Therefore, these units are not subject to the requirements of Subpart 0000a.

⁸ September 18, 2015 publication in Federal Register: <https://www.federalregister.gov/articles/2015/09/18/2015-21023/oil-and-natural-gas-sector-emission-standards-for-new-and-modified-sources>

3.3.6. Non-Applicability of All Other NSPS

NSPS are developed for particular industrial source categories. Other than NSPS developed for natural gas processing plants (Subparts 0000) and associated equipment (Subparts D-Dc and K-Kb), the applicability of a particular NSPS to the wellpad can be readily ascertained based on the industrial source category covered. All other NSPS are categorically not applicable to the proposed project.

3.4. NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad is an Area (minor) source of HAP since its potential emissions of HAP are less than the 10/25 major source thresholds. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type. Besides 40 CFR 63 Subpart A (NESHAP Subpart A), which is similar to 40 CFR 60 Subpart A (NSPS Subpart A), the following NESHAP could potentially apply to the wellpad:

- > 40 CFR Part 63 Subpart HH – Oil and Natural Gas Production Facilities
- > 40 CFR Part 63 Subpart ZZZZ – Stationary Reciprocating Internal Combustion Engines
- > 40 CFR Part 63 Subpart JJJJJJ – Industrial, Commercial, and Institutional Boilers

The applicability of these NESHAP Subparts is discussed in the following sections.

3.4.1. 40 CFR 63 Subpart HH - Oil and Natural Gas Production Facilities

This standard contains requirements for both major and area sources of HAP. At area sources, the only affected source is a triethylene glycol dehydration unit (§63.760(b)(2)). The wellpad does not include a triethylene glycol dehydration unit; therefore the requirements of this subpart do not apply.

3.4.2. 40 CFR 63 Subpart ZZZZ - Stationary Reciprocating Internal Engines

This rule affects reciprocating internal combustion engines (RICE) located at a major and area sources of HAP. 40 CFR §63.6590(c) states that a new or reconstructed stationary RICE located at an area HAP source must meet the requirements of NESHAP Subpart ZZZZ by meeting the requirements of NSPS Subpart JJJJ. No further requirements apply for such engines under NESHAP Subpart ZZZZ. The WEU-8 well pad is a minor (area) source of hazardous air pollutants and the VRU engine is considered a new stationary RICE. Therefore, the requirements contained in §63.6590(c) are applicable. EQT will be in compliance with applicable requirements of 40 CFR 63 Subpart ZZZZ by meeting the applicable requirements of 40 CFR 60 Subpart JJJJ.

3.4.3. 40 CFR 63 Subpart JJJJJJ - Industrial, Commercial, and Institutional Boilers

This MACT standard applies to industrial, commercial, and institutional boilers of various sizes and fuel types at area sources. The proposed line heater will be natural gas-fired and are specifically exempt from this subpart. Therefore, no sources at the wellpad are subject to any requirements under 40 CFR 63 Subpart JJJJJJ.

3.5. WEST VIRGINIA SIP REGULATIONS

The wellpad is potentially subject to regulations contained in the West Virginia Code of State Regulations, Chapter 45 (Code of State Regulations). The Code of State Regulations fall under two main categories, those regulations that are generally applicable (e.g., permitting requirements), and those that have specific applicability (e.g., PM standards for manufacturing equipment).

3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers

45 CSR 2 applies to fuel burning units, defined as equipment burning fuel “for the primary purpose of producing heat or power by indirect heat transfer”. The TEGs and line heaters are fuel burning units and therefore must comply with this regulation. Per 45 CSR 2-3, opacity of emissions from units shall not exceed 10 percent.

3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor

According to 45 CSR 4-3:

No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.

The wellpad is generally subject to this requirement. However, due to the nature of the process at the wellpad, production of objectionable odor from the wellpad during normal operation is unlikely.

3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse

45 CSR 6 applies to activities involving incineration of refuse, defined as “the destruction of combustible refuse by burning in a furnace designed for that purpose. For the purposes of this rule, the destruction of any combustible liquid or gaseous material by burning in a flare or flare stack, thermal oxidizer or thermal catalytic oxidizer stack shall be considered incineration.” The enclosed combustors are incinerators and therefore must comply with this regulation. Per 45 CSR 6-4.3, opacity of emissions from this unit shall not exceed 20 percent, except as provided by 4.4. PM emissions from this unit will not exceed the levels calculated in accordance with 6-4.1.

3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources

45 CSR 16-1 incorporates the federal Clean Air Act (CAA) standards of performance for new stationary sources set forth in 40 CFR Part 60 by reference. As such, by complying with all applicable requirements of 40 CFR Part 60 at the wellpad, EQT will be complying with 45 CSR 16.

3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter

According to 45 CSR 17-3.1:

No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property lines of the property on which the discharge originates or at any public or residential location, which causes or contributes to statutory air pollution.

Due to the nature of the activities at the wellpad, it is unlikely that fugitive particulate matter emissions will be emitted under normal operating conditions. However, EQT will take measures to ensure any fugitive particulate matter emissions will not cross the property boundary should any such emissions occur.

3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks

45 CSR 21-28 applies to any fixed roof petroleum liquid storage tank with a capacity greater than 40,000 gallons. The capacity of each storage tank proposed for the wellpad is less than 40,000 gallons; therefore, 45 CSR 21-28 will not apply to the petroleum liquid storage tanks at this wellpad.

3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants

45 CSR 34-1 incorporates the federal Clean Air Act (CAA) national emissions standards for hazardous air pollutants (NESHAPs) as set forth in 40 CFR Parts 61 and 63 by reference. As such, by complying with all applicable requirements of 40 CFR Parts 61 and 63 at the wellpad, EQT will be complying with 45 CSR 34. Note that there are no applicable requirements under 40 CFR Parts 61 and 63 for the wellpad.

3.5.8. Non-Applicability of Other SIP Rules

A thorough examination of the West Virginia SIP rules with respect to applicability at the wellpad reveals many SIP regulations that do not apply or impose additional requirements on operations. Such SIP rules include those specific to a particular type of industrial operation that is categorically not applicable to the wellpad.

4. G70-B APPLICATION FORMS

The WVDEP permit application forms contained in this application include all applicable G70-B application forms including the required attachments.



West Virginia Department of Environmental Protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25304
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-B GENERAL PERMIT REGISTRATION APPLICATION

PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION, RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- CONSTRUCTION
- MODIFICATION
- RELOCATION
- CLASS I ADMINISTRATIVE UPDATE
- CLASS II ADMINISTRATIVE UPDATE

SECTION I. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office): EQT Production Company

Federal Employer ID No (FEIN): 25-0724685

Applicant's Mailing Address: 625 Liberty Avenue, Suite 1700

City: Pittsburgh

State: PA

ZIP Code: 15222

Facility Name: WEU-8 Wellpad

Operating Site Physical Address: C/R 11/3, West Union, WV
If none available, list road, city or town and zip of facility

City: West Union

Zip Code: 26421

County: Doddridge

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):

Latitude: 39.27004 N

Longitude: -80.80993 W

SIC Code: 1311

DAQ Facility ID No. (For existing facilities) 017-00066

NAICS Code: 211111

CERTIFICATION OF INFORMATION

This G70-B General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. **Any administratively incomplete or improperly signed or unsigned G70-B Registration Application will be returned to the applicant. Furthermore, if the G70-B forms are not utilized, the application will be returned to the applicant. No substitution of forms is allowed.**

I hereby certify that Kenneth Kirk is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-B General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: [Signature]
Name and Title: Kenneth Kirk, Executive Vice President Phone: _____ Fax: _____
Email: KKirk@eqt.com Date: 4-26-2016

If applicable:
Authorized Representative Signature _____
Name and Title: _____ Phone: _____ Fax: _____
Email: _____ Date: _____

If applicable:
Environmental Contact
Name and Title: Alex Bosiljevac, Environmental Coordinator Phone: 412-395-3699 Fax: 412-395-7027
Email: ABosiljevac@eqt.com Date: _____

OPERATING SITE INFORMATION	
Briefly describe the proposed new operation and/or any change(s) to the facility: General permit application for an existing natural gas production well pad.	
Directions to the facility: From West Union, take Old U.S. 50 W to US-50 W. Turn right onto US-50 W and continue for 30 miles. Then turn left onto C/R 11 (Arnolds Creek Road) and continue for 0.5 miles. Turn right onto C/R 11/3 and continue for 0.3 miles. Access road will be on the left.	
ATTACHMENTS AND SUPPORTING DOCUMENTS	
I have enclosed the following required documents:	
Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22). <input type="checkbox"/> Check attached to front of application. <input type="checkbox"/> I wish to pay by electronic transfer. Contact for payment (incl. name and email address): <input checked="" type="checkbox"/> I wish to pay by credit card. Contact for payment (incl. name and email address): R. Alex Bosiljevac, abosiljevac@eqt.com <input checked="" type="checkbox"/> \$500 (Construction, Modification, and Relocation) <input type="checkbox"/> \$300 (Class II Administrative Update) <input checked="" type="checkbox"/> \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ and/or OOOO ¹ <input type="checkbox"/> \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH ²	
¹ Only one NSPS fee will apply. ² Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ. <i>NSPS and NESHAP fees apply to new construction or if the source is being modified.</i>	
<input checked="" type="checkbox"/> Responsible Official or Authorized Representative Signature (if applicable)	
<input checked="" type="checkbox"/> Single Source Determination Form (must be completed in its entirety) – Attachment A	
<input type="checkbox"/> Siting Criteria Waiver (if applicable) – Attachment B	<input checked="" type="checkbox"/> Current Business Certificate – Attachment C
<input checked="" type="checkbox"/> Process Flow Diagram – Attachment D	<input checked="" type="checkbox"/> Process Description – Attachment E
<input checked="" type="checkbox"/> Plot Plan – Attachment F	<input checked="" type="checkbox"/> Area Map – Attachment G
<input checked="" type="checkbox"/> G70-B Section Applicability Form – Attachment H	<input checked="" type="checkbox"/> Emission Units/ERD Table – Attachment I
<input checked="" type="checkbox"/> Fugitive Emissions Summary Sheet – Attachment J	
<input checked="" type="checkbox"/> Gas Well Affected Facility Data Sheet (if applicable) – Attachment K	
<input checked="" type="checkbox"/> Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L	
<input checked="" type="checkbox"/> Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPU's, Heater Treaters, In-Line Heaters if applicable) – Attachment M	
<input checked="" type="checkbox"/> Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N	
<input checked="" type="checkbox"/> Tanker Truck Loading Data Sheet (if applicable) – Attachment O	
<input type="checkbox"/> Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P	
<input type="checkbox"/> Pneumatic Controllers Data Sheet – Attachment Q	
<input checked="" type="checkbox"/> Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment R	
<input checked="" type="checkbox"/> Emission Calculations (please be specific and include all calculation methodologies used) – Attachment S	
<input checked="" type="checkbox"/> Facility-wide Emission Summary Sheet(s) – Attachment T	
<input checked="" type="checkbox"/> Class I Legal Advertisement – Attachment U	
<input checked="" type="checkbox"/> One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments	

All attachments must be identified by name, divided into sections, and submitted in order.

ATTACHMENT A

Single Source Determination

ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL 3).

Is there a facility owned by or associated with the natural gas industry located within one (1) mile of the proposed facility? Yes No

If Yes, please complete the questionnaire on the following page (Attachment A).

Please provide a source aggregation analysis for the proposed facility below:

Please see discussion in the Application Report.

ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM – NOT APPLICABLE

Answer each question with a detailed explanation to determine contiguous or adjacent properties which are under a common control and any support facilities. This section must be completed in its entirety.

Provide a map of contiguous or adjacent facilities (production facilities, compressor stations, dehydration facilities, etc.) which are under common control and those facilities that are not under common control but are support facilities. Please indicate the SIC code, permit number (if applicable), and the distance between facilities in question on the map.

Are the facilities owned by the same parent company or a subsidiary of the parent company? Provide the owners identity and the percentage of ownership of each facility.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Does an entity such as a corporation have decision making authority over the operation of a second entity through a contractual agreement or voting interest? Please explain.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Is there a contract for service relationship between the two (2) companies or, a support/dependency relationship that exists between the two (2) companies? Please explain.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Do the facilities share common workforces, plant managers, security forces, corporate executive officers or board executives?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Will managers or other workers frequently shuttle back and forth to be involved actively at both facilities?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Do the facilities share common payroll activities, employee benefits, health plans, retirement funds, insurance coverage, or other administrative functions? Please explain.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Does one (1) facility operation support the operation of the other facility?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Is one (1) facility dependent on the other? If one (1) facility shuts down, what are the limitations on the other to pursue outside business? Please explain.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Are there any financial arrangements between the two (2) entities?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Are there any legal or lease agreements between the two (2) facilities?	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Do the facilities share products, byproducts, equipment, or other manufacturing or air pollution control device equipment? Please explain.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Do all the pollutant-emitting activities at the facilities belong to the same SIC Code? Please provide the SIC Codes. 1	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Was the location of the new facility chosen primarily because of its proximity to the existing facility to integrate the operation of the two (2) facilities? Please explain.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Will materials be routinely transferred between the two (2) facilities? Please explain the amount of transfer and how often the transfers take place and what percentages go to the various entities.	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Does the facility influence production levels or compliance with environmental regulations at other facilities? Who accepts the responsibility for compliance with air quality requirements? Please explain.	Yes <input type="checkbox"/>	No <input type="checkbox"/>

ATTACHMENT B

Siting Criteria Waiver *(Not Applicable)*

ATTACHMENT B - SITING CRITERIA WAIVER – NOT APPLICABLE

If applicable, please complete this form and it must be notarized.

**G70-B General Permit
Siting Criteria Waiver**

WV Division of Air Quality 300' Waiver

I _____ hereby
Print Name
acknowledge and agree that _____ will
General Permit Applicant's Name

construct an emission unit(s) at a natural gas production facility
that will be located within 300' of my dwelling and/or business.

I hereby offer this waiver of siting criteria to the West Virginia Department of Environmental Protection
Division of Air Quality as permission to construct, install and operate in such location.

Signed:

Signature Date

Signature Date

Taken, subscribed and sworn before me this ____ day of

_____, 20____.

My commission expires: _____

SEAL _____
Notary Public

ATTACHMENT C

Business Certificate

**WEST VIRGINIA
STATE TAX DEPARTMENT
BUSINESS REGISTRATION
CERTIFICATE**

ISSUED TO:
**EQT PRODUCTION COMPANY
625 LIBERTY AVE 1700
PITTSBURGH, PA 15222-3114**

BUSINESS REGISTRATION ACCOUNT NUMBER: 1022-8081

This certificate is issued on: 08/4/2010

*This certificate is issued by
the West Virginia State Tax Commissioner
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered
to conduct business in the State of West Virginia at the location above.*


This certificate is not transferrable and must be displayed at the location for which issued.
This certificate shall be permanent until cessation of the business for which the certificate of registration
was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of
this certificate displayed at every job site within West Virginia.

ATTACHMENT D

Process Flow Diagram

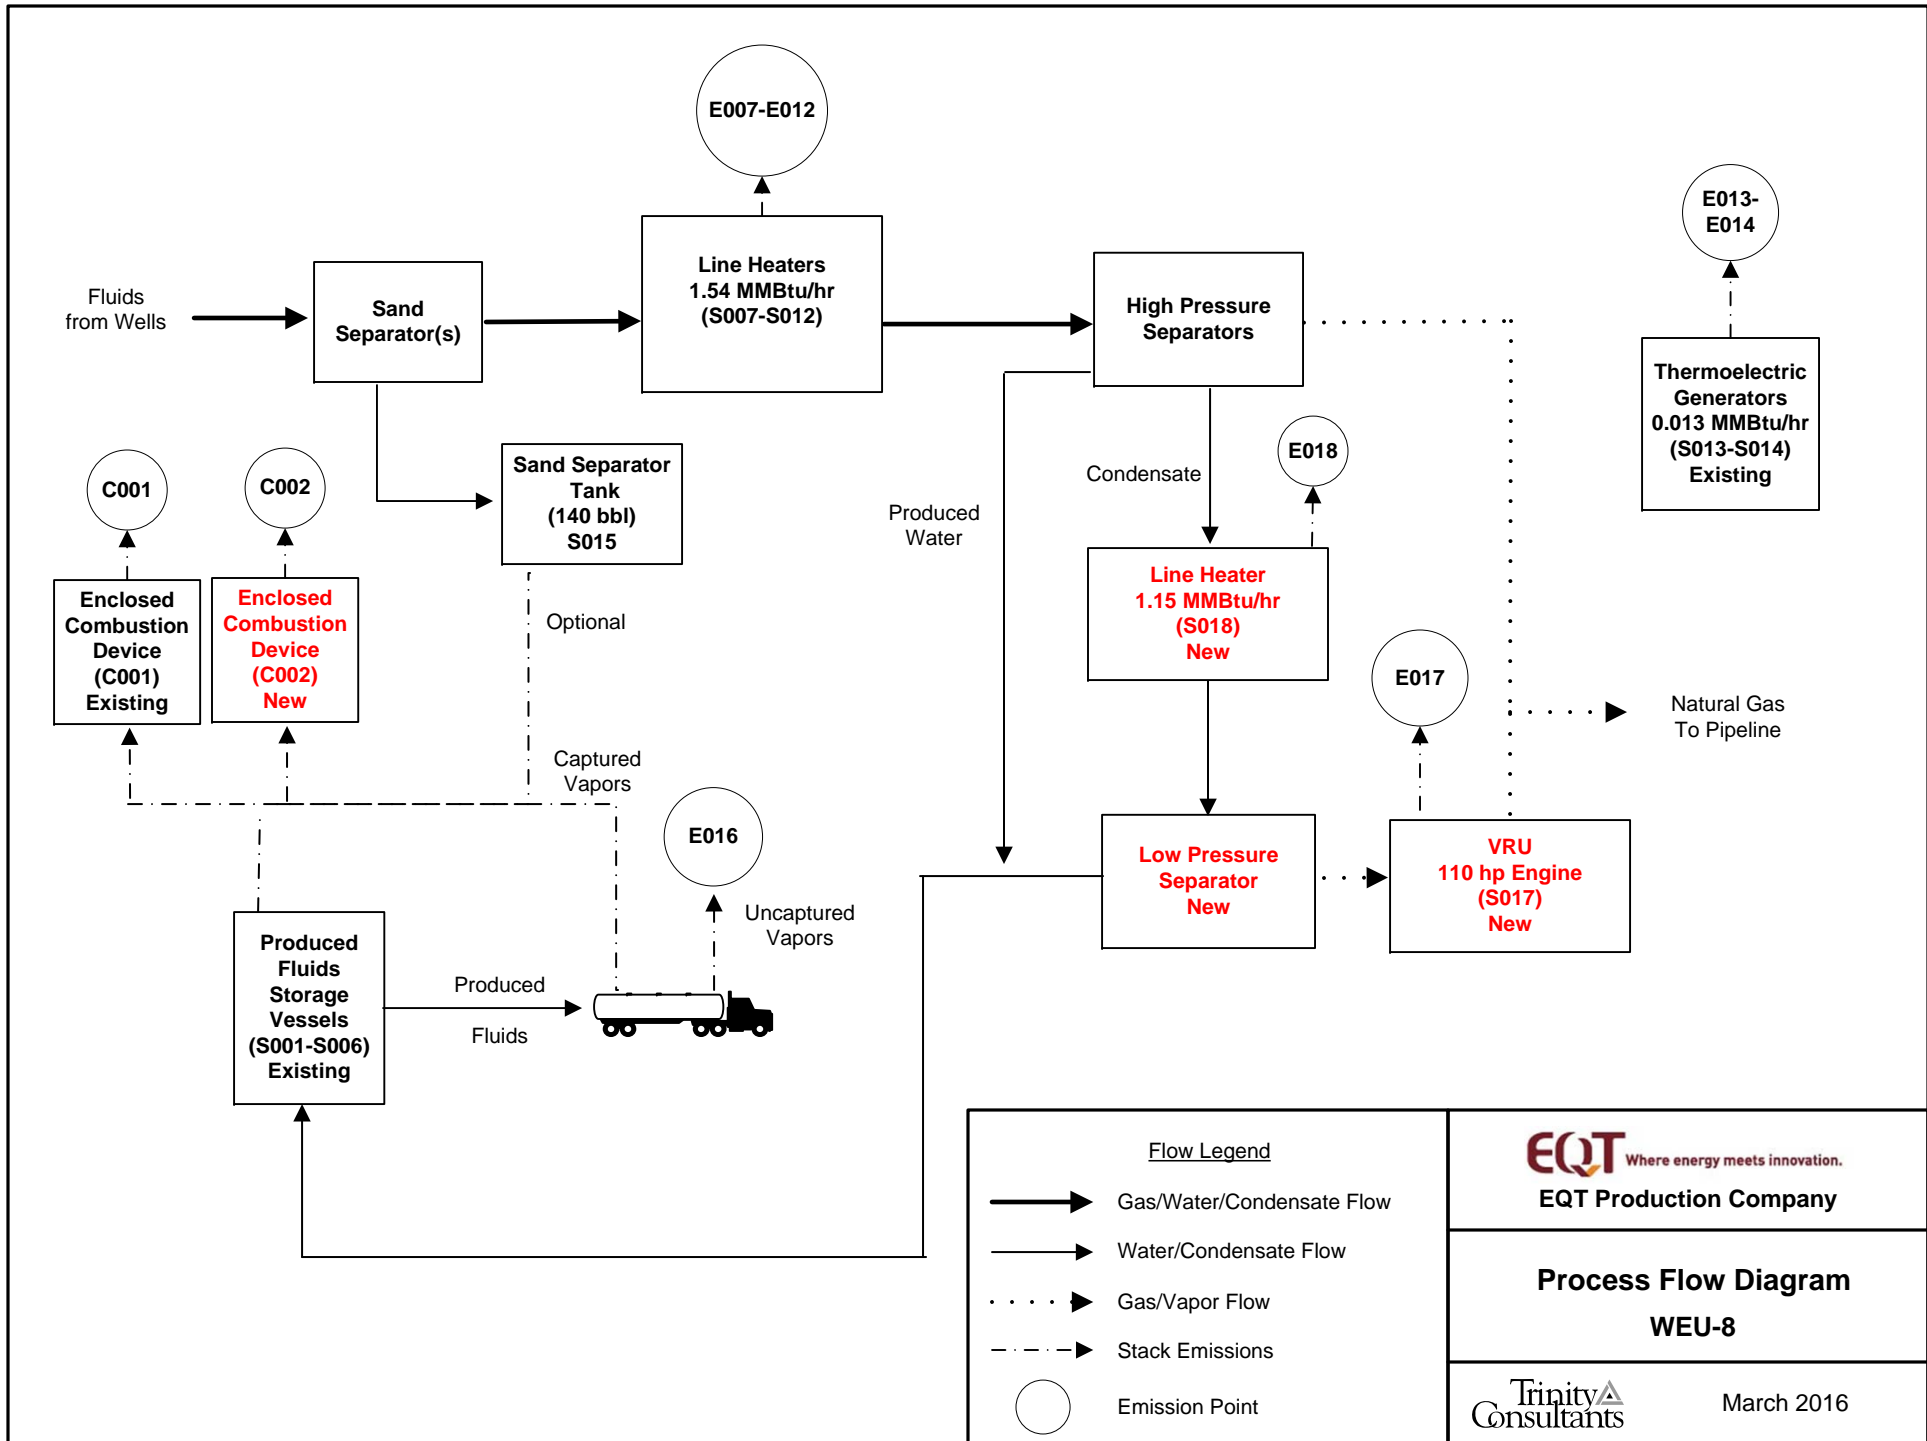

Flow Legend

- Gas/Water/Condensate Flow
- Water/Condensate Flow
- Gas/Vapor Flow
- Stack Emissions
- Emission Point

EQT Where energy meets innovation.
EQT Production Company

Process Flow Diagram
WEU-8

Trinity
 Consultants

March 2016

ATTACHMENT E

Process Description

ATTACHMENT E: PROCESS DESCRIPTION

This G70-B Permit Application involves the permitting of a low pressure separator and associated heater, vapor recovery unit (VRU), and combustor (C002) at an existing natural gas production wellpad (WEU-8). The wellpad consists of six (6) wells, each with the same basic operation.


The incoming gas/liquid stream from the underground well will pass through a sand separator, where sand, water, and residual solids are displaced and transferred to the sand separator tank (S015). The gas stream will then pass through a line heater (S007-S012) to raise/maintain temperature. The stream will then pass through a high pressure (3 phase) separator, which will separate gas (natural gas from the separator is sent to the sales line) from liquids (condensate and produced water). The produced water will be sent to the produced fluids tank and the condensate stream will then pass through a low pressure separator, where it is heated (S018) to volatilize (flash off) lighter hydrocarbons and separate condensate in the liquid stream. The flash gas from the condensate stream is recovered by the Vapor Recovery Unit (S017), which utilizes a natural gas-fired engine driven compressor to raise the pressure of the flash gas and route it back into the natural gas pipeline. The condensate is then transferred to the produced fluid storage vessels (S001-S006).

Emissions from the storage vessels are controlled by an enclosed combustor (C001-C002). Once the tanks are filled, the contents are loaded into trucks for transport. EQT utilizes vapor balancing in the truck loading operations, which means the vapors displaced by the filling of tanker trucks (S016) are routed back into the battery of tanks and ultimately to the combustor. Facility electricity is provided by thermoelectric generators (S013-S014).

A process flow diagram is included as Attachment D.

ATTACHMENT F

Plot Plan

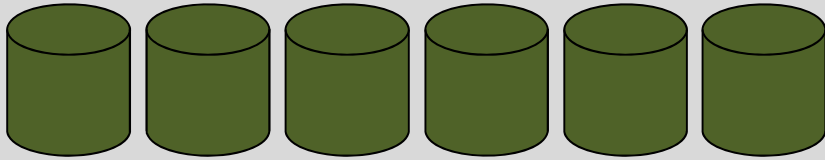


Tanks
400 bbl
(6)
S001-S006



Sand Separator
Tank
140 bbl
S015

**NOTE: This diagram is not to scale.
Locations and distances between surface
equipment are not known at this time.**

Line Heaters
1.54 MMBtu/hr
(6)



Thermoelectric Generators
(2)
S013-S014







One (1)
Combustor
11.66
MMBTU/hr
C001




One (1)
Combustor
11.66
MMBTU/hr
C002


Entrance to WEU-8 Pad

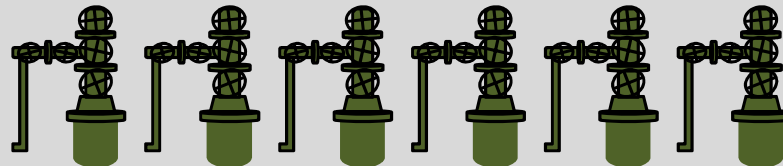

Wellheads
(6)



Line Heater
1.15 MMBtu/hr
S018



VRU Engine
110 hp
S017

Attachment F
WEU-8 Well Pad Plot Plan

ATTACHMENT G

Area Map

ATTACHMENT G: AREA MAP



Figure 1 - Map of WEU-8 Location

UTM Northing (KM): 4,346.760
UTM Easting (KM): 516.396
Elevation: ~1,087 ft

ATTACHMENT H
Applicability Form

ATTACHMENT H – G70-B SECTION APPLICABILITY FORM

**General Permit G70-B Registration
Section Applicability Form**

General Permit G70-B was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, centrifugal compressors, reciprocating compressors, reciprocating internal combustion engines (RICES), tank truck loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-B allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

GENERAL PERMIT G70-B APPLICABLE SECTIONS	
<input checked="" type="checkbox"/> Section 5.0	Gas Well Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water ¹
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO)
<input type="checkbox"/> Section 11.0	Centrifugal Compressor Affected Facility (NSPS, Subpart OOOO) ²
<input type="checkbox"/> Section 12.0	Reciprocating Compressor Affected Facility (NSPS, Subpart OOOO) ²
<input checked="" type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines, Microturbines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck Loading ³
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units ⁴

- 1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subpart OOOO control requirements or the applicable control device requirements of Section 8.
- 2 Applicants that are subject to Section 11 and 12 may also be subject to the applicable RICE requirements of Section 13.
- 3 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.
- 4 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

ATTACHMENT I

Emission Units Table

ATTACHMENT I – EMISSION UNITS / EMISSION REDUCTION DEVICES (ERD) TABLE

Include ALL emission units and air pollution control devices/ERDs that will be part of this permit application review. Do not include fugitive emission sources in this table. Deminimis storage tanks shall be listed in the Attachment L table. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Emission Unit ID ¹	Emission Point ID ²	Emission Unit Description	Year Installed	Manufac. Date ³	Design Capacity	Type ⁴ and Date of Change	Control Device(s) ⁵	ERD(s) ⁶
S001	C001 - C002	Produced Fluid Storage Tank	2013	2013	400 bbl	Existing; No change	C001 – C002	---
S002	C001 - C002	Produced Fluid Storage Tank	2013	2013	400 bbl	Existing; No change	C001 – C002	---
S003	C001 - C002	Produced Fluid Storage Tank	2013	2013	400 bbl	Existing; No change	C001 – C002	---
S004	C001 - C002	Produced Fluid Storage Tank	2013	2013	400 bbl	Existing; No change	C001 – C002	---
S005	C001 - C002	Produced Fluid Storage Tank	2013	2013	400 bbl	Existing; No change	C001 – C002	---
S006	C001 - C002	Produced Fluid Storage Tank	2013	2013	400 bbl	Existing; No change	C001 – C002	---
S007	E007	Line Heater	2013	2013	1.54 MMBtu/hr	Existing; No change	None	---
S008	E008	Line Heater	2013	2013	1.54 MMBtu/hr	Existing; No change	None	---
S009	E009	Line Heater	2013	2013	1.54 MMBtu/hr	Existing; No change	None	---
S010	E010	Line Heater	2013	2013	1.54 MMBtu/hr	Existing; No change	None	---
S011	E011	Line Heater	2013	2013	1.54 MMBtu/hr	Existing; No change	None	---
S012	E012	Line Heater	2013	2013	1.54 MMBtu/hr	Existing; No change	None	---
S013	E013	Thermoelectric Generator	2013	2013	0.013 MMBtu/hr	Existing; No change	None	---
S014	E014	Thermoelectric Generator	2013	2013	0.013 MMBtu/hr	Existing; No change	None	---
S015	E015	Sand Separator Storage Tank	2014	2014	140 bbl	Existing; No change	C001 – C002 (Optional)	---
S016	E016 (Uncaptured) C001–C002 (Controlled, Captured)	Liquid Loading	2013	2013	16,771,020 gal/yr	Modified; Increase throughput	C001 – C002	---
S017	E017	VRU Engine	TBD	TBD	110 hp	New	None	---

S018	E018	Line Heater	TBD	TBD	1.15 MMBtu/hr	New	None	---
C001	C001	Tank Combustor	2015	2015	11.66 MMBtu/hr	Existing; No change	NA	---
C002	C002	Tank Combustor	TBD	TBD	11.66 MMBtu/hr	New	NA	---

¹ For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation.

² For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

³ When required by rule

⁴ New, modification, removal, existing

⁵ For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

⁶ For ERDs use the following numbering system: 1D, 2D, 3D,... or other appropriate designation.

ATTACHMENT J

Fugitive Emissions Summary Sheet

ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions, etc.
Use extra pages for each associated source or equipment if necessary.

Source/Equipment: Fugitive Emissions

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections	<input type="checkbox"/> Infrared (FLIR) cameras	<input checked="" type="checkbox"/> Other (please describe) Will satisfy condition 4.1.4. of the G70-B	<input type="checkbox"/> None required		
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)		
					VOC	HAP	GHG (CO ₂ e)
Pumps	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	11	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input checked="" type="checkbox"/> Liquid <input type="checkbox"/> Both	2.02	0.08	0.39
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	356	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	2.92	0.12	35.88
Safety Relief Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	25	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	3.51	0.15	3.66
Open Ended Lines	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	26	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	0.06	<0.01	5.81
Sampling Connections	<input type="checkbox"/> Yes <input type="checkbox"/> No	0	N/A	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	---	---	---
Connections (Not sampling)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1,578	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	3.98	0.16	17.69
Compressors	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1	(included in other component counts)	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.31	0.01	15.59
Flanges	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	(included in connections)	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	---	---	---
Other ¹	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	30	40 CFR 98 Subpart W	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	4.45	0.18	224.26

¹ Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e.g. pigging operations, equipment blowdowns, pneumatic controllers, etc.):
Pneumatic Controller count is 'Other' category. An estimate of Miscellaneous Gas Venting emissions are included in the Emission Calculations and serve to include such sources as compressor venting, pigging, vessel blowdowns and other sources.

Please indicate if there are any closed vent bypasses (include component): N/A

Specify all equipment used in the closed vent system (e.g. VRU, ERD, thief hatches, tanker truck loading, etc.) N/A

ATTACHMENT K

Gas Well Data Sheet

ATTACHMENT K – GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

API Number	Date of Flowback	Date of Well Completion	Green Completion and/or Combustion Device
047-017-06195	December 2013	December 2013	Green
047-017-06196	December 2013	December 2013	Green
047-017-06197	December 2013	December 2013	Green
047-017-06198	December 2013	December 2013	Green
047-017-06199	December 2013	December 2013	Green
047-017-06200	December 2013	December 2013	Green

Note: If future wells are planned and no API number is available please list as PLANNED. If there are existing wells that commenced construction prior to August 23, 2011, please acknowledge as existing.

This is the same API (American Petroleum Institute) well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).

Every oil and gas well permitted in West Virginia since 1929 has been issued an API number. This API is used by agencies to identify and track oil and gas wells.

The API number has the following format: 047-001-00001

Where,

047 = State code. The state code for WV is 047.

001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).

00001= Well number. Each well will have a unique well number.

ATTACHMENT L

Storage Vessel Data Sheet

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water . (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name WEU-8 Wellpad	2. Tank Name Produced Fluid Tanks (water and condensate)
3. Emission Unit ID number S001-S006	4. Emission Point ID number C001-C002
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> Was the tank manufactured after August 23, 2011? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: N/A <input type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other (Low Pressure Tower) <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded or riveted			
21A. Shell Color: Green	21B. Roof Color: Green	21C. Year Last Painted: New	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): Must be listed for tanks using VRUs with closed vent system.			
24. Is the tank a Vertical Fixed Roof Tank ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft): 0.06	
25. Complete item 25 for Floating Roof Tanks <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type (<i>check one</i>): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (<i>check one</i>) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
SITE INFORMATION - Not Applicable: Tank calculations performed using ProMax software			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft ² -day):		35. Atmospheric Pressure (psia):	
LIQUID INFORMATION - Not Applicable: Tank calculations performed using ProMax software			
36. Avg. daily temperature range of bulk liquid (°F):	36A. Minimum (°F):	36B. Maximum (°F):	
37. Avg. operating pressure range of tank (psig):	37A. Minimum (psig):	37B. Maximum (psig):	
38A. Minimum liquid surface temperature (°F):		38B. Corresponding vapor pressure (psia):	
39A. Avg. liquid surface temperature (°F):		39B. Corresponding vapor pressure (psia):	
40A. Maximum liquid surface temperature (°F):		40B. Corresponding vapor pressure (psia):	
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From: To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name WEU-8 Pad	2. Tank Name Sand Separator Tank
3. Emission Unit ID number S015	4. Emission Point ID number E015
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> Was the tank manufactured after August 23, 2011? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: N/A <input type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other (Low Pressure Tower) <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

TANK INFORMATION

8. Design Capacity <i>(specify barrels or gallons)</i> . Use the internal cross-sectional area multiplied by internal height. 140 bbls	
9A. Tank Internal Diameter (ft.) 10	9B. Tank Internal Height (ft.) 10
10A. Maximum Liquid Height (ft.) 10	10B. Average Liquid Height (ft.) 5
11A. Maximum Vapor Space Height (ft.) 10	11B. Average Vapor Space Height (ft.) 5
12. Nominal Capacity <i>(specify barrels or gallons)</i> . This is also known as “working volume”. 140 bbls	
13A. Maximum annual throughput (gal/yr) See attached emissions calculations for all throughput values	13B. Maximum daily throughput (gal/day) See attached emissions calculations for all throughput values
14. Number of tank turnovers per year See attached emissions calculations for all throughput values	15. Maximum tank fill rate (gal/min) See attached emissions calculations for all throughput values
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input type="checkbox"/> vertical <input checked="" type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical	

PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply:	
<input checked="" type="checkbox"/> Does Not Apply <input type="checkbox"/> Inert Gas Blanket of _____ <input type="checkbox"/> Vent to Vapor Combustion Device ¹ (vapor combustors, flares, thermal oxidizers, enclosed combustors) <input type="checkbox"/> Conservation Vent (psig) Vacuum Setting Pressure Setting <input type="checkbox"/> Emergency Relief Valve (psig) Vacuum Setting Pressure Setting <input type="checkbox"/> Thief Hatch Weighted <input type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Rupture Disc (psig) <input type="checkbox"/> Carbon Adsorption ¹ <input type="checkbox"/> Condenser ¹

¹ Complete appropriate Air Pollution Control Device Sheet									
20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method ¹
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See attached Emissions Calculation for all values									

¹ EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunit lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded			
21A. Shell Color: Gray	21B. Roof Color: Gray	21C. Year Last Painted: New	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): Must be listed for tanks using VRUs with closed vent system.			
24. Is the tank a Vertical Fixed Roof Tank ? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft):	
25. Complete item 25 for Floating Roof Tanks <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type (check one): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (check one) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
SITE INFORMATION - Not Applicable: Tank calculations performed using E&P Tank software			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft ² -day):		35. Atmospheric Pressure (psia):	
LIQUID INFORMATION - Not Applicable: Tank calculations performed using E&P Tank software			

36. Avg. daily temperature range of bulk liquid (°F):	36A. Minimum (°F):	36B. Maximum (°F):	
37. Avg. operating pressure range of tank (psig):	37A. Minimum (psig):	37B. Maximum (psig):	
38A. Minimum liquid surface temperature (°F):	38B. Corresponding vapor pressure (psia):		
39A. Avg. liquid surface temperature (°F):	39B. Corresponding vapor pressure (psia):		
40A. Maximum liquid surface temperature (°F):	40B. Corresponding vapor pressure (psia):		
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From: To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

ATTACHMENT M

Heaters Data Sheet

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO 40CFR60
SUBPART DC
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID# ¹	Emission Point ID# ²	Emission Unit Description (manufacturer, model #)	Year Installed/ Modified	Type ³ and Date of Change	Maximum Design Heat Input (MMBTU/hr) ⁴	Fuel Heating Value (BTU/scf) ⁵
S007	E007	Line Heater	2013	Existing; No change	1.54	~1,216
S008	E008	Line Heater	2013	Existing; No change	1.54	~1,216
S009	E009	Line Heater	2013	Existing; No change	1.54	~1,216
S010	E010	Line Heater	2013	Existing; No change	1.54	~1,216
S011	E011	Line Heater	2013	Existing; No change	1.54	~1,216
S012	E012	Line Heater	2013	Existing; No change	1.54	~1,216
S014	E014	Thermoelectric Generator	2013	Existing; No change	0.013	~1,216
S015	E015	Thermoelectric Generator	2013	Existing; No change	0.013	~1,216
S018	E018	Line Heater	TBD	New	1.15	~1,216

- ¹ Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.
- ² Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.
- ³ New, modification, removal
- ⁴ Enter design heat input capacity in MMBtu/hr.
- ⁵ Enter the fuel heating value in BTU/standard cubic foot.

ATTACHMENT N

Engines Data Sheet

ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*

Emission Unit ID# ¹		S017							
Engine Manufacturer/Model		Ford CSG-637							
Manufacturers Rated bhp/rpm		110							
Source Status ²		NS							
Date Installed/ Modified/Removed/Relocated ³		TBD							
Engine Manufactured /Reconstruction Date ⁴		> July 2010							
Check all applicable Federal Rules for the engine (include EPA Certificate of Conformity if applicable) ⁵		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJJ <input checked="" type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources			
Engine Type ⁶		4SRB							
APCD Type ⁷		NSCR							
Fuel Type ⁸		PQNG							
H ₂ S (gr/100 scf)		0							
Operating bhp/rpm		110							
BSFC (BTU/bhp-hr)		7,000							
Hourly Fuel Throughput		733 NA	ft ³ /hr gal/hr		ft ³ /hr gal/hr		ft ³ /hr gal/hr		
Annual Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)		6.4 NA	MMft ³ /yr gal/yr		MMft ³ /yr gal/yr		MMft ³ /yr gal/yr		
Fuel Usage or Hours of Operation Metered		Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	Yes <input type="checkbox"/>	No <input type="checkbox"/>	Yes <input type="checkbox"/>	No <input type="checkbox"/>		
Calculation Methodology ⁹	Pollutant ¹⁰	Hourly PTE (lb/hr) ¹¹		Annual PTE (tons/year) ¹¹		Hourly PTE (lb/hr) ¹¹		Annual PTE (tons/year) ¹¹	
	NO _x	0.24		1.06					
	CO	0.49		2.12					
	VOC	0.17		0.74					
	SO ₂	<0.01		<0.01					
	PM ₁₀	0.01		0.07					
	Formaldehyde	0.02		0.07					
	Total HAPs	0.02		0.11					
	GHG (CO ₂ e)	90		395					

1 Enter the appropriate Source Identification Number for each natural gas-fueled reciprocating internal combustion compressor/generator engine located at the compressor station. Multiple compressor engines should be designated CE-1, CE-2, CE-3 etc. Generator engines should be designated GE-1, GE-2, GE-3 etc. Microturbine generator engines should be designated MT-1, MT-2, MT-3 etc. If more than three (3) engines exist, please use additional sheets.

2 Enter the Source Status using the following codes:

NS Construction of New Source (installation)
MS Modification of Existing Source

ES Existing Source
RS Relocated Source

**Engine Air Pollution Control Device
(Emission Unit ID# S017, use extra pages as necessary)**

Air Pollution Control Device Manufacturer's Data Sheet included?
Yes No
See attached certification

NSCR SCR Oxidation Catalyst

Provide details of process control used for proper mixing/control of reducing agent with gas stream: Sequential multi-part fuel injection

Manufacturer: Ford	Model #: CSG-637
--------------------	------------------

Design Operating Temperature: 1,600 °F	Design gas volume: scfm
--	--------------------------------

Service life of catalyst: 5,000 hours	Provide manufacturer data? <input type="checkbox"/> Yes <input type="checkbox"/> No
---------------------------------------	---

Volume of gas handled: 444.9 acfm at 1,600 °F	Operating temperature range for NSCR/Ox Cat: From °F to °F
---	---

Reducing agent used, if any:	Ammonia slip (ppm):
------------------------------	---------------------

Pressure drop against catalyst bed (delta P): 6 inches of H₂O

Provide description of warning/alarm system that protects unit when operation is not meeting design conditions:

Is temperature and pressure drop of catalyst required to be monitored per 40CFR63 Subpart ZZZZ?
 Yes No

How often is catalyst recommended or required to be replaced (hours of operation)?
5,000 hours

How often is performance test required?
 Initial
 Annual
 Every 8,760 hours of operation
 Field Testing Required
 No performance test required. If so, why (please list any maintenance required and the applicable sections in NSPS/GACT, Per 40 CFR §60.4243(a)(1), EQT must maintain the certified engine and control device according to the manufacturer's emission related written instructions and keep records of conducted maintenance to demonstrate compliance, but no performance testing is required.




**UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
2015 MODEL YEAR
CERTIFICATE OF CONFORMITY
WITH THE CLEAN AIR ACT**

**OFFICE OF TRANSPORTATION
AND AIR QUALITY
ANN ARBOR, MICHIGAN 48105**

Certificate Issued To: Engine Distributors, Inc.
(U.S. Manufacturer or Importer)
Certificate Number: FEDIB03.7CSG-006

Effective Date:
06/08/2015
Expiration Date:
12/31/2015

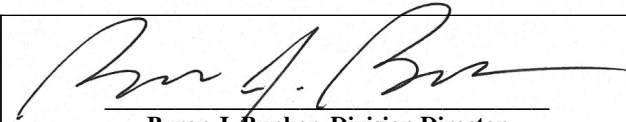
Byron J. Bunker, Division Director
Compliance Division

Issue Date:
06/08/2015
Revision Date:
N/A

Manufacturer: Engine Distributors, Inc.
Engine Family: FEDIB03.7CSG
Mobile/Stationary Certification Type: Mobile and Stationary
Fuel : LPG/Propane
Gasoline (up to and including 10% Ethanol)
Natural Gas (CNG/LNG)
Emission Standards :
Mobile Part 1048
HC + NOx (g/kW-hr) : 0.8
NMHC + NOx (g/kW-hr) : 0.8
CO (g/kW-hr) : 20.6
Part 60 Subpart JJJJ Table 1
NOx (g/kW-hr) : 1.3
HC + NOx (g/kW-hr) : 0.8
CO (g/kW-hr) : 2.7
CO (g/kW-hr) : 20.6
VOC (g/kW-hr) : 0.9
Emergency Use Only : N

Pursuant to Section 213 of the Clean Air Act (42 U.S.C. section 7547) and 40 CFR Part 60, 40 CFR Part 1048, 1065, 1068, and 60 (stationary only and combined stationary and mobile) and subject to the terms and conditions prescribed in those provisions, this certificate of conformity is hereby issued with respect to the test engines which have been found to conform to applicable requirements and which represent the following nonroad engines, by engine family, more fully described in the documentation required by 40 CFR Part 60, 40 CFR Part 1048 and produced in the stated model year.


This certificate of conformity covers only those new nonroad spark-ignition engines which conform in all material respects to the design specifications that applied to those engines described in the documentation required by 40 CFR Part 60, 40 CFR Part 1048 and which are produced during the model year stated on this certificate of the said manufacturer, as defined in 40 CFR Part 60, 40 CFR Part 1048. This certificate of conformity does not cover nonroad engines imported prior to the effective date of the certificate.

It is a term of this certificate that the manufacturer shall consent to all inspections described in 40 CFR 1068.20 and authorized in a warrant or court order. Failure to comply with the requirements of such a warrant or court order may lead to revocation or suspension of this certificate for reasons specified in 40 CFR Part 60, 40 CFR Part 1048. It is also a term of this certificate that this certificate may be revoked or suspended or rendered void *ab initio* for other reasons specified in 40 CFR Part 60, 40 CFR Part 1048.


This certificate does not cover large nonroad engines sold, offered for sale, or introduced, or delivered for introduction, into commerce in the U.S. prior to the effective date of the certificate.

Installation Drawings




Front End View

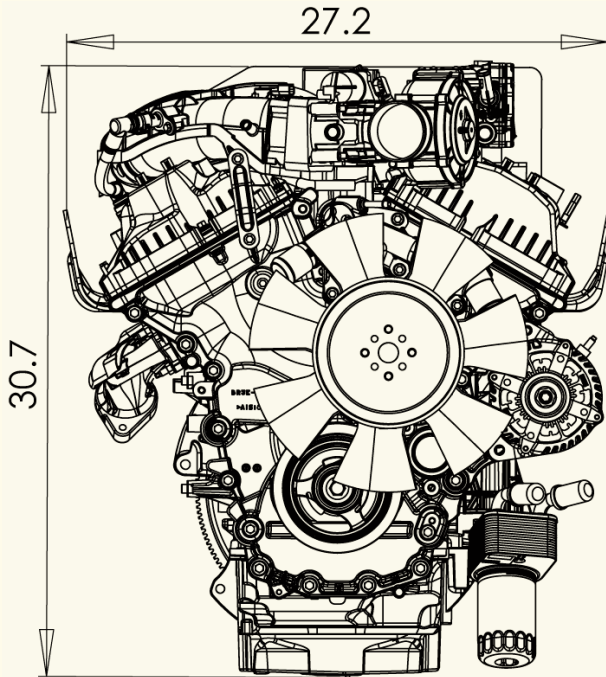

Left Side View

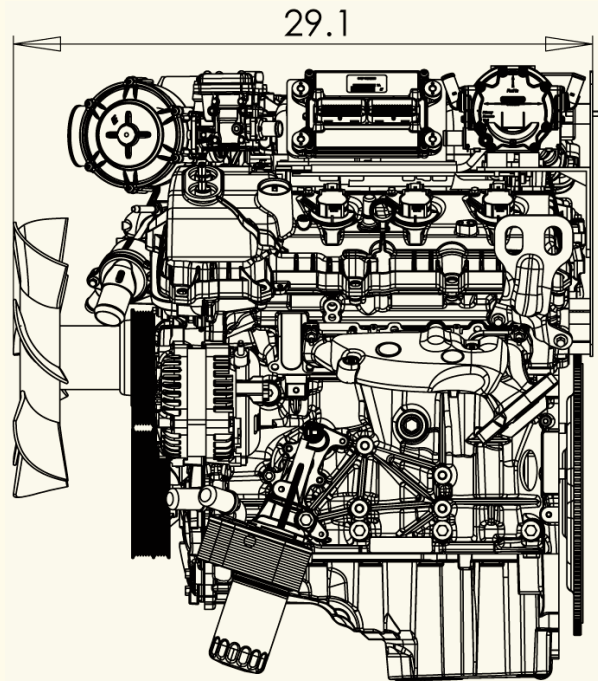

Power Curves (corrected per SAE J1349)

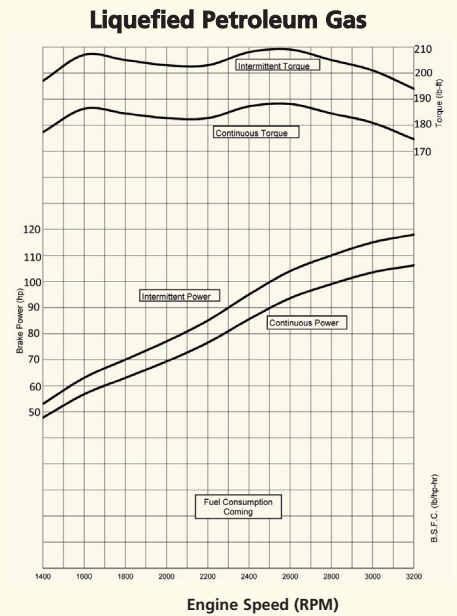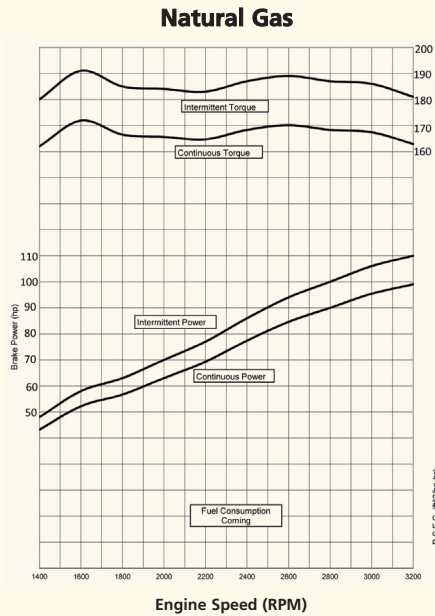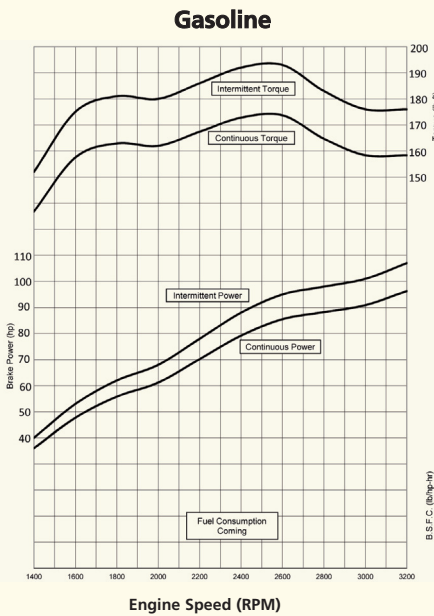

Powertrain Assemblies
& Components
Provided By Ford
Component Sales

For additional information Contact:


**ENGINE
DISTRIBUTORS
INC.**



400 University Ct • Blackwood NJ 08012
856/228-7298 • Fax:856/228-5531
www.edi-dist.com

CSG-637 EFI

3.7 Liter 6-Cylinder

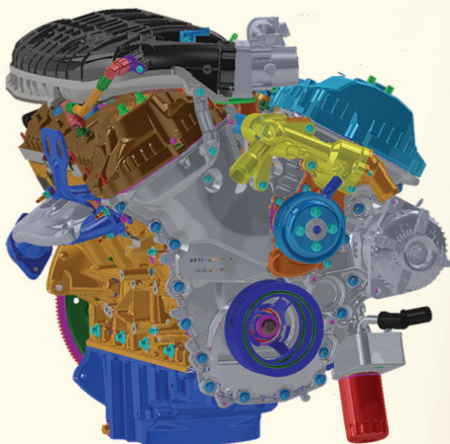

Options

Engine Cooling Fans

- 14" (355mm) diameter suction
- 14" (355mm) diameter pusher

Flywheels

- 11.5" (292mm) SAE over-center clutch
- flat face flywheel

Flywheel Housings

- SAE #3

Exhaust Manifold

- rear dump down

Power Steering Pump

Air Conditioning

Wiring Harnesses

Discrete Speed Switch

Variable Speed Hand Throttle

Variable Speed Foot Pedal

Engine Mounts

- Automotive with insulators
- Open power unit

Electronic Instrument Panel, Gauges

Three Way Catalyst / Muffler Standard

Transmissions

6R80 electronic shift

Emissions Information

California Air Resources Board (CARB)
Environmental Protection Agency (EPA)
Emission Certified Packages

Warranty

Contact Engine Distributors, Inc
for warranty details.



Powertrain Assemblies
& Components
Provided By Ford
Component Sales

Specifications

Engine Type	V-6
Bore and Stroke	3.7" x 3.4" (94mm x 86mm)
Displacement	3.7L Liter (225.7 CID)
Compression Ratio	10.5:1
Oil Capacity.....	6 qts. including filter
Net Weight	355 Lbs. with accessories (161 Kgs.)
Dimensions	L 25.4" x W 29.5" x H 29.4" (646 mm x 751 mm x 748 mm)

Gasoline (corrected per SAE J1349)

Unleaded 87 or 89 octane		
Intermittent Power	107 [HP] @ 3200rpm	(80 [kW] @ 3200rpm)
Continuous Power	96 [HP] @ 3200rpm	(72 [kW] @ 3200rpm)
Intermittent Torque	193 [ft-lbs] @ 2600rpm	(261 [N-m] @ 2600rpm)
Continuous Torque	173 [ft-lbs] @ 2600rpm	(235 [N-m] @ 3200rpm)

Natural Gas (corrected per SAE J1349)

Fuel Specification	1050 BTU/FT3	
Intermittent Power	110 [HP] @ 3200rpm	(82 [kW] @ 3200rpm)
Continuous Power	99 [HP] @ 3200rpm	(74 [kW] @ 3200rpm)
Intermittent Torque	191 [ft-lbs] @ 1600rpm	(259 [N-m] @ 1600rpm)
Continuous Torque	172 [ft-lbs] @ 1600rpm	(233 [N-m] @ 1600rpm)

Liquefied Petroleum Gas (corrected per SAE J1349)

Fuel Specification	HD-5	
Intermittent Power	118 [HP] @ 3200rpm	(88 [kW] @ 3200rpm)
Continuous Power	106 [HP] @ 3200rpm	(79 [kW] @ 3200rpm)
Intermittent Torque	209 [ft-lbs] @ 2600rpm	(284 [N-m] @ 2600rpm)
Continuous Torque	188 [ft-lbs] @ 2600rpm	(255 [N-m] @ 2600rpm)

Standard Features / Benefits

Set-for-life valvetrain

Deep skirted, ribbed cylinder block casting for rigidity

150 AMP Alternator

Aluminum cylinder block and heads.

Chain driven dual camshafts with automatic tensioning system

Structural front cover and deep sump oil pan

Alternate fuel ready valvetrain components

Individual coil on plug electronic ignition

Four main bolts with side bolts through block for strength
and durability

Gasoline Sequential Port Fuel Injection

Closed loop fuel control for all fuels

Electronic engine management system with built-in engine
protection against detonation, high coolant temperature, low oil
pressure, over speed shutdown and starter lockout

Next generation governing – discrete speeds, variable speeds,
drive by wire – using the highest quality components.

Variable CAM Timing for intake camshafts - advances or retards
timing to maximize engine power and fuel efficiency

Forged steel crankshaft

ATTACHMENT O

Truck Loading Data Sheet

ATTACHMENT O – TANKER TRUCK LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks. Use extra pages if necessary.

Truck Loadout Collection Efficiencies

The following applicable capture efficiencies of a truck loadout are allowed:

- For tanker trucks passing the MACT level annual leak test – 99.2%
- For tanker trucks passing the NSPS level annual leak test – 98.7%
- For tanker trucks not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: S016	Emission Point ID#: C001-C002, E016	Year Installed/Modified: N/A		
Emission Unit Description: Uncaptured losses from loading of produced fluids into tanker trucks				
Loading Area Data				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks loading at one (1) time: 1		
Are tanker trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. Trucks utilize vapor recovery lines to route displaced vapors back into battery of tanks.				
Are any of the following truck loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck passing a NSPS level annual leak test? <input checked="" type="checkbox"/> Closed System to tanker truck not passing an annual leak test and has vapor return?				
Projected Maximum Operating Schedule (for rack or transfer point as a whole)				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	Varies	Varies	Varies	Varies
Days/week	7	7	7	7
Bulk Liquid Data (use extra pages as necessary)				
Liquid Name	Produced Fluids			
Max. Daily Throughput (1000 gal/day)	See attached emissions calculations for all throughput values			
Max. Annual Throughput (1000 gal/yr)	See attached emissions calculations for all throughput values			
Loading Method ¹	SP			
Max. Fill Rate (gal/min)	Varies			
Average Fill Time (min/loading)	Varies			
Max. Bulk Liquid Temperature (°F)	See ProMax results			
True Vapor Pressure ²	See ProMax results			
Cargo Vessel Condition ³	U			
Control Equipment or Method ⁴	VB, ECD (captured loading losses)			

Max. Collection Efficiency (%)		70		
Max. Control Efficiency (%)		98		
Max.VOC Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Max.HAP Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Estimation Method ⁵		AP-42 Section 5.2 Methodology (via ProMax)		

- 1 BF Bottom Fill SP Splash Fill SUB Submerged Fill
- 2 At maximum bulk liquid temperature
- 3 B Ballasted Vessel C Cleaned U Uncleaned (dedicated service)
- O Other (describe)
- 4 List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)
- CA Carbon Adsorption VB Dedicated Vapor Balance (closed system)
- ECD Enclosed Combustion Device F Flare
- TO Thermal Oxidization or Incineration
- 5 EPA EPA Emission Factor in AP-42 MB Material Balance
- TM Test Measurement based upon test data submittal O Other (describe)

ATTACHMENT P

Glycol Dehydrator Data Sheet *(Not Applicable)*

**ATTACHMENT P – GLYCOL DEHYDRATION UNIT
DATA SHEET – NOT APPLICABLE**

Complete this data sheet for each Glycol Dehydration Unit, Reboiler, Flash Tank and/or Regenerator at the facility. Include gas sample analysis and GRI- GLYCalc™ input and aggregate report. Use extra pages if necessary.

Manufacturer:		Model:			
Max. Dry Gas Flow Rate:		Reboiler Design Heat Input			
Design Type: <input type="checkbox"/> TEG <input type="checkbox"/> DEG <input type="checkbox"/> EG		Source Status ¹ :			
Date Installed/Modified/Removed ² :		Regenerator Still Vent APCD/ERD ³ :			
Control Device/ERD ID# ³ :		Fuel HV (BTU/scf):			
H ₂ S Content (gr/100 scf):		Operation (hours/year):			
Pump Rate (gpm):					
Water Content (wt %) in: Wet Gas: Dry Gas:					
Is the glycol dehydration unit exempt from 40CFR63 Section 764(d)? <input type="checkbox"/> Yes <input type="checkbox"/> No: If Yes, answer the following:					
The actual annual average flowrate of natural gas to the glycol dehydration unit is less than 85 thousand standard cubic meters per day, as determined by the procedures specified in §63.772(b)(1) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
The actual average emissions of benzene from the glycol dehydration unit process vent to the atmosphere are less than 0.90 megagram per year (1 ton per year), as determined by the procedures specified in §63.772(b)(2) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is the glycol dehydration unit located within an Urbanized Area (UA) or Urban Cluster (UC)? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is a lean glycol pump optimization plan being utilized? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler and mixed with fuel. <input type="checkbox"/> Yes <input type="checkbox"/> No					
What happens when temperature controller shuts off fuel to the reboiler? <input type="checkbox"/> Still vent emissions to the atmosphere. <input type="checkbox"/> Still vent emissions stopped with valve. <input type="checkbox"/> Still vent emissions to glow plug. <input type="checkbox"/> None of the above: Still vent emissions are controlled by an enclosed combustor					
Please indicate if the following equipment is present. <input type="checkbox"/> Flash Tank <input type="checkbox"/> Burner management system that continuously burns condenser or flash tank vapors					
Control Device Technical Data					
Pollutants Controlled		Manufacturer's Guaranteed Control Efficiency (%)			
Emissions Data					
Emission Unit ID / Emission Point ID ⁴	Description	Calculation Methodology ⁵	PTE ⁶	Controlled Maximum Hourly Emissions (lb/hr)	Controlled Maximum Annual Emissions (tpy)

- 1 Enter the Source Status using the following codes:
NS Construction of New Source ES Existing Source
MS Modification of Existing Source
- 2 Enter the date (or anticipated date) of the glycol dehydration unit's installation (construction of source), modification or removal.
- 3 Enter the Air Pollution Control Device (APCD)/Emission Reduction Device (ERD) type designation using the following codes and the device ID number:
NA None CD Condenser FL Flare
CC Condenser/Combustion Combination TO Thermal Oxidizer O Other (please list)
- 4 Enter the appropriate Emission Unit ID Numbers and Emission Point ID Numbers for the glycol dehydration unit reboiler vent and glycol regenerator still vent. The glycol dehydration unit reboiler vent and glycol regenerator still vent should be designated RBV-1 and RSV-1, respectively. If the compressor station incorporates multiple glycol dehydration units, a Glycol Dehydration Emission Unit Data Sheet shall be completed for each, using Source Identification RBV-2 and RSV-2, RBV-3 and RSV-3, etc.
- 5 Enter the Potential Emissions Data Reference designation using the following codes:
MD Manufacturer's Data AP AP-42
GR GRI-GLYCalc™ OT Other (please list)
- 6 Enter the Reboiler Vent and Glycol Regenerator Still Vent Potential to Emit (PTE) for the listed regulated pollutants in lbs per hour and tons per year. The Glycol Regenerator Still Vent potential emissions may be determined using the most recent version of the thermodynamic software model GRI-GLYCalc™ (Radian International LLC & Gas Research Institute). **Attach all referenced Potential Emissions Data (or calculations) and the GRI-GLYCalc™ Aggregate Calculations Report (shall include emissions reports, equipment reports, and stream reports) to this Glycol Dehydration Emission Unit Data Sheet(s). Backup pumps do not have to be considered as operating for purposes of PTE.** This PTE data shall be incorporated in the Emissions Summary Sheet.

ATTACHMENT Q

Pneumatic Controller Data Sheet *(Not Applicable)*

**ATTACHMENT Q – PNEUMATIC CONTROLLERS
DATA SHEET**

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011?

Yes No

Please list approximate number.

ATTACHMENT R

Air Pollution Control Device Data Sheet

**ATTACHMENT R – AIR POLLUTION CONTROL DEVICE /
EMISSION REDUCTION DEVICE SHEETS**

Complete the applicable air pollution control device sheets for each flare, vapor combustor, thermal oxidizer, condenser, adsorption system, vapor recovery unit, BTEX Eliminator, Reboiler with and without Glow Plug, etc. at the facility. Use extra pages if necessary.

Emissions calculations must be performed using the most conservative control device efficiency.

The following five (5) rows are only to be completed if registering an alternative air pollution control device.

Emission Unit ID: Not Applicable	Make/Model:
Primary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No
Secondary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No

VAPOR COMBUSTION (Including Enclosed Combustors)

General Information

Control Device ID#: C001	Installation Date: C001 - 2013; <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Maximum Rated Total Flow Capacity ~7,850 scfh 188,000 scfd	Maximum Design Heat Input (from mfg. spec sheet) 11.66 MMBTU/hr	Design Heat Content 1,500 BTU/scf

Control Device Information

Type of Vapor Combustion Control?		
<input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Thermal Oxidizer	<input type="checkbox"/> Elevated Flare	<input type="checkbox"/> Ground Flare
Manufacturer: LEED Fabrication Model: Enclosed Combustor 48"	Hours of operation per year? 8,760	

List the emission units whose emissions are controlled by this vapor control device (Emission Point ID# S001-S006, S016)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
S001-S006	Produced Fluid Tanks		
S016	Liquid Loading		

If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.

Assist Type (Flares only)	Flare Height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input checked="" type="checkbox"/> Non	~25 feet	4 feet	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Provide determination.

Waste Gas Information

Maximum Waste Gas Flow Rate 130 (scfm)	Heat Value of Waste Gas Stream Varies BTU/ft ³	Exit Velocity of the Emissions Stream Varies (ft/s)
--	--	--

Provide an attachment with the characteristics of the waste gas stream to be burned.

Pilot Gas Information

Number of Pilot Lights 1	Fuel Flow Rate to Pilot Flame per Pilot ~50 scfh	Heat Input per Pilot 0.05 MMBTU/hr	Will automatic re-ignition be used? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
-----------------------------	--	---------------------------------------	---

If automatic re-ignition is used, please describe the method.

Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	If Yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input type="checkbox"/> Other:
---	---

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate)*. See attached information on unit

Additional information attached? Yes No
Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11(b) and performance testing.

VAPOR COMBUSTION (Including Enclosed Combustors)

General Information

Control Device ID#: C002 (new)	Installation Date: C002 - TBD <input checked="" type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Maximum Rated Total Flow Capacity ~7,850 scfh 188,000 scfd	Maximum Design Heat Input (from mfg. spec sheet) 11.66 MMBTU/hr	Design Heat Content 1,500 BTU/scf

Control Device Information

Type of Vapor Combustion Control?		
<input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Thermal Oxidizer	<input type="checkbox"/> Elevated Flare	<input type="checkbox"/> Ground Flare

Manufacturer: LEED Fabrication Model: Enclosed Combustor 48"	Hours of operation per year? 8,760
---	------------------------------------

List the emission units whose emissions are controlled by this vapor control device (Emission Point ID# S001-S006, S016)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
S001-S006	Produced Fluid Tanks		
S016	Liquid Loading		

If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.

Assist Type (Flares only)	Flare Height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input checked="" type="checkbox"/> Non	~25 feet	4 feet	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Provide determination.

Waste Gas Information

Maximum Waste Gas Flow Rate 130 (scfm)	Heat Value of Waste Gas Stream Varies BTU/ft ³	Exit Velocity of the Emissions Stream Varies (ft/s)
--	--	--

Provide an attachment with the characteristics of the waste gas stream to be burned.

Pilot Gas Information

Number of Pilot Lights 1	Fuel Flow Rate to Pilot Flame per Pilot ~50 scfh	Heat Input per Pilot 0.05 MMBTU/hr	Will automatic re-ignition be used? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
-----------------------------	--	---------------------------------------	--

If automatic re-ignition is used, please describe the method.

Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	If Yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input type="checkbox"/> Other:
---	---

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate).* See attached information on unit

Additional information attached? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11(b) and performance testing.

CONDENSER – Not Applicable

General Information

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated
Manufacturer:	Model: Control Device Name:
Control Efficiency (%):	
Manufacturer's required temperature range for control efficiency. °F	
Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:	
Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.	
Additional information attached? <input type="checkbox"/> Yes <input type="checkbox"/> No Please attach copies of manufacturer's data sheets.	
Is condenser routed to a secondary APCD or ERD? <input type="checkbox"/> Yes <input type="checkbox"/> No	

ADSORPTION SYSTEM – Not Applicable

General Information

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Manufacturer:	Model:	Control Device Name:
Design Inlet Volume: scfm	Adsorbent charge per adsorber vessel and number of adsorber vessels:	
Length of Mass Transfer Zone supplied by the manufacturer:	Adsorber diameter: ft	Adsorber area: ft ²
Adsorbent type and physical properties:	Overall Control Efficiency (%):	
Working Capacity of Adsorbent (%):		

Operating Parameters

Inlet volume: scfm @ °F	
Adsorption time per adsorption bed (life expectancy):	Breakthrough Capacity (lbs of VOC/100 lbs of adsorbent):
Temperature range of carbon bed adsorber. °F - °F	

Control Device Technical Data

Pollutants Controlled	Manufacturer's Guaranteed Control Efficiency (%)

Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:

Has the control device been tested by the manufacturer and certified?

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.

Additional information attached? Yes No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

VAPOR RECOVERY UNIT

General Information

Emission Unit ID#: S017

Installation Date: TBD

New Modified Relocated

Device Information

Manufacturer: Ford

Model: CSG-637

List the emission units whose emissions are controlled by this vapor recovery unit (Emission Point ID# NA)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
NA	Low Pressure Separator		

If this vapor recovery unit controls emissions from more than six (6) emission units, please attach additional pages.

Additional information attached? Yes No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

The registrant may claim a capture and control efficiency of 95 % (which accounts for 5% downtime) for the vapor recovery unit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup flare that meet the requirements of Section 8.1.2 of this general permit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup VRU.



**Environmental Control Equipment
Data Sheet**

Item/Tag No.:		Page	1	of	2
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Client:		Supplier:	LEED FABRICATION		
Site:		Model No.:	L30-0011-00		
Unit/Lease:		Remarks:			

GENERAL

1 Design Code:		NDE:	LEED Fabrication Standards		
2 Service:		Customer Specs:	<input type="checkbox"/> Yes		
3 Description:	Standard Dual Stage 48 High Efficiency Combustor		<input checked="" type="checkbox"/> No		

PROCESS DATA

Gas Composition:	mol %	Process Conditions:		
		Variable	Value	Units
4 Methane		Flow Rate	Up to 140	Mscfd
5 Ethane		Pressure	Up to 12	oz/in2
6 Propane		Temperature		°F
7 I-Butane		Molecular Weight		
8 n-Butane		Process/Waste Stream	<input checked="" type="checkbox"/> Gas	<input type="checkbox"/> Liquid
9 I-Pentane		Detailed Process Description / Process Notes:		
10 n-Pentane		1. Turndown 10:1. Based on an expected normal operating rate indicated above.		
11 n-Hexane		2. DRE: 98 % operating at design conditions		
12 CO2		3. Burner Pressure Drop: Min. 0.10 oz/in2		
13 N2				
14 Helium				
15 H2O				
16 C7				
17 C8				
18 C9				
19 C10				
20 C11+				
21 TOTAL				
Other Components:	PPMV	Available Utilities:		
22 H2S		Fuel / Pilot Gas	Min. 30psig Natural Gas /Propane 40-50 SCFH	
23 Benzene		Instrument Air	NA	
24 Toluene		Power	120 V / 60 Hz or Solar Power	
25 E-Benzene		Steam	NA	
26 Xylene		Purge Gas		

DESIGN DATA

27 Ambient Temperatures:		Noise Performance Requirements:	Under 85 dBA	
28 Low, °F	-20	Structural Design Code:		
29 High, °F	120	Wind Design Code:	ASCE	
30 Design Conditions:	Pressure/Temperature			
31 Max. Relative Humidity, %	90	Pressure/Speed	100 mph	
32 Elevation (ASL), ft		Category		
33 Area Classification:	Class I Div 2	Seismic Design Code:		
34 Electrical Design Code:	NEC	Location		

EQUIPMENT SPECIFICATION

35 Type:	<input type="checkbox"/> Elevated <input checked="" type="checkbox"/> Enclosed	Equipment Design:		
36	<input type="checkbox"/> Above Ground	Component	Material / Size / Rating / Other	
37	<input checked="" type="checkbox"/> Stack <input type="checkbox"/> Multiple Stack	Burner		
38	<input type="checkbox"/> Portable / Trailer	Burner Tip / Assist Gas Burner	304 SS	
39		Burner Body	Carbon Steel	
40 Smokeless By:	<input type="checkbox"/> Steam <input type="checkbox"/> Assist Air	Pilot		
41	<input type="checkbox"/> Gas Assist <input checked="" type="checkbox"/> Staging	Pilot Tip	304 SS	
42		Pilot Line(s)	Carbon Steel	
43 Stack:	<input checked="" type="checkbox"/> Self Supporting	Firebox / Stack		
44 Flare Burner:	<input type="checkbox"/> Non-Smokeless <input checked="" type="checkbox"/> Smokeless <input type="checkbox"/> Gas Assist	Shell	Carbon Steel	
45 Pilot:	<input checked="" type="checkbox"/> Intermittent <input type="checkbox"/> Continuous	Piping	Carbon Steel	
46 Pilot Air Inspirator:	<input checked="" type="checkbox"/> Local <input type="checkbox"/> Remote	Nozzles	Carbon Steel	
47 Pilot Flame Control:	<input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (Thermocouple)	Flanges	Carbon Steel	
48		Insulation	Blanket	
49 Pilot Ignition:	<input type="checkbox"/> Flamefront Generator <input checked="" type="checkbox"/> Inspiring Ignitor	Insulation Pins	304 SS	
50	<input type="checkbox"/> Electronic <input checked="" type="checkbox"/> Automatic <input type="checkbox"/> Manual	Refractory	NA	
51	<input type="checkbox"/> With Pilot Flame Control	Refractory Anchors	NA	
52	<input type="checkbox"/> With Auto Pilot Re-Ignition	Ladders and Platforms	NA	
53		Stack Sample Connections	Per EPA requirements	
54 Pilot Ignition Backup:	<input type="checkbox"/> Manual Specify: i.e Piezo-Electric	Sight Glass	2	
55	<input type="checkbox"/> Battery Pack	Other		




**Environmental Control Equipment
Data Sheet**

Item/Tag No.:		Page	2	of	3
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Remarks:	-	Supplier:	LEED FABRICATION		
		Model No.:	L30-0011-00		

Client:	
Site:	
Unit/Lease:	

EQUIPMENT SPECIFICATION

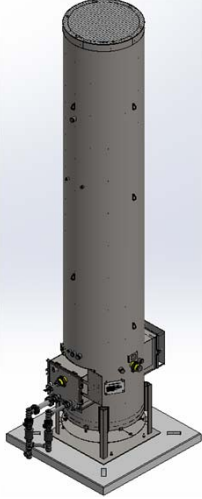56	Flame Detection:	<input type="checkbox"/> Thermocouple	<input checked="" type="checkbox"/> Ionization Rod	Auxiliary Equipment	
57		<input type="checkbox"/> UV Scanner		Valves	NA
58	General Configuration:			Blowers	NA
59				Dampers	NA
60				Inlet KO / Liquid Seal	NA
61				Flame / Detonation Arrestor	Yes
62				Instrumentation & Controls	
63				Solenoids / Shut-Off Valves	Check with Sales for available config.
64				Flow Meters	NA
65				Calorimeter	NA
66				Pressure Switches/Transmitters	NA
67				Thermocouples	Check with Sales for available config.
68				Temperature Switches/Transmitters	NA
69				BMS	Check with Sales for available config.
70		CEMS	NA		
71		Other	NA		
72					
73					
74					
75					

FABRICATION AND INSPECTION

76	Special requirements	<input type="checkbox"/> Skid Mounted	<input checked="" type="checkbox"/> Concrete Pad	Equipment Info	
77		<input type="checkbox"/> Other		Component	Weight / Dimensions
78				Burner	
79	Inspection	<input checked="" type="checkbox"/> Vendor Standard		Burner Assembly	
80		<input type="checkbox"/> Other. Specify:		Stack	
81	Material Certification	<input checked="" type="checkbox"/> Vendor Standard		Stack Assembly	48" OD x 25' H
82		<input type="checkbox"/> MTR		Pilot Tip	
83		<input type="checkbox"/> Certificate of Compliance		Pilot Line(s)	
84		<input type="checkbox"/> Other (Specify):		Stack Assembly	
85	NDE	<input checked="" type="checkbox"/> Vendor Standard		Auxiliary Equipment	
86		<input type="checkbox"/> Radiography. Specify:		Blowers	
87		<input type="checkbox"/> Ultrasonic. Specify:		Inlet KO / Liquid Seal	
88		<input type="checkbox"/> Liquid Penetrant.		Flame / Detonation Arrestor	
89		<input type="checkbox"/> Magnetic Particles.		Skid	
90		<input type="checkbox"/> PMI. Specify:		Instrumentation & Controls	
91		<input type="checkbox"/> Other. Specify:		BMS	
92	Surface Preparation	<input checked="" type="checkbox"/> Vendor Standard		Control Panel	
93		<input type="checkbox"/> Other. Specify:			
94	Paint System	<input checked="" type="checkbox"/> Vendor Standard			
95		<input type="checkbox"/> Other. Specify:			
96	Finished Color	<input checked="" type="checkbox"/> Vendor Standard			
97		<input type="checkbox"/> Other. Specify:			
98					
99					

Additional Notes:




Environmental Control Equipment
Data Sheet

Item/Tag No.:		Page	3	of	3
Project No.:		Revision:	B		
		Date:	27 February 2014		
Project:		By:	JS		
P.O. No.:	-	Checked:	SG		
RFQ No.:	-	Approved:	MS		
Ref. P&ID:	-	Supplier:	LEED FABRICATION		
Remarks:	-	Model No.:	L30-0011-00		

Client:	
Site:	
Unit/Lease:	

GENERAL ARRANGEMENT

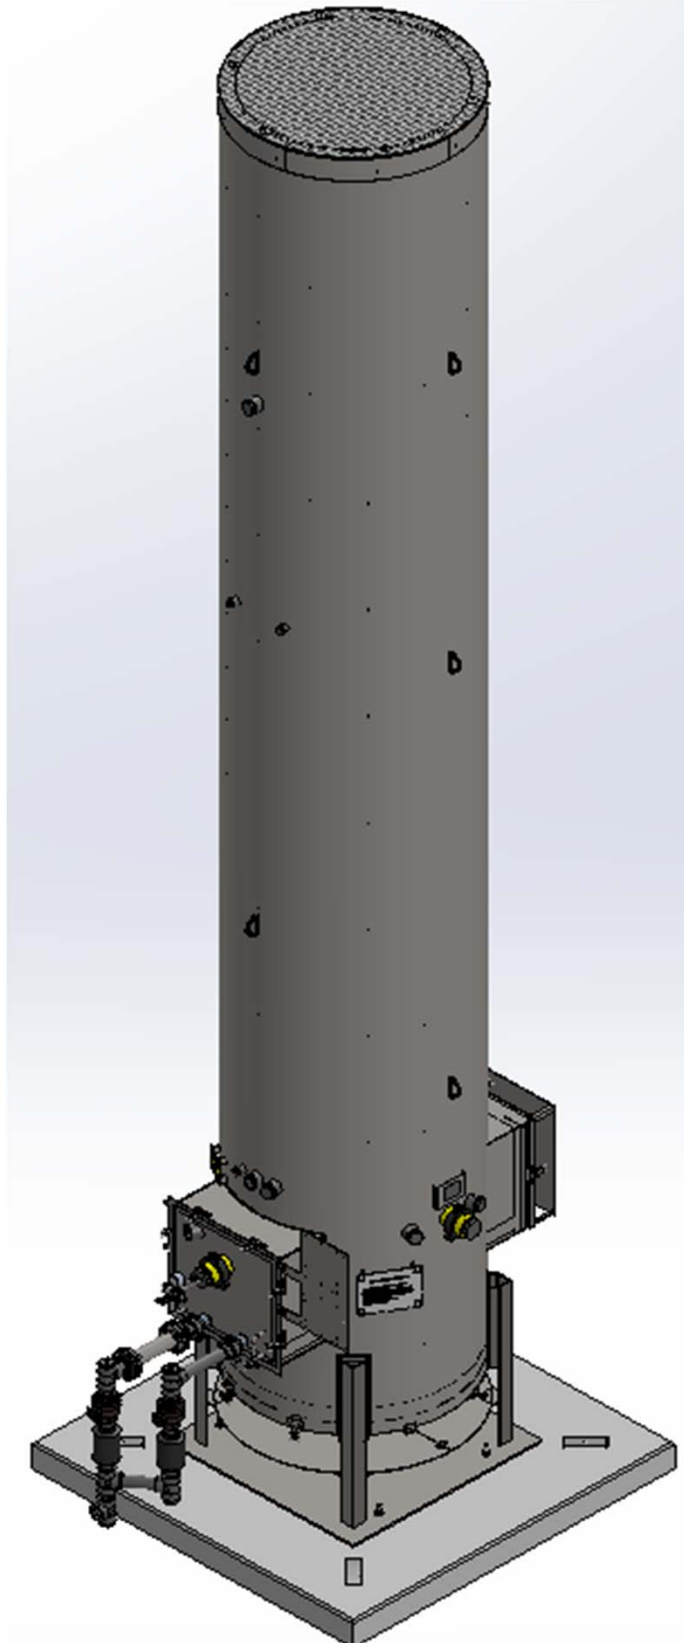

§ MMBTU/hr values are calculated based on 1500 BTU/scf gas

Flare Size	# of Orifices (N)	Pressure (OZ/in ²)	m ³ /s	mSCFD	MMBTU/hr
18	2	1	0.0021	6.34	0.39
18	2	2	0.0029	8.97	0.56
18	2	3	0.0036	10.99	0.68
18	2	4	0.0042	12.69	0.78
18	2	5	0.0046	14.18	0.88
18	2	6	0.0051	15.54	0.96
18	2	7	0.0055	16.78	1.04
18	2	8	0.0059	17.94	1.11
18	2	9	0.0062	19.03	1.18
18	2	10	0.0066	20.06	1.24
18	2	11	0.0069	21.04	1.30
18	2	12	0.0072	21.97	1.36
18	2	13	0.0075	22.87	1.42
18	2	14	0.0078	23.73	1.47
18	2	15	0.0081	24.57	1.52
18	2	16	0.0083	25.37	1.57
18	2	17	0.0086	26.15	1.62
18	2	18	0.0088	26.91	1.67
24	4	1	0.0042	12.69	0.78
24	4	2	0.0059	17.94	1.11
24	4	3	0.0072	21.97	1.36
24	4	4	0.0083	25.37	1.57
24	4	5	0.0093	28.37	1.76
24	4	6	0.0102	31.08	1.92
24	4	7	0.0110	33.56	2.08
24	4	8	0.0118	35.88	2.22
24	4	9	0.0125	38.06	2.35
24	4	10	0.0131	40.12	2.48
24	4	11	0.0138	42.08	2.60
24	4	12	0.0144	43.95	2.72
24	4	13	0.0150	45.74	2.83
24	4	14	0.0156	47.47	2.94
24	4	15	0.0161	49.13	3.04
24	4	16	0.0166	50.75	3.14
24	4	17	0.0171	52.31	3.24
24	4	18	0.0176	53.82	3.33
36	10	1	0.0104	31.72	1.96
36	10	2	0.0147	44.85	2.78
36	10	3	0.0180	54.93	3.40

36	10	4	0.0208	63.43	3.92
36	10	5	0.0232	70.92	4.39
36	10	6	0.0255	77.69	4.81
36	10	7	0.0275	83.91	5.19
36	10	8	0.0294	89.71	5.55
36	10	9	0.0312	95.15	5.89
36	10	10	0.0329	100.29	6.21
36	10	11	0.0345	105.19	6.51
36	10	12	0.0360	109.87	6.80
36	10	13	0.0375	114.35	7.08
36	10	14	0.0389	118.67	7.34
36	10	15	0.0403	122.83	7.60
36	10	16	0.0416	126.86	7.85
36	10	17	0.0429	130.77	8.09
36	10	18	0.0441	134.56	8.33
48	14	1	0.0146	44.40	2.75
48	14	2	0.0206	62.79	3.89
48	14	3	0.0252	76.91	4.76
48	14	4	0.0291	88.80	5.49
48	14	5	0.0325	99.29	6.14
48	14	6	0.0356	108.76	6.73
48	14	7	0.0385	117.48	7.27
48	14	8	0.0412	125.59	7.77
48	14	9	0.0437	133.21	8.24
48	14	10	0.0460	140.41	8.69
48	14	11	0.0483	147.27	9.11
48	14	12	0.0504	153.81	9.52
48	14	13	0.0525	160.09	9.91
48	14	14	0.0545	166.14	10.28
48	14	15	0.0564	171.97	10.64
48	14	16	0.0582	177.61	10.99
48	14	17	0.0600	183.07	11.33
48	14	18	0.0617	188.38	11.66

ATTACHMENT S

Emission Calculations

Company Name:
 Facility Name:
 Project Description:

EOT Production, LLC
WEU 8 Wellpad
G70-B Application

Facility-Wide Emission Summary - Controlled

Wells 6 per pad Carbon equivalent emissions (CO₂e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:
 Storage Tanks 6 per pad CO₂ 1
 Sand Separator Tank 1 per pad CH₄ 25
 Line Heaters 7 per pad N₂O 298
 TEGs 2 per pad
 Dehy Reboiler 0 per pad
 Glycol Dehy 0 per pad
 Dehy Drip Tank 0 per pad
 Dehy Combustor 0 per pad
 Compressor 1 per pad
 High Pressure Separator 6 per pad
 Low Pressure Separator 1 per pad
 Vapor Recovery Unit 1 per pad
 Tank Combustor 2 per pad
 Length of lease road 2,080 feet

Emission Point ID #	Emission Source ID#s	Emission Source Description	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		CO ₂ e	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001-C002	S001-S006	Storage Vessels	---	---	---	---	0.39	1.72	---	---	---	---	---	---	3.28	14.36
C001-C002	S016	Captured Liquid Loading	---	---	---	---	2.79	0.72	---	---	---	---	---	---	---	---
C001	C001	Tank Combustor	1.15	5.03	0.96	4.22	2.8E-04	1.2E-03	0.01	0.03	0.09	0.38	0.09	0.38	1,371.10	6,005.43
C002	C002	Tank Combustor	1.15	5.03	0.96	4.22	2.8E-04	1.2E-03	0.01	0.03	0.09	0.38	0.09	0.38	1,371.10	6,005.43
C001	S001-S006, S016, C001	---	1.15	5.03	0.96	4.22	1.59	1.22	0.01	0.03	0.09	0.38	0.09	0.38	1,372.74	6,012.61
C002	S001-S006, S016, C002	---	1.15	5.03	0.96	4.22	1.59	1.22	0.01	0.03	0.09	0.38	0.09	0.38	1,372.74	6,012.61
E007	S007	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E008	S008	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E009	S009	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E010	S010	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E011	S011	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E012	S012	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E018	S018	Line Heater	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	135.14	591.90
E013	S013	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E014	S014	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E015	S015	Sand Separator Tank	---	---	---	---	0.17	0.76	---	---	---	---	---	---	1.08	4.70
E017	S017	VRU Engine	0.24	1.06	0.49	2.12	0.19	0.81	4.5E-04	2.0E-03	0.01	0.07	0.01	0.07	90.18	394.99
E016	S016	Uncaptured Liquid Loading	---	---	---	---	59.75	15.54	---	---	---	---	---	---	---	---
---	---	Fugitives	---	---	---	---	---	17.25	---	---	---	---	---	---	---	303.29
---	---	Haul Roads	---	---	---	---	---	---	---	---	1.83	---	---	0.18	---	---
Facility Total			3.53	15.46	3.25	14.22	63.35	37.04	0.02	0.09	0.26	2.99	0.26	1.34	4,056.00	18,068.56
Facility Total (excluding fugitive emissions)			3.53	15.46	3.25	14.22	3.59	4.26	0.02	0.09	0.26	1.16	0.26	1.16	4,056.00	17,765.28

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name:
 Facility Name:
 Project Description:

EOT Production, LLC
WEU 8 Wellpad
G70-B Application

Facility-Wide Emission Summary - Controlled

Emission Point ID #	Emission Source ID#s	Emission Source Description	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		n-Hexane		Total HAP	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001-C002	S001-S006	Storage Vessels	---	---	4.9E-04	2.1E-03	7.7E-04	3.4E-03	3.3E-05	1.5E-04	3.4E-04	1.5E-03	0.01	0.04	0.02	0.09
C001-C002	S016	Captured Liquid Loading	---	---	2.1E-03	5.4E-04	2.6E-03	6.8E-04	1.2E-04	3.1E-05	1.2E-03	3.1E-04	0.07	0.02	0.14	0.04
C001	C001	Tank Combustor	---	---	---	---	---	---	---	---	---	---	---	---	---	---
C002	C002	Tank Combustor	---	---	---	---	---	---	---	---	---	---	---	---	---	---
C001	S001-S006, S016, C001	---	---	---	1.3E-03	1.3E-03	1.7E-03	2.0E-03	7.5E-05	8.8E-05	7.6E-04	9.1E-04	0.04	0.03	0.08	0.07
C002	S001-S006, S016, C002	---	---	---	1.3E-03	1.3E-03	1.7E-03	2.0E-03	7.5E-05	8.8E-05	7.6E-04	9.1E-04	0.04	0.03	0.08	0.07
E007	S007	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E008	S008	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E009	S009	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E010	S010	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E011	S011	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E012	S012	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E018	S018	Line Heater	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	2.1E-03	0.01
E013	S013	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E014	S014	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E015	S015	Sand Separator Tank	---	---	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	1.0E-03	<0.01	2.0E-03	1.0E-02
E017	S017	VRU Engine	0.02	0.07	1.2E-03	5.3E-03	4.3E-04	1.9E-03	1.9E-05	8.4E-05	1.5E-04	6.6E-04	---	---	0.02	0.11
E016	S016	Uncaptured Liquid Loading	---	---	0.04	0.01	0.06	0.01	2.5E-03	6.5E-04	2.5E-02	6.6E-03	1.44	0.38	2.95	0.77
---	---	Fugitives	---	---	---	0.01	---	0.03	---	<0.01	---	0.03	---	0.26	---	0.72
---	---	Haul Roads	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Facility Total			0.02	0.07	0.05	0.03	0.06	0.05	2.7E-03	9.1E-04	0.03	0.04	1.54	0.77	3.16	1.81
Facility Total (excluding fugitive emissions)			0.02	0.07	3.8E-03	0.01	3.9E-03	6.1E-03	1.7E-04	2.6E-04	1.7E-03	2.5E-03	0.10	0.14	0.21	0.33

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name: EOT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Produced Fluids Storage Vessels

Potential Throughput

Operational Hours 8,760 hrs/yr
 Maximum Condensate Throughput¹ 7,969 bbl/month
 Maximum Produced Water Throughput¹ 25,306 bbl/month

¹ Based on the highest monthly throughput recorded at the site (January 2015). Includes a safety factor of 30%.

Overall Control Efficiency of Combustor 98%

Storage Tanks - Uncontrolled

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	6.557	28.720	6.557	28.720
Ethane	<0.001	<0.001	<0.001	<0.001	7.916	34.674	7.916	34.674
Propane	0.070	0.308	0.904	3.958	7.271	31.848	8.245	36.113
Isobutane	0.016	0.072	0.197	0.865	1.721	7.536	1.934	8.472
n-Butane	0.033	0.143	0.394	1.726	3.508	15.366	3.935	17.235
Isopentane	0.013	0.055	0.151	0.663	1.369	5.997	1.533	6.715
n-Pentane	0.011	0.050	0.138	0.603	1.262	5.527	1.411	6.180
n-Hexane	0.004	0.017	0.048	0.210	0.448	1.962	0.500	2.190
Cyclohexane	0.001	0.002	0.006	0.028	0.077	0.338	0.084	0.368
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	0.004	0.016	0.044	0.192	0.438	1.918	0.485	2.126
n-Octane	2.9E-04	0.001	0.003	0.015	0.035	0.155	0.039	0.171
n-Nonane	2.3E-04	0.001	0.003	0.012	0.030	0.131	0.033	0.145
n-Decane	1.2E-04	0.001	0.001	0.007	0.017	0.073	0.018	0.080
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	0.007	0.030	0.081	0.355	0.746	3.267	0.834	3.652
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	8.7E-05	3.8E-04	0.002	0.009	0.022	0.098	0.024	0.107
Toluene	1.4E-04	0.001	0.002	0.009	0.036	0.159	0.039	0.169
Ethylbenzene	6.8E-06	3.0E-05	8.7E-05	3.8E-04	0.002	0.007	0.002	0.007
m-Xylene	6.8E-05	3.0E-04	0.001	0.004	0.016	0.071	0.017	0.075
Isooctane	0.004	0.017	0.046	0.201	0.452	1.980	0.502	2.197
Total VOC Emissions:	0.16	0.71	2.02	8.86	17.45	76.43	19.64	86.00
Total HAP Emissions:	8.1E-03	0.04	0.10	0.43	0.98	4.28	1.08	4.75

¹ Uncontrolled emissions calculation using Promax (sum of produced water and condensate). Non-methane emissions are taken from the tank emissions stencil. Methane emissions are taken from the flash stream composition.

² Composition of condensate from WEU-8 sample from 07/22/2014.

Company Name: EOT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Produced Fluids Storage Vessels

Storage Tanks - Controlled

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy			lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	0.131	0.574	0.131	0.574
Ethane	<0.001	<0.001	<0.001	<0.001	0.158	0.693	0.158	0.693
Propane	0.001	0.006	0.018	0.079	0.145	0.637	0.165	0.722
Isobutane	3.3E-04	0.001	0.004	0.017	0.034	0.151	0.039	0.169
n-Butane	0.001	0.003	0.008	0.035	0.070	0.307	0.079	0.345
Isopentane	2.5E-04	0.001	0.003	0.013	0.027	0.120	0.031	0.134
n-Pentane	2.3E-04	0.001	0.003	0.012	0.025	0.111	0.028	0.124
n-Hexane	8.0E-05	3.5E-04	0.001	0.004	0.009	0.039	0.010	0.044
Cyclohexane	1.1E-05	4.6E-05	1.3E-04	0.001	0.002	0.007	0.002	0.007
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	7.3E-05	3.2E-04	0.001	0.004	0.009	0.038	0.010	0.043
n-Octane	5.8E-06	2.5E-05	6.9E-05	3.0E-04	0.001	0.003	0.001	0.003
n-Nonane	4.7E-06	2.1E-05	5.6E-05	2.5E-04	0.001	0.003	0.001	0.003
n-Decane	2.5E-06	1.1E-05	3.0E-05	1.3E-04	3.3E-04	0.001	3.7E-04	0.002
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	1.3E-04	0.001	0.002	0.007	0.015	0.065	0.017	0.073
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	1.7E-06	7.6E-06	4.1E-05	1.8E-04	4.5E-04	0.002	4.9E-04	0.002
Toluene	2.8E-06	1.2E-05	4.2E-05	1.8E-04	0.001	0.003	0.001	0.003
Ethylbenzene	1.4E-07	5.9E-07	1.7E-06	7.6E-06	3.2E-05	1.4E-04	3.3E-05	1.5E-04
m-Xylene	1.4E-06	6.0E-06	1.7E-05	7.6E-05	3.3E-04	0.001	3.4E-04	0.002
Isooctane	7.6E-05	3.3E-04	0.001	0.004	0.009	0.040	0.010	0.044
Total VOC Emissions:	3.3E-03	0.01	0.04	0.18	0.35	1.53	0.39	1.72
Total HAP Emissions:	1.6E-04	7.1E-04	2.0E-03	8.7E-03	2.0E-02	0.09	0.02	0.09

Company Name: EOT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

VRU Engine

Engine Information:

Manufacturer:	Ford
Model No.:	CSG-637
Engine ID	S017
Stroke Cycle:	4-stroke
Type of Burn:	Rich
Rated Horsepower (bhp):	110

Engine Fuel Information:

Fuel Type:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Specific Fuel Consumption (Btu/bhp-hr):	7,000
Maximum Fuel Consumption at 100% Load (scf/hr):	733
Heat Input (MMBtu/hr):	0.77
Potential Fuel Consumption (MMBtu/yr):	6,745
Max. Fuel Consumption at 100%(MMscf/hr):	0.0007
Max. Fuel Consumption (MMscf/yr):	6.4
Max. Annual Hours of Operation (hr/yr):	8,760

Engine Emissions Data:

Pollutant	Emission Factor	Units	Maximum Potential Emissions		Estimation Basis / Emission Factor Source
			lbs/hr	tpy	
NO _x	1.00	g/bhp-hr	0.24	1.06	Manufacturer
VOC (excludes HCHO)	0.70	g/bhp-hr	0.17	0.74	Manufacturer
VOC (includes HCHO)	---	---	0.19	0.81	VOC + HCHO
CO	2.00	g/bhp-hr	0.49	2.12	Manufacturer
SO _x	0.001	lb/MMBtu	<0.01	<0.01	AP-42, Table 3.2-3 (Aug-2000)
PM ₁₀	0.02	lb/MMBtu	0.01	0.07	AP-42, Table 3.2-3 (Aug-2000)
PM _{2.5}	0.02	lb/MMBtu	0.01	0.07	AP-42, Table 3.2-3 (Aug-2000)
Formaldehyde (HCHO)	0.02	lb/MMBtu	0.02	0.07	AP-42, Table 3.2-3 (Aug-2000)
GHG (CO ₂ e)	See Table Below		90	395	40 CFR 98, Tables C-1 & C-2
Other (Total HAP)	See Table Below		0.02	0.11	AP-42, Table 3.2-3 (Aug-2000)

Notes:

1. PM₁₀ and PM_{2.5} are total values (filterable + condensable).
2. GHG (CO₂e) is carbon dioxide equivalent, which is the summation of CO₂ (GWP = 1) + CH₄ (GWP = 25) + N₂O (GWP = 298).
3. Total HAP is the summation of all hazardous air pollutants for which there is a published emission factor for this source type.

Company Name:
 Facility Name:
 Project Description:

EOT Production, LLC
WEU 8 Wellpad
G70-B Application

VRU Engine

Greenhouse Gas (GHG) & Hazardous Air Pollutant (HAP) Emissions Calculations:

Pollutant	Emission Factor	Units	Maximum Potential Emissions		Estimation Basis / Emission Factor Source
			lbs/hr	tpy	
GHGs:					
CO ₂	53.06	kg/MMBtu	90.09	394.59	40 CFR 98, Table C-1
CH ₄	0.001	kg/MMBtu	1.7E-03	7.4E-03	40 CFR 98, Table C-2
N ₂ O	0.0001	kg/MMBtu	1.7E-04	7.4E-04	40 CFR 98, Table C-2
GHG (CO₂e)			90	395	
Organic HAPs:					
1,1,2,2-Tetrachloroethane	2.53E-05	lb/MMBtu	1.9E-05	8.5E-05	AP-42, Table 3.2-3 (Aug-2000)
1,1,2-Trichloroethane	1.53E-05	lb/MMBtu	1.2E-05	5.2E-05	AP-42, Table 3.2-3 (Aug-2000)
1,3-Butadiene	6.63E-04	lb/MMBtu	5.1E-04	2.2E-03	AP-42, Table 3.2-3 (Aug-2000)
1,3-Dichloropropene	1.27E-05	lb/MMBtu	9.8E-06	4.3E-05	AP-42, Table 3.2-3 (Aug-2000)
Acetaldehyde	2.79E-03	lb/MMBtu	2.1E-03	9.4E-03	AP-42, Table 3.2-3 (Aug-2000)
Acrolein	2.63E-03	lb/MMBtu	2.0E-03	8.9E-03	AP-42, Table 3.2-3 (Aug-2000)
Benzene	1.58E-03	lb/MMBtu	1.2E-03	5.3E-03	AP-42, Table 3.2-3 (Aug-2000)
Carbon Tetrachloride	1.77E-05	lb/MMBtu	1.4E-05	6.0E-05	AP-42, Table 3.2-3 (Aug-2000)
Chlorobenzene	1.29E-05	lb/MMBtu	9.9E-06	4.4E-05	AP-42, Table 3.2-3 (Aug-2000)
Chloroform	1.37E-05	lb/MMBtu	1.1E-05	4.6E-05	AP-42, Table 3.2-3 (Aug-2000)
Ethylbenzene	2.48E-05	lb/MMBtu	1.9E-05	8.4E-05	AP-42, Table 3.2-3 (Aug-2000)
Ethylene Dibromide	2.13E-05	lb/MMBtu	1.6E-05	7.2E-05	AP-42, Table 3.2-3 (Aug-2000)
Methanol	3.06E-03	lb/MMBtu	2.4E-03	1.0E-02	AP-42, Table 3.2-3 (Aug-2000)
Methylene Chloride	4.12E-05	lb/MMBtu	3.2E-05	1.4E-04	AP-42, Table 3.2-3 (Aug-2000)
Naphthalene	9.71E-05	lb/MMBtu	7.5E-05	3.3E-04	AP-42, Table 3.2-3 (Aug-2000)
PAH	1.41E-04	lb/MMBtu	1.1E-04	4.8E-04	AP-42, Table 3.2-3 (Aug-2000)
Styrene	1.19E-05	lb/MMBtu	9.2E-06	4.0E-05	AP-42, Table 3.2-3 (Aug-2000)
Toluene	5.58E-04	lb/MMBtu	4.3E-04	1.9E-03	AP-42, Table 3.2-3 (Aug-2000)
Vinyl Chloride	7.18E-06	lb/MMBtu	5.5E-06	2.4E-05	AP-42, Table 3.2-3 (Aug-2000)
Xylene	1.95E-04	lb/MMBtu	1.5E-04	6.6E-04	AP-42, Table 3.2-3 (Aug-2000)
Total HAP			0.02	0.11	

Company Name: EQT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Sand Separator Tank

Throughput Parameter	Value	Units
Tank Capacity	5,880	gallons
Operational Hours	8,760	hrs/yr
Throughput	280	bbl/month
Percent Produced Water	50%	
Total Produced Water Throughput	140	bbl/month

¹ Conservatively assumes 2 turnovers/month of sand and produced water.

Description	Potential Throughput (gal/yr)
Produced Water and Sand	141,120

Sand Separator Tank (140 bbl) - Uncontrolled (Per tank) ^{2,3}

Constituent	Total Emissions ¹	
	lb/hr	tpy
Methane	0.043	0.188
Ethane	0.068	0.296
Propane	0.090	0.396
Isobutane	0.022	0.098
n-Butane	0.037	0.164
Isopentane	0.009	0.038
n-Pentane	0.007	0.030
Hexanes	0.003	0.011
Heptanes	0.001	0.005
Octane	<0.001	<0.001
Nonane	<0.001	<0.001
Decane	0.001	0.003
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
n-Hexane	0.001	0.006
2,2,4-Trimethylpentane	0.001	0.004
Total HC Emissions:	0.284	1.242
Total VOC Emissions:	0.173	0.758
Total HAP Emissions:	0.002	0.010

² E&P TANK 2.0 calculates working, breathing and flashing losses and reports the sum as one total.

³ E&P TANK v2.0 emission calculations are based on WEU-8 sample from 07/22/2014.

Company Name: EQT Production, LLC
Facility Name: WEU 8 Wellpad
Project Description: G70-B Application

Sand Separator Tank

Sand Separator Tank (140 bbl) - Controlled (Per tank)

Constituent	Total Emissions	
	lb/hr	tpy
Methane	0.043	0.188
Ethane	0.068	0.296
Propane	0.090	0.396
Isobutane	0.022	0.098
n-Butane	0.037	0.164
Isopentane	0.009	0.038
n-Pentane	0.007	0.030
Hexanes	0.003	0.011
Heptanes	0.001	0.005
Octane	<0.001	<0.001
Nonane	<0.001	<0.001
Decane	0.001	0.003
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
n-Hexane	0.001	0.006
2,2,4-Trimethylpentane	0.001	0.004
Total Emissions:	0.283	1.241
Total VOC Emissions:	0.173	0.758
Total HAP Emissions:	0.002	0.010

Company Name: EQT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Tank Combustor

Source Designation:	C001 & C002
Pilot Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Pilot Rating (MMBtu/hr)	0.05
Combustor Rating (MMBtu/hr) ¹	11.66
Combustor Rating (Mscfd) ¹	188.38
Combustor Rating (scf/hr)	7849.17
Pilot Fuel Consumption (scf/hr):	50.00
Potential Annual Hours of Operation (hr/yr):	8,760

¹ Maximum heat input for 48" model from Leed Enclosed Combustor Operations Manual

Enclosed Combustor Emissions

Pollutant	Emission Factors ²	Combustor		Pilot		Total	
	(lb/MMBtu)	(lb/hr)	(tpy)	(lb/hr)	(tpy)	(lb/hr)	(tpy)
NO _x	0.10	1.14	5.01	5.1E-03	0.02	1.15	5.03
CO	0.08	0.96	4.21	4.3E-03	0.02	0.96	4.22
VOC	5.4E-03	---	---	2.8E-04	1.2E-03	0.00	0.00
SO ₂	5.9E-04	0.01	0.03	3.1E-05	1.4E-04	0.01	0.03
PM/PM ₁₀	0.01	0.09	0.38	3.9E-04	1.7E-03	0.09	0.38
CO ₂	117.00	1364.189	5975.146	6.14	26.90	1370.33	6002.05
CH ₄	2.2E-03	---	---	1.2E-04	5.1E-04	0.00	0.00
N ₂ O	2.2E-04	2.6E-03	0.01	1.2E-05	5.1E-05	2.6E-03	0.01

² Emission factors from AP-42 Ch. 1.4 for natural gas combustion were used as they were determined to be most representative of the process. Ch. 5.3 (Natural Gas Processing) was consulted, however, factors contained there are appropriate for amine gas sweetening processes, which is not the case at the wellpad. Also, Ch. 13.5 (Industrial Flares) was consulted, but since the control device in this case is an enclosed combustor vs. an elevated flare, these factors were also determined to be inappropriate.

Combustor Maximum Loading:

$$\frac{7849.17 \text{ scf}}{\text{hr}} \times \frac{\text{lb-mol}}{379.5 \text{ scf}} \times \frac{20.01 \text{ lb}}{\text{lb-mol}} = 413.81 \text{ lb/hr}$$

Company Name: EQT Production, LLC
Facility Name: WEU 8 Wellpad
Project Description: G70-B Application

Line Heaters

Source Designation:	S007-S012
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.54
Fuel Consumption (MMscf/hr):	1.47E-03
Potential Annual Hours of Operation (hr/yr):	8,760

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{1,4}	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	0.15	0.64
CO	84	0.12	0.54
VOC	5.5	0.01	0.04
SO ₂	0.6	8.8E-04	3.9E-03
PM Total	7.6	0.01	0.05
PM Condensable	5.7	0.01	0.04
PM ₁₀ (Filterable)	1.9	2.8E-03	0.01
PM _{2.5} (Filterable)	1.9	2.8E-03	0.01
Lead	5.00E-04	7.3E-07	3.2E-06
CO ₂	117.0	180.00	788.38
CH ₄	2.21E-03	3.4E-03	1.5E-02
N ₂ O	2.21E-04	3.4E-04	1.5E-03

Company Name: EQT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
HAPs:			
2-Methylnaphthalene	2.4E-05	3.5E-08	1.5E-07
3-Methylchloranthrene	1.8E-06	2.6E-09	1.2E-08
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.3E-08	1.0E-07
Acenaphthene	1.8E-06	2.6E-09	1.2E-08
Acenaphthylene	1.8E-06	2.6E-09	1.2E-08
Anthracene	2.4E-06	3.5E-09	1.5E-08
Benz(a)anthracene	1.8E-06	2.6E-09	1.2E-08
Benzene	2.1E-03	3.1E-06	1.3E-05
Benzo(a)pyrene	1.2E-06	1.8E-09	7.7E-09
Benzo(b)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Benzo(g,h,i)perylene	1.2E-06	1.8E-09	7.7E-09
Benzo(k)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Chrysene	1.8E-06	2.6E-09	1.2E-08
Dibenzo(a,h) anthracene	1.2E-06	1.8E-09	7.7E-09
Dichlorobenzene	1.2E-03	1.8E-06	7.7E-06
Fluoranthene	3.0E-06	4.4E-09	1.9E-08
Fluorene	2.8E-06	4.1E-09	1.8E-08
Formaldehyde	7.5E-02	1.1E-04	4.8E-04
Hexane	1.8E+00	2.6E-03	1.2E-02
Indo(1,2,3-cd)pyrene	1.8E-06	2.6E-09	1.2E-08
Naphthalene	6.1E-04	8.9E-07	3.9E-06
Phenanthrene	1.7E-05	2.5E-08	1.1E-07
Pyrene	5.0E-06	7.3E-09	3.2E-08
Toluene	3.4E-03	5.0E-06	2.2E-05
Arsenic	2.0E-04	2.9E-07	1.3E-06
Beryllium	1.2E-05	1.8E-08	7.7E-08
Cadmium	1.1E-03	1.6E-06	7.1E-06
Chromium	1.4E-03	2.1E-06	9.0E-06
Cobalt	8.4E-05	1.2E-07	5.4E-07
Manganese	3.8E-04	5.6E-07	2.4E-06
Mercury	2.6E-04	3.8E-07	1.7E-06
Nickel	2.1E-03	3.1E-06	1.3E-05
Selenium	2.4E-05	3.5E-08	1.5E-07
Total HAP		2.8E-03	1.2E-02

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU 8 Wellpad
Project Description: G70-B Application

Line Heater

Source Designation:	S018
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.15
Fuel Consumption (MMscf/hr):	1.10E-03
Potential Annual Hours of Operation (hr/yr):	8,760

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{1,4}	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	0.11	0.48
CO	84	0.09	0.40
VOC	5.5	0.01	0.03
SO ₂	0.6	6.6E-04	2.9E-03
PM Total	7.6	0.01	0.04
PM Condensable	5.7	0.01	0.03
PM ₁₀ (Filterable)	1.9	2.1E-03	0.01
PM _{2.5} (Filterable)	1.9	2.1E-03	0.01
Lead	5.00E-04	5.5E-07	2.4E-06
CO ₂	117.0	135.00	591.29
CH ₄	2.21E-03	2.5E-03	1.1E-02
N ₂ O	2.21E-04	2.5E-04	1.1E-03

Company Name: EQT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Line Heater

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
HAPs:			
2-Methylnaphthalene	2.4E-05	2.6E-08	1.2E-07
3-Methylchloranthrene	1.8E-06	2.0E-09	8.7E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.8E-08	7.7E-08
Acenaphthene	1.8E-06	2.0E-09	8.7E-09
Acenaphthylene	1.8E-06	2.0E-09	8.7E-09
Anthracene	2.4E-06	2.6E-09	1.2E-08
Benz(a)anthracene	1.8E-06	2.0E-09	8.7E-09
Benzene	2.1E-03	2.3E-06	1.0E-05
Benzo(a)pyrene	1.2E-06	1.3E-09	5.8E-09
Benzo(b)fluoranthene	1.8E-06	2.0E-09	8.7E-09
Benzo(g,h,i)perylene	1.2E-06	1.3E-09	5.8E-09
Benzo(k)fluoranthene	1.8E-06	2.0E-09	8.7E-09
Chrysene	1.8E-06	2.0E-09	8.7E-09
Dibenzo(a,h)anthracene	1.2E-06	1.3E-09	5.8E-09
Dichlorobenzene	1.2E-03	1.3E-06	5.8E-06
Fluoranthene	3.0E-06	3.3E-09	1.4E-08
Fluorene	2.8E-06	3.1E-09	1.3E-08
Formaldehyde	7.5E-02	8.2E-05	3.6E-04
Hexane	1.8E+00	2.0E-03	8.7E-03
Indo(1,2,3-cd)pyrene	1.8E-06	2.0E-09	8.7E-09
Naphthalene	6.1E-04	6.7E-07	2.9E-06
Phenanthrene	1.7E-05	1.9E-08	8.2E-08
Pyrene	5.0E-06	5.5E-09	2.4E-08
Toluene	3.4E-03	3.7E-06	1.6E-05
Arsenic	2.0E-04	2.2E-07	9.6E-07
Beryllium	1.2E-05	1.3E-08	5.8E-08
Cadmium	1.1E-03	1.2E-06	5.3E-06
Chromium	1.4E-03	1.5E-06	6.7E-06
Cobalt	8.4E-05	9.2E-08	4.0E-07
Manganese	3.8E-04	4.2E-07	1.8E-06
Mercury	2.6E-04	2.9E-07	1.3E-06
Nickel	2.1E-03	2.3E-06	1.0E-05
Selenium	2.4E-05	2.6E-08	1.2E-07
Total HAP		2.1E-03	9.1E-03

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU 8 Wellpad
Project Description: G70-B Application

Thermoelectric Generators

Source Designation:	S013-S014
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr) ¹	0.013
Fuel Consumption (MMscf/hr):	1.23E-05
Potential Annual Hours of Operation (hr/yr):	8,760

¹ Global Thermoelectric specification sheet states 311 ft³/day at 1000 BTU/ft³.

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{2,5}	Potential Emissions	
		(lb/hr) ³	(tons/yr) ⁴
NO _x	100	1.2E-03	0.01
CO	84	1.0E-03	4.5E-03
VOC	5.5	6.8E-05	3.0E-04
SO ₂	0.6	7.4E-06	3.2E-05
PM Total	7.6	9.4E-05	4.1E-04
PM Condensable	5.7	7.0E-05	3.1E-04
PM ₁₀ (Filterable)	1.9	2.3E-05	1.0E-04
PM _{2.5} (Filterable)	1.9	2.3E-05	1.0E-04
Lead	5.00E-04	6.2E-09	2.7E-08
CO ₂	116.9	1.51	6.64
CH ₄	2.21E-03	2.9E-05	1.3E-04
N ₂ O	2.21E-04	2.9E-06	1.3E-05

Company Name: EQT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Thermoelectric Generators

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ²	Potential Emissions	
		(lb/hr) ³	(tons/yr) ⁴
HAPs:			
2-Methylnaphthalene	2.4E-05	3.0E-10	1.3E-09
3-Methylchloranthrene	1.8E-06	2.2E-11	9.7E-11
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.0E-10	8.6E-10
Acenaphthene	1.8E-06	2.2E-11	9.7E-11
Acenaphthylene	1.8E-06	2.2E-11	9.7E-11
Anthracene	2.4E-06	3.0E-11	1.3E-10
Benz(a)anthracene	1.8E-06	2.2E-11	9.7E-11
Benzene	2.1E-03	2.6E-08	1.1E-07
Benzo(a)pyrene	1.2E-06	1.5E-11	6.5E-11
Benzo(b)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Benzo(g,h,i)perylene	1.2E-06	1.5E-11	6.5E-11
Benzo(k)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Chrysene	1.8E-06	2.2E-11	9.7E-11
Dibenzo(a,h) anthracene	1.2E-06	1.5E-11	6.5E-11
Dichlorobenzene	1.2E-03	1.5E-08	6.5E-08
Fluoranthene	3.0E-06	3.7E-11	1.6E-10
Fluorene	2.8E-06	3.5E-11	1.5E-10
Formaldehyde	7.5E-02	9.3E-07	4.1E-06
Hexane	1.8E+00	2.2E-05	9.7E-05
Indo(1,2,3-cd)pyrene	1.8E-06	2.2E-11	9.7E-11
Naphthalene	6.1E-04	7.5E-09	3.3E-08
Phenanthrene	1.7E-05	2.1E-10	9.2E-10
Pyrene	5.0E-06	6.2E-11	2.7E-10
Toluene	3.4E-03	4.2E-08	1.8E-07
Arsenic	2.0E-04	2.5E-09	1.1E-08
Beryllium	1.2E-05	1.5E-10	6.5E-10
Cadmium	1.1E-03	1.4E-08	5.9E-08
Chromium	1.4E-03	1.7E-08	7.6E-08
Cobalt	8.4E-05	1.0E-09	4.5E-09
Manganese	3.8E-04	4.7E-09	2.1E-08
Mercury	2.6E-04	3.2E-09	1.4E-08
Nickel	2.1E-03	2.6E-08	1.1E-07
Selenium	2.4E-05	3.0E-10	1.3E-09
Total HAP		2.3E-05	1.0E-04

² Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

³ Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

⁴ Annual Emissions (tons/yr)_{potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁵ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Liquid Loading

Throughput 16,771,020 gal/yr
 Capture Efficiency 70% non-tested tanker trucks
 Control Efficiency 98% Combustor destruction efficiency

Liquid Loading Emissions

	Uncontrolled Emissions		Uncaptured Emissions		Controlled Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Propane	87.288	22.695	26.186	6.808	1.222	0.318
Isobutane	19.774	5.141	5.932	1.542	0.277	0.072
n-Butane	39.365	10.235	11.810	3.070	0.551	0.143
Isopentane	15.180	3.947	4.554	1.184	0.213	0.055
n-Pentane	13.797	3.587	4.139	1.076	0.193	0.050
n-Hexane	4.812	1.251	1.443	0.375	0.067	0.018
Cyclohexane	0.638	0.166	0.191	0.050	0.009	0.002
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	4.392	1.142	1.318	0.343	0.061	0.016
n-Octane	0.347	0.090	0.104	0.027	0.005	0.001
n-Nonane	0.282	0.073	0.085	0.022	0.004	0.001
n-Decane	0.149	0.039	0.045	0.012	0.002	0.001
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	8.123	2.112	2.437	0.634	0.114	0.030
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	0.149	0.039	0.045	0.012	0.002	0.001
Toluene	0.188	0.049	0.056	0.015	0.003	0.001
Ethylbenzene	0.008	0.002	0.003	0.001	1.2E-04	3.1E-05
m-Xylene	0.084	0.022	0.025	0.007	0.001	3.1E-04
Isooctane	4.596	1.195	1.379	0.359	0.064	0.017
Total VOC Emissions:	199.173	51.785	59.752	15.536	2.788	0.725
Total HAP Emissions:	9.837	2.558	2.951	0.767	0.138	0.036

¹ Uncontrolled emissions calculation using Promax (sum of produced water and condensate).

² Hourly emissions assume two hours of loading per day, five days per week.

Company Name: EOT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Fugitive Emissions

Fugitive Emissions from Component Leaks

Facility Equipment Type ¹	Valves	Connectors	Open-Ended Lines	Pressure Relief Devices
Wellhead	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line heaters	14	65	2	1
Dehydrators	24	90	2	2

¹ Table W-1B to Subpart W of Part 98 —Default Average Component Counts for Major Onshore Natural Gas Production

Fugitive VOC/Total Emissions from Component Leaks

Equipment Type	Service	Emission Factors ¹ (kg/hr/source)	Facility Equipment Count ² (units)	TOC Annual Fugitive Emissions (tpy)	Weight Fraction VOC	Weight Fraction HAP	VOC Emissions ³ (tpy)	HAP Emissions ³ (tpy)
Pumps	Light Liquid	0.01990	11	2.02	1.00	0.04	2.02	0.08
Compressor	Gas	0.22800	1	2.20	0.14	0.01	0.31	0.01
Valves	Gas	0.00597	356	20.49	0.14	0.01	2.92	0.12
Pressure Relief Valves	Gas	0.10400	25	24.60	0.14	0.01	3.51	0.15
Open-Ended Lines	All	0.00170	26	0.42	0.14	0.01	0.06	2.5E-03
Connectors	All	0.00183	1,578	27.88	0.14	0.01	3.98	0.16
Intermittent Pneumatic Devices ⁴	Gas	13.5	30	---	---	---	4.45	0.18
Emission Totals:				77.62	---	---	17.25	0.72

¹ U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCOMI factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A. Pneumatic assumes operation 1/3 of the year.

² Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

³ Potential emissions VOC/HAP (tpy) = Emission factor (kg/hr/source) * Number of Sources * Weight % VOC/HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

⁴ Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Company Name: EOT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Fugitive Emissions

Fugitive Specific HAP Emissions from Component Leaks

Equipment Type	Service	Emission Factors ¹ (kg/hr/source)	Facility Equipment Count ² (units)	TOC Annual Fugitive Emissions (tpy)	Benzene Emissions ³ (tpy)	Toluene Emissions ³ (tpy)	Ethylbenzene Emissions ³ (tpy)	Xylene Emissions ³ (tpy)	n-Hexane Emissions ⁴ (tpy)
Pumps	Light Liquid	0.01990	11	2.02	1.6E-04	4.6E-04	0.0E+00	5.4E-04	4.8E-03
Compressor	Gas	0.22800	1	2.20	1.7E-04	5.1E-04	0.0E+00	5.8E-04	0.01
Valves	Gas	0.00597	356	20.49	1.6E-03	4.7E-03	0.0E+00	0.01	0.05
Pressure Relief Valves	Gas	0.10400	25	24.60	1.9E-03	0.01	0.0E+00	0.01	0.06
Open-Ended Lines	All	0.00170	26	0.42	3.3E-05	9.6E-05	0.0E+00	1.1E-04	9.9E-04
Connectors	All	0.00183	1,578	27.88	2.2E-03	0.01	0.0E+00	0.01	0.07
Intermittent Pneumatic Devices ⁴	Gas	13.5	30	---	2.4E-03	0.01	0.0E+00	0.01	0.07
Emission Totals:				77.62	0.01	0.03	0.0E+00	0.03	0.26

¹ U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCOMI factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A. Pneumatic assumes operation 1/3 of the year.

² Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

³ Potential emissions HAP (tpy) = Emission factor (kg/hr/source) * Number of Sources * Weight % HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

⁴ Potential emissions HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

GHG Fugitive Emissions from Component Leaks

Component	Component Count	GHG Emission Factor ¹ (scf/hr/component)	CH ₄ Emissions ^{2,3} (tpy)	CO ₂ Emissions ^{2,3} (tpy)	CO ₂ e Emissions ⁴ (tpy)
Pumps	11	0.01	0.02	1.3E-04	0.39
Compressor	1	4.17	0.62	0.01	15.59
Valves	356	0.027	1.43	0.01	35.88
Pressure Relief Devices	25	0.04	0.15	1.2E-03	3.66
Open-Ended Lines	26	0.061	0.23	1.9E-03	5.81
Connectors	1,578	0.003	0.71	0.01	17.69
Intermittent Pneumatic Devices	30	6	8.97	0.07	224.26
Total			12.13	0.10	303.29

¹ Population emission factors for gas service in the Eastern U.S. from *Table W-1A of Subpart W - Default Whole Gas Emission Factors for Onshore Production*, 40 CFR 98, Subpart W (Table W-6 for compressor). Pneumatic assumes operation 1/3 of the year.

² Calculated in accordance with Equations W-32a, W-35 and W-36 in Subpart W of 40 CFR 98. See footnote 4 above for sample calculation.

³ Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Mole fractions of CH₄ and CO₂ based on gas analysis:

CH₄: 81% CO₂: 0.24%

⁴ Carbon equivalent emissions (CO₂e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:

Carbon Dioxide (CO₂): 1
Methane (CH₄): 25

Company Name: EQT Production, LLC
 Facility Name: WEU 8 Wellpad
 Project Description: G70-B Application

Haul Roads

Estimated Potential Road Fugitive Emissions

Unpaved Road Emissions

Unpaved Roads: $E \text{ (lb/VMT)} = k(s/12)^a(W/3)^b \cdot [(365-p)/365]$

	PM	PM₁₀	PM_{2.5}	
k Factor (lb/VMT)	4.9	1.5	0.15	AP-42 Table 13.2.2-2 (Final, 11/06)
Silt content, s	4.8	%		AP-42 Table 13.2.2-1 (11/06), for Sand and Gravel Processing
Number of Rain Days, p	150			AP-42 Figure 13.2.1-2
a	0.7	0.9	0.9	AP-42 Table 13.2.2-2 (Final, 11/06)
b	0.45	0.45	0.45	AP-42 Table 13.2.2-2 (Final, 11/06)

Description	Weight of Empty Truck (tons)	Weight of Truck w/ Max Load (tons)	Mean Vehicle Weight (tons)	Length of Unpaved Road Traveled (mile)	Trips Per Year	Mileage Per Year	Control (%)	Emissions (tpy)		
								PM	PM ₁₀	PM _{2.5}
Liquids Hauling	20	40	30	0.39	4,193	3,303	0	7.07	1.80	0.18
Employee Vehicles	3	3	3	0.39	200	158	0	0.12	0.03	0.00
Total Potential Emissions								7.19	1.83	0.18

Company Name: EQT Production, LLC
Facility Name: WEU 8 Wellpad
Project Description: G70-B Application

Gas Analysis

Sample Location: WEU 1 Gas Analysis - 512507
Sample Date: 5/29/2013
HHV (Btu/scf): 1,216 Note: A conservatively low BTU content of 1,050 was used for calculations

Constituent	Natural Gas Stream Speciation (Mole %)	Molecular Weight	Molar Weight	Average Weight Fraction	Natural Gas Stream Speciation (Wt. %)
Carbon Dioxide	0.240	44.01	0.11	0.01	0.528
Nitrogen	0.428	28.01	0.12	0.01	0.599
Methane	80.616	16.04	12.93	0.65	64.630
Ethane	13.296	30.07	4.00	0.20	19.983
Propane	3.541	44.10	1.56	0.08	7.805
Isobutane	0.426	58.12	0.25	0.01	1.237
n-Butane	0.746	58.12	0.43	0.02	2.167
Isopentane	0.191	72.15	0.14	0.01	0.689
n-Pentane	0.164	72.15	0.12	0.01	0.591
Cyclopentane	<0.001	70.1	0.0	0.0	0.000
n-Hexane	0.055	86.18	0.05	0.00	0.237
Cyclohexane	0.009	84.16	0.01	0.00	0.038
Other Hexanes	0.091	86.18	0.08	0.00	0.392
Heptanes	0.079	100.21	0.08	0.00	0.396
Methylcyclohexane	<0.001	98.19	0.00	0.00	0.000
2,2,4-Trimethylpentane	0.052	114.23	0.06	0.00	0.297
Benzene*	0.002	78.11	0.00	0.00	0.008
Toluene*	0.005	92.14	0.00	0.00	0.023
Ethylbenzene*	<0.001	106.17	0.00	0.00	0.000
Xylenes*	0.005	106.16	0.01	0.00	0.027
C8 + Heavies	0.054	130.80	0.07	0.00	0.353
Totals	100.000		20.01	1.00	100

TOC (Total)	99.33	98.87
VOC (Total)	5.42	14.26
HAP (Total)	0.12	0.59

EQT Production
WEU-8

Names	Units	LPT Gas to VRU	PW Tank Flash	Condensate Flash	Combined Flash Vapor
Temperature	°F	110	70	70	69.821
Pressure	psig	30	0.6297	0.6297	0.6295
Mole Fraction Vapor	%	100	100	100	100
Std Vapor Volumetric Flow	MMSCFD	88.579	3.343	6.2975	9.6405
Net Ideal Gas Heating Value	Btu/ft³	1830.5	1026.5	2143.7	1795.3
Molecular Weight	lb/mol	34.645	31.859	43.989	33.998
Methane(Mole Fraction)	%	37.877	78.428	17.48	38.614
Ethane(Mole Fraction)	%	26.299	12.575	31.4	24.872
Propane(Mole Fraction)	%	16.59	3.1397	25.01	17.423
Isobutane(Mole Fraction)	%	3.259	0.14695	4.9123	3.2998
n-Butane(Mole Fraction)	%	6.7719	0.11225	9.908	6.7146
Isopentane(Mole Fraction)	%	2.4293	0.10462	3.2628	2.1807
n-Pentane(Mole Fraction)	%	2.3466	0.097466	3.0561	2.0001
n-Hexane(Mole Fraction)	%	0.84294	0.012483	0.95336	0.62709
Benzene(Mole Fraction)	%	0.031488	0.007379	0.036216	0.031955
n-Heptane(Mole Fraction)	%	0.84671	0.0026544	0.82823	0.44424
n-Octane(Mole Fraction)	%	0.072164	0.00030073	0.007098	0.039205
n-Nonane(Mole Fraction)	%	0.06408	0.0014056	0.048714	0.031003
n-Decane(Mole Fraction)	%	0.03844	0.0006801	0.04428	0.018022
Toluene(Mole Fraction)	%	0.021923	0.00046	0.013135	0.046977
m-Xylene(Mole Fraction)	%	0.02494	0.015751	0.02624	0.018654
Ethylbenzene(Mole Fraction)	%	0.0023629	0.0014833	0.0020145	0.0018303

Properties	Pipeline
Std Vapor Volumetric Flow (Total)	10 MMSCFD
Pressure(Total)	390 psig
Temperature(Total)	91 °F

Properties	Reservoir Gas
Std Vapor Volumetric Flow (Total)	10 ⁴ MMSCFD
Pressure(Total)	700 ⁴ psig
Temperature(Total)	75 ⁴ °F
Std Liquid Volumetric Flow (Light Liquid)	18.3 bbl/d

Properties	Reservoir Water
Pressure(Total)	700 ⁴ psig
Temperature(Total)	75 ⁴ °F
Std Liquid Volumetric Flow (Total)	835 ⁴ bbl/d

Properties	Reservoir Oil
Pressure(Total)	700 ⁴ psig
Temperature(Total)	75 ⁴ °F
Std Liquid Volumetric Flow (Total)	415 ⁴ bbl/d

Properties	Produced Water
Std Liquid Volumetric Flow (Total)	832 bbl/d
API Gravity(Total)	10.015

Properties	Sales Oil
Std Liquid Volumetric Flow (Total)	262 bbl/d
API Gravity(Total)	71.13



Tank loss calculations for "Combined PW".
Total working and breathing losses from the Vertical Cylinder are 0.2848 ton/yr.
Flashing losses are 3.364 ton/yr.
Loading losses are 0.745 ton/yr of loaded liquid.
Warning: expansion coefficient is negative. Verify vapor pressure of stored fluid


Tank loss calculations for "LPT Condensate".
Total working and breathing losses from the Vertical Cylinder are 9.285 ton/yr.
Flashing losses are 73.06 ton/yr.
Loading losses are 51.04 ton/yr of loaded liquid.

Stream Combined Flash Vapor C3+ Mass Flow =89.68 ton/yr

Names	Units	Pilot Heat Input
Energy Rate	Btu/h	73556+100F

WEU-8 Plant Schematic

Client Name:	EQT	Job: V1.0
Location:	WEU-8	
Flowsheet:	WEU-8	

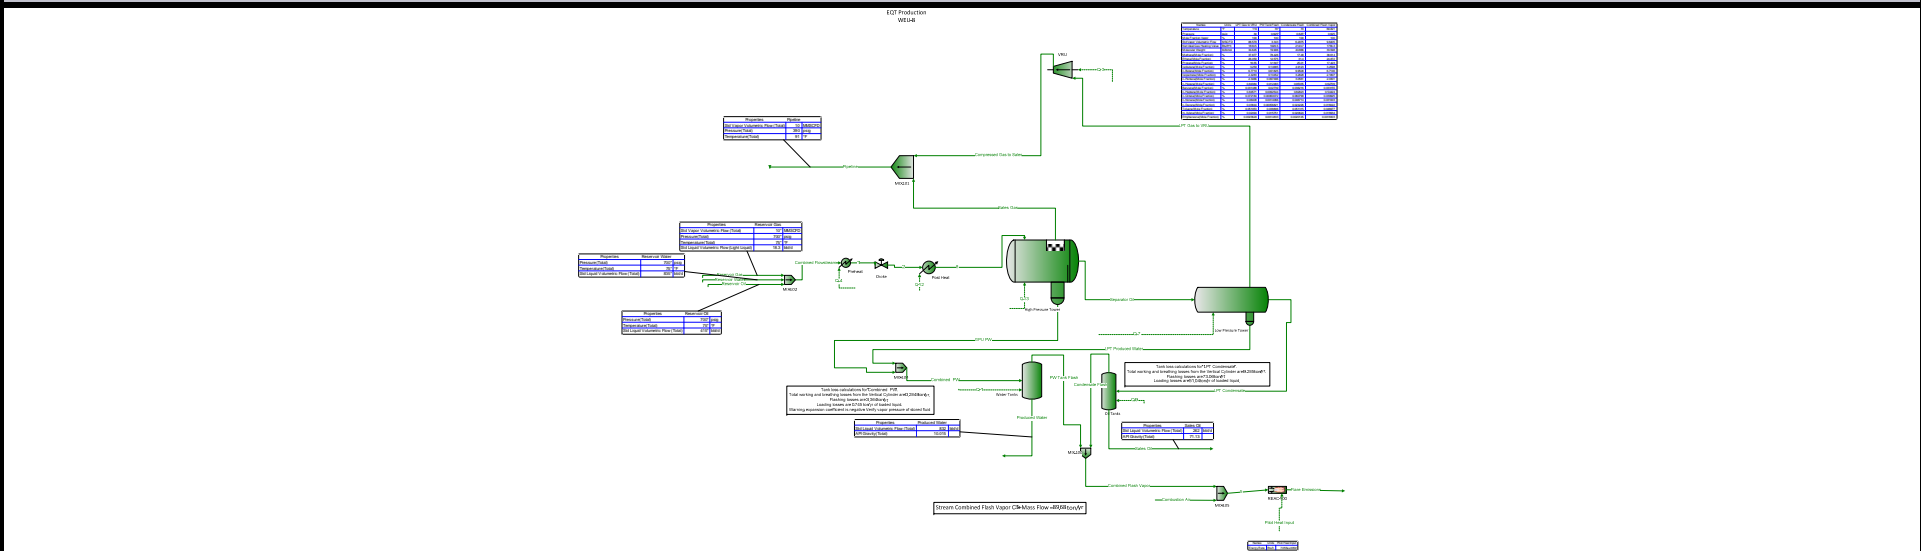

* User Specified Values
? Extrapolated or Approximate Values

Process Streams Report All Streams Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-8	
Flowsheet:	WEU-8	

Connections

	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
From Block	MIX-104	MIX-100	MIX-101	Water Tanks	--
To Block	Water Tanks	MIX-105	--	--	MIX-102

Stream Composition

	Combined PW lb/h	Combined Flash Vapor lb/h	Pipeline lb/h	Produced Water lb/h	Reservoir Gas lb/h
Nitrogen	0.0239935	0.0259912	131.618	0.000554782	131.645 *
Methane	4.84009	6.55708	14308.6	0.22204	14200 *
CO2	0.688892	0.408285	116.469	0.343857	115.972 *
Ethane	1.46611	7.91645	4555.3	0.0782274	4389.7 *
Propane	0.539298	8.13228	1918	0.0325867	1714.42 *
Isobutane	0.0320525	2.00551	342.551	0.000722849	271.861 *
n-Butane	0.139085	4.13103	642.903	0.00718733	476.075 *
Isopentane	0.0286435	1.66537	245.318	0.000964032	151.306 *
n-Pentane	0.0266972	1.55041	229.775	0.00087778	129.917 *
n-Hexane	0.0040043	0.572017	93.2484	5.58744E-05	52.0404 *
Methylcyclopentane	0	0	0	0	0 *
Benzene	0.0648697	0.0274136	3.09425	0.0570165	1.71531 *
Cyclohexane	0.00893343	0.0964967	14.4717	0.00152484	8.31649 *
n-Heptane	0.00345974	0.577243	111.846	5.60077E-05	86.9156 *
n-Octane	0.00025452	0.0482735	11.2014	2.64881E-06	13.7963 *
n-Nonane	0.000684712	0.042089	11.474	2.25546E-05	42.2465 *
n-Decane	0.000304337	0.0241308	8.12949	7.59005E-06	20.3089 *
n-Undecane	0	0	0	0	0 *
Dodecane	0	0	0	0	0 *
Water	12144	0.181617	38.6997	12143.8	0 *
Triethylene Glycol	0	0	0	0	0 *
Oxygen	0	0	0	0	0 *
Argon	0	0	0	0	0 *
Carbon Monoxide	0	0	0	0	0 *
Cyclopentane	0	0	0	0	0 *
Isohexane	0.007246	0.94188	147.689	0.000109966	86.1032 *
3-Methylpentane	0	0	0	0	0 *
Neohexane	0	0	0	0	0 *
2,3-Dimethylbutane	0	0	0	0	0 *
Methylcyclohexane	0	0	0	0	0 *
Isooctane	0.000587872	0.591202	112.808	1.02065E-06	65.2188 *
Decane, 2-Methyl-	0	0	0	0	0 *
Toluene	0.0944624	0.0458166	6.11861	0.0813384	5.05831 *
m-Xylene	0.0443975	0.0212776	3.48489	0.0382595	5.82836 *
Ethylbenzene	0.00396652	0.0020568	0.329808	0.00338852	0 *

	Combined PW gpm	Combined Flash Vapor ft^3/h	Pipeline ft^3/h	Produced Water gpm	Reservoir Gas ft^3/h
Nitrogen	6.5182E-05	0.345976	71.1815	1.48173E-06	40.7439
Methane	0.0240118	151.714	12554.7	0.0010852	6614.47
CO2	0.00109224	3.4315	34.8712	0.000537865	16.9697
Ethane	0.00495881	96.8342	1816.73	0.000261497	755.475
Propane	0.00155838	67.3184	450.135	9.32029E-05	131.791
Isobutane	8.46364E-05	12.517	53.9791	1.89059E-06	10.005
n-Butane	0.000362574	25.7399	95.4482	1.85624E-05	12.636
Isopentane	6.94861E-05	8.30695	24.8332	2.31806E-06	0.388671
n-Pentane	6.48843E-05	7.72351	22.5073	2.11477E-06	-0.0727567
n-Hexane	9.24662E-06	2.3657	5.87404	1.2795E-07	-0.855979
Methylcyclopentane	0	0	0	0	0
Benzene	0.000121885	0.125916	0.253801	0.000106332	-0.0138208
Cyclohexane	1.81866E-05	0.410036	1.00432	3.08064E-06	-0.10248

* User Specified Values
? Extrapolated or Approximate Values

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-8	
Flowsheet:	WEU-8	

	Combined PW gpm	Combined Flash Vapor ft ³ /h	Pipeline ft ³ /h	Produced Water gpm	Reservoir Gas ft ³ /h
Volumetric Flow					
n-Heptane	7.72734E-06	2.03789	4.21146	1.24084E-07	-1.93395
n-Octane	5.50457E-07	0.148305	0.231281	5.68341E-09	-0.207445
n-Nonane	1.44563E-06	0.114134	0.0717069	4.7249E-08	-0.129596
n-Decane	6.3232E-07	0.0585211	-0.0173361	1.56484E-08	0.140401
n-Undecane	0	0	0	0	0
Dodecane	0	0	0	0	0
Water	24.3852	3.73523	28.9781	24.3117	0
Triethylene Glycol	0	0	0	0	0
Oxygen	0	0	0	0	0
Argon	0	0	0	0	0
Carbon Monoxide	0	0	0	0	0
Cyclopentane	0	0	0	0	0
Isohexane	1.67578E-05	3.9018	9.94996	2.52178E-07	-1.13602
3-Methylpentane	0	0	0	0	0
Neohexane	0	0	0	0	0
2,3-Dimethylbutane	0	0	0	0	0
Methylcyclohexane	0	0	0	0	0
Isooctane	1.25855E-06	1.82866	3.72164	2.16742E-09	-1.2577
Decane, 2-Methyl-	0	0	0	0	0
Toluene	0.000175654	0.176895	0.31284	0.000150161	-0.0813615
m-Xylene	8.18786E-05	0.0707276	0.105976	7.00598E-05	-0.0555046
Ethylbenzene	7.27606E-06	0.00684437	0.010677	6.17197E-06	0

	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
Mole Fraction					
Nitrogen	1.26987E-06	0.000876529	0.00417487	2.93782E-08	0.00428 *
Methane	0.000447315	0.38614	0.792534	2.05318E-05	0.80616 *
CO2	2.32079E-05	0.0087644	0.00235156	1.15904E-05	0.0024 *
Ethane	7.22898E-05	0.248723	0.134614	3.85929E-06	0.13296 *
Propane	1.81328E-05	0.17423	0.0386497	1.09626E-06	0.03541 *
Isobutane	8.17618E-07	0.0325978	0.00523692	1.8449E-08	0.00426 *
n-Butane	3.54789E-06	0.0671463	0.0098287	1.83439E-07	0.00746 *
Isopentane	5.88611E-07	0.0218066	0.00302129	1.98212E-08	0.00191 *
n-Pentane	5.48615E-07	0.0203013	0.00282987	1.80478E-08	0.00164 *
n-Hexane	6.88929E-08	0.00627092	0.000961504	9.61828E-10	0.00055 *
Methylcyclopentane	0	0	0	0	0 *
Benzene	1.23128E-06	0.000331554	3.5199E-05	1.08281E-06	2E-05 *
Cyclohexane	1.57379E-07	0.00108322	0.000152795	2.68775E-08	9E-05 *
n-Heptane	5.11916E-08	0.00544237	0.000991827	8.29162E-10	0.00079 *
n-Octane	3.30354E-09	0.000399245	8.71346E-05	3.43988E-11	0.00011 *
n-Nonane	7.91525E-09	0.000310027	7.94939E-05	2.60872E-10	0.0003 *
n-Decane	3.17129E-09	0.000160224	5.077E-05	7.91341E-11	0.00013 *
n-Undecane	0	0	0	0	0 *
Dodecane	0	0	0	0	0 *
Water	0.999428	0.00952406	0.00190879	0.99996	0 *
Triethylene Glycol	0	0	0	0	0 *
Oxygen	0	0	0	0	0 *
Argon	0	0	0	0	0 *
Carbon Monoxide	0	0	0	0	0 *
Cyclopentane	0	0	0	0	0 *
Isohexane	1.24665E-07	0.0103257	0.00152285	1.89297E-09	0.00091 *
3-Methylpentane	0	0	0	0	0 *
Neohexane	0	0	0	0	0 *
2,3-Dimethylbutane	0	0	0	0	0 *
Methylcyclohexane	0	0	0	0	0 *
Isooctane	7.63026E-09	0.00488952	0.000877525	1.32547E-11	0.00052 *
Decane, 2-Methyl-	0	0	0	0	0 *
Toluene	1.52002E-06	0.000469773	5.90072E-05	1.30955E-06	5E-05 *
m-Xylene	6.20023E-07	0.000189342	2.91676E-05	5.34596E-07	5E-05 *

* User Specified Values

? Extrapolated or Approximate Values

ProMax 3.2.15289.0
Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report All Streams Tabulated by Total Phase						
Client Name:	EQT					Job: V1.0
Location:	WEU-8					
Flowsheet:	WEU-8					
	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas	
Mole Fraction						
Ethylbenzene	5.53936E-08	1.83028E-05	2.7604E-06	4.73473E-08	0 *	
Stream Properties						
Property	Units	Combined PW	Combined Flash Vapor	Pipeline	Produced Water	Reservoir Gas
Temperature	°F	90	69.8207	90.9806	70	75 *
Pressure	psig	390	0.625	390	0.625	700 *
Mole Fraction Vapor		0	1	0.999919	0	0.99782
Mole Fraction Light Liquid		1	0	8.05029E-05	1	0.00218033
Mole Fraction Heavy Liquid		0	0	0	0	0
Molecular Weight	lb/lbmol	18.0169	33.5981	20.4843	18.0158	20.008
Mass Density	lb/ft ³	62.0468	0.0914446	1.51874	62.2746	2.89944
Mass Flow	lb/h	12152	35.5639	23053.1	12144.7	21968.4
Vapor Volumetric Flow	ft ³ /h	195.852	388.912	15179.1	195.019	7576.77
Liquid Volumetric Flow	gpm	24.4179	48.4877	1892.46	24.314	944.636
Std Liquid Volumetric Flow	sgpm	24.3224	0.161854	135.658	24.2797	131.273
Specific Gravity		0.994835	1.16005		0.998487	
API Gravity		10.0576			10.0151	
Net Ideal Gas Heating Value	Btu/ft ³	0.599323	1756.32	1118.73	0.0407069	1096.63
Net Liquid Heating Value	Btu/lb	-1046.47	19706.1	20666.5	-1058.83	20746.3
Std Vapor Volumetric Flow	MMSCFD	6.14291	0.00964051	10.2497	6.13957	10 *
Remarks						

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-8	
Flowsheet:	WEU-8	

Connections

	Reservoir Oil	Sales Oil		
From Block	--	Oil Tanks		
To Block	MIX-102	--		

Stream Composition

Mass Flow	Reservoir Oil lb/h	Sales Oil lb/h		
Nitrogen	0 *	0.00015395		
Methane	115.795 *	0.396073		
CO2	1.28534 *	0.0360571		
Ethane	181.974 *	8.38349		
Propane	249.154 *	37.4005		
Isobutane	98.001 *	25.3042		
n-Butane	245.321 *	74.3551		
Isopentane	177.303 *	81.6258		
n-Pentane	203.455 *	102.046		
n-Hexane	173.661 *	131.881		
Methylcyclopentane	0 *	0		
Benzene	6.02923 *	4.56585		
Cyclohexane	32.3923 *	26.1391		
n-Heptane	454.076 *	428.569		
n-Octane	117.957 *	120.503		
n-Nonane	306.287 *	337.017		
n-Decane	605.585 *	617.741		
n-Undecane	0 *	0		
Dodecane	0 *	0		
Water	0 *	0.0146117		
Triethylene Glycol	0 *	0		
Oxygen	0 *	0		
Argon	0 *	0		
Carbon Monoxide	0 *	0		
Cyclopentane	0 *	0		
Isohexane	217.616 *	155.089		
3-Methylpentane	0 *	0		
Neohexane	0 *	0		
2,3-Dimethylbutane	0 *	0		
Methylcyclohexane	0 *	0		
Isooctane	455.623 *	407.442		
Decane, 2-Methyl-	0 *	0		
Toluene	29.2645 *	28.077		
m-Xylene	48.8352 *	51.1191		
Ethylbenzene	4.48486 *	4.14961		

Volumetric Flow	Reservoir Oil gpm	Sales Oil gpm		
Nitrogen	0	4.91682E-07		
Methane	0.820325	0.00229086		
CO2	0.00218969	4.28645E-05		
Ethane	0.824596	0.0339901		
Propane	0.959386	0.136293		
Isobutane	0.346626	0.0875427		
n-Butane	0.84047	0.249599		
Isopentane	0.564669	0.260098		
n-Pentane	0.642831	0.322578		
n-Hexane	0.51739	0.398268		
Methylcyclopentane	0	0		
Benzene	0.0131377	0.0101298		
Cyclohexane	0.080484	0.066771		
n-Heptane	1.30038	1.25573		
n-Octane	0.325054	0.34185		
n-Nonane	0.81969	0.932608		

* User Specified Values

? Extrapolated or Approximate Values

ProMax 3.2.15289.0
Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-8	
Flowsheet:	WEU-8	

Volumetric Flow	Reservoir Oil gpm	Sales Oil gpm			
n-Decane	1.5894	1.68193			
n-Undecane	0	0			
Dodecane	0	0			
Water	0	-2.09134E-05			
Triethylene Glycol	0	0			
Oxygen	0	0			
Argon	0	0			
Carbon Monoxide	0	0			
Cyclopentane	0	0			
Isohexane	0.65554	0.47347			
3-Methylpentane	0	0			
Neohexane	0	0			
2,3-Dimethylbutane	0	0			
Methylcyclohexane	0	0			
Isooctane	1.27246	1.17324			
Decane, 2-Methyl-	0	0			
Toluene	0.0639699	0.0634237			
m-Xylene	0.106651	0.11624			
Ethylbenzene	0.00975743	0.00942096			

Mole Fraction	Reservoir Oil	Sales Oil			
Nitrogen	0 *	2.12955E-07			
Methane	0.1384 *	0.000956702			
CO2	0.00056 *	3.1748E-05			
Ethane	0.11604 *	0.0108038			
Propane	0.10834 *	0.0328666			
Isobutane	0.03233 *	0.0168703			
n-Butane	0.08093 *	0.0495726			
Isopentane	0.04712 *	0.0438401			
n-Pentane	0.05407 *	0.0548076			
n-Hexane	0.03864 *	0.0593024			
Methylcyclopentane	0 *	0			
Benzene	0.00148 *	0.00226505			
Cyclohexane	0.00738 *	0.0120354			
n-Heptane	0.08689 *	0.165736			
n-Octane	0.0198 *	0.0408787			
n-Nonane	0.04579 *	0.101824			
n-Decane	0.08161 *	0.16824			
n-Undecane	0 *	0			
Dodecane	0 *	0			
Water	0 *	3.1429E-05			
Triethylene Glycol	0 *	0			
Oxygen	0 *	0			
Argon	0 *	0			
Carbon Monoxide	0 *	0			
Cyclopentane	0 *	0			
Isohexane	0.04842 *	0.069738			
3-Methylpentane	0 *	0			
Neohexane	0 *	0			
2,3-Dimethylbutane	0 *	0			
Methylcyclohexane	0 *	0			
Isooctane	0.07648 *	0.138218			
Decane, 2-Methyl-	0 *	0			
Toluene	0.00609 *	0.0118082			
m-Xylene	0.00882 *	0.0186584			
Ethylbenzene	0.00081 *	0.0015146			

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job: V1.0
Location:	WEU-8	
Flowsheet:	WEU-8	

Stream Properties

Property	Units	Reservoir Oil	Sales Oil			
Temperature	°F	75 *	70 *			
Pressure	psig	700 *	0.625			
Mole Fraction Vapor		0	0			
Mole Fraction Light Liquid		1	1			
Mole Fraction Heavy Liquid		0	0			
Molecular Weight	lb/lbmol	71.4066	102.372			
Mass Density	lb/ft ³	39.4984	43.2505			
Mass Flow	lb/h	3724.1	2641.85			
Vapor Volumetric Flow	ft ³ /h	94.2849	61.0826			
Liquid Volumetric Flow	gpm	11.755	7.61549			
Std Liquid Volumetric Flow	sgpm	12.1042 *	7.63225			
Specific Gravity		0.633301	0.693462			
API Gravity		88.8576	71.1298			
Net Ideal Gas Heating Value	Btu/ft ³	3656.81	5187.95			
Net Liquid Heating Value	Btu/lb	19283.1	19076.1			
Std Vapor Volumetric Flow	MMSCFD	0.474994	0.235035			

Remarks

Energy Stream Report

Client Name:	EQT	Job: V1.0
Location:	WEU-8	
Flowsheet:	WEU-8	

Energy Streams

Energy Stream	Energy Rate	Power	From Block	To Block
Pilot Heat Input	705491 * Btu/h	277.268 * hp	--	REAC-100

Remarks

	20160119_EQT_WEU 8.pmx Project Warnings Report	
--	---	--

Client Name:	EQT	Job: V1.0
Location:	WEU-8	

ProMax:ProMax!Project!Flowsheets!WEU-8!Blocks!VRU
Warning: The change in entropy is negative.

	User Value Sets Report	
--	-------------------------------	--

Client Name:	EQT	Job: V1.0
Location:	WEU-8	

Tank Losses.53

User Value [ShellLength]

* Parameter	20 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value [ShellDiam]

* Parameter	12 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value [BreatherVP]

* Parameter	0.875 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [BreatherVacP]

* Parameter	-0.0375 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [DomeRadius]

Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

User Value [OpPress]

* Parameter	0 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [AvgPercentLiq]

* Parameter	50 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [MaxPercentLiq]

* Parameter	90 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [AnnNetTP]

* Parameter	272.472 bbl/day	Upper Bound	bbl/day
* Lower Bound	0 bbl/day	* Enforce Bounds	False

User Value [OREff]

* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [AtmPressure]

* Parameter	14.2535 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

* User Specified Values
? Extrapolated or Approximate Values

User Value Sets Report

Client Name:	EQT	Job: V1.0
Location:	WEU-8	

User Value [MaxLiqSurfaceT]

* Parameter	61.4758 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [TotalLosses]

* Parameter	9.28538 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [WorkingLosses]

* Parameter	2.85735 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [StandingLosses]

* Parameter	0.237782 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [LoadingLosses]

* Parameter	51.0391 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [FlashingLosses]

* Parameter	73.064 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [GasMoleWeight]

* Parameter	0.0547111 kg/mol	Upper Bound	kg/mol
Lower Bound	kg/mol	* Enforce Bounds	False

Remarks

This User Value Set was programmatically generated. GUID={5524AB8C-40B1-4354-9DD7-EED65770BF87}

Tank Losses.331

User Value [ShellLength]

* Parameter	20 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value Sets Report

Client Name:	EQT	Job: V1.0
Location:	WEU-8	

User Value [ShellDiam]			
* Parameter	12 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value [BreatherVP]			
* Parameter	0.875 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [BreatherVacP]			
* Parameter	-0.0375 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [DomeRadius]			
Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

User Value [OpPress]			
* Parameter	0 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [AvgPercentLiq]			
* Parameter	50 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [MaxPercentLiq]			
* Parameter	90 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [AnnNetTP]			
* Parameter	837.186 bbl/day	Upper Bound	bbl/day
* Lower Bound	0 bbl/day	* Enforce Bounds	False

User Value [OREff]			
* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [AtmPressure]			
* Parameter	14.2535 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [MaxLiqSurfaceT]			
* Parameter	61.4758 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [TotalLosses]			
* Parameter	0.284783 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [WorkingLosses]			
* Parameter	0.0949277 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [StandingLosses]			
* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

* User Specified Values
 ? Extrapolated or Approximate Values

User Value Sets Report

Client Name:	EQT	Job: V1.0
Location:	WEU-8	

User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [LoadingLosses]

* Parameter	0.745004 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [FlashingLosses]

* Parameter	3.36381 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [GasMoleWeight]

* Parameter	0.0452315 kg/mol	Upper Bound	kg/mol
Lower Bound	kg/mol	* Enforce Bounds	False

Remarks

This User Value Set was programmatically generated. GUID={23417019-6BCF-4B6A-8C2C-C51E3F9510A8}

20160131_EQT_WEU 8 _Sand Separator Tank.txt

* Project Setup Information

*

Project File : Z:\Client\EQT Corporation\West Virginia\WV
Wells\153901.0056 WV Wells 2015\WEU 8\2016-0131 Draft G70-B Application\Att S
Emission Calcs\01 E&P TANK\20160131_EQT_WEU 8 _Sand Separator Tank.ept
Flowsheet Selection : Oil Tank with Separator
Calculation Method : RVP Distillation
Control Efficiency : 0.0%
Known Separator Stream : Low Pressure Oil
Entering Air Composition : No

Filed Name : WEU 8 Wellpad
Well Name : WEU 8 Wellpad
Well ID : WEU 8 Wellpad Sample 07/22/2014
Date : 2016.02.01

* Data Input

*

Separator Pressure : 380.00[psi g]
Separator Temperature : 60.00[F]
Ambient Pressure : 14.70[psi a]
Ambient Temperature : 55.00[F]
C10+ SG : 0.7299
C10+ MW : 111.126

-- Low Pressure Oil

No.	Component	mol %
1	H2S	0.0000
2	O2	0.0000
3	CO2	0.0560
4	N2	0.0000
5	C1	13.8400
6	C2	11.6040
7	C3	10.8340
8	i-C4	3.2330
9	n-C4	8.0930
10	i-C5	4.7120
11	n-C5	5.4070
12	C6	5.5800
13	C7	8.6890
14	C8	1.9800
15	C9	4.5790
16	C10+	8.1610
17	Benzene	0.1480
18	Toluene	0.6090
19	E-Benzene	0.0810
20	Xylenes	0.8820
21	n-C6	3.8640
22	2,2,4-Triethyl p	7.6480

-- Sales Oil

20160131_EQT_WEU 8 _Sand Separator Tank.txt

 Production Rate : 0.1 [bbl/day]
 Days of Annual Operation : 365 [days/year]
 API Gravity : 59.11
 Reid Vapor Pressure : 10.60 [psi a]

 * Calculation Results
 *

-- Emission Summary

Item	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]	
Page 1	-----				E&P TANK
Total HAPs	0.010	0.002	0.010	0.002	
Total HC	1.242	0.284	1.242	0.284	
VOCs, C2+	1.054	0.241	1.054	0.241	
VOCs, C3+	0.758	0.173	0.758	0.173	

Uncontrolled Recovery Info.

Vapor	75.6400	x1E-3	[MSCFD]
HC Vapor	75.5400	x1E-3	[MSCFD]
GOR	756.40		[SCF/bbl]

-- Emission Composition

No	Component	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
1	H2S	0.000	0.000	0.000	0.000
2	O2	0.000	0.000	0.000	0.000
3	CO2	0.002	0.000	0.002	0.000
4	N2	0.000	0.000	0.000	0.000
5	C1	0.188	0.043	0.188	0.043
6	C2	0.296	0.068	0.296	0.068
7	C3	0.396	0.090	0.396	0.090
8	i-C4	0.098	0.022	0.098	0.022
9	n-C4	0.164	0.037	0.164	0.037
10	i-C5	0.038	0.009	0.038	0.009
11	n-C5	0.030	0.007	0.030	0.007
12	C6	0.011	0.003	0.011	0.003
13	C7	0.005	0.001	0.005	0.001
14	C8	0.000	0.000	0.000	0.000
15	C9	0.000	0.000	0.000	0.000
16	C10+	0.003	0.001	0.003	0.001
17	Benzene	0.000	0.000	0.000	0.000
18	Toluene	0.000	0.000	0.000	0.000
19	E-Benzene	0.000	0.000	0.000	0.000
20	Xylenes	0.000	0.000	0.000	0.000
21	n-C6	0.006	0.001	0.006	0.001
22	2,2,4-Tri methyl p	0.004	0.001	0.004	0.001
	Total	1.241	0.283	1.241	0.283

-- Stream Data

No.	Component	MW	LP Oil	Flash Oil	Sale Oil	Flash Gas	W&S Gas
Total	Emissions						

20160131_EQT_WEU 8 _Sand Separator Tank.txt

	mol %	mol %	mol %	mol %	mol %	mol %
1 H2S 0.0000	34.80	0.0000	0.0000	0.0000	0.0000	0.0000
2 O2 0.0000	32.00	0.0000	0.0000	0.0000	0.0000	0.0000
3 CO2 0.1305	44.01	0.0560	0.0055	0.0000	0.1596	0.0363
4 N2 0.0000	28.01	0.0000	0.0000	0.0000	0.0000	0.0000
5 C1 32.2599	16.04	13.8400	0.3481	0.0000	41.5142	2.3102
6 C2 27.0461	30.07	11.6040	2.3928	0.0012	30.4978	15.8754
7 C3 24.6676	44.10	10.8340	7.2575	0.4400	18.1699	45.6963
8 i-C4 4.6379	58.12	3.2330	3.4972	2.1774	2.6911	10.9386
9 n-C4 7.7342	58.12	8.0930	9.7466	8.3628	4.7011	17.5504
10 i-C5 1.4585	72.15	4.7120	6.5360	7.1566	0.9706	3.0373
11 n-C5 1.1471	72.15	5.4070	7.6762	8.6077	0.7524	2.4244
12 C6 0.3652	86.16	5.5800	8.1894	9.4982	0.2277	0.8101
13 C7 0.1555	100.20	8.6890	12.8822	15.1007	0.0881	0.3737
14 C8 0.0092	114.23	1.9800	2.9430	3.4608	0.0046	0.0240
15 C9 0.0064	128.28	4.5790	6.8101	8.0146	0.0027	0.0184
16 C10+ 0.0725	111.13	8.1610	12.1214	14.2383	0.0376	0.1856
17 Benzene 0.0068	78.11	0.1480	0.2181	0.2541	0.0042	0.0154
18 Tol uene 0.0063	92.13	0.6090	0.9042	1.0618	0.0035	0.0157
19 E-Benzene 0.0002	106.17	0.0810	0.1204	0.1417	0.0001	0.0006
20 Xyl enes 0.0021	106.17	0.8820	1.3115	1.5431	0.0010	0.0058
21 n-C6 0.1857	86.18	3.8640	5.6930	6.6277	0.1125	0.4226
22 224Tri methyl p 0.1079	114.24	7.6480	11.3468	13.3133	0.0612	0.2592

MW	68.17	86.79	93.71	29.95	47.80
34.17 Stream Mole Ratio	1.0000	0.6723	0.5710	0.3277	0.1013
0.4290 Heating Value [BTU/SCF]				1754.88	2711.52
1980.70 Gas Gravi ty [Gas/Ai r]				1.03	1.65
1.18 Bubbl e Pt. @ 100F [psi a]	517.29	47.28	11.11		

Page 2-----E&P TANK

RVP @ 100F [psi a]	163.87	31.35	10.59
Spec. Gravi ty @ 100F	0.610	0.660	0.673

20160131_EQT_WEU 8 _Sand Separator Tank.txt



Certificate of Analysis
 Number: 2030-14070266-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Gary Vermillion
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

July 31, 2014

Field: EQT
 Station Name: 513764
 Sample Point: Submeter
 Cylinder No: GAS
 Analyzed: 07/30/2014 08:31:58 by CC

Sampled By: RM-GAS
 Sample Of: Liquid Spot
 Sample Date: 07/22/2014
 Sample Conditions: 380 psig
 Method: GPA 2186

Analytical Data

Components	Mol. %	Wt. %	L.V. %
Nitrogen	NIL	NIL	NIL
Methane	13.840	3.113	6.497
Carbon Dioxide	0.056	0.035	0.027
Ethane	11.604	4.893	8.595
Propane	10.834	6.699	8.267
Iso-Butane	3.233	2.635	2.930
n-Butane	8.093	6.596	7.066
Iso-Pentane	4.712	4.767	4.773
n-Pentane	5.407	5.470	5.428
i-Hexanes	4.842	5.784	5.428
n-Hexane	3.864	4.673	4.407
Benzene	0.148	0.162	0.113
Cyclohexane	0.738	0.870	0.693
i-Heptanes	5.670	7.847	7.003
n-Heptane	3.019	4.242	3.858
Toluene	0.609	0.787	0.563
i-Octanes	7.648	11.620	9.856
n-Octane	1.980	3.172	2.808
Ethylbenzene	0.081	0.121	0.086
Xylenes	0.882	1.313	0.947
i-Nonanes	3.369	5.896	4.861
n-Nonane	1.210	2.176	1.885
i-Decanes	4.357	8.333	6.598
n-Decane	0.790	1.577	1.342
Undecanes	1.371	2.995	2.495
Dodecanes	0.834	1.991	1.651
Tridecanes	0.255	0.660	0.542
Tetradecanes Plus	0.554	1.573	1.281
	100.000	100.000	100.000

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis

Number: 2030-14070266-001A

Carencro Laboratory
4790 NE Evangeline Thruway
Carencro, LA 70520

Gary Vermillion
Gas Analytical Services
PO Box 1028
Bridgeport, WV 26330

July 31, 2014

Field: EQT
Station Name: 513764
Sample Point: Submeter
Cylinder No: GAS
Analyzed: 07/30/2014 08:31:58 by CC

Sampled By: RM-GAS
Sample Of: Liquid Spot
Sample Date: 07/22/2014
Sample Conditions: 380 psig
Method: GPA 2186

Analytical Data

Components	Mol. %	Wt. %	L.V. %
Nitrogen	NIL	NIL	NIL
Carbon Dioxide	0.056	0.035	0.027
Methane	13.840	3.113	6.497
Ethane	11.604	4.893	8.595
Propane	10.834	6.699	8.267
Iso-Butane	3.233	2.635	2.930
n-Butane	8.093	6.596	7.066
Iso-Pentane	4.712	4.767	4.773
n-Pentane	5.407	5.470	5.428
Hexanes Plus	42.221	65.792	56.417
	100.000	100.000	100.000

Physical Properties	Total	C6+
Molecular Weight	71.314	111.126
BTU / Cu. Ft. @ 14.73 psia DRY	3927.0	5996.3
BTU / LB.	20847.0	20426.0
BTU / GAL.	108847.0	124418.0
Cu. Ft. Vapor per Gallon @ 14.73 psia	27.705	20.734
Pounds per Gallon (in Vacuum)	5.218	6.086
Pounds per Gallon (in Air)	5.213	6.079
Specific Gravity at 60°F	0.6259	0.7299
API Gravity at 60°F	94.57	62.35
Specific Gravity as a vapor	2.4620	3.8370

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis

Number: 2030-14070266-001A

Carencro Laboratory
4790 NE Evangeline Thruway
Carencro, LA 70520

Gary Vermillion
Gas Analytical Services
PO Box 1028
Bridgeport, WV 26330

July 31, 2014

Field: EQT
Station Name: 513764
Sample Point: Submeter
Cylinder No: GAS
Analyzed: 07/30/2014 08:31:58 by CC

Sampled By: RM-GAS
Sample Of: Liquid Spot
Sample Date: 07/22/2014
Sample Conditions: 380 psig
Method: GPA 2186

Analytical Data

Components	Mol. %	Wt. %	L.V. %
Nitrogen	NIL	NIL	NIL
Carbon Dioxide	0.056	0.035	0.027
Methane	13.840	3.113	6.497
Ethane	11.604	4.893	8.595
Propane	10.834	6.699	8.267
Iso-Butane	3.233	2.635	2.930
n-Butane	8.093	6.596	7.066
Iso-Pentane	4.712	4.767	4.773
n-Pentane	5.407	5.470	5.428
Hexanes	8.706	10.457	9.835
Heptanes Plus	<u>33.515</u>	<u>55.335</u>	<u>46.582</u>
	100.000	100.000	100.000

Physical Properties	Total	C7+
Molecular Weight	71.314	117.749
BTU / Cu. Ft. @ 14.73 psia DRY	3927.0	6325.4
BTU / LB.	20847.0	20338.6
BTU / GAL.	108847.0	126192.2
Cu. Ft. Vapor per Gallon @ 14.73 psia	27.705	19.929
Pounds per Gallon (in Vacuum)	5.218	6.198
Pounds per Gallon (in Air)	5.213	6.191
Specific Gravity at 60°F	0.6259	0.7434
API Gravity at 60°F	94.57	58.83
Specific Gravity as a vapor	2.4620	4.0655

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
 Number: 2030-13050229-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507
 Station Location: EQT Production
 Cylinder No: GAS
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS
 Sample Of: Gas Spot
 Sample Date: 05/20/2013 12:00
 Sample Conditions: 313 psig
 Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia	
Nitrogen	0.428	0.599		
Carbon Dioxide	0.240	0.528		
Methane	80.616	64.659		
Ethane	13.296	19.989	3.567	
Propane	3.541	7.807	0.978	
Iso-Butane	0.426	1.238	0.140	
n-Butane	0.746	2.168	0.236	
Iso-Pentane	0.191	0.689	0.070	
n-Pentane	0.164	0.592	0.060	
i-Hexanes	0.091	0.381	0.037	
n-Hexane	0.055	0.232	0.022	
Benzene	0.002	0.009	0.001	
Cyclohexane	0.009	0.038	0.003	
i-Heptanes	0.056	0.267	0.024	
n-Heptane	0.023	0.114	0.011	
Toluene	0.005	0.023	0.002	
i-Octanes	0.052	0.284	0.024	
n-Octane	0.011	0.063	0.006	
Ethylbenzene	NIL	NIL	NIL	
Xylenes	0.005	0.026	0.002	
i-Nonanes	0.024	0.149	0.012	
n-Nonane	0.006	0.037	0.003	
Decane Plus	0.013	0.108	0.009	
	<u>100.000</u>	<u>100.000</u>	<u>5.207</u>	
				GPM TOTAL C2+ 5.207



Certificate of Analysis
 Number: 2030-13050229-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507
 Station Location: EQT Production
 Cylinder No: GAS
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS
 Sample Of: Gas Spot
 Sample Date: 05/20/2013 12:00
 Sample Conditions: 313 psig
 Method: GPA 2286

Physical Properties	Total	C10+
Calculated Molecular Weight	20.00	141.68
GPA 2172-09 Calculation:		
Calculated Gross BTU per ft³ @ 14.73 psia & 60°F		
Real Gas Dry BTU	1216.5	7479.1
Water Sat. Gas Base BTU	1195.9	7349.0
Relative Density Real Gas	0.6926	4.8910
Compressibility Factor	0.9967	

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
 Number: 2030-13050229-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507
 Station Location: EQT Production
 Cylinder No: GAS
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS
 Sample Of: Gas Spot
 Sample Date: 05/20/2013 12:00
 Sample Conditions: 313 psig
 Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia		
Nitrogen	0.428	0.599		GPM TOTAL C2+	5.208
Carbon Dioxide	0.240	0.528		GPM TOTAL C3+	1.641
Methane	80.616	64.659		GPM TOTAL iC5+	0.286
Ethane	13.296	19.989	3.567		
Propane	3.541	7.807	0.979		
Iso-butane	0.426	1.238	0.140		
n-Butane	0.746	2.168	0.236		
Iso-pentane	0.191	0.689	0.070		
n-Pentane	0.164	0.592	0.060		
Hexanes Plus	0.352	1.731	0.156		
	100.000	100.000	5.208		

Physical Properties	Total	C6+
Relative Density Real Gas	0.6926	3.3957
Calculated Molecular Weight	20.00	98.35
Compressibility Factor	0.9967	

GPA 2172-09 Calculation:

Calculated Gross BTU per ft³ @ 14.73 psia & 60°F

Real Gas Dry BTU	1216.6	5333.2
Water Sat. Gas Base BTU	1195.9	5240.3

Comments: H2O Mol% : 1.740 ; Wt% : 1.570

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
 Number: 2030-13050229-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512507
 Station Location: EQT Production
 Cylinder No: GAS
 Analyzed: 05/29/2013 11:21:20 by CC

Sampled By: GR-GAS
 Sample Of: Gas Spot
 Sample Date: 05/20/2013 12:00
 Sample Conditions: 313 psig
 Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia		
Nitrogen	0.428	0.599		GPM TOTAL C2+	5.207
Carbon Dioxide	0.240	0.528		GPM TOTAL C3+	1.640
Methane	80.616	64.659		GPM TOTAL iC5+	0.286
Ethane	13.296	19.989	3.567		
Propane	3.541	7.807	0.978		
Iso-Butane	0.426	1.238	0.140		
n-Butane	0.746	2.168	0.236		
Iso-Pentane	0.191	0.689	0.070		
n-Pentane	0.164	0.592	0.060		
Hexanes	0.146	0.613	0.059		
Heptanes Plus	0.206	1.118	0.097		
	100.000	100.000	5.207		

Physical Properties	Total	C7+
Relative Density Real Gas	0.6926	3.7086
Calculated Molecular Weight	20.00	107.41
Compressibility Factor	0.9967	

GPA 2172-09 Calculation:

Calculated Gross BTU per ft³ @ 14.73 psia & 60°F

Real Gas Dry BTU	1216.6	5765.9
Water Sat. Gas Base BTU	1195.9	5665.5

Comments: H2O Mol% : 1.740 ; Wt% : 1.570

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.

ATTACHMENT T

Emission Summary Sheet

ATTACHMENT T – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID# (Emission Source ID)	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		GHG (CO ₂ e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001 (S001-S006, S016, C001)	1.15	5.03	0.96	4.22	1.59	1.22	0.01	0.03	0.09	0.38	0.09	0.38	1,372.74	6,012.61
C002 (S001-S006, S016, C002)	1.15	5.03	0.96	4.22	1.59	1.22	0.01	0.03	0.09	0.38	0.09	0.38	1,372.74	6,012.61
E007 (S007)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E008 (S008)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E009 (S009)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E010 (S010)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E011 (S011)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E012 (S012)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E018 (S018)	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	135.14	591.90
E013 (S013)	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E014 (S014)	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E015 (S015)	---	---	---	---	0.17	0.76	---	---	---	---	---	---	1.08	4.70
E017 (S017)	0.24	1.06	0.49	2.12	0.19	0.81	4.5E-04	2.0E-03	0.01	0.07	0.01	0.07	90.18	394.99
E016 (S016)	---	---	---	---	59.75	15.54	---	---	---	---	---	---	---	---
Fugitives	---	---	---	---	---	17.25	---	---	---	---	---	---	---	303.29
Haul Roads	---	---	---	---	---	---	---	---	---	1.83	---	0.18	---	---
Facility Total	3.53	15.46	3.25	14.22	63.35	37.04	0.02	0.09	0.26	2.99	0.26	1.34	4,056.00	18,068.56
Facility Total (excl. fugitives)	3.53	15.46	3.25	14.22	3.59	4.26	0.02	0.09	0.26	1.16	0.26	1.16	4,056.00	17,765.28

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators. According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT T – FACILITY-WIDE HAP CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001 (S001-S006, S016, C001)	---	---	1.3E-03	1.3E-03	1.7E-03	2.0E-03	7.5E-05	8.8E-05	7.6E-04	9.1E-04	0.04	0.03	0.08	0.07
C002 (S001-S006, S016, C002)	---	---	1.3E-03	1.3E-03	1.7E-03	2.0E-03	7.5E-05	8.8E-05	7.6E-04	9.1E-04	0.04	0.03	0.08	0.07
E007 (S007)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E008 (S008)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E009 (S009)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E010 (S010)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E011 (S011)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E012 (S012)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E018 (S018)	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	2.1E-03	0.01
E013 (S013)	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E014 (S014)	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E015 (S015)	---	---	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	1.0E-03	<0.01	2.0E-03	1.0E-02
E017 (S017)	0.02	0.07	1.2E-03	5.3E-03	4.3E-04	1.9E-03	1.9E-05	8.4E-05	1.5E-04	6.6E-04	---	---	0.02	0.11
E016 (S016)	---	---	0.04	0.01	0.06	0.01	2.5E-03	6.5E-04	2.5E-02	6.6E-03	1.44	0.38	2.95	0.77
Fugitives	---	---	---	0.01	---	0.03	---	<0.01	---	0.03	---	0.26	---	0.84
Haul Roads	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Facility Total	0.02	0.07	0.05	0.03	0.06	0.05	2.7E-03	9.1E-04	0.03	0.04	1.54	0.77	3.16	1.81

Facility Total (excl. fugitives)	0.02	0.07	3.8E-03	0.01	3.9E-03	6.1E-03	1.7E-04	2.6E-04	1.7E-03	2.5E-03	0.10	0.14	0.21	0.33
---	------	------	---------	------	---------	---------	---------	---------	---------	---------	------	------	------	------

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators. According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT U

Class I Legal Advertisement

RECOMMENDED PUBLIC NOTICE TEMPLATE

AIR QUALITY PERMIT NOTICE Notice of Application

Notice is given that EQT Production Company has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a G70-B General Permit Registration for a modification to an existing natural gas production facility WEU-8 located on C/R 11/3 road, near West Union, in Doddridge County, West Virginia. The latitude and longitude coordinates are: 39.27004 N, -80.80993 W.

The applicant estimates the potential to discharge the following Regulated Air Pollutants will be:

Pollutant	Emissions in tpy (tons per year)
NOx	15.46
CO	14.22
VOC	4.26
SO ₂	0.09
PM	1.16
Total HAPs	1.81
Carbon Dioxide Equivalents (CO ₂ e)	17,765.28

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57th Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the (Day) day of (Month), 2016.

By: EQT Production Company
Kenneth Kirk, Executive Vice President
625 Liberty Ave Suite 1700
Pittsburgh, PA 15222

ATTACHMENT V

General Permit Registration Application Fee