




Arsenal Resources

G70-D General Permit Registration Application

Palleta Natural Gas Production Site

Clarksburg, West Virginia

Prepared By:



ERM

ENVIRONMENTAL RESOURCES MANAGEMENT, Inc.
Hurricane, West Virginia

May 2017



May 18, 2017

Mr. William F. Durham, Director
West Virginia Department of Environmental Protection
Division of Air Quality
601 57th Street, SE
Charleston, West Virginia, 25304

**RE: G70-D General Permit Registration Application
Arsenal Resources
Palleta Natural Gas Production Site**

Dear Director Durham:

Enclosed are one (1) original hard copy and two (2) complete PDFs included on CD-ROM of a G70-D General Permit Registration Application for the authority to construct the Palleta natural gas production site located in Harrison County, West Virginia.

A legal advertisement will be published in the next few days and proof of publication will be forwarded as soon as it is received. Please contact me for payment of the application fee by credit card.

If you have any questions concerning this permit application, please contact me at (724) 940-1112 or by email at myingling@arsenalresources.com.

Sincerely,

Meghan M.B. Yingling
Environmental Compliance Manager
Arsenal Resources

Enclosures

1.0 INTRODUCTION NARRATIVE

Arsenal Resources, LLC (Arsenal) submits this G70-D General Permit application to the West Virginia Department of Environmental Protection's Department of Air Quality (WVDAQ) for the Palleta Wellpad (Palleta) site located in Harrison County, West Virginia. This application addresses the operational activities associated with the production of natural gas and produced water at the Palleta site.

Arsenal currently has the following equipment constructed at the Palleta site:

- Five (5) Natural Gas Wells;
- Five (5) Gas Production Units/Heaters each rated at 1.00 MMBtu/hr input;
- One (1) 210 bbl Blowdown Tank;
- Five (5) 400 bbl Produced Fluids Tank;
- One (1) Produced Fluids Loadout; and
- One (1) Thermoelectric Generator.

Arsenal would like to submit a G70-D Class II General permit to reflect the following equipment at the Palleta site:

- Eight (8) Natural Gas Wells;
- Eight (8) Gas Production Units/Heaters each rated at 1.00 MMBtu/hr input;
- One (1) 210 bbl Blowdown Tank;
- Eight (8) 400 bbl Produced Fluids Tank;
- Two (2) Produced Fluids Loadout; and
- One (1) Thermoelectric Generator.

Statement of Aggregation

The Palleta pad is located in Harrison County, WV and operated by Arsenal. Stationary sources of air pollutants may require aggregation of total emission levels if these sources share the same industrial grouping, are operating under common control, and are classified as contiguous or adjacent properties. Arsenal operates the Palleta with the same industrial grouping as nearby facilities, and some of these facilities are under common control. However, the Palleta site is not subject to the aggregation of stationary emission sources because these sites do not meet the definition of contiguous or adjacent facilities.

The Palleta pad operates under SIC code 1311 (Crude Petroleum and Natural Gas Extraction). There are surrounding wells operated by Noble that share the same two digit major SIC code of 13 for Crude Petroleum and Natural Gas Extraction. Therefore, the Palleta pad does share the same SIC codes as the surrounding wells and compressor stations.

Arsenal is the sole operator of the Palleta pad. Arsenal is also the sole operator of other production sites and compressor stations in the area. Therefore, Arsenal does qualify as having nearby operations under common control.

On August 18, 2016 the EPA Administrator signed the *Source Determination for Certain Emission Units in the Oil and Natural Gas Sector*. This notice clarified EPA's position regarding how properties in the oil and natural gas sector are determined to be adjacent in order to assist permitting authorities and permit applicants in making consistent source determinations. The following proposed regulatory text defines "adjacent" for the oil and gas sector in terms of proximity.

Pollutant emitting activities shall be considered adjacent if they are located on the same surface site, or on surface sites that are located within ¼ mile of one another.

There are no Arsenal owned or operated sites with a ¼ mile radius of the Palleta pad. Nearby sites do not meet the definition of contiguous or adjacent properties since they are not in contact and do not share a common boundary. The operations conducted at the Palleta site do not rely on or interact with other sites. Furthermore, operations separated by this distance do not meet the common sense notion of a "plant."

Based on the above reasoning, Arsenal is not subject to the aggregation of stationary emission sources since the stationary sources are not considered contiguous or adjacent facilities.

2.0 REGULATORY DISCUSSION

This section outlines the State air quality regulations that could be reasonably expected to apply to the Palleta pad and makes an applicability determination for each regulation based on activities conducted at the site and the emissions of regulated air pollutants. This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-D permit application forms. The West Virginia State Regulations address federal regulations, including Prevention of Significant Deterioration permitting, Title V permitting, New Source Performance Standards, and National Emission Standards for Hazardous Air Pollutants.

The regulatory requirements in reference to Palleta are described in detail in the below section.

West Virginia State Air Regulations

45 CSR 02 – To Prevent and Control Particulate Air Pollution From Combustion of Fuel in Indirect Heat Exchangers

The line heaters associated with gas production units are indirect heat exchangers that combust natural gas but are exempt from this regulation since the heat input capacities are less than 10 MMBtu/hr.

45 CSR 04 – To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor

Operations conducted at the Palleta well pad are subject to this requirement. Based on the nature of the process at the well pad, the presence of objectionable odors is unlikely.

45 CSR 06 – Control of Air Pollution from the Combustion of Refuse

The Palleta Wellpad does not have a combustion device and is therefore not subject to this rule.

45 CSR 10 – To Prevent and Control Air Pollution from the Emission of Sulfur Oxides

The line heaters are indirect heat exchangers that combust natural gas but are exempt from this regulation since the heat input capacities are less than 10 MMBtu/hr.

45 CSR 13 – Permits for Construction, Modification, Relocation and Operation of Stationary Sources of Air Pollutants

This G70-D permit application is being submitted for the operational activities associated with Arsenal's production of natural gas.

45 CSR 14 – Permits for Construction and Major Modification of Major Stationary Sources of Air Pollution for the Prevention of Significant Deterioration

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration (PSD). The G70-D applicability criterion excludes facilities that meet the definition of a major source as defined in 45 CSR 19 for being eligible for the general permit.

Operation of equipment at the Palleta pad will not exceed emission thresholds established by this permitting program. Arsenal will monitor future construction and modification activities at the site closely and will compare any future increase in emissions with the PSD thresholds to ensure these activities will not trigger this program.

45 CSR 16 - Standards of Performance for New Stationary Sources (NSPS)

45 CSR 16 applies to all registrants that are subject to any of the NSPS requirements described in more detail in the Federal Regulations section.

45 CSR 19 – Permits for Construction and Major Modification of Major Stationary Sources of Air Pollution which Cause or Contributed to Non-attainment

Federal construction permitting programs regulate new and modified sources of nonattainment pollutants under Non-Attainment New Source Review (NNSR). The G70-D applicability criterion excludes facilities that meet the definition of a major source as defined in 45 CSR 19 for being eligible for the general permit.

Harrison County, WV is in attainment for all pollutants with a National Ambient Air Quality Standard (NAAQS). Therefore, this regulation would not apply to the Palleta site.

45 CSR 25 – Control of Air Pollution from Hazardous Waste Treatment, Storage, and Disposal Facilities

No hazardous waste will be burned at this well site; therefore, it is not subject to this hazardous waste rule.

45 CSR 30 – Requirements for Operating Permits

45 CSR 30 applies to the requirements of the federal Title V operating permit program (40 CFR 70). The major source thresholds for the Title V operating permit program regulations are 10 tons per year (tpy) of a single hazardous air pollutant (HAP), 25 tpy of any combination of HAPs, or 100 tpy of all other regulated pollutants.

The potential emissions of all regulated pollutants at the proposed facility are below the corresponding major source threshold(s). Therefore, the Palleta wellpad will not be a major source under the Title V program.

45 CSR 34 – National Emission Standards for Hazardous Air Pollutants (NESHAP)

45 CSR 34 applies to all registrants that are subject to any of the NESHAP requirements. The NESHAP Rules are discussed further in the Federal Regulation section of this document.

Federal Regulations

New Source Performance Standards

40 CFR 60, Subpart OOOO (Standards of Performance for Crude oil and Natural Gas Production, Transmission and Distribution)

Subpart OOOO establishes emission standards and compliance schedules for the control of volatile organic compounds (VOC) and sulfur dioxide (SO₂) emissions from affected facilities that commence construction, modification or reconstruction between August 23, 2011 and September 18, 2015. The applicable provisions and requirements of Subpart OOOO are included under the G70-D permit.

The Palleta Wellpad does not have any affected facilities subject to Subpart OOOO.

Subpart OOOOa (Standards Of Performance For Crude Oil And Natural Gas Facilities For Which Construction, Modification, Or Reconstruction Commenced After September 18, 2015)

The Palleta facility commenced construction after September 18, 2015 and, therefore, will qualify as an affected facility under OOOOa. The Palleta site will qualify as a collection of Fugitive Components Affected Facility. As a Fugitive Component Affected Facility, in order to comply, LDAR monitoring at the Palleta site must be performed within 60 days of startup of

production and then semi-annually thereafter. The Palleta site will also qualify as a gas well affected facility for all production wells.

There are several equipment types that have been installed at Palleta that do not meet the affected facility definitions as specified by EPA. These include:

- Storage vessels: Emissions from each storage vessel were determined to be below 6 tons per year (tpy) of VOC. Therefore, the produced water tanks are not affected storage vessels.
- Pneumatic devices: All pneumatic devices installed at the Palleta facility are either low-continuous bleed or intermittent bleed and do not qualify as affected sources

40 CFR 60 Subpart JJJJ (Standards of Performance for Stationary Spark Ignition Internal Combustion Engines)

The Palleta facility does not operate any engines and, therefore, will not be subject to 40 CFR 60 Subpart JJJJ.

No additional NSPS are expected to be applicable to this facility.

National Emissions Standards for Hazardous Air Pollutants

The following NESHAP included in the G70-D permit are not applicable to the Palleta facility:

- *40 CFR 63 Subpart HH (National Emission Standards for Hazardous Air Pollutants from Oil and Natural Gas Production Facilities).*
- *40CFR63 Subpart ZZZZ (National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines)*

No additional NESHAP are expected to be applicable to this facility.

General Permit G70-D will establish an emission cap on the following regulated and hazardous air pollutants (consistent with the PTE of the facility):

Regulated Pollutant	Potential Annual Emissions (tpy)	Maximum Annual Emission Limit (tpy)
CO	2.89	80
NOx	3.44	50
PM	<0.01	20
PM-10	<0.01	20
SO ₂	<0.01	20
VOC	38.33	80
Total HAPs	1.43	20

The fugitive emissions of a stationary source shall not be considered in determining whether it is a major stationary source for the purposes of 45CSR30-2.26.b or for eligibility of this General Permit.



west virginia department of environmental protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25 4
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-D GENERAL PERMIT REGISTRATION APPLICATION

PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION,
RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF
NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- CONSTRUCTION, MODIFICATION, RELOCATION, CLASS I ADMINISTRATIVE UPDATE, CLASS II ADMINISTRATIVE UPDATE

SECTION 1. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office): Arsenal Resources, LLC

Federal Employer ID No. (FEIN): 47-1919654

Applicant's Mailing Address: 65 Professional Place Suite 200

City: Bridgeport State: WV ZIP Code: 26330

Facility Name: Palleta Natural Gas Production Site

Operating Site Physical Address: 633 Quiet Acres Road, Clarksburg, West Virginia 26301
If none available, list road, city or town and zip of facility.

City: Clarksburg Zip Code: 26301 County: Harrison

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):
Latitude: 39.20971
Longitude: -80.36708

SIC Code: 1331 NAICS Code: 211111 DAQ Facility ID No. (For existing facilities)

CERTIFICATION OF INFORMATION

This G70-D General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered

I hereby certify that _____ is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-D General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: _____
Name and Title: Phone: Fax:
Email: Date:

If applicable:
Authorized Representative Signature: [Signature]
Name and Title: Meghan M.B. Yingling, Environmental Compliance Manager Phone: 724-940-1112 Fax:
Email: myingling@arsenalresources.com Date: 5/18/17

If applicable:
Environmental Contact
Name and Title: Meghan M.B. Yingling, Environmental Compliance Manager Phone: 724-940-1112 Fax:
Email: myingling@arsenalresources.com Date: 5/18/17

OPERATING SITE INFORMATION

Briefly describe the proposed new operation and/or any change(s) to the facility: **Construction of three (3) new wells and associated well equipment at the site.**

Directions to the facility:

Take WV-270 E/Main St to Liberty Street in West Milford for 0.9 Miles. Continue on Liberty Street/Poling Rd/Alpha Rd for 2.4 miles - turn right at Mine Hollow Road (access road to the wellpad).

ATTACHMENTS AND SUPPORTING DOCUMENTS

I have enclosed the following required documents:

Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22).

- Check attached to front of application.
- I wish to pay by electronic transfer. Contact for payment (incl. name and email address):
- I wish to pay by credit card. Contact for payment (incl. name and email address): **Meghan Yingling, myingling@arsenalresources.com**

- \$500 (Construction, Modification, and Relocation) \$300 (Class II Administrative Update)
- \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ, OOOO and/or OOOOa ¹
- \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH ²

¹ Only one NSPS fee will apply.

² Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ.
NSPS and NESHAP fees apply to new construction or if the source is being modified.

- Responsible Official or Authorized Representative Signature (if applicable)
- Single Source Determination Form (**must be completed**) – Attachment A
- Siting Criteria Waiver (if applicable) – Attachment B Current Business Certificate – Attachment C
- Process Flow Diagram – Attachment D Process Description – Attachment E
- Plot Plan – Attachment F Area Map – Attachment G
- G70-D Section Applicability Form – Attachment H Emission Units/ERD Table – Attachment I
- Fugitive Emissions Summary Sheet – Attachment J
- Gas Well Affected Facility Data Sheet (if applicable) – Attachment K
- Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L
- Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPU's, Heater Treaters, In-Line Heaters if applicable) – Attachment M
- Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N
- Tanker Truck/Rail Car Loading Data Sheet (if applicable) – Attachment O
- Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P
- Pneumatic Controllers Data Sheet – Attachment Q
- Pneumatic Pump Data Sheet – Attachment R
- Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment S
- Emission Calculations (please be specific and include all calculation methodologies used) – Attachment T
- Facility-wide Emission Summary Sheet(s) – Attachment U
- Class I Legal Advertisement – Attachment V
- One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments

All attachments must be identified by name, divided into sections, and submitted in order.

ATTACHMENT A
SINGLE SOURCE DETERMINATION

ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL 3).

The Source Determination Rule for the oil and gas industry was published in the Federal Register on June 3, 2016 and will become effective on August 2, 2016. EPA defined the term “adjacent” and stated that equipment and activities in the oil and gas sector that are under common control will be considered part of the same source if they are located on the same site or on sites that share equipment and are within ¼ mile of each other.

Is there equipment and activities in the same industrial grouping (defined by SIC code)?

Yes No

Is there equipment and activities under the control of the same person/people?

Yes No

Is there equipment and activities located on the same site or on sites that share equipment and are within ¼ mile of each other?

Yes No

ATTACHMENT B
SITTING CRITERIA WAIVER
(NOT APPLICABLE)

ATTACHMENT C
BUSINESS CERTIFICATE

WEST VIRGINIA
STATE TAX DEPARTMENT

BUSINESS REGISTRATION
CERTIFICATE

ISSUED TO:
ARSENAL RESOURCES LLC
6031 WALLACE ROAD EXT 300
WEXFORD, PA 15090-3430

BUSINESS REGISTRATION ACCOUNT NUMBER: **2247-4512**

This certificate is issued on: **03/8/2017**

*This certificate is issued by
the West Virginia State Tax Commissioner
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered
to conduct business in the State of West Virginia at the location above.*

This certificate is not transferrable and must be displayed at the location for which issued

This certificate shall be permanent until cessation of the business for which the certificate of registration was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.


Change in name or change of location shall be considered a cessation of the business and a new certificate shall be required.





TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of this certificate displayed at every job site within West Virginia.

ATTACHMENT D
PROCESS FLOW DIAGRAM

Attachment D

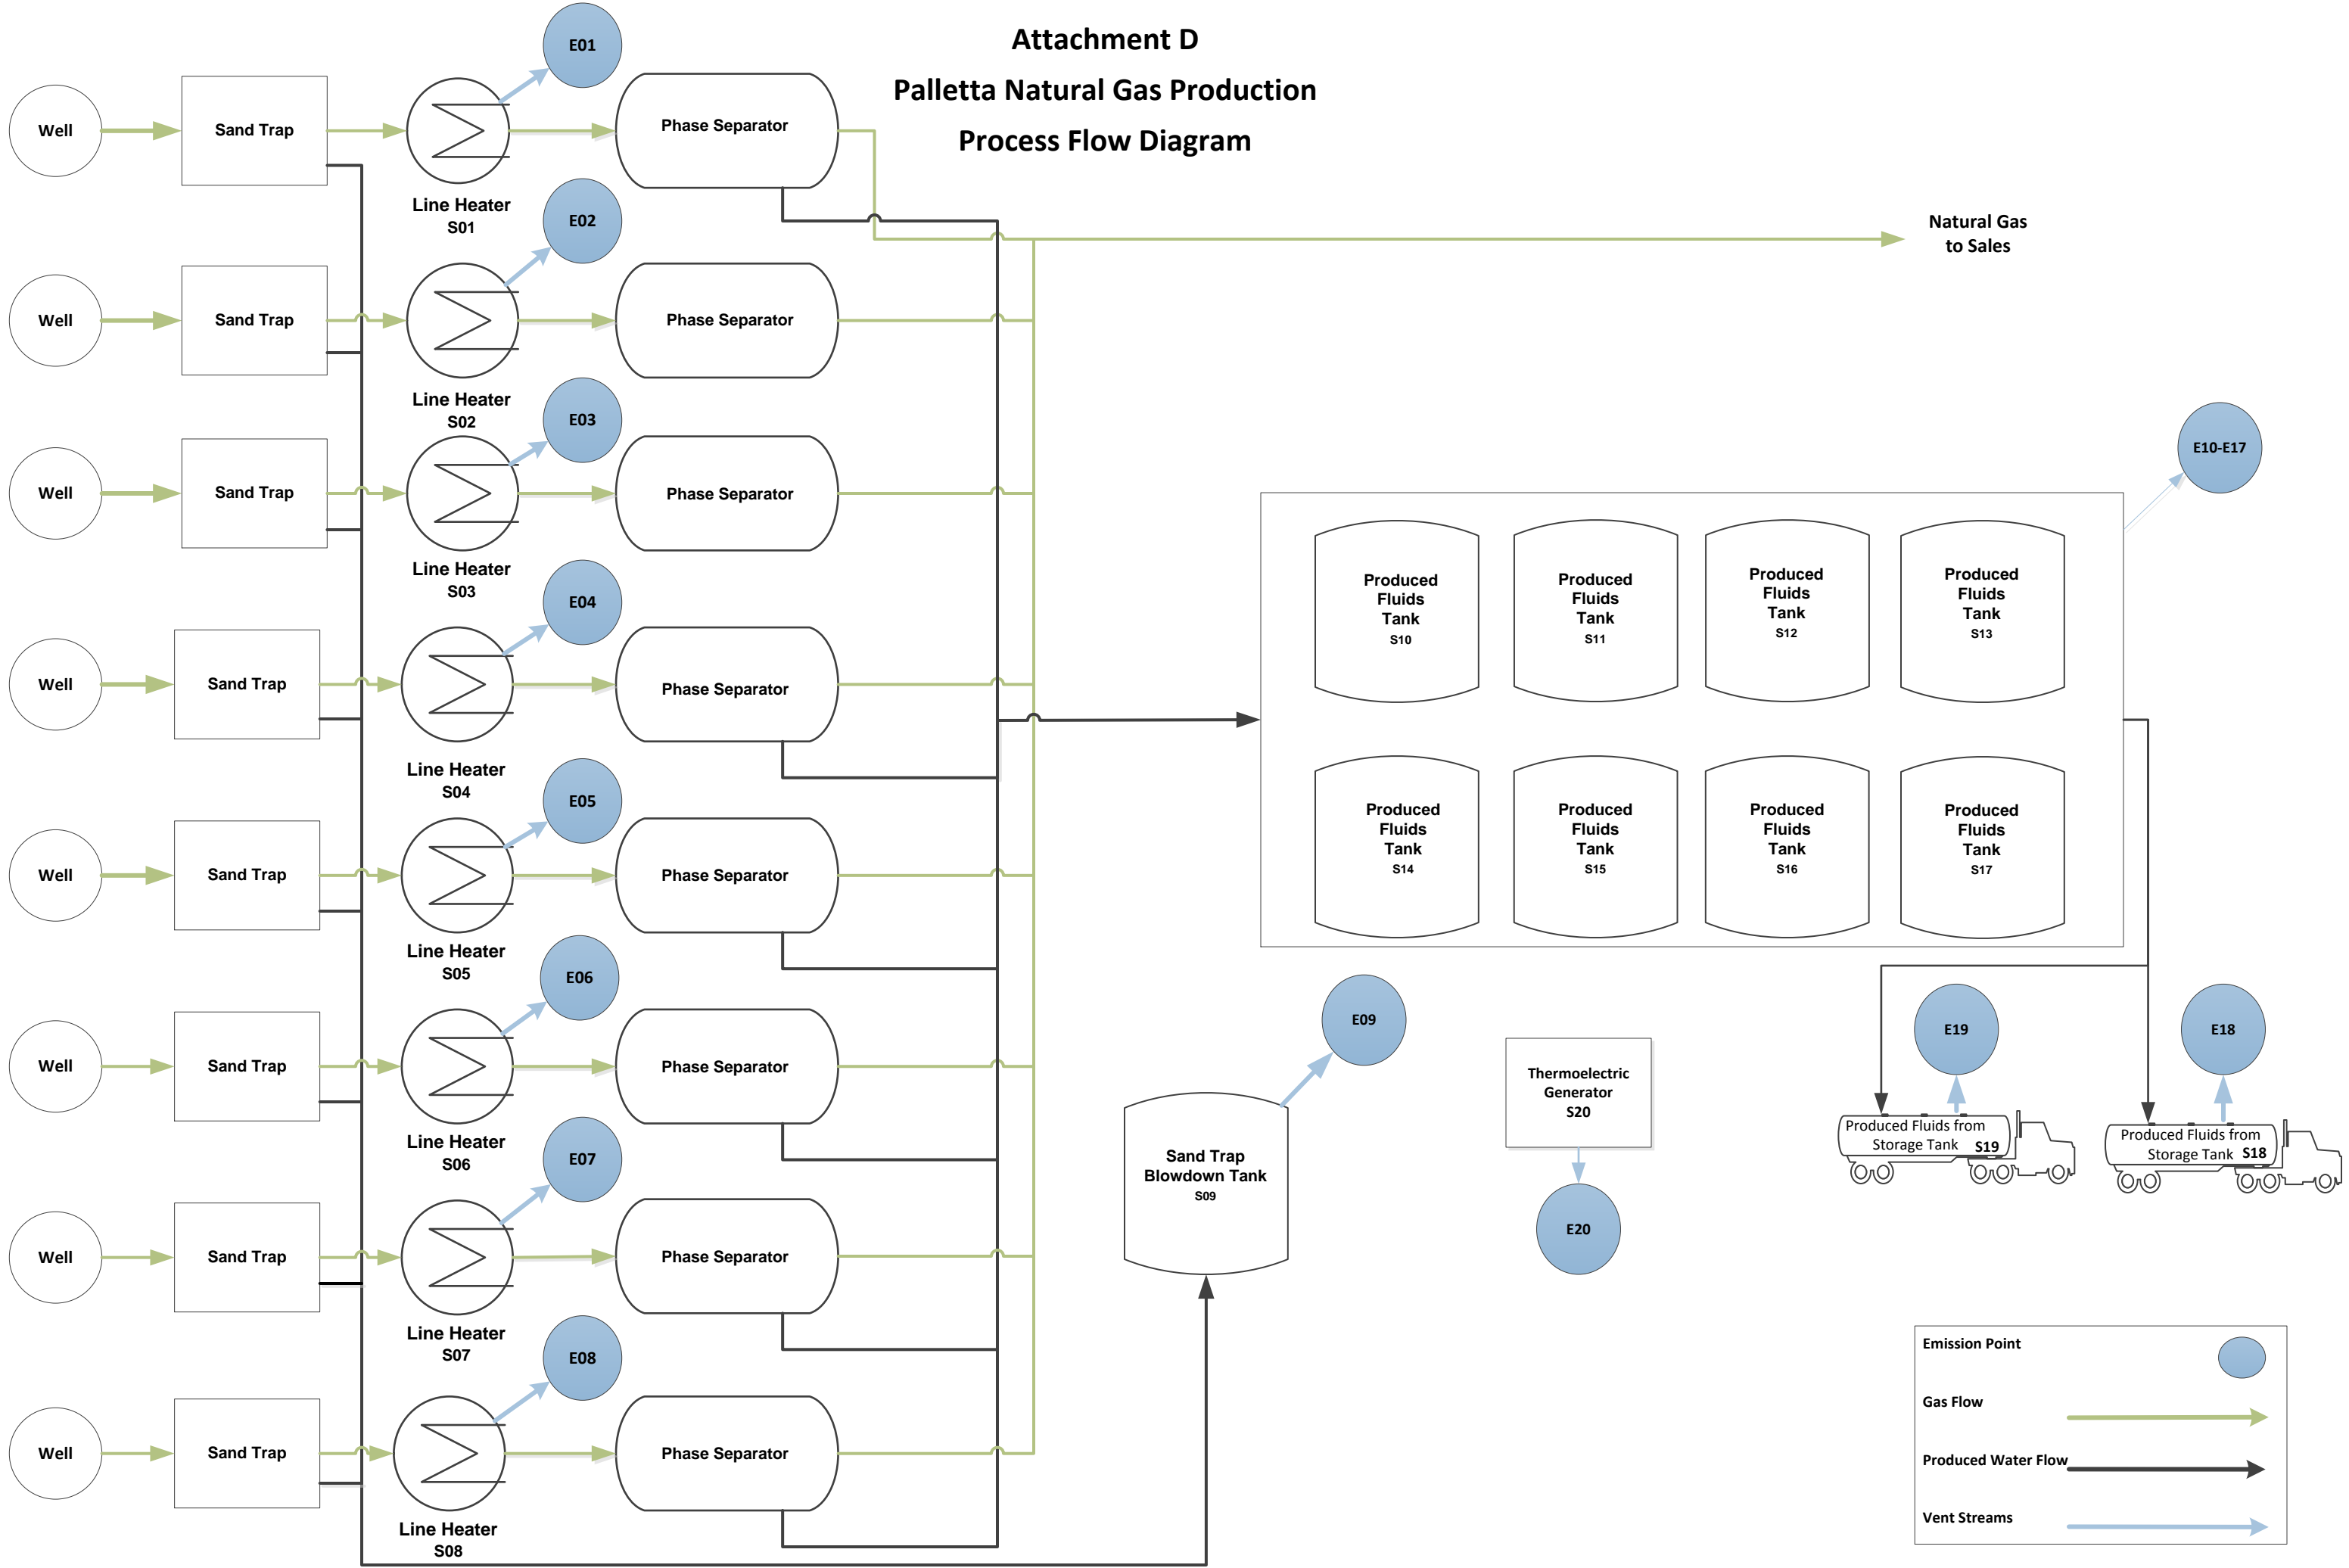Palletta Natural Gas Production Process Flow Diagram



Emission Point	
Gas Flow	
Produced Water Flow	
Vent Streams	

ATTACHMENT E
PROCESS DESCRIPTION



Attachment E – Process Description

This permit application is being filed for Arsenal Resources, LLC and addresses operational activities associated with the Palleta Wellpad natural gas production site. Natural gas flows from the eight (8) wellheads that were drilled and completed on the Palleta pad. The raw gas is first routed through the sand traps to remove any sediment. Fluids from these sand traps are blowdown to the sand trap blowdown tank (S09), as needed. From the sand traps, raw gas is routed through line heaters (S01-S08) to assist with the phase separation process in the downstream separators. In the separator, produced fluids are removed from the raw gas before being dumped to produced fluids tank (S10-17). The separated gas is then sent off site via a sales pipeline. The produced fluids are pumped into a tank truck (S18) on an as needed basis and are disposed of off-site. Power to the site is provided by a thermoelectric generator (S19).


A Process Flow Diagram is included as Attachment D.

ATTACHMENT F
PLOT PLAN

ATTACHMENT F - PALETTA WELL PAD PLOT PLAN

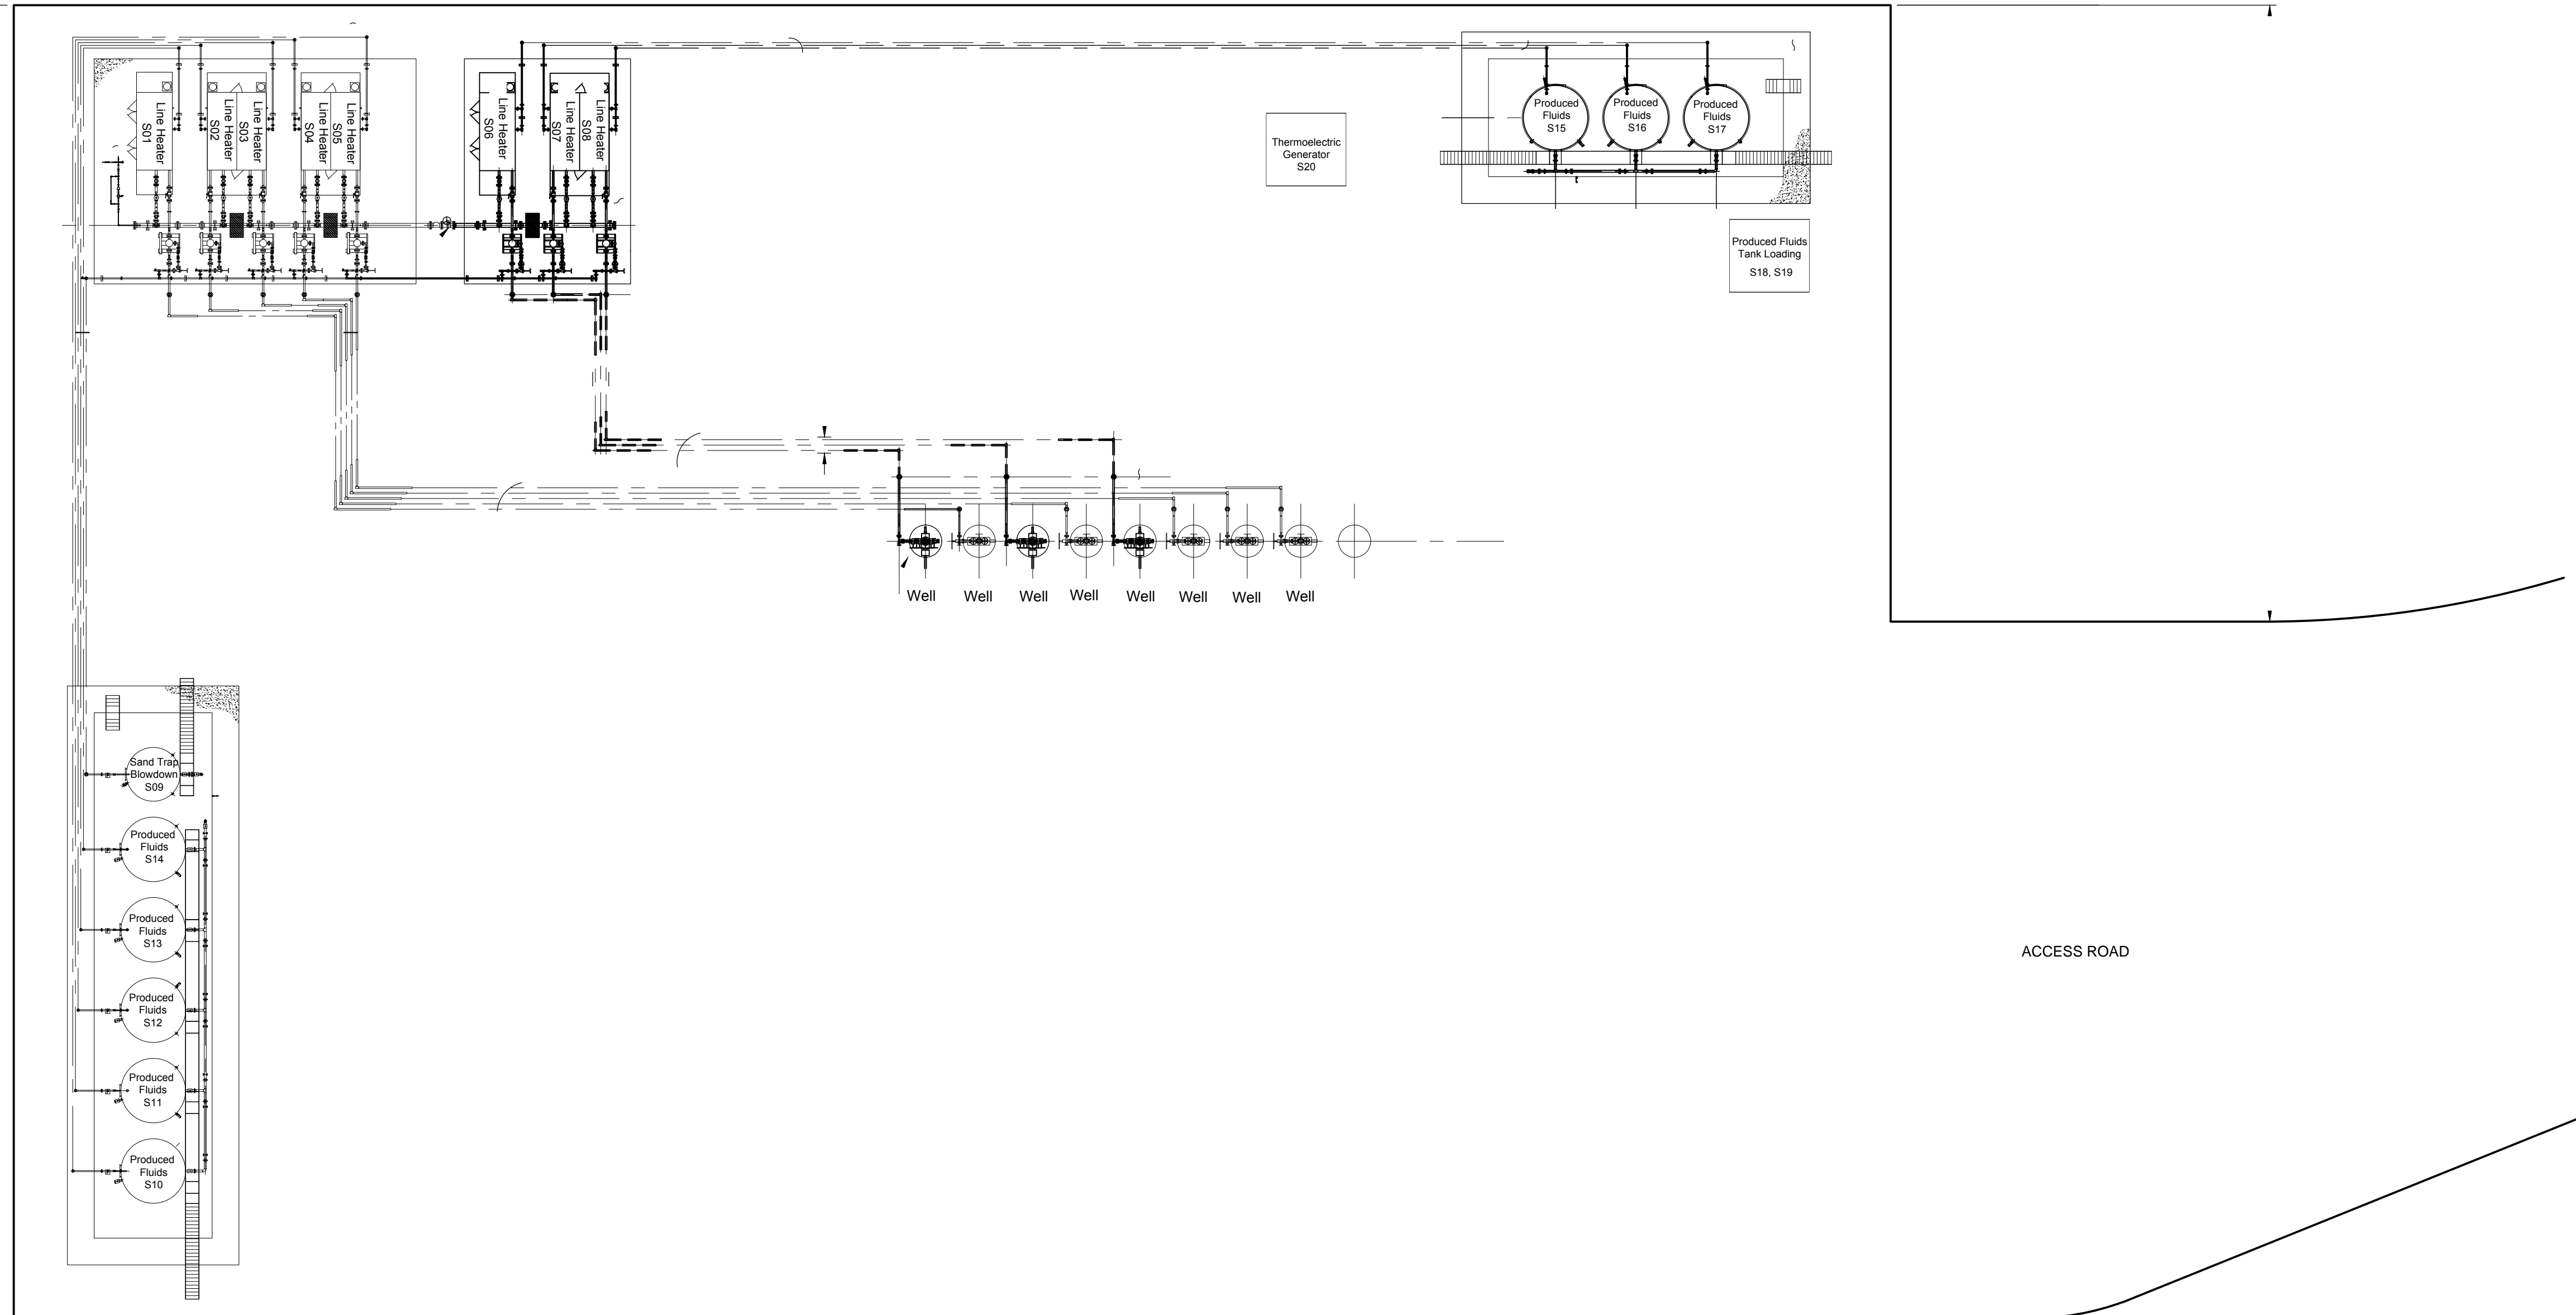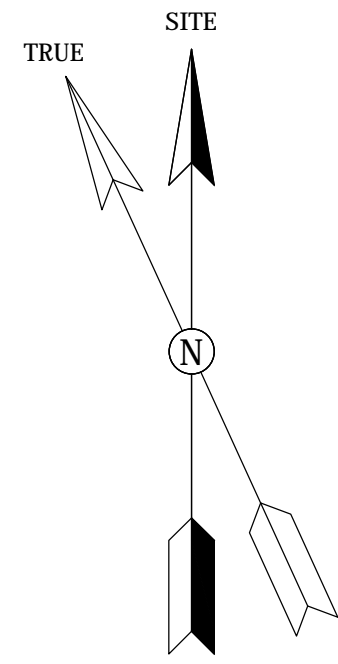


Vavco LLC
 Issued for Construction / Fabrication
 Issued By: Mark Hadley
 Issued on: May 09, 2017 @ 08:43:07

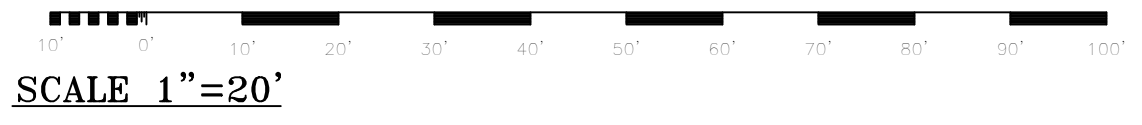


VAVCO <small>American Energy Infrastructure</small> 101 WOODBURN ROAD, WILKES-BARE, PA 18254		ARSENAL RESOURCES HARRISON COUNTY, WV	
PALETTA WELL PAD PHASE II SITE MECHANICAL LAYOUT			
0 ISSUED FOR CONSTRUCTION	5/4/2017 HJC ACM MMH	DATE DWN CHK JAPRV	SCALE 1"=20' DRAWING NUMBER ARR-1613-P-100 REVISION 0

ARR-1613-P.dwg


ATTACHMENT G
AREA MAP

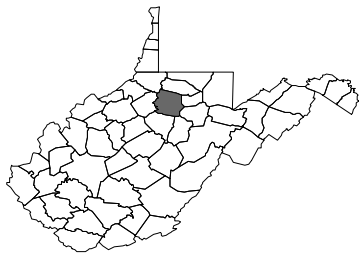


West Virginia

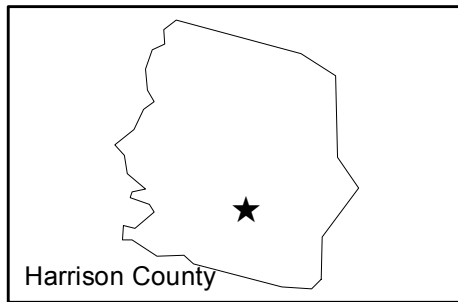

Harrison County



LAT. 39.209712 LON. -80.367083
 HARRISON COUNTY
 WEST VIRGINIA

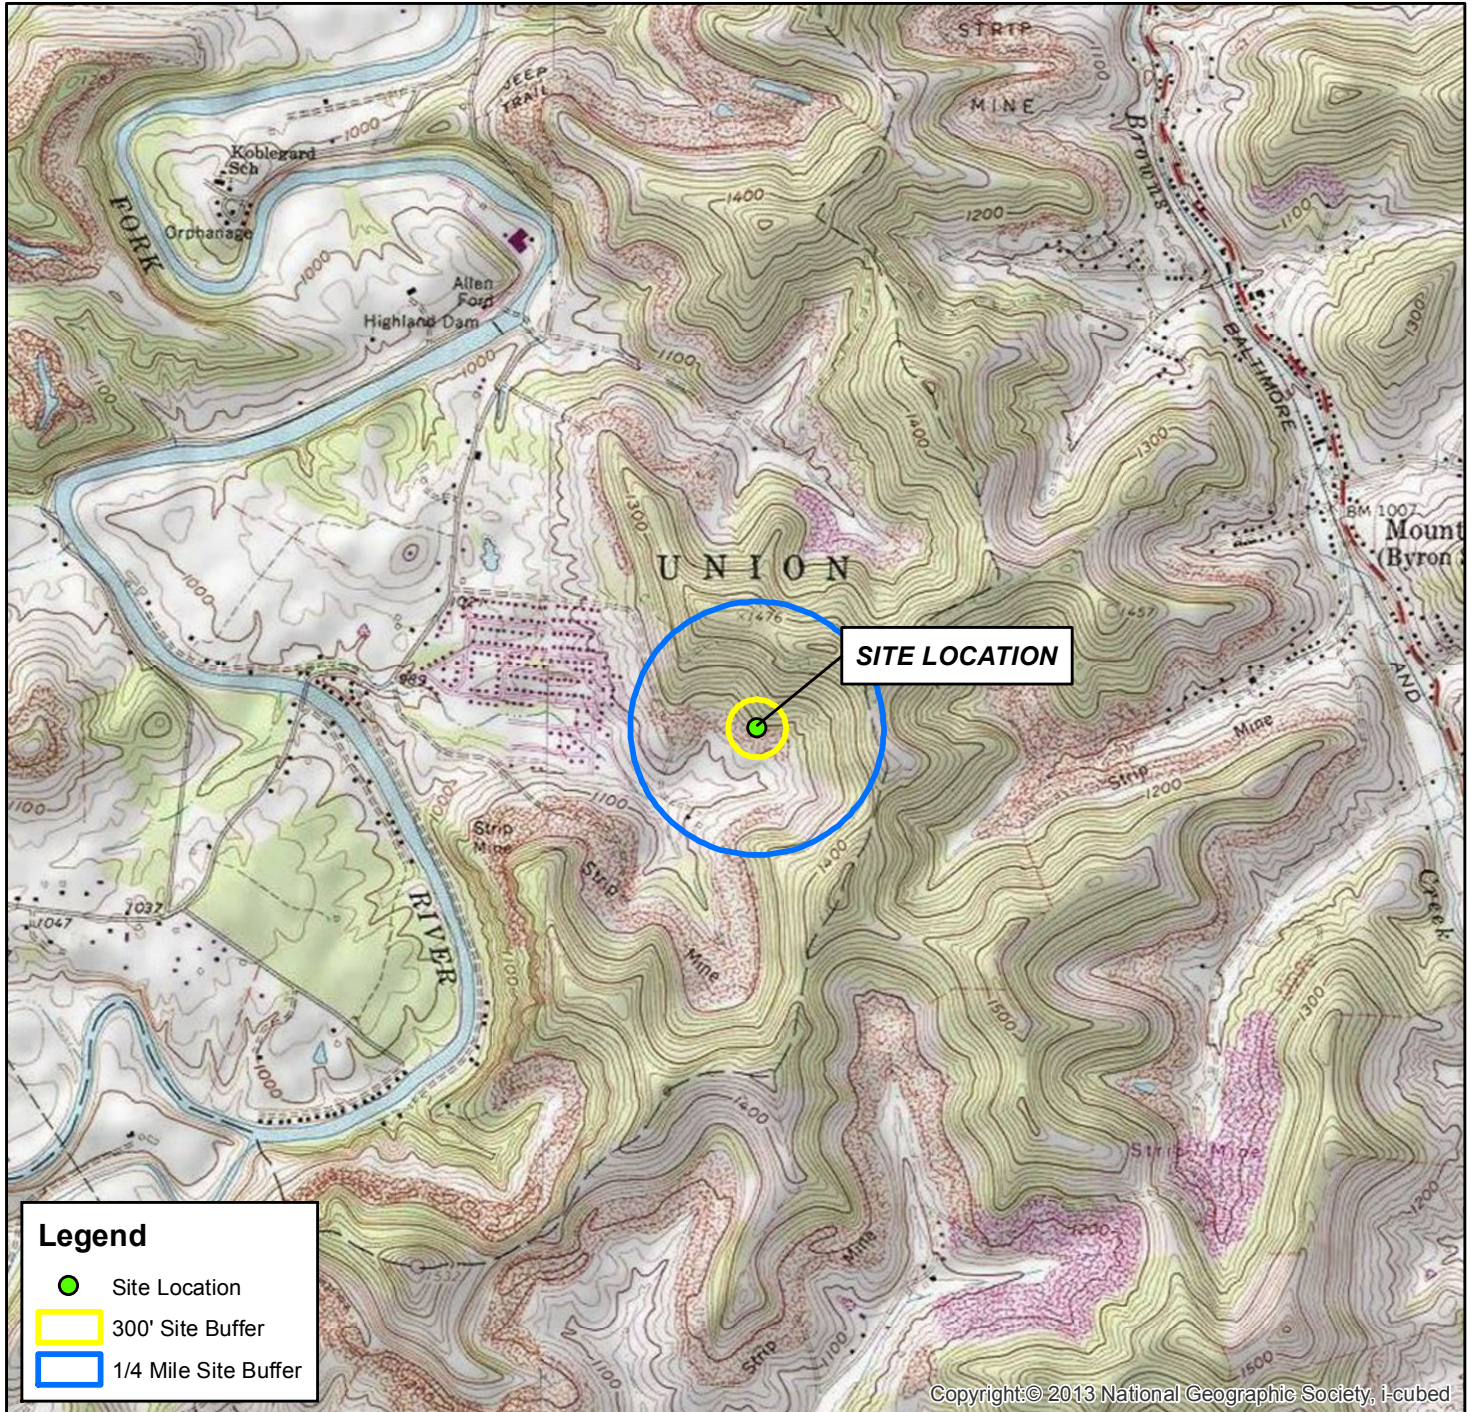

Legend

- Site Location
- 300' Site Buffer
- 1/4 Mile Site Buffer

USGS 1:24K 7.5' Quadrangle:
 Mount Clare, WV

SITE LOCATION MAP

Copyright © 2013 National Geographic Society, i-cubed



Arsenal Resources

Arsenal Palleta Wellpad
 West Milford/Clarksburg
 Harrison County, West Virginia

GIS Review: GM

CHK'D: GM

0405216

Drawn By:
 SRV-5/8/17

Environmental Resources Management

ATTACHMENT G

ATTACHMENT H
G70-D SECTION
APPLICABILITY FORM

ATTACHMENT H – G70-D SECTION APPLICABILITY FORM

**General Permit G70-D Registration
Section Applicability Form**

General Permit G70-D was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, pneumatic pumps, reciprocating internal combustion engines (RICEs), tank truck/rail car loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-D allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

GENERAL PERMIT G70-D APPLICABLE SECTIONS	
<input checked="" type="checkbox"/> Section 5.0	Gas and Oil Well Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water ¹
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO/OOOOa and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input type="checkbox"/> Section 11.0	Pneumatic Pump Affected Facility (NSPS, Subpart OOOOa)
<input checked="" type="checkbox"/> Section 12.0	Fugitive Emissions GHG and VOC Standards (NSPS, Subpart OOOOa)
<input type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck/Rail Car Loading ²
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units ³

1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subparts OOOO or OOOOa control requirements or the applicable control device requirements of Section 8.

2 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.

3 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

ATTACHMENT I
EMISSION UNITS

ATTACHMENT I – EMISSION UNITS / EMISSION REDUCTION DEVICES (ERD) TABLE

Include ALL emission units and air pollution control devices/ERDs that will be part of this permit application review. Do not include fugitive emission sources in this table. Deminimis storage tanks shall be listed in the Attachment L table. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Emission Unit ID ¹	Emission Point ID ²	Emission Unit Description	Year Installed	Manufac. Date ³	Design Capacity	Type ⁴ and Date of Change	Control Device(s) ⁵	ERD(s) ⁶
S01	E01	Line Heater	2016	2016	1.0 MMBtu/hr	Existing	N/A	N/A
S02	E02	Line Heater	2016	2016	1.0 MMBtu/hr	Existing	N/A	N/A
S03	E03	Line Heater	2016	2016	1.0 MMBtu/hr	Existing	N/A	N/A
S04	E04	Line Heater	2016	2016	1.0 MMBtu/hr	Existing	N/A	N/A
S05	E05	Line Heater	2016	2016	1.0 MMBtu/hr	Existing	N/A	N/A
S06	E06	Line Heater	2017	2017	1.0 MMBtu/hr	New	N/A	N/A
S07	E07	Line Heater	2017	2017	1.0 MMBtu/hr	New	N/A	N/A
S08	E08	Line Heater	2017	2017	1.0 MMBtu/hr	New	N/A	N/A
S09	E09	Sand Trap Blowdown Tank	2016	2016	210 bbl	Existing	N/A	N/A
S10	E10	Produced Fluids Tank	2016	2016	400 bbl	Existing	N/A	N/A
S11	E11	Produced Fluids Tank	2016	2016	400 bbl	Existing	N/A	N/A
S12	E12	Produced Fluids Tank	2016	2016	400 bbl	Existing	N/A	N/A
S13	E13	Produced Fluids Tank	2016	2016	400 bbl	Existing	N/A	N/A
S14	E14	Produced Fluids Tank	2016	2016	400 bbl	Existing	N/A	N/A
S15	E15	Produced Fluids Tank	2017	2017	400 bbl	New	N/A	N/A
S16	E16	Produced Fluids Tank	2017	2017	400 bbl	New	N/A	N/A
S17	E17	Produced Fluids Tank	2017	2017	400 bbl	New	N/A	N/A
S18	E18	Produced Fluids Loadout	2016	2016	554,122 bbl/yr	Modified	N/A	N/A
S19	E19	Produced Fluids Loadout	2017	2017	332,473 bbl/yr	New	N/A	N/A
S19	E19	Thermoelectric Generator	2016	2016	0.0007 MMBTU/hr	Existing	N/A	N/A

¹ For Emission Units (or Sources) use the following numbering system:1S, 2S, 3S,... or other appropriate designation.

² For Emission Points use the following numbering system:1E, 2E, 3E, ... or other appropriate designation.

³ When required by rule

⁴ New, modification, removal, existing

⁵ For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

⁶ For ERDs use the following numbering system: 1D, 2D, 3D,... or other appropriate designation.

ATTACHMENT J
FUGITIVE EMISSIONS

ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions, etc.
Use extra pages for each associated source or equipment if necessary.

Source/Equipment: **Palleta site equipment**

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections	<input type="checkbox"/> Infrared (FLIR) cameras	<input checked="" type="checkbox"/> Other (please describe)	<input type="checkbox"/> None required		
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)		
					VOC	HAP	GHG (methane, CO ₂ e)
Pumps	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both			
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	292	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.01	<0.01	34.36
Safety Relief Valves	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	8	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	<0.01	<0.01	1.39
Open Ended Lines	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	20	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	<0.01	<0.01	5.32
Sampling Connections	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both			
Connections (Not sampling)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1277	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.01	<0.01	16.70
Compressors	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both			
Flanges	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both			
Other ¹	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both			

¹ Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e.g. pigging operations, equipment blowdowns, pneumatic controllers, etc.):

N/A

Please indicate if there are any closed vent bypasses (include component):

N/A

Specify all equipment used in the closed vent system (e.g. VRU, ERD, thief hatches, tanker truck/rail car loading, etc.)

N/A

ATTACHMENT K
GAS WELL AFFECTED FACILITY
DATA SHEET

ATTACHMENT K – GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

API Number	Date of Flowback	Date of Well Completion	Green Completion and/or Combustion Device	Subject to OOOO or OOOOa?
047-033-05766	NA	~6/16/2017	Green Completion	Yes
047-033-05767	NA	~6/16/2017	Green Completion	Yes
047-033-05768	NA	~6/16/2017	Green Completion	Yes
047-033-05769	11/27/2015	2/16/2016	Green Completion	Yes
047-033-05771	11/27/2015	8/23/2016	Green Completion	Yes
047-033-05772	11/27/2015	8/23/2016	Green Completion	Yes
047-033-05773	11/27/2015	8/23/2016	Green Completion	Yes
047-033-05774	11/27/2015	8/23/2016	Green Completion	Yes

Note: If future wells are planned and no API number is available please list as PLANNED. If there are existing wells that commenced construction prior to August 23, 2011, please acknowledge as existing.

This is the same API (American Petroleum Institute) well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).

Every oil and gas well permitted in West Virginia since 1929 has been issued an API number. This API is used by agencies to identify and track oil and gas wells.

The API number has the following format: 047-001-00001

Where,

- 047 = State code. The state code for WV is 047.*
- 001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).*
- 00001= Well number. Each well will have a unique well number.*

ATTACHMENT L
STORAGE VESSEL DATA SHEET

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water. (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name Produced Fluids Storage Battery	2. Tank Name Produced Fluids Tank
3. Emission Unit ID number S10-17	4. Emission Point ID number E10-17
5. Date Installed , Modified or Relocated (<i>for existing tanks</i>) NA Was the tank manufactured after August 23, 2011 and on or before September 18, 2015? <input type="checkbox"/> Yes <input type="checkbox"/> No Was the tank manufactured after September 18, 2015? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other <input type="checkbox"/> Relocation
7A. Description of Tank Modification (<i>if applicable</i>)	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

¹ EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded			
21A. Shell Color: Olive Vine	21B. Roof Color: Olive Vine	21C. Year Last Painted:	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): 0 psig Must be listed for tanks using VRUs with closed vent system.			
24. Is the tank a Vertical Fixed Roof Tank ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft): 0.06	
25. Complete item 25 for Floating Roof Tanks <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type (check one): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (check one) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
SITE INFORMATION			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft ² -day):		35. Atmospheric Pressure (psia):	
LIQUID INFORMATION			
36. Avg. daily temperature range of bulk liquid (°F):	36A. Minimum (°F):	36B. Maximum (°F):	
37. Avg. operating pressure range of tank (psig): 0.0	37A. Minimum (psig): 0.0	37B. Maximum (psig): 0.0	
38A. Minimum liquid surface temperature (°F):		38B. Corresponding vapor pressure (psia):	
39A. Avg. liquid surface temperature (°F):		39B. Corresponding vapor pressure (psia):	
40A. Maximum liquid surface temperature (°F):		40B. Corresponding vapor pressure (psia):	
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From: To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water. (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name Blowdown Storage Vessel	2. Tank Name Sand Trap Blowdown
3. Emission Unit ID number S09	4. Emission Point ID number E09
5. Date Installed , Modified or Relocated (<i>for existing tanks</i>) Was the tank manufactured after August 23, 2011 and on or before September 18, 2015? <input type="checkbox"/> Yes <input type="checkbox"/> No Was the tank manufactured after September 18, 2015? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input checked="" type="checkbox"/> Other <input type="checkbox"/> Relocation
7A. Description of Tank Modification (<i>if applicable</i>) N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

TANK INFORMATION

8. Design Capacity (<i>specify barrels or gallons</i>). Use the internal cross-sectional area multiplied by internal height. 210 bbl	
9A. Tank Internal Diameter (ft.) 12	9B. Tank Internal Height (ft.) 12
10A. Maximum Liquid Height (ft.) 12	10B. Average Liquid Height (ft.) 6
11A. Maximum Vapor Space Height (ft.) 11	11B. Average Vapor Space Height (ft.)
12. Nominal Capacity (<i>specify barrels or gallons</i>). This is also known as "working volume". 210 bbl	
13A. Maximum annual throughput (gal/yr) 2,293,200	13B. Maximum daily throughput (gal/day) 6,283
14. Number of tank turnovers per year 260	15. Maximum tank fill rate (gal/min) 4.36
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input checked="" type="checkbox"/> vertical <input type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input checked="" type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical <input type="checkbox"/> Other (describe)	

PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply: <input type="checkbox"/> Does Not Apply <input type="checkbox"/> Rupture Disc (psig) <input type="checkbox"/> Inert Gas Blanket of _____ <input type="checkbox"/> Carbon Adsorption¹ <input type="checkbox"/> Vent to Vapor Combustion Device ¹ (vapor combustors, flares, thermal oxidizers, enclosed combustors) <input type="checkbox"/> Conservation Vent (psig) <input type="checkbox"/> Condenser¹ <div style="display: flex; justify-content: space-around; width: 100%;"> Vacuum Setting Pressure Setting </div> <input type="checkbox"/> Emergency Relief Valve (psig) <div style="display: flex; justify-content: space-around; width: 100%;"> Vacuum Setting Pressure Setting </div> <input type="checkbox"/> Thief Hatch Weighted <input type="checkbox"/> Yes <input type="checkbox"/> No ¹ Complete appropriate Air Pollution Control Device Sheet									
20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method ¹
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See Attachment U									

¹ EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded			
21A. Shell Color: Olive Vine	21B. Roof Color: Olive Vine	21C. Year Last Painted:	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): 0 psig Must be listed for tanks using VRUs with closed vent system.			
24. Is the tank a Vertical Fixed Roof Tank ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft): 0.06	
25. Complete item 25 for Floating Roof Tanks <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type (<i>check one</i>): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (<i>check one</i>) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
SITE INFORMATION			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft ² -day):		35. Atmospheric Pressure (psia):	
LIQUID INFORMATION			
36. Avg. daily temperature range of bulk liquid (°F):		36A. Minimum (°F):	36B. Maximum (°F):
37. Avg. operating pressure range of tank (psig): 0.0		37A. Minimum (psig): 0.0	37B. Maximum (psig): 0.0
38A. Minimum liquid surface temperature (°F):		38B. Corresponding vapor pressure (psia):	
39A. Avg. liquid surface temperature (°F):		39B. Corresponding vapor pressure (psia):	
40A. Maximum liquid surface temperature (°F):		40B. Corresponding vapor pressure (psia):	
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From: To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

ATTACHMENT M
SMALL HEATERS AND REBOILERS

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO
40CFR60 SUBPART DC
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID#¹	Emission Point ID#²	Emission Unit Description (manufacturer, model #)	Year Installed/Modified	Type³ and Date of Change	Maximum Design Heat Input (MMBTU/hr)⁴	Fuel Heating Value (BTU/scf)⁵
S01	E01	Line Heater	2016	Existing	1.00	1,020
S02	E02	Line Heater	2016	Existing	1.00	1,020
S03	E03	Line Heater	2016	Existing	1.00	1,020
S04	E04	Line Heater	2016	Existing	1.00	1,020
S05	E05	Line Heater	2016	Existing	1.00	1,020
S06	E06	Line Heater	2017	New	1.00	1,020
S07	E07	Line Heater	2017	New	1.00	1,020
S08	E08	Line Heater	2017	New	1.00	1,020
S20	E20	TEG	2016	Existing	0.0007	1,020

¹ Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.

² Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

³ New, modification, removal

⁴ Enter design heat input capacity in MMBtu/hr.

⁵ Enter the fuel heating value in BTU/standard cubic foot.

ATTACHMENT N
INTERNAL COMBUSTION ENGINE DATA SHEET
(NOT APPLICABLE)

ATTACHMENT O – TANKER TRUCK/RAIL CAR LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks/rail cars. Use extra pages if necessary.

Truck/Rail Car Loadout Collection Efficiencies

The following applicable capture efficiencies of a truck/rail car loadout are allowed:

- For tanker trucks/rail cars passing the MACT level annual leak test – 99.2%
- For tanker trucks/rail cars passing the NSPS level annual leak test – 98.7%
- For tanker trucks/rail cars not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking/rail car company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: S18	Emission Point ID#: E18	Year Installed/Modified: 2017 Modified		
Emission Unit Description: Tanker Truck load out for produced water tanks				
Loading Area Data				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks/rail cars loading at one (1) time: 1		
Are tanker trucks/rail cars pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. N/A				
Are any of the following truck/rail car loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck/rail car passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car passing a NSPS level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car not passing an annual leak test and has vapor return?				
Projected Maximum Operating Schedule (for rack or transfer point as a whole)				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	24	24	24	24
Days/week	7	7	7	7
Bulk Liquid Data (use extra pages as necessary)				
Liquid Name	Produced Fluids			
Max. Daily Throughput (1000 gal/day)	102.02			
Max. Annual Throughput (1000 gal/yr)	37,237			
Loading Method ¹	BF			
Max. Fill Rate (gal/min)	70.85			
Average Fill Time (min/loading)	NA			
Max. Bulk Liquid Temperature (°F)	60			
True Vapor Pressure ²	NA			
Cargo Vessel Condition ³	U			
Control Equipment or Method ⁴	None			

Max. Collection Efficiency (%)		NA		
Max. Control Efficiency (%)		NA		
Max.VOC Emission Rate	Loading (lb/hr)	0.04		
	Annual (ton/yr)	0.16		
Max.HAP Emission Rate	Loading (lb/hr)	<0.01		
	Annual (ton/yr)	<0.01		
Estimation Method ⁵		O - ProMax		

- 1 BF Bottom Fill SP Splash Fill SUB Submerged Fill
- 2 At maximum bulk liquid temperature
- 3 B Ballasted Vessel C Cleaned U Uncleaned (dedicated service)
O Other (describe)
- 4 List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)
CA Carbon Adsorption VB Dedicated Vapor Balance (closed system)
ECD Enclosed Combustion Device F Flare
TO Thermal Oxidization or Incineration
- 5 EPA EPA Emission Factor in AP-42 MB Material Balance
TM Test Measurement based upon test data submittal O Other (describe)

ATTACHMENT O
TANKER TRUCK/RAIL CAR LOADING

ATTACHMENT O – TANKER TRUCK/RAIL CAR LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks/rail cars. Use extra pages if necessary.

Truck/Rail Car Loadout Collection Efficiencies

The following applicable capture efficiencies of a truck/rail car loadout are allowed:

- For tanker trucks/rail cars passing the MACT level annual leak test – 99.2%
- For tanker trucks/rail cars passing the NSPS level annual leak test – 98.7%
- For tanker trucks/rail cars not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking/rail car company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: S18	Emission Point ID#: E18	Year Installed/Modified: 2017 Modified		
Emission Unit Description: Tanker Truck load out for produced water tanks				
Loading Area Data				
Number of Pumps: 2	Number of Liquids Loaded: 1	Max number of trucks/rail cars loading at one (1) time: 1		
Are tanker trucks/rail cars pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. N/A				
Are any of the following truck/rail car loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck/rail car passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car passing a NSPS level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car not passing an annual leak test and has vapor return?				
Projected Maximum Operating Schedule (for rack or transfer point as a whole)				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	24	24	24	24
Days/week	7	7	7	7
Bulk Liquid Data (use extra pages as necessary)				
Liquid Name	Produced Fluids*	Produced Fluids*		
Max. Daily Throughput (1000 gal/day)	63.76	38.26		
Max. Annual Throughput (1000 gal/yr)	23,273	13,964		
Loading Method ¹	BF	BF		
Max. Fill Rate (gal/min)	70.85	70.85		
Average Fill Time (min/loading)	NA	NA		
Max. Bulk Liquid Temperature (°F)	60	60		
True Vapor Pressure ²	NA	NA		
Cargo Vessel Condition ³	U	U		
Control Equipment or Method ⁴	None	None		

Max. Collection Efficiency (%)		NA	NA	
Max. Control Efficiency (%)		NA	NA	
Max.VOC Emission Rate	Loading (lb/hr)	0.04		
	Annual (ton/yr)	0.16		
Max.HAP Emission Rate	Loading (lb/hr)	<0.01		
	Annual (ton/yr)	<0.01		
Estimation Method ⁵		O - ProMax	O - ProMax	

***Arsenal Resources is providing estimates of fluid throughputs from tank unloading activities based upon expected operations. The types of fluids are identified between loading racks, so it is requested that a single permit limitation is placed on total fluid throughputs for the site.**

1	BF	Bottom Fill	SP	Splash Fill	SUB	Submerged Fill
2	At maximum bulk liquid temperature					
3	B	Ballasted Vessel	C	Cleaned	U	Uncleaned (dedicated service)
	O	Other (describe)				
4	List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)					
	CA	Carbon Adsorption	VB	Dedicated Vapor Balance (closed system)		
	ECD	Enclosed Combustion Device	F	Flare		
	TO	Thermal Oxidization or Incineration				
5	EPA	EPA Emission Factor in AP-42			MB	Material Balance
	TM	Test Measurement based upon test data submittal			O	Other (describe)

ATTACHMENT P
GLYCOL DEHYDRATION UNIT DATA SHEET
(NOT APPLICABLE)

ATTACHMENT Q
PNEUMATIC CONTROLLERS DATA SHEET

**ATTACHMENT Q – PNEUMATIC CONTROLLERS
DATA SHEET**

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list approximate number.

ATTACHMENT R
PNEUMATIC PUMP DATA SHEET

**ATTACHMENT R – PNEUMATIC PUMP
DATA SHEET**

Are there any natural gas-driven diaphragm pumps located at a well site that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list.

Source ID #	Date	Pump Make/Model	Pump Size

ATTACHMENT S
AIR POLLUTION CONTROL DEVICE/EMISSION
REDUCTION DEVICE SHEETS
(NOT APPLICABLE)

ATTACHMENT T
EMISSION CALCULATIONS

Attachment T - Emission Calculations Line Heaters S01 - S08

Pollutant	Emission Factor	Emission Factor Units	Emission Factor Basis / Source	Boiler Rating (MMBtu/hr)	Heat Value of Natural Gas (Btu/scf)	Annual Operating Hours	Max. Hourly Emissions. (lb/hr)	Max. Annual Emissions. (tpy)
VOC's	5.5	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	0.02
Hexane	1.8	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	<0.01
Formaldehyde	0.075	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	<0.01
Benzene	0.0021	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	<0.01
Toluene	0.0034	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	<0.01
Pb	0.0005	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	<0.01
CO	84	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	0.08	0.36
NOx	100	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	0.10	0.43
PM _{Filterable}	1.9	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	<0.01
PM _{Condensable}	5.7	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	0.02
PM _{Total}	7.6	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	0.03
SO ₂	0.6	lb/10 ⁶ scf	AP-42 Chapter 1.4	1.00	1,020	8,760	<0.01	<0.01
CO ₂	53.06	kg CO ₂ / MMBtu	40 CFR Subpart C	1.00	1,020	8,760	116.98	512.36
CH ₄	0.001	kg CO ₂ / MMBtu	40 CFR Subpart C	1.00	1,020	8,760	<0.01	<0.01
N ₂ O	0.0001	kg CO ₂ / MMBtu	40 CFR Subpart C	1.00	1,020	8,760	<0.01	<0.01
Total HAPs							<0.01	<0.01
Total CO ₂ e							117.10	512.89

Notes:

-Emission rates displayed above represent the max. hourly and max. annual emissions for one line heater. Cumulative emission rates for all 8 line heaters are displayed in the Total Site Emissions Table.

-Greenhouse Gas Emissions are calculated using 40 CFR 98 Subpart C Table C-1 and C-2 emission factors.

-AP-42, Chapter 1.4 references are from the July 1998 revision.

Max. Annual Emissions based upon Max. Hourly Emissions @ 8760 hr/yr.

-CO₂ equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP CO₂=1, GWP CH₄=25, GWP N₂O=298

Example Equations:

Max. Hourly Emission Rate (lb/hr) = Emission Factor (lb/10⁶ scf) ÷ Heating Value of Natural Gas (Btu/scf) x Boiler Rating (MMBtu/hr)

Attachment T - Emission Calculations Sand Trap Blowdown Tank S09

Pollutant	Max. Hourly Emissions using ProMax (lb/hr)	Max. Annual Emissions using ProMax (tons/yr)
VOCs	0.35	1.53
Total HAPs	0.01	0.05
Hexane	0.01	0.05
Benzene	<0.01	<0.01
Toluene	<0.01	<0.01
Ethylbenzene	<0.01	<0.01
Xylene	<0.01	<0.01
CO ₂	<0.01	<0.01
CH ₄	0.18	0.78
Total CO ₂ e	4.48	19.61

Notes:

-Blowdown operations are conducted on the Palleta pad daily to allow for the removal of fluids from the sand traps. Based on available operational information, blowdowns are assumed to occur for one hour per day.

-Emission rates for the Sand Trap Blowdown Tank were calculated using ProMax software. ProMax output sheets for the Palleta Pad are attached.

-CO₂ equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1. GWP CO₂=1, GWP CH₄=25, GWP N₂O=298

**Attachment T - Emission Calculations
Produced Fluids Tanks S10 - S17**

Pollutant	Max. Hourly Emissions using ProMax (lb/hr)	Max. Annual Emissions using ProMax (tons/yr)
VOCs	8.37	36.66
Total HAPs	0.30	1.31
Hexane	0.26	1.13
Benzene	<0.01	0.03
Toluene	0.03	0.12
Ethylbenzene	<0.01	<0.01
Xylene	<0.01	0.01
CO ₂	0.03	0.11
CH ₄	4.30	18.82
Total CO ₂ e	107.46	470.67

Notes:

- Emission rates for Produced Fluid Tanks S10 - S17 were calculated using ProMax software. ProMax output sheets for the Palleta Pad are attached.
- CO₂ equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP CO₂=1, GWP CH₄=25, GWP N₂O=298
- For emission calculation purposes, the total throughput for tanks S10 - S17 is modeled as being received through a single tank. The throughput value represents the total throughput for all eight (8) 400-barrel tanks. Therefore, emission rates represent a total from all produced fluids tanks located on the well pad. Actual throughput for each tank will vary based on operations.
- Arsenal Resources will operate the Palleta Site in Harrison county where the produced hydrocarbon condensate is expected to be minimal. A representative analysis was used in order to find a conservative estimate of emissions from condensate. In order to comply with the permit, Arsenal will collect and analyze a pressurized tank liquid sample within 30 days of production start up.

**Attachment T - Emission Calculations
Liquids Unloading (S18/S19)**

Pollutant	Max. Hourly Emissions using ProMax (lb/hr)	Max. Annual Emissions using ProMax (tons/yr)
VOCs	0.04	0.16
Total HAPs	<0.01	<0.01
Hexane	<0.01	<0.01
Benzene	<0.01	<0.01
Toluene	<0.01	<0.01
Ethylbenzene	<0.01	<0.01
Xylene	<0.01	<0.01
CO ₂	<0.01	0.01
CH ₄	0.03	0.12
Total CO ₂ e	0.70	3.06

Notes:

-Emission rates for Liquids Unloading was calculated using ProMax software. ProMax output sheets for the Palleta Pad are attached.

-CO₂ equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP

CO₂=1, GWP CH₄=25, GWP N₂O=298

Attachment T - Emission Calculations TEG (S20)

Pollutant	Emission Factor	Emission Factor Units	Emission Factor Basis / Source	Boiler Rating (MMBtu/hr)	Heat Value of Natural Gas (Btu/scf)	Annual Operating Hours	Max. Hourly Emissions. (lb/hr)	Max. Annual Emissions. (tpy)
VOC's	5.5	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
Hexane	1.8	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
Formaldehyde	0.075	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
Benzene	0.0021	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
Toluene	0.0034	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
Pb	0.0005	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
CO	84	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
NOx	100	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
PM _{Filterable}	1.9	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
PM _{Condensable}	5.7	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
PM _{Total}	7.6	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
SO ₂	0.6	lb/10 ⁶ scf	AP-42 Chapter 1.4	0.0007	1,020	8,760	<0.01	<0.01
CO ₂	53.06	kg CO ₂ / MMBtu	40 CFR Subpart C	0.0007	1,020	8,760	0.08	0.36
CH ₄	0.001	kg CO ₂ / MMBtu	40 CFR Subpart C	0.0007	1,020	8,760	<0.01	<0.01
N ₂ O	0.0001	kg CO ₂ / MMBtu	40 CFR Subpart C	0.0007	1,020	8,760	<0.01	<0.01
Total HAPs							<0.01	<0.01
Total CO ₂ e							0.08	0.36

Notes:

-Greenhouse Gas Emissions are calculated using 40 CFR 98 Subpart C Table C-1 and C-2 emission factors.

-AP-42, Chapter 1.4 references are from the July 1998 revision.

Max. Annual Emissions based upon Max. Hourly Emissions @ 8760 hr/yr.

-CO₂ equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP CO₂=1, GWP CH₄=25, GWP N₂O=298

Example Equations:

Max. Hourly Emission Rate (lb/hr) = Emission Factor (lb/10⁶ scf) ÷ Heating Value of Natural Gas (Btu/scf) x Boiler Rating (MMBtu/hr)

Attachment T - Emission Calculations Fugitive Leaks

Default Average Component Counts for Major Onshore Natural Gas Production Equipment				
Facility Equipment Type	Valves	Connectors	Open-ended Lines	Pressure Relief Valves
Wellheads	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line Heaters	14	65	2	1
Dehydrators	24	90	2	2

- Table W-1B to 40CFR98 Subpart W

Well Specific Equipment Counts	
Facility Equipment Type	Count on Site
Wellheads	8
Separators	8
Meters/Piping	9
Compressors	0
In-line Heaters	8
Dehydrators	0

Gas Composition														
	Propane	Butane	Pentanes	Heptane	Octanes	Nonanes	Decanes	Hexane	Benzene	Toluene	Ethylbenzene	Xylene	CO ₂	CH ₄
Mole %	0.20	0.02	0.002	<0.01	<0.001	<0.001	<0.001	0.0046	<0.001	<0.001	<0.001	<0.001	0.11	96.12
MW	44	58	72	100	114	128	142	86.00	78.00	92.00	106.00	106.00	44.00	16.00

Fugitive Emissions													
Facility Equipment Type	Total Count	Emission Rate (scf/hr/component) ²	Hours of Operation	VOCs (lbs/hr)	VOCs (tons/yr)	HAPs (lbs/hr)	HAPs (tons/yr)	CO ₂ (lbs/hr)	CO ₂ (tons/yr)	CH ₄ (lbs/hr)	CH ₄ (tons/yr)	Total CO ₂ e (lbs/hr)	Total CO ₂ e (tons/yr)
Valves	292	0.027	8760	0.00	0.01	<0.001	<0.001	0.002	0.007	0.31	1.38	7.86	34.45
Connectors	1277	0.003	8760	0.00	0.00	<0.001	<0.001	<0.001	0.003	0.15	0.67	3.82	16.74
Open-ended Lines	20	0.06	8760	<0.001	0.00	<0.001	<0.001	<0.001	0.001	0.05	0.21	1.22	5.33
Pressure Relief Valves	8	0.04	8760	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	0.01	0.06	0.32	1.40
Total Emissions:				<0.01	0.02	<0.01	<0.01	<0.01	0.01	0.53	2.32	13.22	57.92

- Table W-1A to 40CFR98 Subpart W

Example Equations:

Fugitive Emissions (lb/hr) = Count x Emission Rate x Hours of Operation ÷ 385.5 scf/lbmol x mol VOC's

Attachment T - Emission Calculations Fugitive Emissions from Unpaved Haul Roads

Constant	Industrial Roads		
	PM	PM-10	PM-2.5
k (lb/VMT)	4.9	1.5	0.15
a	0.7	0.9	0.9
b	0.45	0.45	0.45

where

k Particle size multiplier¹
s 4.8 Silt content of road surface material (%)
p 150 Number of days per year with precipitation

Item Number	Description	Number of Wheels	W	Miles per Trip	Maximum Trips per Year	Control Device ID Number	Control Efficiency (%)	PM Emissions (lbs/hr)	PM Emissions (tons/yr)	PM-10 Emissions (lbs/hr)	PM-10 Emissions (tons/yr)	PM-2.5 Emissions (lbs/hr)	PM-2.5 Emissions (tons/yr)
			Mean Vehicle Weight (tons)										
1	Liquids Hauling	14	30	1.17	10,400	NA	NA	5.01	26.06	1.28	6.64	0.13	0.66
2	Employee Vehicles	4	3	1.17	200	NA	NA	1.78	0.18	0.45	0.05	0.05	0.005
Totals:								6.79	26.24	1.73	6.69	0.17	0.67

Notes:

- ¹ - Particle Size Multiplier used from AP-42 13.2.2 - Final Version 11/2006
- ² - Silt Content of Road Surface uses Sand and Gravel Processing Plant Road from AP-42 13.2.2 - Final Version 11/2006
- ³ - Number of days per year with precipitation >0.01 in³ found using AP-42 13.2.2 Figure 13.2.2-1 - Final Version 11/2006

Example Calculations:

Emissions (lb/Vehicle Mile Traveled) - $E = k \times (s/12)^a \times (W/3)^b$ Equation 1a from AP-42 13.2.2 - Final Version 11/2006

Size Specific Emissions (lb/VMT) - $E_{ext} = E[(365-p)/365]$ Equation 2 from AP-42 13.2.2 - Final Version 11/2006

Attachment T - Emission Calculations Palleta Site Emission Levels

Emission Sources	VOCs		HAPs		CO		NO _x		PM - Total		PM - 10/2.5		PM - CON		SO ₂		CO ₂		CH ₄		N ₂ O		CO ₂ e	
	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr
Line Heater (E01)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Line Heater (E02)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Line Heater (E03)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Line Heater (E04)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Line Heater (E05)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Line Heater (E06)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Line Heater (E07)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Line Heater (E08)	<0.01	0.02	<0.01	<0.01	0.0824	0.36	0.10	0.43	<0.01	0.03	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	116.98	512.36	<0.01	<0.01	<0.01	<0.01	117.10	512.89
Blowdown Tank (E09)	0.35	1.53	0.01	0.05	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.18	0.78	<0.01	<0.01	4.48	19.61
Fluids Tank (E10-E17)	8.37	36.66	0.30	1.31	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.03	0.11	4.30	18.82	<0.01	<0.01	107.46	470.67
Tank Truck Loading Activities (E18E19)	0.04	0.16	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.01	0.03	0.12	<0.01	<0.01	0.70	3.06	
TEG (E20)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.08	0.36	<0.01	<0.01	<0.01	<0.01	0.08	0.36
Haul Roads	--	--	--	--	--	--	--	--	6.79	26.24	6.79	26.24	--	--	--	--	--	--	--	--	--	--	--	--
Fugitives Leaks	<0.01	0.02	<0.01	<0.01	--	--	--	--	--	--	--	--	--	--	--	--	<0.01	0.01	0.53	2.32	--	--	13.22	57.92
Totals	8.75	38.35	0.33	1.43	0.66	2.89	0.78	3.44	6.79	26.50	6.79	26.24	<0.01	0.20	<0.01	<0.01	935.93	4099.38	5.03	22.04	<0.01	<0.01	1062.72	4654.72

Attachment T - Emission Calculations

Palleta Site Emission Levels - HAP Speciation


Emission Sources	Total HAPs		Formaldehyde		Hexane		Benzene		Toluene		Ethylbenzene		Xylene	
	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr
Line Heater (E01)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E02)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E03)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E04)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E05)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E06)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E07)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E08)	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Blowdown Tank (E09)	0.01	0.05	<0.01	<0.01	0.01	0.05	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Fluids Tanks (E10-E17)	0.30	1.31	<0.01	<0.01	0.26	1.13	<0.01	0.03	0.03	0.12	<0.01	<0.01	<0.01	0.01
Tank Truck Loading Activities (E18/E19)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
TEG (E20)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Haul Roads	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Fugitives Leaks	0.000	0.000	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Totals	0.33	1.43	<0.01	<0.01	0.28	1.25	0.01	0.03	0.03	0.13	<0.01	<0.01	<0.01	0.01

ATTACHMENT T
SUPPORTING INFORMATION

Flowsheet1 Plant Schematic

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Arsenal - Palleta Well Pad Produced Fluids 1% Condensate

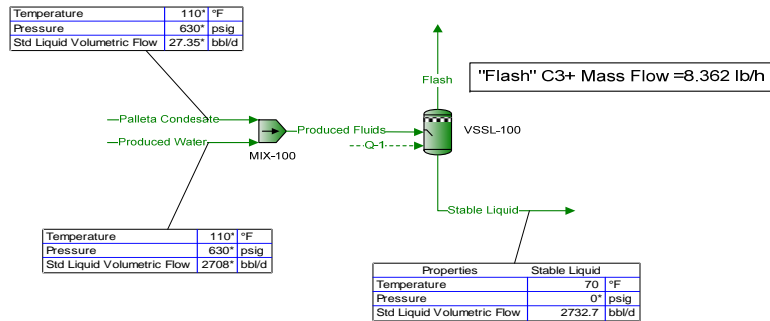

Palleta Tank Farm
Annual tank loss calculations for "Stable Liquid".
Total working and breathing losses from the Vertical Cylinder are 0.18 lb/h.
Loading losses are 0.877 lb/h of loaded liquid.
* All components are reported.

Note
Working, Breathing and Loading losses include non-VOC components

* User Specified Values
? Extrapolated or Approximate Values

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Connections

	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
From Block	VSSL-100	--	MIX-100	--	VSSL-100
To Block	--	MIX-100	VSSL-100	MIX-100	--

Stream Composition

	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
Mole Fraction	%	%	%	%	%
Nitrogen	0	0 *	0	0 *	0
Methane	49.3185	10.674 *	0.0136845	0 *	0.00150213
Carbon Dioxide	0.106726	0.065 *	8.33327E-05	0 *	5.69832E-05
Ethane	21.6056	5.377 *	0.00689354	0 *	0.00155687
Propane	11.8735	3.736 *	0.00478971	0 *	0.00185714
Isobutane	2.96065	1.359 *	0.0017423	0 *	0.0010112
n-Butane	4.77322	2.754 *	0.00353074	0 *	0.00235223
Isopentane	2.1106	2.508 *	0.00321536	0 *	0.00269466
n-Pentane	1.50745	2.25 *	0.00288459	0 *	0.00251284
i-Hexane	1.36364	4.742 *	0.00607944	0 *	0.00574401
n-Hexane	0.55268	2.718 *	0.00348459	0 *	0.00334889
2,2,4-Trimethylpentane	0.0012568	0.018 *	2.30768E-05	0 *	2.27719E-05
Benzene	0.0138494	0.109 *	0.000139743	0 *	0.000136355
Heptane	0.850963	13.22 *	0.0169486	0 *	0.0167425
Toluene	0.0563531	1.097 *	0.0014064	0 *	0.00139282
Octane	0.30782	15.626 *	0.0200332	0 *	0.0199621
Ethylbenzene	0.00332532	0.2 *	0.000256408	0 *	0.00025565
o-Xylene	0.00484914	0.368 *	0.000471791	0 *	0.00047071
Nonane	0.0691724	11.599 *	0.0148704	0 *	0.014857
Decane	0.0403203	21.58 *	0.0276665	0 *	0.0276633
Water	2.47956	0 *	99.8718	100 *	99.8959

	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
Molar Flow	lbmol/h	lbmol/h	lbmol/h	lbmol/h	lbmol/h
Nitrogen	0	0 *	0	0 *	0
Methane	0.267527	0.300504 *	0.300504	0 *	0.0329777
Carbon Dioxide	0.000578931	0.00182994 *	0.00182994	0 *	0.00125101
Ethane	0.117199	0.151378 *	0.151378	0 *	0.0341795
Propane	0.0644076	0.105179 *	0.105179	0 *	0.0407718
Isobutane	0.01606	0.0382598 *	0.0382598	0 *	0.0221999
n-Butane	0.0258922	0.0775332 *	0.0775332	0 *	0.051641
Isopentane	0.0114489	0.0706076 *	0.0706076	0 *	0.0591587
n-Pentane	0.0081771	0.0633441 *	0.0633441	0 *	0.055167
i-Hexane	0.00739704	0.133501 *	0.133501	0 *	0.126104
n-Hexane	0.002998	0.0765197 *	0.0765197	0 *	0.0735217
2,2,4-Trimethylpentane	6.81746E-06	0.000506753 *	0.000506753	0 *	0.000499935
Benzene	7.51258E-05	0.00306867 *	0.00306867	0 *	0.00299354
Heptane	0.00461602	0.372182 *	0.372182	0 *	0.367566
Toluene	0.000305686	0.0308838 *	0.0308838	0 *	0.0305781
Octane	0.00166976	0.439918 *	0.439918	0 *	0.438248
Ethylbenzene	1.80381E-05	0.00563059 *	0.00563059	0 *	0.00561255
o-Xylene	2.6304E-05	0.0103603 *	0.0103603	0 *	0.010334
Nonane	0.000375224	0.326546 *	0.326546	0 *	0.326171
Decane	0.000218716	0.60754 *	0.60754	0 *	0.607322
Water	0.0134503	0 *	2193.13	2193.13 *	2193.12

	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
Mass Fraction	%	%	%	%	%
Nitrogen	0	0 *	0	0 *	0
Methane	26.0964	1.79018 *	0.012119	0 *	0.0013305

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 4.0.16071.0
 Copyright © 2002-2016 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Mass Fraction	Flash %	Palleta Condensate %	Produced Fluids %	Produced Water %	Stable Liquid %
Carbon Dioxide	0.154923	0.029906 *	0.000202455	0 *	0.000138462
Ethane	21.4282	1.69028 *	0.0114427	0 *	0.0025847
Propane	17.2693	1.72227 *	0.0116593	0 *	0.00452146
Isobutane	5.67583	0.825773 *	0.00559023	0 *	0.00324502
n-Butane	9.15068	1.67342 *	0.0113285	0 *	0.0075485
Isopentane	5.02266	1.89171 *	0.0128063	0 *	0.0107343
n-Pentane	3.58733	1.69711 *	0.0114889	0 *	0.01001
i-Hexane	3.876	4.27212 *	0.028921	0 *	0.0273298
n-Hexane	1.57093	2.44868 *	0.0165768	0 *	0.0159339
2,2,4-Trimethylpentane	0.00473521	0.0214954 *	0.000145518	0 *	0.000143619
Benzene	0.0356819	0.0890107 *	0.000602576	0 *	0.000588067
Heptane	2.81246	13.8486 *	0.093751	0 *	0.0926265
Toluene	0.171261	1.05669 *	0.00715345	0 *	0.00708558
Octane	1.15977	18.6604 *	0.126325	0 *	0.125898
Ethylbenzene	0.0116444	0.221978 *	0.00150273	0 *	0.00149853
o-Xylene	0.0169803	0.40844 *	0.00276502	0 *	0.00275914
Nonane	0.292622	15.5523 *	0.105284	0 *	0.105207
Decane	0.189222	32.0996 *	0.217305	0 *	0.217316
Water	1.47338	0 *	99.323	100 *	99.3635

Mass Flow	Flash lb/h	Palleta Condensate lb/h	Produced Fluids lb/h	Produced Water lb/h	Stable Liquid lb/h
Nitrogen	0	0 *	0	0 *	0
Methane	4.29179	4.82083 *	4.82083	0 *	0.529044
Carbon Dioxide	0.0254785	0.0805348 *	0.0805348	0 *	0.0550563
Ethane	3.52406	4.5518 *	4.5518	0 *	1.02775
Propane	2.84009	4.63795 *	4.63795	0 *	1.79786
Isobutane	0.93344	2.22375 *	2.22375	0 *	1.29031
n-Butane	1.50491	4.5064 *	4.5064	0 *	3.00149
Isopentane	0.826022	5.09425 *	5.09425	0 *	4.26823
n-Pentane	0.589968	4.5702 *	4.5702	0 *	3.98023
i-Hexane	0.637443	11.5045 *	11.5045	0 *	10.8671
n-Hexane	0.258353	6.59411 *	6.59411	0 *	6.33576
2,2,4-Trimethylpentane	0.000778748	0.0578856 *	0.0578856	0 *	0.0571069
Benzene	0.00586821	0.239699 *	0.239699	0 *	0.233831
Heptane	0.462534	37.2933 *	37.2933	0 *	36.8308
Toluene	0.0281654	2.84558 *	2.84558	0 *	2.81742
Octane	0.190734	50.2512 *	50.2512	0 *	50.0604
Ethylbenzene	0.00191502	0.597771 *	0.597771	0 *	0.595856
o-Xylene	0.00279257	1.0999 *	1.0999	0 *	1.09711
Nonane	0.0481243	41.8812 *	41.8812	0 *	41.8331
Decane	0.0311193	86.4419 *	86.4419	0 *	86.4107
Water	0.242311	0 *	39509.8	39509.8 *	39509.6

Stream Properties

Property	Units	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
Temperature	°F	70.0022	110 *	110.004	110 *	70.0022
Pressure	psia	14.6959	644.696 *	644.696	644.696 *	14.6959 *
Mole Fraction Vapor	%	100	0	0	0	0
Mole Fraction Light Liquid	%	0	100	0.112466	100	0.101263
Mole Fraction Heavy Liquid	%	0	0	99.8875	0	99.8987
Molecular Weight	lb/lbmol	30.318	95.6535	18.1148	18.0153	18.1118
Mass Density	lb/ft^3	0.0790203	41.7451	61.661	61.8554	62.1172
Molar Flow	lbmol/h	0.542447	2.81529	2195.94	2193.13	2195.4
Mass Flow	lb/h	16.4459	269.293	39779.1	39509.8	39762.7
Vapor Volumetric Flow	ft^3/h	208.122	6.45089	645.126	638.745	640.124
Liquid Volumetric Flow	gpm	25.9477	0.804267	80.4313	79.6357	79.8076

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 4.0.16071.0
 Copyright © 2002-2016 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Stream Properties

Property	Units	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
Std Vapor Volumetric Flow	MMSCFD	0.0049404	0.0256406	19.9998	19.9742	19.9949
Std Liquid Volumetric Flow	sgpm	0.0780088	0.797808 *	79.7808	78.983 *	79.7028
Compressibility		0.991947	0.241637	0.0309805	0.0307136	0.000753836
Specific Gravity		1.0468	0.669324	0.988648	0.991765	0.995963
API Gravity			72.1924	10.3431	9.9226	10.3689
Enthalpy	Btu/h	-22219.6	-253208	-2.68412E+08	-2.68158E+08	-2.70012E+08
Mass Enthalpy	Btu/lb	-1351.07	-940.27	-6747.55	-6787.13	-6790.59
Mass Cp	Btu/(lb*°F)	0.435804	0.541859	0.976934	0.979728	0.979194
Ideal Gas CpCv Ratio		1.178	1.05294	1.32183	1.32394	1.32392
Dynamic Viscosity	cP	0.00947713	0.324899	0.632971	0.636007	0.991516
Kinematic Viscosity	cSt	7.48717	0.485873	0.640844	0.641894	0.996477
Thermal Conductivity	Btu/(h*ft*°F)	0.0140865	0.0683226	0.360881	0.363956	0.344607
Surface Tension	lbf/ft		0.000915441	0.0046988	0.00473609	0.00500006 ?
Net Ideal Gas Heating Value	Btu/ft^3	1595.95	4863.26	6.23491	0	5.84211
Net Liquid Heating Value	Btu/lb	19847.5	19138.5	-923.024	-1059.76	-931.614
Gross Ideal Gas Heating Value	Btu/ft^3	1745.93	5246.17	56.9714	50.3101	56.5541
Gross Liquid Heating Value	Btu/lb	21724.7	20657.6	139.846	0	130.918

Remarks

Blocks
MIX-100
Mixer/Splitter Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		Modified: 10:45 AM, 5/11/2017
Flowsheet:	Flowsheet1	Status: Solved 11:40 AM, 5/11/2017

Connections

Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
Produced Water	Inlet		Palleta Condensate	Inlet	
Produced Fluids	Outlet	VSSL-100			

Block Parameters

Pressure Drop	0 psi	Fraction to PStream Produced Fluids	100 %
---------------	-------	--	-------

Remarks

Blocks
VSSL-100
Separator Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		Modified: 11:52 AM, 5/11/2017
Flowsheet:	Flowsheet1	Status: Solved 11:56 AM, 5/11/2017

Connections

Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
Produced Fluids	Inlet	MIX-100	Flash	Vapor Outlet	
Stable Liquid	Light Liquid Outlet		Q-1	Energy	

Block Parameters

Pressure Drop	630	psi	Main Liquid Phase	Light Liquid
Mole Fraction Vapor	0.0247022	%	Heat Duty	-1.6229E+06 Btu/h
Mole Fraction Light Liquid	0.101238	%	Heat Release Curve Type	Plug Flow
Mole Fraction Heavy Liquid	99.8741	%	Heat Release Curve Increments	10

Remarks

Flowsheet Environment Environment1					
Client Name:	Arsenal - Palleta Well Pad			Job:	
Location:					
Flowsheet:	Flowsheet1				
Environment Settings					
Number of Poynting Intervals	0	Phase Tolerance	1 %		
Gibbs Excess Model	77 °F	Emulsion Enabled	False		
Evaluation Temperature					
Freeze Out Temperature	10 °F				
Threshold Difference					
Components					
Component Name	Henry's Law Component	Phase Initiator	Component Name	Henry's Law Component	Phase Initiator
Nitrogen	False	False	2,2,4-Trimethylpentane	False	False
Methane	False	False	Benzene	False	False
Carbon Dioxide	False	False	Heptane	False	False
Ethane	False	False	Toluene	False	False
Propane	False	False	Octane	False	False
Isobutane	False	False	Ethylbenzene	False	False
n-Butane	False	False	o-Xylene	False	False
Isopentane	False	False	Nonane	False	False
n-Pentane	False	False	Decane	False	False
i-Hexane	False	False	Water	False	True
n-Hexane	False	False			
Physical Property Method Sets					
Liquid Molar Volume	COSTALD	Overall Package	Peng-Robinson		
Stability Calculation	Peng-Robinson	Vapor Package	Peng-Robinson		
Light Liquid Package	Peng-Robinson	Heavy Liquid Package	Peng-Robinson		
Remarks					

Environments Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

Project-Wide Constants

Atmospheric Pressure	14.6959 psia	Ideal Gas Reference Pressure	14.6959 psia
Ideal Gas Reference Temperature	60 °F	Ideal Gas Reference Volume	379.484 ft ³ /lbmol
Liquid Reference Temperature	60 °F		

Environment [Environment1]

Environment Settings

Number of Poynting Intervals	0	Phase Tolerance	1 %
Gibbs Excess Model	77 °F	Emulsion Enabled	False
Evaluation Temperature			
Freeze Out Temperature	10 °F		
Threshold Difference			

Components

Component Name	Henry's Law Component	Phase Initiator	Component Name	Henry's Law Component	Phase Initiator
Nitrogen	False	False	2,2,4-Trimethylpentane	False	False
Methane	False	False	Benzene	False	False
Carbon Dioxide	False	False	Heptane	False	False
Ethane	False	False	Toluene	False	False
Propane	False	False	Octane	False	False
Isobutane	False	False	Ethylbenzene	False	False
n-Butane	False	False	o-Xylene	False	False
Isopentane	False	False	Nonane	False	False
n-Pentane	False	False	Decane	False	False
i-Hexane	False	False	Water	False	True
n-Hexane	False	False			

Physical Property Method Sets

Liquid Molar Volume	COSTALD	Overall Package	Peng-Robinson
Stability Calculation	Peng-Robinson	Vapor Package	Peng-Robinson
Light Liquid Package	Peng-Robinson	Heavy Liquid Package	Peng-Robinson

Remarks

User Value Sets Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

Palleta Tank Farm

User Value [ShellLength]

* Parameter	20 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value [ShellDiam]

* Parameter	12 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value [BreatherVP]

* Parameter	0.03 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [BreatherVacP]

* Parameter	-0.03 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [DomeRadius]

Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

User Value [OpPress]

* Parameter	0 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [AvgPercentLiq]

* Parameter	50 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [MaxPercentLiq]

* Parameter	90 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [AnnNetTP]

* Parameter	2732.38 bbl/day	Upper Bound	bbl/day
* Lower Bound	0 bbl/day	* Enforce Bounds	False

User Value [OREff]

* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [MaxAvgT]

* Parameter	59.9 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [MinAvgT]

* Parameter	40.7 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [BulkLiqT]

* Parameter	54.64 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [AvgP]

* Parameter	14.1085 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 4.0.16071.0
 Copyright © 2002-2016 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

User Value Sets Report

Client Name: Arsenal - Palleta Well Pad

Job:

Location:

User Value [ThermI]

* Parameter	1069 Btu/ft^2/day	Upper Bound	Btu/ft^2/day
Lower Bound	Btu/ft^2/day	* Enforce Bounds	False

User Value [AvgWindSpeed]

* Parameter	9.1 mi/h	Upper Bound	mi/h
Lower Bound	mi/h	* Enforce Bounds	False

User Value [MaxHourlyLoadingRate]

* Parameter	113.849 bbl/hr	Upper Bound	bbl/hr
* Lower Bound	0 bbl/hr	* Enforce Bounds	False

User Value [EntrainedOilFrac]

* Parameter	1 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [TurnoverRate]

* Parameter	343.788	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [LLossSatFactor]

* Parameter	1.45	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [AtmPressure]

* Parameter	14.1085 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [TVP]

* Parameter	0.280327 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [AvgLiqSurfaceT]

* Parameter	60.2465 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [MaxLiqSurfaceT]

* Parameter	70.3624 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [TotalLosses]

* Parameter	0.180018 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [WorkingLosses]

* Parameter	0.0190737 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [StandingLosses]

* Parameter	0.00342856 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
-------------	----------	-------------	--------

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 4.0.16071.0
 Copyright © 2002-2016 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

User Value Sets Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

User Value [RimSealLosses]

Lower Bound	ton/yr	* Enforce Bounds	False
-------------	--------	------------------	-------

User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [LoadingLosses]

* Parameter	0.877029 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [MaxHourlyLoadingLoss]

* Parameter	0.877029 lb/hr	Upper Bound	lb/hr
Lower Bound	lb/hr	* Enforce Bounds	False

User Value [PStar]

Parameter		Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [FlashingLosses]

* Parameter	0 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [TotalResidual]

* Parameter	174160 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [GasMoleWeight]

* Parameter	0.0188286 kg/mol	Upper Bound	kg/mol
Lower Bound	kg/mol	* Enforce Bounds	False

User Value [VapReportableFrac]

* Parameter	100 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [LiqReportableFrac]

* Parameter	100 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [FlashReportableFrac]

* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [BlockReady]

* Parameter	1	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value Sets Report		
-------------------------------	--	--

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

Remarks
 This User Value Set was programmatically generated. GUID={3843DD0A-6AE9-40D0-99C6-A976AAF7621C}

Tank Losses

User Value [BlockReady]

* Parameter	1	Upper Bound	
Lower Bound		* Enforce Bounds	False

Remarks
 This User Value Set was programmatically generated. GUID={3843DD0A-6AE9-40D0-99C6-A976AAF7621C}

Cn+ Flow/Frac.

User Value [CnPlusSum]

* Parameter	8.36226 lb/h	Upper Bound	
Lower Bound		* Enforce Bounds	False


Remarks
 This User Value Set was programmatically generated. GUID={51458694-C13A-4E3B-ABA8-E2C3EE2A851B}

* User Specified Values
 ? Extrapolated or Approximate Values

Flowsheet1 Plant Schematic

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Arsenal - Palleta Well Pad Blowdown Tank 1% Condensate

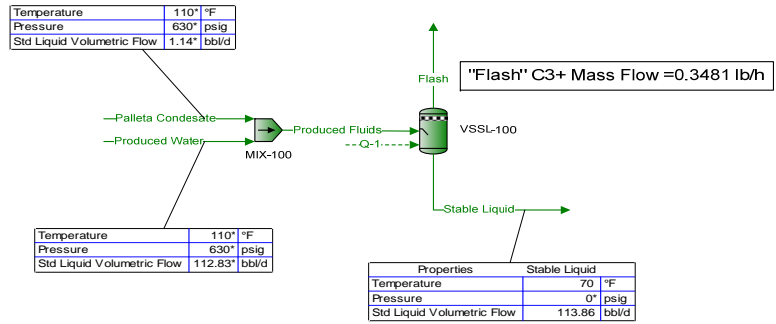

Palleta Tank Farm
 Annual tank loss calculations for "Stable Liquid".
 Total working and breathing losses from the Horizontal Cylinder are 0.008053 lb/h.
 Flashing losses are 0 lb/h.
 Loading losses are 0.03655 lb/h of loaded liquid.
 * All components are reported.

Note
 Working, Breathing and Loading losses include non-VOC components

* User Specified Values
 ? Extrapolated or Approximate Values

Process Streams Report
All Streams
Tabulated by Total Phase

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Connections

	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
From Block	VSSL-100	--	MIX-100	--	VSSL-100
To Block	--	MIX-100	VSSL-100	MIX-100	--

Stream Composition

	Flash %	Palleta Condensate %	Produced Fluids %	Produced Water %	Stable Liquid %
Mole Fraction					
Nitrogen	0	0 *	0	0 *	0
Methane	49.331	10.674 *	0.0136846	0 *	0.00150298
Carbon Dioxide	0.106695	0.065 *	8.3333E-05	0 *	5.69994E-05
Ethane	21.6084	5.377 *	0.00689356	0 *	0.0015579
Propane	11.8728	3.736 *	0.00478973	0 *	0.00185828
Isobutane	2.95963	1.359 *	0.0017423	0 *	0.00101169
n-Butane	4.771	2.754 *	0.00353076	0 *	0.00235317
Isopentane	2.10892	2.508 *	0.00321537	0 *	0.00269525
n-Pentane	1.50612	2.25 *	0.0028846	0 *	0.0025133
i-Hexane	1.36214	4.742 *	0.00607947	0 *	0.00574451
n-Hexane	0.552014	2.718 *	0.0034846	0 *	0.00334911
2,2,4-Trimethylpentane	0.00125508	0.018 *	2.30768E-05	0 *	2.27725E-05
Benzene	0.0138336	0.109 *	0.000139743	0 *	0.000136361
Heptane	0.84976	13.22 *	0.0169487	0 *	0.0167429
Toluene	0.0562764	1.097 *	0.00140641	0 *	0.00139285
Octane	0.307326	15.626 *	0.0200333	0 *	0.0199623
Ethylbenzene	0.00332006	0.2 *	0.000256409	0 *	0.000255653
o-Xylene	0.00484136	0.368 *	0.000471793	0 *	0.000470714
Nonane	0.0690478	11.599 *	0.0148705	0 *	0.0148571
Decane	0.0402409	21.58 *	0.0276666	0 *	0.0276635
Water	2.47545	0 *	99.8718	100 *	99.8959

	Flash lbmol/h	Palleta Condensate lbmol/h	Produced Fluids lbmol/h	Produced Water lbmol/h	Stable Liquid lbmol/h
Molar Flow					
Nitrogen	0	0 *	0	0 *	0
Methane	0.0111462	0.0125211 *	0.0125211	0 *	0.00137486
Carbon Dioxide	2.41076E-05	7.62479E-05 *	7.62479E-05	0 *	5.21403E-05
Ethane	0.00488236	0.00630746 *	0.00630746	0 *	0.00142509
Propane	0.00268263	0.00438249 *	0.00438249	0 *	0.00169987
Isobutane	0.000668721	0.00159417 *	0.00159417	0 *	0.000925446
n-Butane	0.001078	0.00323056 *	0.00323056	0 *	0.00215257
Isopentane	0.000476505	0.00294199 *	0.00294199	0 *	0.00246549
n-Pentane	0.000340303	0.00263935 *	0.00263935	0 *	0.00229905
i-Hexane	0.000307773	0.00556258 *	0.00556258	0 *	0.0052548
n-Hexane	0.000124726	0.00318833 *	0.00318833	0 *	0.00306361
2,2,4-Trimethylpentane	2.83583E-07	2.11148E-05 *	2.11148E-05	0 *	2.08312E-05
Benzene	3.12567E-06	0.000127862 *	0.000127862	0 *	0.000124736
Heptane	0.000192001	0.0155076 *	0.0155076	0 *	0.0153156
Toluene	1.27155E-05	0.00128683 *	0.00128683	0 *	0.00127411
Octane	6.94396E-05	0.01833 *	0.01833	0 *	0.0182605
Ethylbenzene	7.50159E-07	0.000234609 *	0.000234609	0 *	0.000233859
o-Xylene	1.09389E-06	0.00043168 *	0.00043168	0 *	0.000430586
Nonane	1.56012E-05	0.0136061 *	0.0136061	0 *	0.0135905
Decane	9.09235E-06	0.0253143 *	0.0253143	0 *	0.0253052
Water	0.000559321	0 *	91.3805	91.3805 *	91.3799

	Flash %	Palleta Condensate %	Produced Fluids %	Produced Water %	Stable Liquid %
Mass Fraction					
Nitrogen	0	0 *	0	0 *	0
Methane	26.1084	1.79018 *	0.012119	0 *	0.00133126

* User Specified Values
? Extrapolated or Approximate Values

ProMax 4.0.16071.0
Copyright © 2002-2016 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Mass Fraction	Flash %	Palleta Condensate %	Produced Fluids %	Produced Water %	Stable Liquid %
Carbon Dioxide	0.154911	0.029906 *	0.000202456	0 *	0.000138502
Ethane	21.4354	1.69028 *	0.0114427	0 *	0.00258641
Propane	17.2718	1.72227 *	0.0116593	0 *	0.00452423
Isobutane	5.67505	0.825773 *	0.00559025	0 *	0.00324659
n-Butane	9.14832	1.67342 *	0.0113286	0 *	0.00755151
Isopentane	5.01972	1.89171 *	0.0128064	0 *	0.0107366
n-Pentane	3.5849	1.69711 *	0.011489	0 *	0.0100118
i-Hexane	3.87254	4.27212 *	0.0289211	0 *	0.0273322
n-Hexane	1.56936	2.44868 *	0.0165769	0 *	0.015935
2,2,4-Trimethylpentane	0.00472973	0.0214954 *	0.000145518	0 *	0.000143623
Benzene	0.0356486	0.0890107 *	0.000602578	0 *	0.000588091
Heptane	2.80907	13.8486 *	0.0937513	0 *	0.0926289
Toluene	0.171064	1.05669 *	0.00715348	0 *	0.00708572
Octane	1.15815	18.6604 *	0.126326	0 *	0.125899
Ethylbenzene	0.0116283	0.221978 *	0.00150273	0 *	0.00149855
o-Xylene	0.0169566	0.40844 *	0.00276503	0 *	0.00275916
Nonane	0.292156	15.5523 *	0.105285	0 *	0.105207
Decane	0.188889	32.0996 *	0.217305	0 *	0.217317
Water	1.47124	0 *	99.323	100 *	99.3635

Mass Flow	Flash lb/h	Palleta Condensate lb/h	Produced Fluids lb/h	Produced Water lb/h	Stable Liquid lb/h
Nitrogen	0	0 *	0	0 *	0
Methane	0.178813	0.200869 *	0.200869	0 *	0.0220561
Carbon Dioxide	0.00106096	0.00335563 *	0.00335563	0 *	0.00229467
Ethane	0.146808	0.189659 *	0.189659	0 *	0.0428512
Propane	0.118292	0.193249 *	0.193249	0 *	0.0749566
Isobutane	0.0388676	0.0926565 *	0.0926565	0 *	0.0537889
n-Butane	0.0626555	0.187767 *	0.187767	0 *	0.125112
Isopentane	0.0343793	0.212261 *	0.212261	0 *	0.177882
n-Pentane	0.0245525	0.190426 *	0.190426	0 *	0.165873
i-Hexane	0.0265224	0.479357 *	0.479357	0 *	0.452835
n-Hexane	0.0107483	0.274756 *	0.274756	0 *	0.264007
2,2,4-Trimethylpentane	3.23932E-05	0.00241191 *	0.00241191	0 *	0.00237952
Benzene	0.000244152	0.00998752 *	0.00998752	0 *	0.00974337
Heptane	0.0192389	1.5539 *	1.5539	0 *	1.53466
Toluene	0.00117159	0.118566 *	0.118566	0 *	0.117395
Octane	0.00793199	2.09381 *	2.09381	0 *	2.08588
Ethylbenzene	7.96406E-05	0.0249072 *	0.0249072	0 *	0.0248276
o-Xylene	0.000116133	0.0458293 *	0.0458293	0 *	0.0457132
Nonane	0.00200093	1.74506 *	1.74506	0 *	1.74306
Decane	0.00129367	3.60176 *	3.60176	0 *	3.60047
Water	0.0100763	0 *	1646.24	1646.24 *	1646.23

Stream Properties

Property	Units	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
Temperature	°F	69.9535	110 *	110.004	110 *	69.9535
Pressure	psia	14.6959	644.696 *	644.696	644.696 *	14.6959 *
Mole Fraction Vapor	%	100	0	0	0	0
Mole Fraction Light Liquid	%	0	100	0.112466	100	0.101268
Mole Fraction Heavy Liquid	%	0	0	99.8875	0	99.8987
Molecular Weight	lb/lbmol	30.3117	95.6535	18.1148	18.0153	18.1118
Mass Density	lb/ft^3	0.0790111	41.7451	61.661	61.8554	62.1177
Molar Flow	lbmol/h	0.0225948	0.117304	91.4978	91.3805	91.4752
Mass Flow	lb/h	0.684885	11.2206	1657.47	1646.24	1656.78
Vapor Volumetric Flow	ft^3/h	8.66822	0.268788	26.8803	26.6144	26.6716
Liquid Volumetric Flow	gpm	1.08071	0.0335113	3.35131	3.31816	3.3253

* User Specified Values

? Extrapolated or Approximate Values

ProMax 4.0.16071.0
Copyright © 2002-2016 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		
Flowsheet:	Flowsheet1	

Stream Properties

Property	Units	Flash	Palleta Condensate	Produced Fluids	Produced Water	Stable Liquid
Std Vapor Volumetric Flow	MMSCFD	0.000205784	0.00106836	0.833326	0.832258	0.833121
Std Liquid Volumetric Flow	sgpm	0.00324911	0.0332421 *	3.3242	3.29096 *	3.32096
Compressibility		0.991948	0.241637	0.0309805	0.0307136	0.0007539
Specific Gravity		1.04658	0.669324	0.988648	0.991765	0.99597
API Gravity			72.1924	10.3431	9.9226	10.369
Enthalpy	Btu/h	-925.388	-10550.4	-1.11838E+07	-1.11733E+07	-1.12506E+07
Mass Enthalpy	Btu/lb	-1351.16	-940.27	-6747.55	-6787.13	-6790.64
Mass Cp	Btu/(lb*°F)	0.435797	0.541859	0.976934	0.979728	0.979197
Ideal Gas CpCv Ratio		1.17804	1.05294	1.32183	1.32394	1.32392
Dynamic Viscosity	cP	0.00947683	0.324899	0.632971	0.636007	0.992128
Kinematic Viscosity	cSt	7.4878	0.485873	0.640844	0.641894	0.997084
Thermal Conductivity	Btu/(h*ft*°F)	0.0140862	0.0683226	0.360881	0.363956	0.344584
Surface Tension	lbf/ft		0.000915441	0.0046988	0.00473609	0.00500042 ?
Net Ideal Gas Heating Value	Btu/ft^3	1595.68	4863.26	6.23493	0	5.84233
Net Liquid Heating Value	Btu/lb	19848.3	19138.5	-923.023	-1059.76	-931.61
Gross Ideal Gas Heating Value	Btu/ft^3	1745.64	5246.17	56.9714	50.3101	56.5543
Gross Liquid Heating Value	Btu/lb	21725.7	20657.6	139.846	0	130.923

Remarks

	Blocks MIX-100 Mixer/Splitter Report	
--	--	--

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		Modified: 10:45 AM, 5/11/2017
Flowsheet:	Flowsheet1	Status: Solved 3:06 PM, 5/11/2017

Connections					
Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
Produced Water	Inlet		Palleta Condensate	Inlet	
Produced Fluids	Outlet	VSSL-100			

Block Parameters			
Pressure Drop	0 psi	Fraction to PStream Produced Fluids	100 %

Remarks

Blocks
VSSL-100
Separator Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		Modified: 11:52 AM, 5/11/2017
Flowsheet:	Flowsheet1	Status: Solved 3:09 PM, 5/11/2017

Connections

Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
Produced Fluids	Inlet	MIX-100	Flash	Vapor Outlet	
Stable Liquid	Light Liquid Outlet		Q-1	Energy	

Block Parameters

Pressure Drop	630	psi	Main Liquid Phase	Light Liquid
Mole Fraction Vapor	0.0246943	%	Heat Duty	-67700 Btu/h
Mole Fraction Light Liquid	0.101243	%	Heat Release Curve Type	Plug Flow
Mole Fraction Heavy Liquid	99.8741	%	Heat Release Curve Increments	10

Remarks

Flowsheet Environment Environment1					
Client Name:	Arsenal - Palleta Well Pad			Job:	
Location:					
Flowsheet:	Flowsheet1				
Environment Settings					
Number of Poynting Intervals	0	Phase Tolerance	1 %		
Gibbs Excess Model	77 °F	Emulsion Enabled	False		
Evaluation Temperature					
Freeze Out Temperature	10 °F				
Threshold Difference					
Components					
Component Name	Henry's Law Component	Phase Initiator	Component Name	Henry's Law Component	Phase Initiator
Nitrogen	False	False	2,2,4-Trimethylpentane	False	False
Methane	False	False	Benzene	False	False
Carbon Dioxide	False	False	Heptane	False	False
Ethane	False	False	Toluene	False	False
Propane	False	False	Octane	False	False
Isobutane	False	False	Ethylbenzene	False	False
n-Butane	False	False	o-Xylene	False	False
Isopentane	False	False	Nonane	False	False
n-Pentane	False	False	Decane	False	False
i-Hexane	False	False	Water	False	True
n-Hexane	False	False			
Physical Property Method Sets					
Liquid Molar Volume	COSTALD	Overall Package	Peng-Robinson		
Stability Calculation	Peng-Robinson	Vapor Package	Peng-Robinson		
Light Liquid Package	Peng-Robinson	Heavy Liquid Package	Peng-Robinson		
Remarks					

Environments Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

Project-Wide Constants

Atmospheric Pressure	14.6959 psia	Ideal Gas Reference Pressure	14.6959 psia
Ideal Gas Reference Temperature	60 °F	Ideal Gas Reference Volume	379.484 ft ³ /lbmol
Liquid Reference Temperature	60 °F		

Environment [Environment1]

Environment Settings

Number of Poynting Intervals	0	Phase Tolerance	1 %
Gibbs Excess Model	77 °F	Emulsion Enabled	False
Evaluation Temperature			
Freeze Out Temperature	10 °F		
Threshold Difference			

Components

Component Name	Henry's Law Component	Phase Initiator	Component Name	Henry's Law Component	Phase Initiator
Nitrogen	False	False	2,2,4-Trimethylpentane	False	False
Methane	False	False	Benzene	False	False
Carbon Dioxide	False	False	Heptane	False	False
Ethane	False	False	Toluene	False	False
Propane	False	False	Octane	False	False
Isobutane	False	False	Ethylbenzene	False	False
n-Butane	False	False	o-Xylene	False	False
Isopentane	False	False	Nonane	False	False
n-Pentane	False	False	Decane	False	False
i-Hexane	False	False	Water	False	True
n-Hexane	False	False			

Physical Property Method Sets

Liquid Molar Volume	COSTALD	Overall Package	Peng-Robinson
Stability Calculation	Peng-Robinson	Vapor Package	Peng-Robinson
Light Liquid Package	Peng-Robinson	Heavy Liquid Package	Peng-Robinson

Remarks

User Value Sets Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

Palleta Tank Farm

User Value [ShellLength]

* Parameter	10 ft	Upper Bound	ft	
* Lower Bound	0 ft	* Enforce Bounds	False	

User Value [ShellDiam]

* Parameter	10 ft	Upper Bound	ft	
* Lower Bound	0 ft	* Enforce Bounds	False	

User Value [BreatherVP]

* Parameter	0.03 psig	Upper Bound	psig	
Lower Bound	psig	* Enforce Bounds	False	

User Value [BreatherVacP]

* Parameter	-0.03 psig	Upper Bound	psig	
Lower Bound	psig	* Enforce Bounds	False	

User Value [DomeRadius]

Parameter	ft	Upper Bound	ft	
Lower Bound	ft	* Enforce Bounds	False	

User Value [OpPress]

* Parameter	0 psig	Upper Bound	psig	
Lower Bound	psig	* Enforce Bounds	False	

User Value [AvgPercentLiq]

* Parameter	50 %	Upper Bound	%	
Lower Bound	%	* Enforce Bounds	False	

User Value [MaxPercentLiq]

* Parameter	90 %	Upper Bound	%	
Lower Bound	%	* Enforce Bounds	False	

User Value [AnnNetTP]

* Parameter	113.849 bbl/day	Upper Bound	bbl/day	
* Lower Bound	0 bbl/day	* Enforce Bounds	False	

User Value [OREff]

* Parameter	0 %	Upper Bound	%	
Lower Bound	%	* Enforce Bounds	False	

User Value [MaxAvgT]

* Parameter	59.9 °F	Upper Bound	°F	
Lower Bound	°F	* Enforce Bounds	False	

User Value [MinAvgT]

* Parameter	40.7 °F	Upper Bound	°F	
Lower Bound	°F	* Enforce Bounds	False	

User Value [BulkLiqT]

* Parameter	54.64 °F	Upper Bound	°F	
Lower Bound	°F	* Enforce Bounds	False	

User Value [AvgP]

* Parameter	14.1085 psia	Upper Bound	psia	
Lower Bound	psia	* Enforce Bounds	False	

* User Specified Values
 ? Extrapolated or Approximate Values

User Value Sets Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

User Value [ThermI]

* Parameter	1069 Btu/ft^2/day	Upper Bound	Btu/ft^2/day
Lower Bound	Btu/ft^2/day	* Enforce Bounds	False

User Value [AvgWindSpeed]

* Parameter	9.1 mi/h	Upper Bound	mi/h
Lower Bound	mi/h	* Enforce Bounds	False

User Value [MaxHourlyLoadingRate]

* Parameter	4.74372 bbl/hr	Upper Bound	bbl/hr
* Lower Bound	0 bbl/hr	* Enforce Bounds	False

User Value [EntrainedOilFrac]

* Parameter	1 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [TurnoverRate]

* Parameter	330.037	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [LLossSatFactor]

* Parameter	1.45	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [AtmPressure]

* Parameter	14.1085 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [TVP]

* Parameter	0.28034 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [AvgLiqSurfaceT]

* Parameter	60.2465 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [MaxLiqSurfaceT]

* Parameter	70.3624 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [TotalLosses]

* Parameter	0.00805262 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [WorkingLosses]

* Parameter	0.00644937 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [StandingLosses]

* Parameter	0.00160325 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
-------------	----------	-------------	--------

User Value Sets Report

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

User Value [RimSealLosses]

Lower Bound	ton/yr	* Enforce Bounds	False
-------------	--------	------------------	-------

User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [LoadingLosses]

* Parameter	0.0365453 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [MaxHourlyLoadingLoss]

* Parameter	0.0365453 lb/hr	Upper Bound	lb/hr
Lower Bound	lb/hr	* Enforce Bounds	False

User Value [PStar]

Parameter		Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [FlashingLosses]

* Parameter	0 lb/h	Upper Bound	lb/h
Lower Bound	lb/h	* Enforce Bounds	False

User Value [TotalResidual]

* Parameter	7256.66 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [GasMoleWeight]

* Parameter	0.018829 kg/mol	Upper Bound	kg/mol
Lower Bound	kg/mol	* Enforce Bounds	False

User Value [VapReportableFrac]

* Parameter	100 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [LiqReportableFrac]

* Parameter	100 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [FlashReportableFrac]

* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [BlockReady]

* Parameter	1	Upper Bound	
Lower Bound		* Enforce Bounds	False

<h2>User Value Sets Report</h2>		
---------------------------------	--	--

Client Name:	Arsenal - Palleta Well Pad	Job:
Location:		

Remarks
 This User Value Set was programmatically generated. GUID={3843DD0A-6AE9-40D0-99C6-A976AAF7621C}

Tank Losses

User Value [BlockReady]

* Parameter	1	Upper Bound	
Lower Bound		* Enforce Bounds	False

Remarks
 This User Value Set was programmatically generated. GUID={3843DD0A-6AE9-40D0-99C6-A976AAF7621C}

Cn+ Flow/Frac.

User Value [CnPlusSum]

* Parameter	0.348127 lb/h	Upper Bound	
Lower Bound		* Enforce Bounds	False

Remarks
 This User Value Set was programmatically generated. GUID={51458694-C13A-4E3B-ABA8-E2C3EE2A851B}

* User Specified Values
 ? Extrapolated or Approximate Values



Certificate of Analysis
 Number: 2030-14100210-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Gary Vermillion
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

Oct. 27, 2014

Field:
 Station N
 Station Number:
 Sample Point:
 Analyzed: 10/23/2014 14:04:51 by GR

Sampled By: GR-SPL
 Sample Of: Condensate Spot
 Sample Date: 10/08/2014 15:00
 Sample Conditions: 630 psig
 Method: GPA-2186M/GPA-2103

Analytical Data

Components	Mol. %	MW	Wt. %	Sp. Gravity	L.V. %
Nitrogen	NIL	28.013	NIL	0.807	NIL
Methane	10.674	16.043	1.735	0.300	4.055
Carbon Dioxide	0.065	44.010	0.029	0.817	0.025
Ethane	5.377	30.069	1.638	0.356	3.224
Propane	3.736	44.096	1.669	0.507	2.308
Iso-Butane	1.359	58.122	0.800	0.563	0.997
n-Butane	2.754	58.122	1.622	0.584	1.947
Iso-Pentane	2.508	72.149	1.833	0.625	2.056
n-Pentane	2.250	72.149	1.645	0.631	1.829
i-Hexanes	4.742	85.172	4.092	0.667	4.303
n-Hexane	2.718	86.175	2.373	0.664	2.506
2,2,4-Trimethylpentane	0.018	114.231	0.021	0.697	0.021
Benzene	0.109	78.114	0.086	0.885	0.068
Heptanes	13.220	98.287	13.166	0.700	13.187
Toluene	1.097	92.141	1.024	0.872	0.823
Octanes	15.626	110.146	17.442	0.732	16.710
Ethylbenzene	0.200	106.167	0.215	0.872	0.173
Xylenes	0.368	106.167	0.396	0.885	0.314
Nonanes	11.599	124.568	14.638	0.744	13.792
Decanes Plus	21.580	162.726	35.576	0.788	31.662
	100.000		100.000		100.000

Physical Properties	Total	C10+
Specific Gravity at 60°F	0.7012	0.7879
API Gravity at 60°F	70.284	48.091
Molecular Weight	98.699	162.726
Pounds per Gallon (in Vacuum)	5.846	6.569
Pounds per Gallon (in Air)	5.840	6.562
Cu. Ft. Vapor per Gallon @ 14.73 psia	22.427	15.283

Patti L. Petro

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
 Number: 2030-14100210-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Gary Vermillion
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

Oct. 27, 2014

Field:
 Station Name:
 Station Number:
 Sample Point:
 Analyzed: 10/23/2014 14:04:51 by GR

Sampled By: GR-SPL
 Sample Of: Condensate Spot
 Sample Date: 10/08/2014 15:00
 Sample Conditions: 630 psig
 Method: GPA-2186M/GPA-2103

Analytical Data

Components	Mol. %	MW	Wt. %	Sp. Gravity	L.V. %
Nitrogen	NIL	28.013	NIL	0.807	NIL
Carbon Dioxide	0.065	44.010	0.029	0.817	0.025
Methane	10.674	16.043	1.735	0.300	4.055
Ethane	5.377	30.069	1.638	0.356	3.224
Propane	3.736	44.096	1.669	0.507	2.308
Iso-butane	1.359	58.122	0.800	0.563	0.997
n-Butane	2.754	58.122	1.622	0.584	1.947
Iso-pentane	2.508	72.149	1.833	0.625	2.056
n-Pentane	2.250	72.149	1.645	0.631	1.829
Hexanes	7.460	85.537	6.465	0.666	6.809
Heptanes Plus	63.817	127.692	82.564	0.754	76.750
	100.000		100.000		100.000

Physical Properties	Total	C7+
Specific Gravity at 60°F	0.7012	0.7543
API Gravity at 60°F	70.284	56.084
Molecular Weight	98.699	127.692
Pounds per Gallon (in Vacuum)	5.846	6.289
Pounds per Gallon (in Air)	5.840	6.282
Cu. Ft. Vapor per Gallon @ 14.73 psia	22.427	18.647

Patricia L. Peters

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
Number: 2030-14100210-001A

Carencro Laboratory
4790 NE Evangeline Thruway
Carencro, LA 70520

Gary Vermillion
Gas Analytical Services
PO Box 1028
Bridgeport, WV 26330

Oct. 27, 2014

Field:
Station Name:
Station Number:
Sample Point:

Sampled By: GR-SPL
Sample Of: Condensate Spot
Sample Date: 10/08/2014 15:00
Sample Conditions: 630 psig

Analytical Data

Test	Method	Result	Units	Detection Limit	Lab Tech.	Analysis Date
Color Visual	Proprietary	Straw			CM	10/23/2014
API Gravity @ 60° F	ASTM D-5002	60.59	°		CM	10/23/2014
Specific Gravity @ 60/60° F	ASTM D-5002	0.7366			CM	10/23/2014
Density @ 60° F	ASTM D-5002	0.7359	g/ml		CM	10/23/2014
Shrinkage Factor	Proprietary	0.9173			CM	10/23/2014
Flash Factor	Proprietary	198.5929	Cu. Ft./S.T. Bbl		CM	10/23/2014

Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.

Gas Analytical
 Stonewood, West Virginia
 8444 Water Street
 Stonewood, WV 26301-8006

Report Date: Jan 17, 2017 10:05a

Client:	MOUNTAINEER KEYSTONE	Date Sampled:	Jan 13, 2017
Client Code:	5764	Analysis Date:	Jan 16, 2017 12:00a
Site:	PALETTA 8	Collected By:	JM
Field:	190-WEST VIRGINIA	Date Effective:	Feb 1, 2017 12:00a
Meter:	5203	Sample Pressure (PSI):	45.0
Source Laboratory	Stonewood, WV	Sample Temp (°F):	60
Lab File No:	516613903	Field H2O (lb/MMSCFD):	
Cylinder No:	5857		
Analysis Status:	good		
Sample Type:	Spot		
Measurement Analyst:	<i>Ashley Free</i>		

Component	Mol %	GPM @Contract PSIA
H2S		
Methane	96.1193	0.0000
Ethane	3.2990	0.8839
Propane	0.1964	0.0542
I-Butane	0.0072	0.0024
N-Butane	0.0133	0.0042
I-Pentane	0.0015	0.0005
N-Pentane	0.0007	0.0003
Nitrogen	0.2453	0.0000
Oxygen		
Carbon Dioxide	0.1127	0.0000
Helium	0.0000	
Hexanes+	0.0046	0.0020
TOTAL	100.0000	0.9475

Analytical Results at Base Conditions (Real)	
BTU/SCF (Dry):	1,037.3348 BTU/ft ³
BTU/SCF (Saturated):	1,019.5843 BTU/ft ³
PSIA:	14.696 PSI
Temperature (°F):	60.0 °F
Z Factor (Dry):	0.99787
Z Factor (Saturated):	0.99752

Analytical Results at Contract Conditions (Real)	
BTU/SCF (Dry):	1,039.7399 BTU/ft ³
BTU/SCF (Saturated):	1,021.9901 BTU/ft ³
PSIA:	14.730 PSI
Temperature (°F):	60.0 °F
Z Factor (Dry):	0.99787
Z Factor (Saturated):	0.99752

Calculated Specific Gravities		
Ideal Gravity:	0.5743	Real Gravity: 0.5753
Molecular Wt:	16.6346 lb/lbmol	

Methods, standards, and uncertainties based on
 GPA 2261-13.
 Analytical Calculations performed in accordance with
 GPA 2172-09.

Source	Date	Notes

ATTACHMENT U
FACILITY-WIDE CONTROLLER
EMISSIONS SUMMARY SHEET

ATTACHMENT U – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		CH ₄		GHG (CO ₂ e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Line Heater (E01)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Line Heater (E02)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Line Heater (E03)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Line Heater (E04)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Line Heater (E05)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Line Heater (E06)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Line Heater (E07)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Line Heater (E08)	0.10	0.43	0.08	0.36	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	<0.01	117.10	512.89
Blowdown (E09)	<0.01	<0.01	<0.01	<0.01	0.35	1.53	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.18	0.78	4.48	19.61
Fluids Tank (E10-E17)	<0.01	<0.01	<0.01	<0.01	8.37	36.66	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	4.30	18.82	107.46	470.67
Tank Truck Loading Activities (E18/E019)	<0.01	<0.01	<0.01	<0.01	0.04	0.16	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.03	0.12	0.70	3.06
TEG (E20)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.08	0.36
TOTAL	0.78	3.44	0.66	2.89	8.75	38.33	<0.01	<0.01	<0.01	<0.01	<0.01	0.20	4.50	19.73	1,049.50	4,596.81

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators. According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT U – FACILITY-WIDE HAP CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Line Heater (E01)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E02)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E03)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E04)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E05)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E06)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E07)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Line Heater (E08)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Blowdown Tank (E09)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.01	0.05	0.01
Fluids Tank (E10-E17)	<0.01	<0.01	<0.01	0.03	0.03	0.12	<0.01	<0.01	<0.01	0.01	0.26	1.13	0.30	1.31
Tank Truck Loading Activities (E18/E19)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
TEG (E20)	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
TOTAL	<0.01	<0.01	0.01	0.03	0.03	0.13	<0.01	<0.01	<0.01	0.01	0.28	1.25	0.33	1.43

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT V
CLASS 1 LEGAL ADVERTISEMENT

AIR QUALITY PERMIT NOTICE

Notice of Application

Notice is given that Arsenal Resources, LLC has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a G70-D General Permit for a natural gas production operation located in Harrison County, West Virginia. The latitude and longitude coordinates are: 39.20971 and -80.36708.

The applicant estimates the maximum potential to discharge the following regulated air pollutants on a facility-wide basis will be:

Particulate Matter (PM) = 26.50 tpy
Sulfur Dioxide (SO₂) = <0.01 tpy
Volatile Organic Compounds (VOC) = 38.35 tpy
Carbon Monoxide (CO) = 2.89 tpy
Nitrogen Oxides (NO_x) = 3.44 tpy
Total Hazardous Air Pollutants (HAPs) = 1.36 tpy
Formaldehyde (HCHO) = <0.01 tpy
Hexane (C₆H₁₄) = 1.25 tpy
Carbon Dioxide Equivalents (CO₂e) = 4,596.81 tpy

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57th Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the 18th day of May 2017.

By: Arsenal Resources
Meghan M.B. Yingling
Environmental Compliance Manager
6031 Wallace Road Ext. Suite 300
Wexford, PA 15090