

Jay M. Richert
Refining General Manager

Catlettsburg Refining, LLC

A subsidiary of Marathon Petroleum Company LP

11631 U.S. Route 23
P.O. Box 1492
Catlettsburg, KY 41129
Tel: 606.921.6200
Fax: 606.921.3500

March 15, 2019

Mr. William F. Durham
West Virginia Department of Environmental Protection
Division for Air Quality
601 57th Street SE
Charleston, WV 254304

**RE: Renewal Title V Permit Application
MPLX Terminal and Storage LLC
Neal Propane Cavern**

Dear Mr. Durham:

Marathon Petroleum Company LP (MPC) owns and operates a propane cavern in Neal, West Virginia. The propane cavern serves the Catlettsburg refinery by providing intermediate storage of excess propane. MPC submitted an initial Title V Operating Application and received the Title V Operating permit (R30-09900118-2014) which became effective on September 30, 2014 and will expire on September 16, 2019. This submittal fulfills the permit renewal application requirements in section 2.3 of the current Title V Operating Permit and in accordance with 45 CSR 30-4.1.a.3. As documented in the *Title V Permit Application Checklist for Administrative Completeness* provided in Section 4 of the application, the application consists of two (2) hard copies and two (2) electronic copies burned to separate CDs. The application materials contain all of the required elements of a West Virginia initial Title V application including an area map, plot plan, process flow diagram, and signed copies of the relevant application forms.

Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. Through this letter and application, MPC requests use of these procedures in accordance with 45 CSR30. If upon your review, you determine that any additional information is needed or if you have any questions regarding the planned changes, please do not hesitate to contact Clay Woford of my staff at 606-921-6880 or rowoford@marathonpetroleum.com.

Respectfully,

Jay M. Richert
Deputy Assistant Secretary

Attachment

rcw/kmt/gdn
rcw/kmt/gdn

cc: Ms. Cristina Fernandez, Director
Air Protection Division
U.S. EPA, Region 3
1650 Arch Street (3AP00)
Philadelphia, PA 19103-2029

TABLE OF CONTENTS

| | |
|--|------------|
| 1. INTRODUCTION | 1-2 |
| 1.1. Facility Description | 1-2 |
| 1.2. Renewal Title V Application Organization | 1-3 |
| 2. AIR PERMITTING AND REGULATORY REQUIREMENTS | 2-4 |
| 2.1. Title V Operating Permit Program | 2-4 |
| 2.2. New Source Performance Standards (NSPS) | 2-5 |
| <i>2.2.1. NSPS Subpart GGGa - Standards of Performance for Equipment Leaks of VOC in Petroleum Refineries for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006</i> | 2-5 |
| 2.3. National Emission Standards for Hazardous Air Pollutants (NESHAP) | 2-6 |
| <i>2.3.1. NESHAP Subpart CC – Petroleum Refineries</i> | 2-6 |
| 2.4. Compliance Assurance Monitoring | 2-6 |
| 2.5. Chemical Accident Prevention Regulations | 2-7 |
| 2.6. PROTECTION OF STRATOSPHERIC OZONE | 2-7 |
| 2.7. West Virginia SIP Regulations | 2-7 |
| <i>2.7.1. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor – State Only</i> | 2-7 |
| <i>2.7.2. 45 CSR 7: To Prevent and Control Particulate Matter Air Pollution from Manufacturing Processes and Associated Operations</i> | 2-7 |
| <i>2.7.3. 45 CSR 11: Prevention of Air Pollution Emergency Episodes</i> | 2-8 |
| <i>2.7.4. 45 CSR 13: Permits for Construction, Modification, Relocation and Operation of Stationary Sources of Air Pollutants, Notification Requirements, Administrative Updates, Temporary Permits, General Permits, Permission to Commence Construction, and Procedures for Evaluation</i> | 2-8 |
| <i>2.7.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution From Materials Handling, Preparation, Storage and Other Sources of Fugitive Matter</i> | 2-8 |
| <i>2.7.6. 45 CSR 21: To Prevent and Control Air Pollution From the Emission of Volatile Organic Compounds</i> | 2-8 |
| <i>2.7.7. 45 CSR 27: To Prevent and Control the Emissions of Toxic Air Pollutants</i> | 2-9 |
| <i>2.7.8. 45 CSR 30: Requirements for Operating Permits</i> | 2-9 |
| <i>2.7.9. Non-Applicability of Other SIP Rules</i> | 2-9 |
| 3. AIR EMISSIONS QUANTIFICATION | 3-1 |
| 4. RENEWAL TITLE V APPLICATION FORMS | 4-1 |
| ATTACHMENT A: AREA MAP | A |
| ATTACHMENT B: PLOT PLAN | B |
| ATTACHMENT C: PROCESS FLOW DIAGRAM | C |
| ATTACHMENT D: TITLE V EQUIPMENT TABLE | D |
| ATTACHMENT E: EMISSION UNIT FORM | E |
| ATTACHMENT F: SCHEDULE OF COMPLIANCE FORM | F |
| ATTACHMENT G: AIR POLLUTION CONTROL DEVICE FORM | G |
| ATTACHMENT H: COMPLIANCE ASSURANCE MONITORING PLAN FORM | H |
| ATTACHMENT I: SUPPORTING EMISSIONS DOCUMENTATION | I |

1. INTRODUCTION

Marathon Petroleum Company LP (MPC) owns and operates a propane cavern in Neal, West Virginia. MPC's operations is managed as one integrated system, enhancing our flexibility in supplying markets throughout the United States.

Based on the links to equipment within the refinery, the propane cavern is considered part of a refining process unit subject to the New Source Performance Standards (NSPS) for Equipment Leaks of VOC in Petroleum Refineries (40 CFR 60 Subpart GGGa). In light of the precedent established with the issuance of the initial Title V permit for the MPLX Terminal and Storage LLC (MPLX) Neal, West Virginia butane cavern, MPC has prepared this renewal Title V permit application for the propane cavern so that West Virginia Department of Environmental Protection (WVDEP) can document and enforce the leak detection and repair (LDAR) requirements under NSPS Subpart GGGa applicable to the propane cavern piping components located in West Virginia.

1.1. FACILITY DESCRIPTION

Initial construction of the propane cavern began in August 1979 with commencement of operation in late 1980. The propane cavern serves the Catlettsburg refinery by providing intermediate storage of excess propane produced in the Saturate Gas Plant (SGP), HF Alkylation (HF Alky) Unit, and Cumene Unit. After being treated at the refinery to remove contaminants, propane is transferred as a liquid product via a pipeline traversing across the Big Sandy River and is pumped into the propane cavern. The cavern also receives propane extracted from the propylene/propane stream sold by the Catlettsburg refinery to the Braskem America, Inc. (Braskem) Kenova, West Virginia plant. Braskem separates the propane from the propane/propylene stream, uses the propylene stream in their chemical manufacturing process, and routes the separated propane stream to the cavern. On the outlet side of the system, the cavern can supply propane to the refinery's fuel gas system, but its predominant function is to supply the product propane for sale to outside customers. Propane destined for sale or use in the refinery's fuel gas system is transported back across the Big Sandy River via a separate, dedicated cavern discharge piping network. Product propane is dried, routed through carbon adsorption beds, certified for certain product specifications, and charged to a series of five (5) pressurized, bullet tanks (i.e., Tanks 862- 866 listed in the refinery's Title V permit). Any off-specification product is pumped back to the cavern. From the bullet tanks, the on-specification product propane is transferred into tanker trucks or railcars for transportation to customers.

1.2. RENEWAL TITLE V APPLICATION ORGANIZATION

The remainder of this Title V permit application is organized as follows:

- Section 2 contains an overview of regulatory applicability for the Neal propane cavern.
- Section 3 describes the potential emission calculation methodologies used to quantify hourly and annual potential emissions from the fugitive equipment leak components located in West Virginia and from the Lube Area Flare located at the Catlettsburg refinery in Kentucky.
- Section 4 contains the required WVDEP Renewal Title V Application General Form and the Title V Application Checklist for Administrative Completeness.
- Attachment A contains an area map.
- Attachment B contains a site plan.
- Attachment C contains a process flow diagram.
- Attachment D contains the WVDEP Title V equipment table.
- Attachment E contains a WVDEP emission unit form covering the equipment leak components at the propane cavern.
- Attachment F is a placeholder for the Schedule of Compliance Form. This form is only required to be completed if noncompliance with applicable requirements is documented in the permit application. MPC is in compliance with all applicable requirements for the propane cavern, so this form is not required to be included in the initial Title V application.
- Attachment G is a placeholder for the Air Pollution Control Device Form. No air pollution control devices associated with the propane cavern are located in West Virginia.
- Attachment H is contains the Compliance Assurance Monitoring (CAM) Plan Form to formally document nonapplicability of CAM requirements to the propane cavern (refer to Section 2.5).
- Attachment I contains supporting documentation for the facility-wide emission calculations discussed in Section 3.

2. AIR PERMITTING AND REGULATORY REQUIREMENTS

A key objective of a Title V operating permit application is to compile all applicable Clean Air Act-derived requirements into one document. The requirements can be categorized as (1) emission limits, operating limits, and work practice standards, and (2) testing, monitoring, recordkeeping, and reporting requirements. To compile a list of the requirements applicable to a facility, it is first necessary to determine which Federal and State air regulations apply to the facility as a whole, or to individual emission units located at the facility. This section discusses the applicability determinations made for Federal and State air quality regulations. Regulations potentially applicable to the propane cavern facility are detailed in the “Applicable Requirements” sections of Title V General Form provided by the WVDEP contained in Section 4 of this report.

The remainder of this section summarizes the air permitting requirements and key air quality regulations that apply to the operation of the propane cavern. Applicability or non-applicability of the following regulatory programs is addressed:

- Title V of the 1990 Clean Air Act Amendments;
- New Source Performance Standards (NSPS);
- National Emission Standards for Hazardous Air Pollutants (NESHAP);
- Compliance Assurance Monitoring (CAM);
- Risk Management Plan (RMP);
- West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP Title V General Form in Section 4 and the Emission Unit Form in Attachment E, which fulfill the requirement to include citations and descriptions of applicable statutory and administrative code requirements.

In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the propane cavern facility. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the propane cavern. Regulations that are categorically non-applicable are not discussed.

2.1. TITLE V OPERATING PERMIT PROGRAM

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in CSR 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP, 100,000 tpy for GHGs expressed on a carbon dioxide equivalent (CO₂e) basis, and 100 tpy of all other regulated pollutants. MPC is applying for a Title V permit for the propane cavern and the portion of the piping located in West Virginia to provide a mechanism for WVDEP to enforce the LDAR requirements applicable to the fugitive equipment leak components located in West Virginia.

2.2. NEW SOURCE PERFORMANCE STANDARDS (NSPS)

New Source Performance Standards (NSPS) (40 CFR Part 60) require new, modified, or reconstructed sources in specific source categories to control emissions to the level achievable by the best demonstrated technology as specified in the applicable provisions. Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability determinations for NSPS regulations of relevance to the propane cavern.

2.2.1. NSPS Subpart GGGa - Standards of Performance for Equipment Leaks of VOC in Petroleum Refineries for Which Construction, Reconstruction, or Modification Commenced After November 7, 2006

NSPS Subpart GGGa applies to the group of all equipment leak components within a petroleum refining process unit for which construction, reconstruction, or modification commenced after November 7, 2006. The propane cavern equipment leak components that are located in West Virginia are predominantly associated with the HF Alky petroleum refining process units operated by the refinery and designated as FUG018, 2-036 in the refinery's current Title V Permit V-12-026 issued by the Kentucky Division for Air Quality (KDAQ) on January 1, 2014. The HF Alky unit meets the definition of process unit under NSPS GGGa and has already triggered applicability of Subpart GGGa. Therefore, the equipment leak components for the propane cavern are also subject to Subpart GGGa. The current definition of a process unit under Subpart GGGa is "components assembled to produce intermediate or final products from petroleum, unfinished petroleum derivatives, or other intermediates; a process unit can operate independently if supplied with sufficient feed or raw materials and sufficient storage facilities for the product."¹ The original definition of process unit in Subpart GGGa which is currently stayed included "any feed, intermediate and final product storage vessels (except as specified in §60.482-1a(g)), product transfer racks, and connected ducts and piping." While this definition of "process unit" in 40 CFR 60.591a that includes storage vessels is stayed indefinitely, Catlettsburg expects the final rule addressing the stay will retain equipment leak components at storage vessels as part of the affected facility definition, and therefore, Catlettsburg has implemented the LDAR program required under NSPS Subpart GGGa at the propane cavern (regardless of whether or not it is considered to fall under the current process unit definition that does not explicitly include all types of storage vessels). This regulatory interpretation is further supported by the United States Environmental Protection Agency (U.S. EPA) guidance discussed in the following paragraphs.

U.S. EPA has noted that, even before promulgating the new definition of process unit under NSPS Subpart GGGa, the agency had always intended to regulate storage vessels. In the Federal Register Preamble, U.S. EPA stated the following:

The amended definition of process unit clarifies EPA's original intent and is consistent with the language provided by the commenters from the January 1981 rulemaking. ... [T]he 1981 language also states that a process unit includes storage tanks and all fluid transport equipment. There is no specification that these components are only included if within the battery limits. There has been confusion in the past regarding the inclusion of components outside of the battery limits but within the property of the facility. To clarify this issue, EPA previously issued formal guidance (see April 6, 1994 letter from John Rasnic to Raymond Hiley in Docket ID No. EPA-HQ-OAR-2006-0699).

We agree that the determination of whether a particular tank is a storage tank, feed tank, or intermediate tank and part of a process unit must be done on a site-specific basis, dependent on how the tank functions within a particular plant site. The physical proximity of the storage tank to the other processing equipment within a process unit is not a sole determinate in establishing whether a storage tank is part of the process or not.¹

¹ 72 FR 64,860 at p.64,869, November 17, 2006.

In the April 6, 1994 Letter from John Ransic, cited above, U.S. EPA was asked to clarify the definition of process unit. U.S. EPA provided the following clarification:

*Chemical manufacturing process unit means the equipment assembled and connected by pipes or ducts to process raw materials and to manufacture an intended product. For the purpose of this subpart, chemical manufacturing process unit includes air oxidation reactors and their associated product separators and recovery devices; reactors and their associated product separators and recovery devices; distillation units and their associated distillate receivers and recovery devices; associated unit operations (as defined in this section); and **any feed, intermediate and product storage vessels, product transfer racks, and connected ducts and piping**. A chemical manufacturing process unit includes pumps, compressors, agitators, pressure relief devices, sampling connection systems, open-ended valves or lines, valves, connectors, instrumentation systems, and control devices or systems. A chemical manufacturing process unit is identified by its primary product. (Emphasis added).²*

Because Subpart GGGa arguably applies to the propane cavern under the current process unit definition and will certainly apply once the stay is lifted, MPC has included the propane cavern piping components into the refinery's LDAR program. Attachment E documents the applicable provisions from NSPS Subpart GGGa to the propane cavern equipment leak components which WVDEP can reference in drafting the emission unit-specific requirements for the propane cavern's Title V permit.

2.3. NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS (NESHAP)

National Emission Standards for Hazardous Air Pollutants (NESHAP) are emission standards for major and area sources of HAP. 40 CFR Part 63 NESHAP allowable emission standards and/or work practices for HAP sources in designated source categories are established on the basis of a Maximum Achievable Control Technology (MACT) determination. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type. The following is a summary of applicability determinations for NESHAP regulations of relevance to the propane cavern.

2.3.1. NESHAP Subpart CC – Petroleum Refineries

The standards and requirements for 40 CFR 63 Subpart CC apply to petroleum refining process units and related emissions points including equipment leaks at petroleum refinery process units. The propane cavern equipment leak components located in West Virginia are associated with the HF Alky petroleum refining process unit operated by the refinery and are subject to NSPS Subpart GGGa. Pursuant to 40 CFR 63.640(p)(2), equipment leaks that are also subject to the provisions of Subpart GGGa are required to comply only with the provisions specified in Subpart GGGa. Therefore, the propane cavern equipment leaks are not required to comply with NESHAP Subpart CC.

2.4. COMPLIANCE ASSURANCE MONITORING

Under 40 CFR 64, the CAM regulations, facilities are required to prepare and submit monitoring plans for certain emissions units with the initial or renewal Title V operating permit application. CAM Plans are intended to provide an on-going and reasonable assurance of compliance with emission limits for sources that utilize active control devices where existing Title V permit requirements may not be considered sufficient.

Pursuant to the general applicability criteria in 40 CFR 64.2, CAM only applies to emission units that use a control device (as defined in 40 CFR 64.1) to comply with a federally-enforceable requirement (e.g., emission limit) and whose

² Letter from Mr. John Rasnic, U.S. EPA in Docket ID No. EPA-HQ-OAR-2006-0699, April 6, 1994.

pre-controlled emission levels exceed the major source thresholds under the Title V operating permit program. There are no control devices located at the propane cavern facility; therefore, CAM is not applicable.

2.5. CHEMICAL ACCIDENT PREVENTION REGULATIONS

Chemical accident prevention requirements established pursuant to Section 112(r) of the Clean Air Act are included in 40 CFR Part 68. Applicability of this part is determined based on the type and quantity of chemicals stored at a facility. MPC has evaluated the amount of Section 112(r) substances stored at the propane cavern facility and has determined that the propane and propylene stored in the cavern constitute a flammable mixture (CAS #00-11-11) stored in a quantity that exceeds the applicable threshold listed in 40 CFR 68 Subpart F, Tables 3 and 4 (i.e. 10,000 pounds). Pursuant to 40 CFR 68.10(d)(2), the propane cavern is subject to Program Level 3 requirements under the chemical accident prevention provisions because it is subject to the Occupational Safety and Health Administration (OSHA) process safety management standard (PSM) in 29 CFR 1910.119. MPC conducted an offsite consequence analysis (OCA) for both a worst-case and alternative release scenario from the propane cavern in accordance with the applicable requirements for flammable mixtures in 40 CFR 68.165. Finally, MPC has developed a Program Level 3 Process Hazards Analysis (PHA) for the propane cavern following the applicable requirements under 40 CFR 68 Subpart D.

2.6. PROTECTION OF STRATOSPHERIC OZONE

MPC will comply with all applicable requirements of 40 CFR 82 for any consumption, recycling, and importing of controlled substances for the operation/maintenance of any applicable air-conditioning units.

2.7. WEST VIRGINIA SIP REGULATIONS

This section of the application highlights applicability of specific West Virginia State Implementation Plan (SIP) regulations that may apply to the propane cavern facility.

2.7.1. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor – State Only

Pursuant to 45 CSR 4-3: *No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.* The propane cavern facility is subject to this state only requirement.

2.7.2. 45 CSR 7: To Prevent and Control Particulate Matter Air Pollution from Manufacturing Processes and Associated Operations

45 CSR 7 does not apply to the propane cavern because it is not a source of smoke, particulate matter, or other gaseous matter and it is not considered to be a manufacturing process.

2.7.3. 45 CSR 11: Prevention of Air Pollution Emergency Episodes

Pursuant to 45 CSR 11-5.2: when requested by the Secretary, the permittee shall prepare standby plans for reducing the emissions for air pollutants in accordance with objectives set forth in Tables I, II, and III of 45 CSR 11. The propane cavern is located in West Virginia Air Quality Control Region(AQCR) 3 (U.S. EPA AQCR 103). This region is classified as Priority I for particulate matter and Priority III for sulfur oxides, carbon monoxide, nitrogen dioxide, hydrocarbons, and Photo-Chemical Oxidants according to Table A of 45 CSR 11.

2.7.4. 45 CSR 13: Permits for Construction, Modification, Relocation and Operation of Stationary Sources of Air Pollutants, Notification Requirements, Administrative Updates, Temporary Permits, General Permits, Permission to Commence Construction, and Procedures for Evaluation

Pursuant to 45 CSR 13-5:

No person shall cause, suffer, allow or permit the construction, modification, relocation and operation of any stationary source to be commenced without notifying the Secretary of such intent and obtaining a permit to construct, modify, relocate and operate the stationary source as required in this rule or any other applicable rule promulgated by the Secretary.

In the event that Catlettsburg would propose the construction of an additional unit at the propane cavern facility or modifications to existing units, the proper Rule 13 (R13) permit application procedures would be followed, if necessary.

2.7.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution From Materials Handling, Preparation, Storage and Other Sources of Fugitive Matter

Pursuant to 45 CSR 17-3:

No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property on which the discharge originates which causes or contributes to statutory air pollution.

The propane cavern facility is subject to this requirement.

2.7.6. 45 CSR 21: To Prevent and Control Air Pollution From the Emission of Volatile Organic Compounds

The only potentially applicable sections of this regulation are 45 CSR 21-26 for Leaks from Petroleum Refinery Equipment and 45 CSR 21-40 for Other Facilities that Emit Volatile Organic Compound (VOC). Pursuant to 45 CSR 21-26:

This section 26, applies to all equipment in volatile organic compound (VOC) service in any process unit at a petroleum refinery, regardless of size or throughput.

The propane cavern is not a source within the definition of petroleum refinery. Although the cavern is a co-located source with the Catlettsburg refinery in that it is adjacent to the refinery and under common control, the cavern itself is not a refinery. Petroleum refinery is defined as “any facility engaged in producing gasoline, kerosene, distillate fuel oils, residual fuel oils, lubricants, or other products through distillation of petroleum or through the redistillation, cracking, or reforming of unfinished petroleum derivatives.”³ The cavern is used for storage only, not the production

³ 45 CSR 21-2.55

of propane. Therefore, the source located in West Virginia is not a petroleum refinery that would trigger application of 45 CSR 21-26.

Pursuant to 45 CSR 21-40:

This section 40, applies to any facility that has aggregate maximum theoretical emissions of 90.7 megagrams (100 tons) or more of VOC's per calendar year in absence of control devices; provided that this section 40, applies to any sources within such facility other than those sources subject to regulation under sections 11 through 39 of 45 CSR 21.

This requirement does not apply to the propane cavern facility because the aggregate maximum emissions of VOC from the facility are less than 100 tons per year.

2.7.7. 45 CSR 27: To Prevent and Control the Emissions of Toxic Air Pollutants

Pursuant to the definition of “chemical processing unit” in 45 CSR 27-2.4, the affected facility under West Virginia’s air toxics program does not include “equipment used in the production and distribution of petroleum products providing that such equipment does not produce or contact materials containing more than 5% benzene by weight.” The propane stored in the propane cavern does not contain detectable quantities of benzene (as verified through recent sampling), so the propane cavern is not considered to be a chemical processing unit and is, thus, exempt from the requirements of 45 CSR 27. Furthermore, the equipment leak components associated with the propane cavern are not in “toxic air pollutant service” because they do not contain or contact process fluid containing detectable quantities of a toxic air pollutant. Therefore, the propane cavern would not be subject to any requirements under 45 CSR 27 even if were considered to be a chemical processing unit.

2.7.8. 45 CSR 30: Requirements for Operating Permits

The propane cavern facility is subject to Title V operating permit requirements as discussed in Section 2.1 above. Pursuant to 45 CSR 30-4.1.a.2, this application is being submitted to fulfill the renewal permit application requirements for the propane cavern prior to the March 16, 2019 deadline.

2.7.9. Non-Applicability of Other SIP Rules

A thorough examination of the West Virginia SIP rule applicability to the propane cavern reveals many SIP regulations that do not apply or impose additional requirements on the propane cavern operations. Such SIP rules include those specific to a particular type of industrial operation that is categorically not applicable to the propane cavern facility.

3. AIR EMISSIONS QUANTIFICATION

This section of the application provides a discussion of emission calculation methodologies used for the emission sources at the propane cavern. Detailed emissions calculations are provided in Attachment I to this report.

Fugitive VOC emissions from piping components such as valves and connectors comprise an area source (1S) at the propane cavern facility. The cavern fugitive area source is the only emission point (1E) associated with the propane cavern located in West Virginia. The VOC emissions from fugitive sources are calculated based on the component count, refinery average emission factors from the EPA document titled Protocol for Equipment Leak Emission Estimates, dated November 1995, and an assumed control efficiency for implementing the NSPS Subpart VVa LDAR program required by NSPS Subpart GGGa.

Unlike the butane cavern, periodic pressure control venting from the propane cavern (primarily during the summer months) is tied into the refinery's sour fuel gas system rather than to the Lube Flare. In this configuration, pressure control venting from the propane cavern is not considered an emissions source because any emissions from combusting the propane cavern's contribution to the refinery's fuel gas are accounted for at the boilers, heaters, and other combustion devices firing fuel gas located at the refinery. These fuel gas combustion devices (FGCD) are addressed individually in the refinery's Kentucky Title V permit, and they do not need to be referenced in the propane cavern Title V permit. Although periodic venting from the propane cavern for pressure control does not contribute to flaring emissions at the refinery, the process water degassing drum associated with the propane cavern does have a vent tied into the flare header line that crosses the Big Sandy River. All process water from the butane and propane caverns is sent to the degassing drum, where any entrained liquefied petroleum gas (LPG) is separated from the water and is vented to the Lube Flare. The wastewater is then transferred to the Braskem Neal plant by vacuum truck. The combined wastewater stream from the Neal plant including contributions from the propane cavern, butane cavern, and Neal plant operations is sent to the refinery by a pipeline that traverses across the river where it is then processed in the refinery's wastewater treatment plant. Contributions to flaring emission from the propane cavern degassing drum vent were accounted for through the applicable Kentucky air permitting process. Therefore, these emissions do not need to be addressed in this initial Title V application for the propane cavern because they do not occur in West Virginia and all applicable requirements for the Lube Flare are captured in the refinery's current Title V permit.

4. RENEWAL TITLE V APPLICATION FORMS

The completed Title V Permit General Form and the Title V Permit Application Checklist for Administrative Completeness are included in this section.



WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION

DIVISION OF AIR QUALITY

601 57th Street SE

Charleston, WV 25304

Phone: (304) 926-0475

www.dep.wv.gov/daq

INITIAL/RENEWAL TITLE V PERMIT APPLICATION - GENERAL FORMS

Section 1: General Information

| | | | |
|--|--|---|--|
| 1. Name of Applicant (As registered with the WV Secretary of State's Office): Marathon Petroleum Company, LP | | 2. Facility Name or Location: Neal Propane Cavern | |
| 3. DAQ Plant ID No.: 099-00118 | | 4. Federal Employer ID No. (FEIN): 31-1537655 | |
| 5. Permit Application Type: <input type="checkbox"/> Initial Permit When did operations commence? Fourth Quarter 1980 <input checked="" type="checkbox"/> Permit Renewal What is the expiration date of the existing permit? 06/16/2019 <input type="checkbox"/> Update to Initial/Renewal Permit Application | | | |
| 6. Type of Business Entity: <input type="checkbox"/> Corporation <input type="checkbox"/> Governmental Agency <input type="checkbox"/> LLC <input type="checkbox"/> Partnership <input checked="" type="checkbox"/> Limited Partnership | | 7. Is the Applicant the: <input type="checkbox"/> Owner <input type="checkbox"/> Operator <input checked="" type="checkbox"/> Both If the Applicant is not both the owner and operator, please provide the name and address of the other party. | |
| 8. Number of onsite employees: 0 | | | |
| 9. Governmental Code: <input checked="" type="checkbox"/> Privately owned and operated; 0 <input type="checkbox"/> County government owned and operated; 3 <input type="checkbox"/> Federally owned and operated; 1 <input type="checkbox"/> Municipality government owned and operated; 4 <input type="checkbox"/> State government owned and operated; 2 <input type="checkbox"/> District government owned and operated; 5 | | | |
| 10. Business Confidentiality Claims Does this application include confidential information (per 45CSR31)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, identify each segment of information on each page that is submitted as confidential, and provide justification for each segment claimed confidential, including the criteria under 45CSR§31-4.1, and in accordance with the DAQ's "PRECAUTIONARY NOTICE-CLAIMS OF CONFIDENTIALITY" guidance. | | | |

| | | |
|-----------------------------------|----------------------------|------------|
| 11. Mailing Address | | |
| Street or P.O. Box: P.O. Box 1492 | | |
| City: Catlettsburg | State: Kentucky | Zip: 41129 |
| Telephone Number: (606) 921-6880 | Fax Number: (606) 921-3290 | |

| | | |
|--|-----------------------------------|--|
| 12. Facility Location | | |
| Street: 100 Big Sandy River Road | City: Kenova | County: Wayne |
| UTM Easting: 360.688 km | UTM Northing: 4,247.736 km | Zone: <input checked="" type="checkbox"/> 17 or <input type="checkbox"/> 18 |
| Directions: From I-64 East take exit 1 for US-52 S toward Kenova Ceredo. On U.S. 52 S/W Virginia 75 E, turn right onto Co Hwy 1/16, turn left to stay on Co Hwy 1/16, turn left onto Novamount Rd, facility will be on the right. | | |
| Portable Source? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | | |
| Is facility located within a nonattainment area? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | | If yes, for what air pollutants? |
| Is facility located within 50 miles of another state? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | | If yes, name the affected state(s). Kentucky |
| Is facility located within 100 km of a Class I Area¹? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If no, do emissions impact a Class I Area¹? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | | If yes, name the area(s). |
| <small>¹ Class I areas include Dolly Sods and Otter Creek Wilderness Areas in West Virginia, and Shenandoah National Park and James River Face Wilderness Area in Virginia.</small> | | |

| | | |
|--|-----------------------------------|--------------------------------|
| 13. Contact Information | | |
| Responsible Official: Jay M. Richert | | Title: Vice President |
| Street or P.O. Box: P.O. Box 1492 | | |
| City: Catlettsburg | State: Kentucky | Zip: 41129 |
| Telephone Number: (606) 921-6200 | Fax Number: (606) 921-3500 | |
| E-mail address: jmrichert@marathonpetroleum.com | | |
| Environmental Contact: Clay Woford | | Title: HES Professional |
| Street or P.O. Box: P.O. Box 1492 | | |
| City: Catlettsburg | State: Kentucky | Zip: 41129 |
| Telephone Number: (606) 921-6880 | Fax Number: (606) 921-3290 | |
| E-mail address: rowoford@marathonpetroleum.com | | |
| Application Preparer: Same as Environmental Contact | | Title: |
| Company: | | |
| Street or P.O. Box: | | |
| City: | State: | Zip: |
| Telephone Number: () - | Fax Number: () - | |
| E-mail address: | | |

14. Facility Description

List all processes, products, NAICS and SIC codes for normal operation, in order of priority. Also list any process, products, NAICS and SIC codes associated with any alternative operating scenarios if different from those listed for normal operation.

| Process | Products | NAICS | SIC |
|-----------------|----------|--------|------|
| Propane Storage | Propane | 427710 | 2911 |

Provide a general description of operations.

The propane cavern in Neal, WV was built to store propane produced by the refinery. Propane is primarily sold as a commercial product to outside customers, but it can also be blended into the refinery's fuel gas system for pressure control and to ensure the fuel gas meets heat content specifications. The Catlettsburg refinery produces propane all year from the Saturate Gas Plant, HF Alkylation Unit, and Cumene Unit.

15. Provide an **Area Map** showing plant location as **ATTACHMENT A**.

16. Provide a **Plot Plan(s)**, e.g. scaled map(s) and/or sketch(es) showing the location of the property on which the stationary source(s) is located as **ATTACHMENT B**. For instructions, refer to "Plot Plan - Guidelines."

17. Provide a detailed **Process Flow Diagram(s)** showing each process or emissions unit as **ATTACHMENT C**. Process Flow Diagrams should show all emission units, control equipment, emission points, and their relationships.

Section 2: Applicable Requirements

| 18. Applicable Requirements Summary | |
|--|--|
| Instructions: Mark all applicable requirements. | |
| <input checked="" type="checkbox"/> SIP | <input type="checkbox"/> FIP |
| <input type="checkbox"/> Minor source NSR (45CSR13) | <input type="checkbox"/> PSD (45CSR14) |
| <input type="checkbox"/> NESHAP (45CSR34) | <input type="checkbox"/> Nonattainment NSR (45CSR19) |
| <input checked="" type="checkbox"/> Section 111 NSPS | <input type="checkbox"/> Section 112(d) MACT standards |
| <input type="checkbox"/> Section 112(g) Case-by-case MACT | <input checked="" type="checkbox"/> 112(r) RMP |
| <input type="checkbox"/> Section 112(i) Early reduction of HAP | <input type="checkbox"/> Consumer/commercial prod. reqts., section 183(e) |
| <input type="checkbox"/> Section 129 Standards/Reqts. | <input checked="" type="checkbox"/> Stratospheric ozone (Title VI) |
| <input type="checkbox"/> Tank vessel reqt., section 183(f) | <input type="checkbox"/> Emissions cap 45CSR§30-2.6.1 |
| <input type="checkbox"/> NAAQS, increments or visibility (temp. sources) | <input type="checkbox"/> 45CSR27 State enforceable only rule |
| <input type="checkbox"/> 45CSR4 State enforceable only rule | <input type="checkbox"/> Acid Rain (Title IV, 45CSR33) |
| <input type="checkbox"/> Emissions Trading and Banking (45CSR28) | <input type="checkbox"/> Compliance Assurance Monitoring (40CFR64) |
| <input type="checkbox"/> CAIR NO _x Annual Trading Program (45CSR39) | <input type="checkbox"/> CAIR NO _x Ozone Season Trading Program (45CSR40) |
| <input type="checkbox"/> CAIR SO ₂ Trading Program (45CSR41) | |

| 19. Non Applicability Determinations |
|--|
| <p>List all requirements which the source has determined not applicable and for which a permit shield is requested. The listing shall also include the rule citation and the reason why the shield applies.</p> <p>Refer to the non-applicable regulations identified in Section 2 of the Application.</p> |
| <input checked="" type="checkbox"/> Permit Shield |

20. Facility-Wide Applicable Requirements

List all facility-wide applicable requirements. For each applicable requirement, include the underlying rule/regulation citation and/or construction permit with the condition number. (Note: Title V permit condition numbers alone are not the underlying applicable requirements).

Discharge of Air Pollutants of Objectionable Odor Not Allowed [45 CSR 4-3.1] (state enforceable only)

Standby Plan for Reducing Emissions [45 CSR 11-5]

Payment of Annual Fees [45 CSR 30]

Risk Management Plan [40 CFR 68]

Control Particulate Matter Air Pollution From Other Sources of Fugitive Matter [45 CSR 17-3]

Permit Shield

For all facility-wide applicable requirements listed above, provide monitoring/testing / recordkeeping / reporting which shall be used to demonstrate compliance. If the method is based on a permit or rule, include the condition number and/or citation. (Note: Each requirement listed above must have an associated method of demonstrating compliance. If there is not already a required method in place, then a method must be proposed.)

Discharge of Air Pollutants of Objectionable Odor Not Allowed [45 CSR 4-3.1]

The permittee shall maintain a record of all odor complaints received, any investigation performed in response to such a complaint, and any responsive action(s) taken.

Standby Plan for Reducing Emissions [45 CSR 11-5.2]

When requested by the Secretary, the permittee shall prepare standby plans for reducing the emissions for air pollutants in accordance with objectives set forth in Tables I, II, and III of 45 CSR 11.

Payment of Annual Fees [40 CSR 30]

The permittee shall submit a Certified Emissions Statement (CES) and pay fees on an annual basis in accordance with the submittal requirement of the Division of Air Quality.

Risk Management Plan [40 CFR 68]

The permittee shall submit a risk management plan (RMP) by the date specified in 40 CFR 68.10 and shall certify compliance with the requirements of Part 68 as part of the annual compliance certification as required by 40 CFR Part 70.

Control Particulate Matter Air Pollution From Other Sources of Fugitive Matter [45 CSR 17-3]

No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property on which the discharge originates which causes or contributes to statutory air pollution.

Are you in compliance with all facility-wide applicable requirements? Yes No

If no, complete the Schedule of Compliance Form as ATTACHMENT F.

| 21. Active Permits/Consent Orders | | |
|-----------------------------------|--------------------------------|--|
| Permit or Consent Order Number | Date of Issuance MM/DD/YYYY | List any Permit Determinations that Affect the Permit (<i>if any</i>) |
| NA | // | |
| | // | |

| 22. Inactive Permits/Obsolete Permit Conditions | | |
|---|------------------|-------------------------|
| Permit Number | Date of Issuance | Permit Condition Number |
| NA | // | |
| | // | |

Section 3: Facility-Wide Emissions

| 23. Facility-Wide Emissions Summary [Tons per Year] | |
|--|----------------------------------|
| Criteria Pollutants | Potential Emissions ³ |
| Carbon Monoxide (CO) | - |
| Nitrogen Oxides (NO _x) | - |
| Lead (Pb) | - |
| Particulate Matter (PM _{2.5}) ¹ | - |
| Particulate Matter (PM ₁₀) ¹ | - |
| Total Particulate Matter (TSP) | - |
| Sulfur Dioxide (SO ₂) | - |
| Volatile Organic Compounds (VOC) | 3.78 |
| Hazardous Air Pollutants ² | Potential Emissions |
| 1,3-Butadiene | - |
| Benzene | - |
| Regulated Pollutants other than Criteria and HAP | Potential Emissions |
| | |

¹PM_{2.5} and PM₁₀ are components of TSP.
²For HAPs that are also considered PM or VOCs, emissions should be included in both the HAPs section and the Criteria Pollutants section.
³Only includes potential emissions from the fugitive equipment leak components in West Virginia and not flare emissions occurring in Kentucky attributable to the butane cavern (refer to Table I-1 in Attachment I).

Section 4: Insignificant Activities

| 24. Insignificant Activities (Check all that apply) | |
|--|--|
| <input type="checkbox"/> | 1. Air compressors and pneumatically operated equipment, including hand tools. |
| <input checked="" type="checkbox"/> | 2. Air contaminant detectors or recorders, combustion controllers or shutoffs. |
| <input type="checkbox"/> | 3. Any consumer product used in the same manner as in normal consumer use, provided the use results in a duration and frequency of exposure which are not greater than those experienced by consumer, and which may include, but not be limited to, personal use items; janitorial cleaning supplies, office supplies and supplies to maintain copying equipment. |
| <input checked="" type="checkbox"/> | 4. Bathroom/toilet vent emissions. (One Port-a-let) |
| <input checked="" type="checkbox"/> | 5. Batteries and battery charging stations, except at battery manufacturing plants. (Uninterruptable power supply for power backup to supply controls and critical lighting) |
| <input type="checkbox"/> | 6. Bench-scale laboratory equipment used for physical or chemical analysis, but not lab fume hoods or vents. Many lab fume hoods or vents might qualify for treatment as insignificant (depending on the applicable SIP) or be grouped together for purposes of description. |
| <input type="checkbox"/> | 7. Blacksmith forges. |
| <input type="checkbox"/> | 8. Boiler water treatment operations, not including cooling towers. |
| <input type="checkbox"/> | 9. Brazing, soldering or welding equipment used as an auxiliary to the principal equipment at the source. |
| <input type="checkbox"/> | 10. CO ₂ lasers, used only on metals and other materials which do not emit HAP in the process. |
| <input type="checkbox"/> | 11. Combustion emissions from propulsion of mobile sources, except for vessel emissions from Outer Continental Shelf sources. |
| <input type="checkbox"/> | 12. Combustion units designed and used exclusively for comfort heating that use liquid petroleum gas or natural gas as fuel. |
| <input checked="" type="checkbox"/> | 13. Comfort air conditioning or ventilation systems not used to remove air contaminants generated by or released from specific units of equipment. |
| <input type="checkbox"/> | 14. Demineralized water tanks and demineralizer vents. |
| <input type="checkbox"/> | 15. Drop hammers or hydraulic presses for forging or metalworking. |
| <input type="checkbox"/> | 16. Electric or steam-heated drying ovens and autoclaves, but not the emissions from the articles or substances being processed in the ovens or autoclaves or the boilers delivering the steam. |
| <input type="checkbox"/> | 17. Emergency (backup) electrical generators at residential locations. |
| <input type="checkbox"/> | 18. Emergency road flares. |
| <input type="checkbox"/> | 19. Emission units which do not have any applicable requirements and which emit criteria pollutants (CO, NO _x , SO ₂ , VOC and PM) into the atmosphere at a rate of less than 1 pound per hour and less than 10,000 pounds per year aggregate total for each criteria pollutant from all emission units. Please specify all emission units for which this exemption applies along with the quantity of criteria pollutants emitted on an hourly and annual basis: |

| 24. Insignificant Activities (Check all that apply) | |
|--|--|
| <input type="checkbox"/> | 20. Emission units which do not have any applicable requirements and which emit hazardous air pollutants into the atmosphere at a rate of less than 0.1 pounds per hour and less than 1,000 pounds per year aggregate total for all HAPs from all emission sources. This limitation cannot be used for any source which emits dioxin/furans nor for toxic air pollutants as per 45CSR27. Please specify all emission units for which this exemption applies along with the quantity of hazardous air pollutants emitted on an hourly and annual basis: |
| <input type="checkbox"/> | 21. Environmental chambers not using hazardous air pollutant (HAP) gases. |
| <input type="checkbox"/> | 22. Equipment on the premises of industrial and manufacturing operations used solely for the purpose of preparing food for human consumption. |
| <input type="checkbox"/> | 23. Equipment used exclusively to slaughter animals, but not including other equipment at slaughterhouses, such as rendering cookers, boilers, heating plants, incinerators, and electrical power generating equipment. |
| <input type="checkbox"/> | 24. Equipment used for quality control/assurance or inspection purposes, including sampling equipment used to withdraw materials for analysis. |
| <input type="checkbox"/> | 25. Equipment used for surface coating, painting, dipping or spray operations, except those that will emit VOC or HAP. |
| <input type="checkbox"/> | 26. Fire suppression systems. |
| <input type="checkbox"/> | 27. Firefighting equipment and the equipment used to train firefighters. |
| <input type="checkbox"/> | 28. Flares used solely to indicate danger to the public. |
| <input type="checkbox"/> | 29. Fugitive emission related to movement of passenger vehicle provided the emissions are not counted for applicability purposes and any required fugitive dust control plan or its equivalent is submitted. |
| <input type="checkbox"/> | 30. Hand-held applicator equipment for hot melt adhesives with no VOC in the adhesive formulation. |
| <input type="checkbox"/> | 31. Hand-held equipment for buffing, polishing, cutting, drilling, sawing, grinding, turning or machining wood, metal or plastic. |
| <input type="checkbox"/> | 32. Humidity chambers. |
| <input type="checkbox"/> | 33. Hydraulic and hydrostatic testing equipment. |
| <input type="checkbox"/> | 34. Indoor or outdoor kerosene heaters. |
| <input type="checkbox"/> | 35. Internal combustion engines used for landscaping purposes. |
| <input type="checkbox"/> | 36. Laser trimmers using dust collection to prevent fugitive emissions. |
| <input type="checkbox"/> | 37. Laundry activities, except for dry-cleaning and steam boilers. |
| <input type="checkbox"/> | 38. Natural gas pressure regulator vents, excluding venting at oil and gas production facilities. |
| <input type="checkbox"/> | 39. Oxygen scavenging (de-aeration) of water. |
| <input type="checkbox"/> | 40. Ozone generators. |
| <input checked="" type="checkbox"/> | 41. Plant maintenance and upkeep activities (e.g., grounds-keeping, general repairs, cleaning, painting, welding, plumbing, re-tarring roofs, installing insulation, and paving parking lots) provided these activities are not conducted as part of a manufacturing process, are not related to the source's primary business activity, and not otherwise triggering a permit modification. (Cleaning and painting activities qualify if they are not subject to VOC or HAP control requirements. Asphalt batch plant owners/operators must still get a permit if otherwise requested.) |
| <input type="checkbox"/> | 42. Portable electrical generators that can be moved by hand from one location to another. "Moved by Hand" means that it can be moved without the assistance of any motorized or non-motorized vehicle, conveyance, or device. |
| <input type="checkbox"/> | 43. Process water filtration systems and demineralizers. |

| 24. Insignificant Activities (Check all that apply) | |
|--|---|
| <input type="checkbox"/> | 44. Repair or maintenance shop activities not related to the source's primary business activity, not including emissions from surface coating or de-greasing (solvent metal cleaning) activities, and not otherwise triggering a permit modification. |
| <input type="checkbox"/> | 45. Repairs or maintenance where no structural repairs are made and where no new air pollutant emitting facilities are installed or modified. |
| <input type="checkbox"/> | 46. Routing calibration and maintenance of laboratory equipment or other analytical instruments. |
| <input type="checkbox"/> | 47. Salt baths using nonvolatile salts that do not result in emissions of any regulated air pollutants. Shock chambers. |
| <input type="checkbox"/> | 48. Shock chambers. |
| <input type="checkbox"/> | 49. Solar simulators. |
| <input type="checkbox"/> | 50. Space heaters operating by direct heat transfer. |
| <input type="checkbox"/> | 51. Steam cleaning operations. |
| <input type="checkbox"/> | 52. Steam leaks. |
| <input type="checkbox"/> | 53. Steam sterilizers. |
| <input type="checkbox"/> | 54. Steam vents and safety relief valves. |
| <input type="checkbox"/> | 55. Storage tanks, reservoirs, and pumping and handling equipment of any size containing soaps, vegetable oil, grease, animal fat, and nonvolatile aqueous salt solutions, provided appropriate lids and covers are utilized. |
| <input type="checkbox"/> | 56. Storage tanks, vessels, and containers holding or storing liquid substances that will not emit any VOC or HAP. Exemptions for storage tanks containing petroleum liquids or other volatile organic liquids should be based on size limits such as storage tank capacity and vapor pressure of liquids stored and are not appropriate for this list. |
| <input type="checkbox"/> | 57. Such other sources or activities as the Director may determine. |
| <input type="checkbox"/> | 58. Tobacco smoking rooms and areas. |
| <input type="checkbox"/> | 59. Vents from continuous emissions monitors and other analyzers. |

Section 5: Emission Units, Control Devices, and Emission Points

| |
|---|
| 25. Equipment Table |
| Fill out the Title V Equipment Table and provide it as ATTACHMENT D . |
| 26. Emission Units |
| For each emission unit listed in the Title V Equipment Table , fill out and provide an Emission Unit Form as ATTACHMENT E . |
| For each emission unit not in compliance with an applicable requirement, fill out a Schedule of Compliance Form as ATTACHMENT F . |
| 27. Control Devices |
| For each control device listed in the Title V Equipment Table , fill out and provide an Air Pollution Control Device Form as ATTACHMENT G . |
| For any control device that is required on an emission unit in order to meet a standard or limitation for which the potential pre-control device emissions of an applicable regulated air pollutant is greater than or equal to the Title V Major Source Threshold Level, refer to the Compliance Assurance Monitoring (CAM) Form(s) for CAM applicability. Fill out and provide these forms, if applicable, for each Pollutant Specific Emission Unit (PSEU) as ATTACHMENT H . |

Section 6: Certification of Information

28. Certification of Truth, Accuracy and Completeness and Certification of Compliance

*Note: This Certification must be signed by a responsible official. The **original**, signed in **blue ink**, must be submitted with the application. Applications without an **original** signed certification will be considered as incomplete.*

a. Certification of Truth, Accuracy and Completeness

I certify that I am a responsible official (as defined at 45CSR§30-2.38) and am accordingly authorized to make this submission on behalf of the owners or operators of the source described in this document and its attachments. I certify under penalty of law that I have personally examined and am familiar with the statements and information submitted in this document and all its attachments. Based on my inquiry of those individuals with primary responsibility for obtaining the information, I certify that the statements and information are to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false statements and information or omitting required statements and information, including the possibility of fine and/or imprisonment.

b. Compliance Certification

Except for requirements identified in the Title V Application for which compliance is not achieved, I, the undersigned hereby certify that, based on information and belief formed after reasonable inquiry, all air contaminant sources identified in this application are in compliance with all applicable requirements.

Responsible official (type or print)

| | |
|----------------------|-----------------------|
| Name: Jay M. Richert | Title: Vice President |
|----------------------|-----------------------|

Responsible official's signature:

Signature:  Signature Date: 3/14/19
 (Must be signed and dated in blue ink)

Note: Please check all applicable attachments included with this permit application:

| | |
|-------------------------------------|---|
| <input checked="" type="checkbox"/> | ATTACHMENT A: Area Map |
| <input checked="" type="checkbox"/> | ATTACHMENT B: Plot Plan(s) |
| <input checked="" type="checkbox"/> | ATTACHMENT C: Process Flow Diagram(s) |
| <input checked="" type="checkbox"/> | ATTACHMENT D: Equipment Table |
| <input checked="" type="checkbox"/> | ATTACHMENT E: Emission Unit Form(s) |
| <input type="checkbox"/> | ATTACHMENT F: Schedule of Compliance Form(s) N/A |
| <input type="checkbox"/> | ATTACHMENT G: Air Pollution Control Device Form(s) N/A |
| <input checked="" type="checkbox"/> | ATTACHMENT H: Compliance Assurance Monitoring (CAM) Form(s) |


All of the required forms and additional information can be found and downloaded from, the DEP website at www.dep.wv.gov/dag, requested by phone (304) 926-0475, and/or obtained through the mail.

**TITLE V PERMIT APPLICATION CHECKLIST
FOR ADMINISTRATIVE COMPLETENESS**

| | |
|---|---|
| <p>A complete application is demonstrated when all of the information required below is properly prepared, completed and attached. The items listed below are required information which must be submitted with a Title V permit application. Any submittal will be considered incomplete if the required information is not included.*</p> | |
| <input checked="" type="checkbox"/> | Two signed copies of the application (at least one <u>must</u> contain the original “ <i>Certification</i> ” page signed and dated in blue ink) |
| <input checked="" type="checkbox"/> | Correct number of copies of the application on separate CDs or diskettes, (i.e. at least one disc per copy) |
| <input checked="" type="checkbox"/> | *Table of Contents (needs to be included but not for administrative completeness) |
| <input checked="" type="checkbox"/> | Facility information |
| <input checked="" type="checkbox"/> | Description of process and products, including NAICS and SIC codes, and including alternative operating scenarios |
| <input checked="" type="checkbox"/> | Area map showing plant location |
| <input checked="" type="checkbox"/> | Plot plan showing buildings and process areas |
| <input checked="" type="checkbox"/> | Process flow diagram(s), showing all emission units, control equipment, emission points, and their relationships |
| <input type="checkbox"/> | Identification of all applicable requirements with a description of the compliance status, the methods used for demonstrating compliance, and a Schedule of Compliance Form (ATTACHMENT F) for all requirements for which the source is not in compliance |
| <input type="checkbox"/> | Listing of all active permits and consent orders (if applicable) |
| <input checked="" type="checkbox"/> | Facility-wide emissions summary |
| <input checked="" type="checkbox"/> | Identification of Insignificant Activities |
| <input checked="" type="checkbox"/> | ATTACHMENT D - Title V Equipment Table completed for all emission units at the facility except those designated as insignificant activities |
| <input checked="" type="checkbox"/> | ATTACHMENT E - Emission Unit Form completed for each emission unit listed in the Title V Equipment Table (ATTACHMENT D) and a Schedule of Compliance Form (ATTACHMENT F) for all requirements for which the emission unit is not in compliance |
| <input type="checkbox"/> | ATTACHMENT G - Air Pollution Control Device Form completed for each control device listed in the Title V Equipment Table (ATTACHMENT D) |
| <input checked="" type="checkbox"/> | ATTACHMENT H – Compliance Assurance Monitoring (CAM) Plan Form completed for each control device for which the “Is the device subject to CAM?” question is answered “Yes” on the Air Pollution Control Device Form (ATTACHMENT G) |
| <input checked="" type="checkbox"/> | General Application Forms signed by a Responsible Official |
| <input type="checkbox"/> | Confidential Information submitted in accordance with 45CSR31 |

ATTACHMENT A: AREA MAP

Attachment A - Aerial Map of Propane Cavern

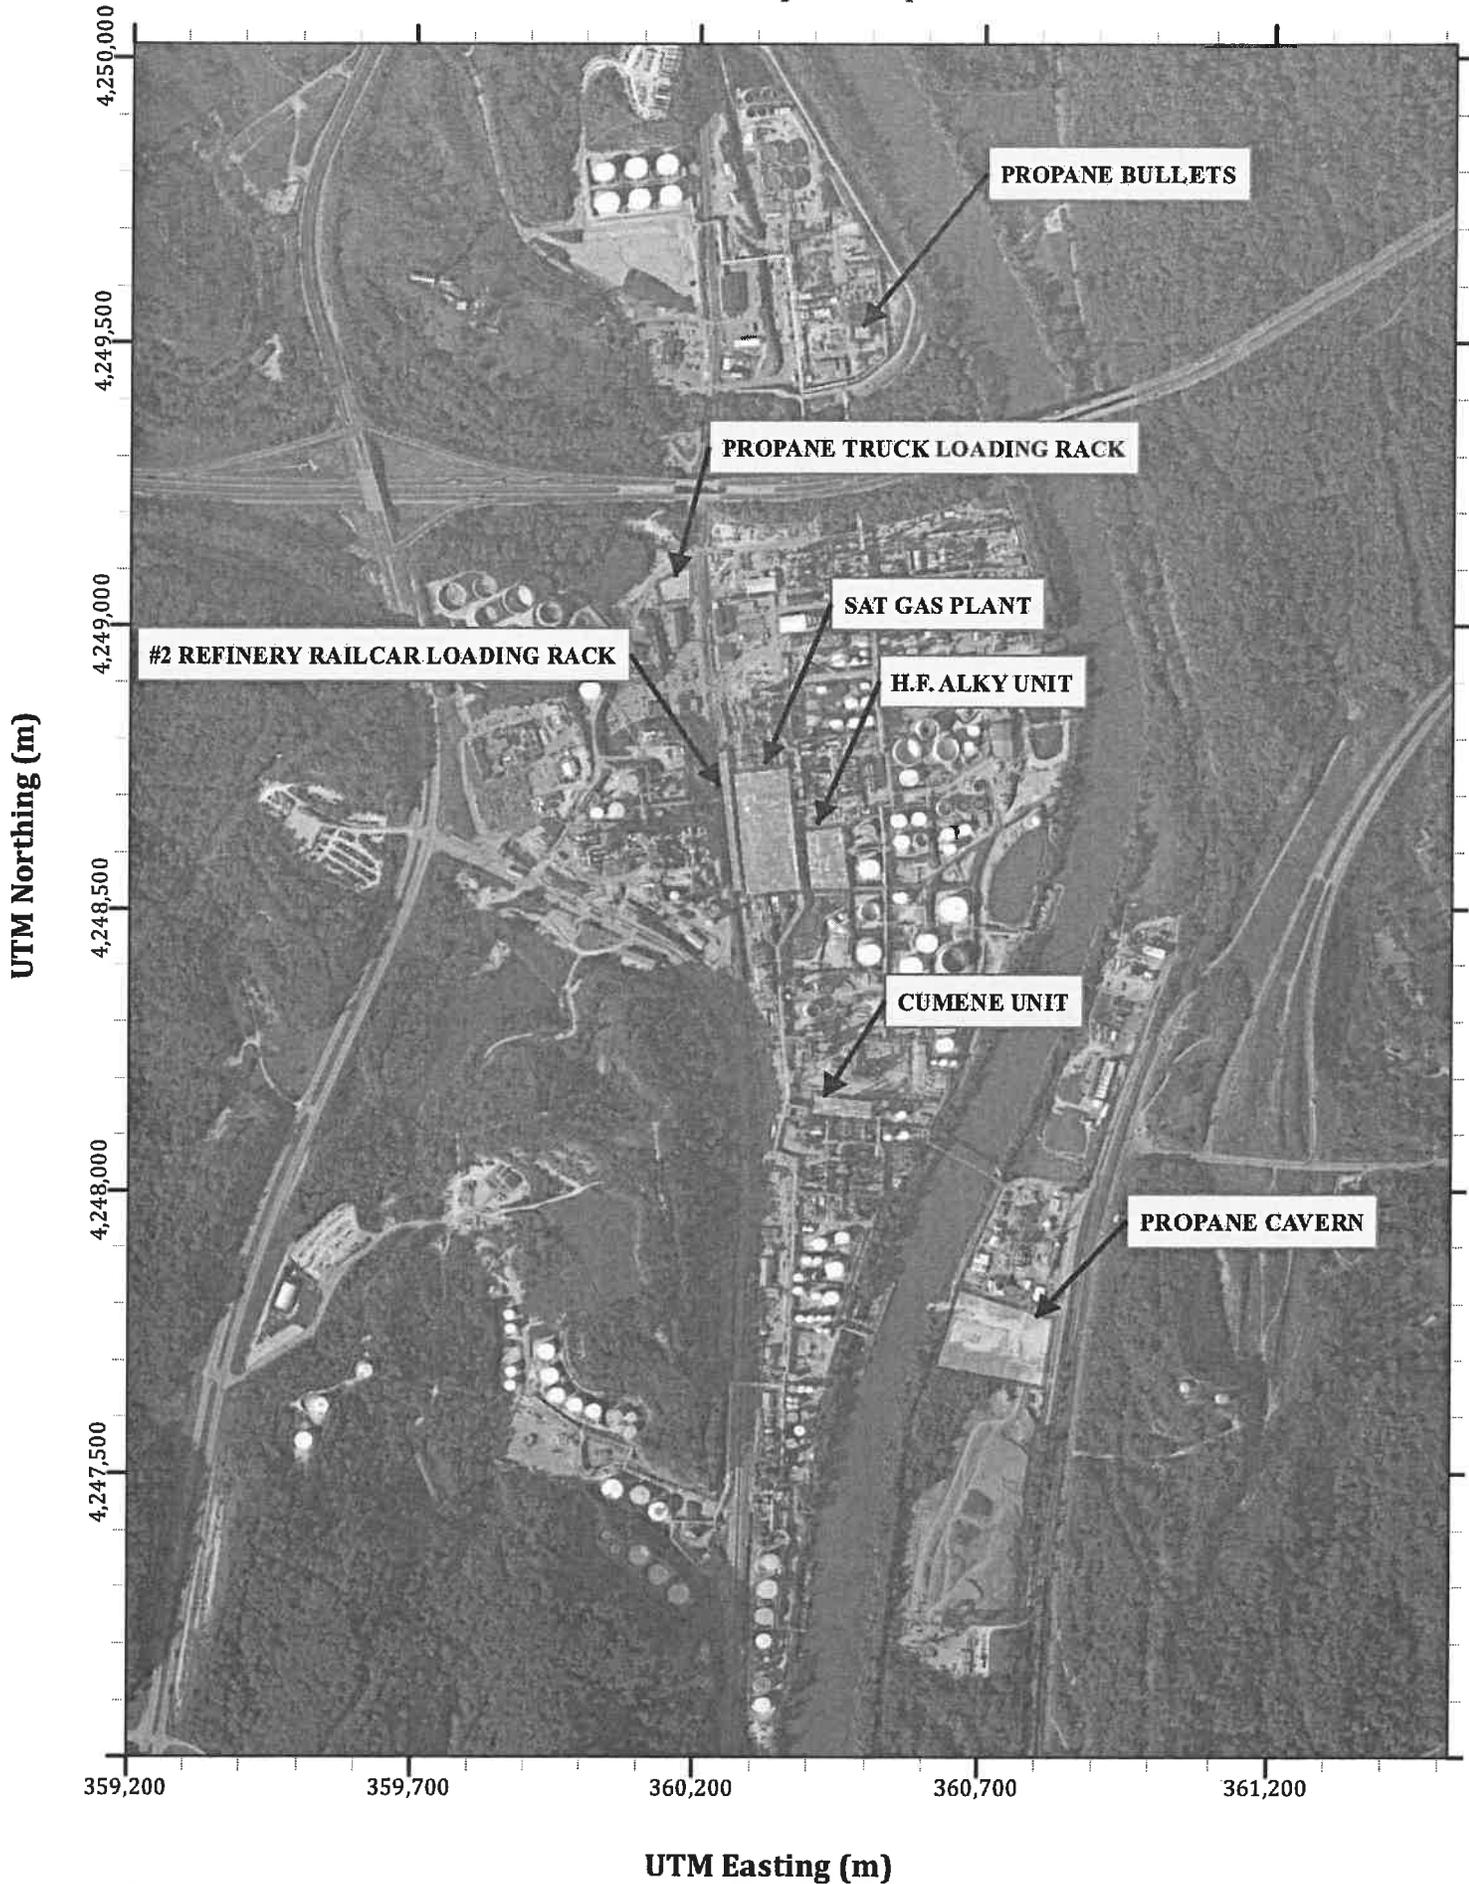


All Coordinates shown in UTM Coordinates,
Zone 17. NAD 83 Datum

ATTACHMENT B: PLOT PLAN



| | | |
|--|-------------|----------|
| REV. NO. | DESCRIPTION | APPR. |
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| SURVEYOR  CATLETTSBURG REFINING LLC SUBSIDIARY OF MARATHON PETROLEUM COMPANY LLC | | |
| DRAWN | VD | CHK'D BY |
| SCALE | ENG. JOB | DWG. |
| DATE | | |

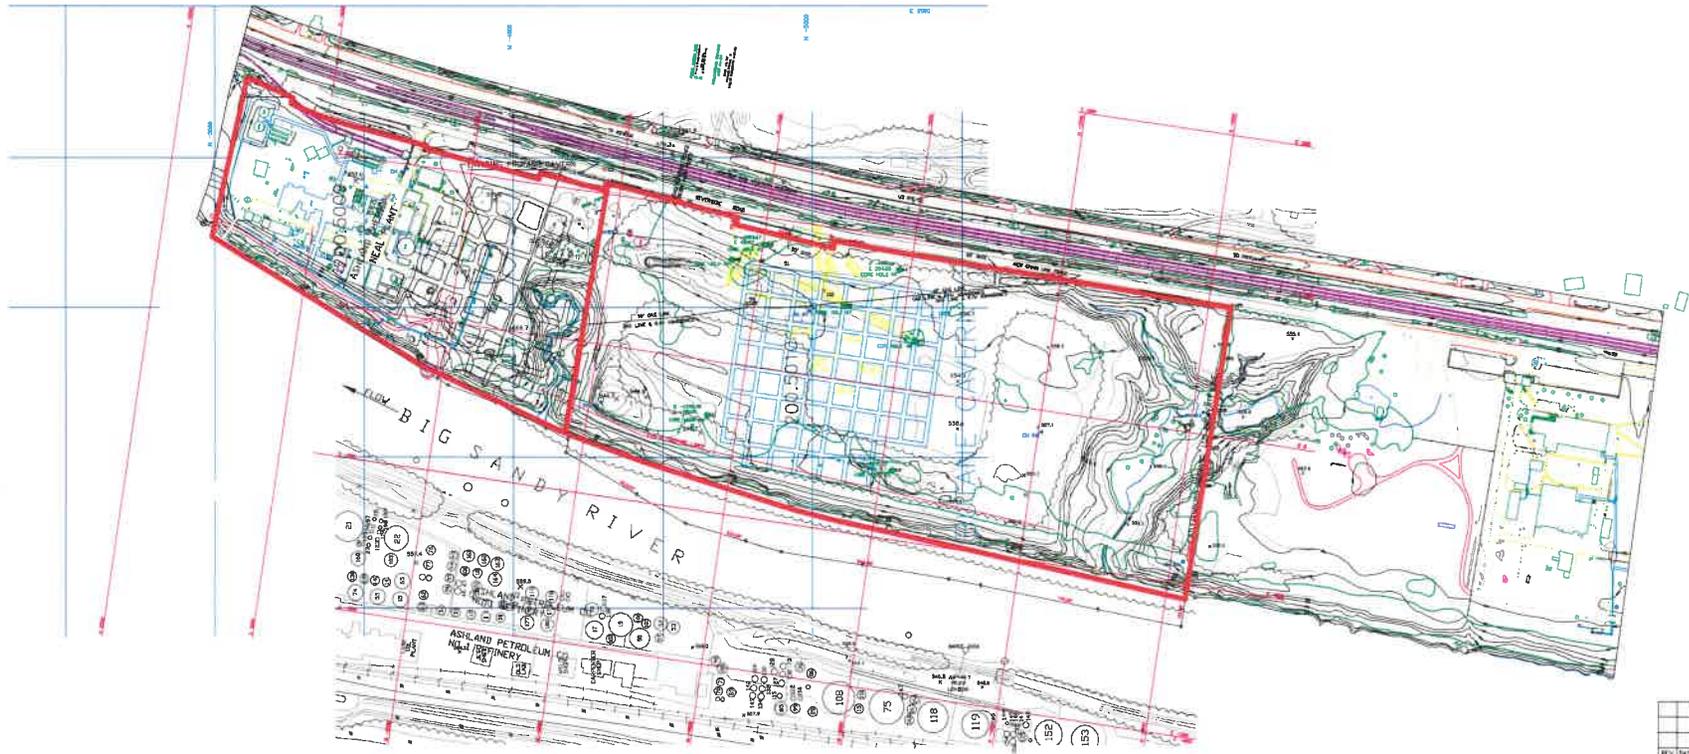

| REV. DATE | BY | DESCRIPTION | APPR. |
|-----------|----|-------------|-------|
| | DE | DESIGN | |
| | DE | PROJECT | |
| | DE | ELEC. | |
| | | SURVEYOR | |

  **CATLETTSBURG REFINING LLC**
MEMBER OF
VALERO ENERGY SERVICES LLC


**DETAIL PLOT PLAN
OF
NEAL WEST VIRGINIA**

DRAWN: RDW, WJG
SCALE: 1"=200'
DATE: 08/11/05

ENG. JOB: []
DWG. 1-11AA-303-S-A

ATTACHMENT C: PROCESS FLOW DIAGRAM

Attachment C: Propane Cavern Process Flow Diagram

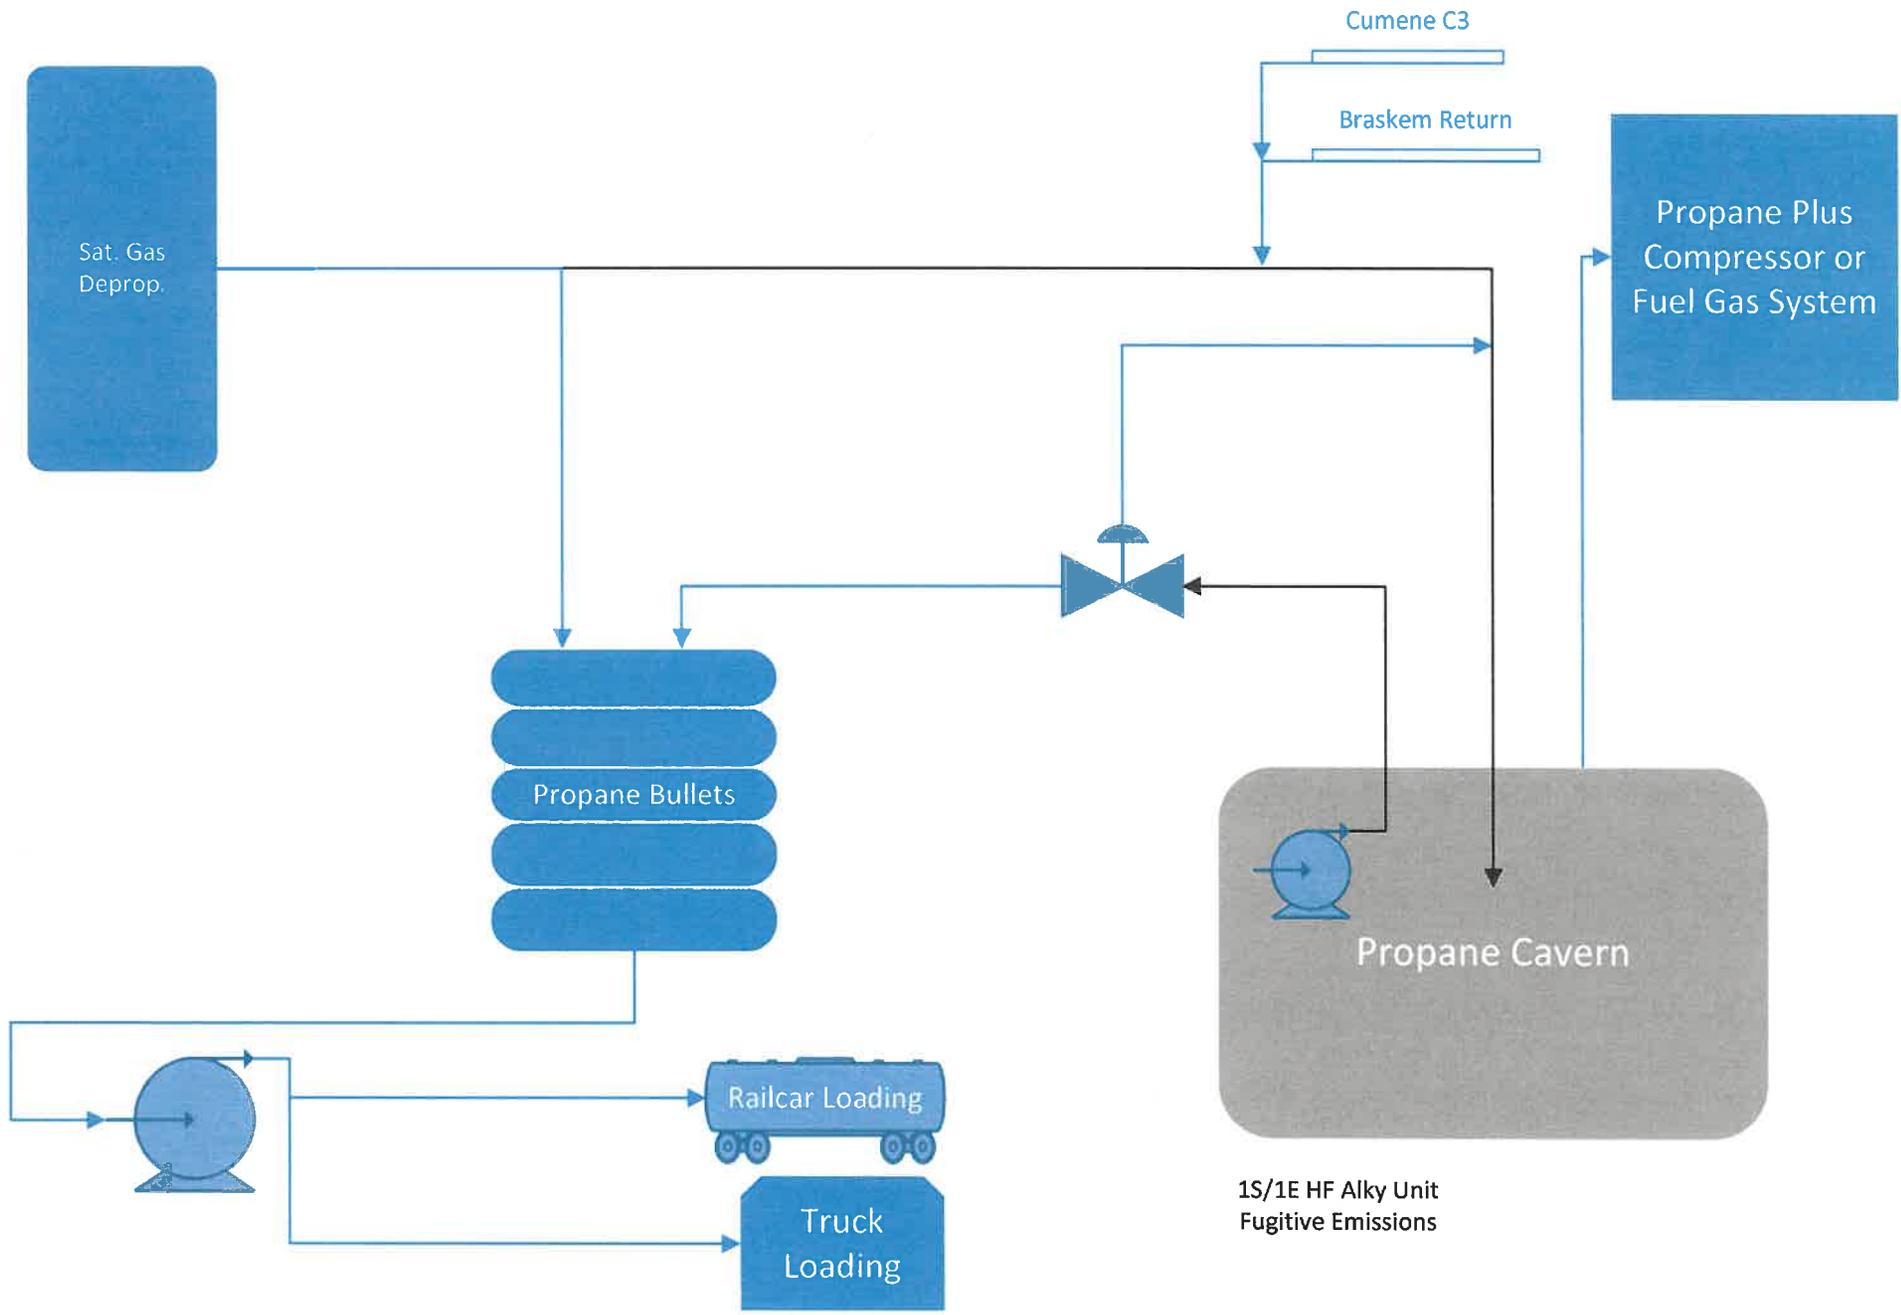

ATTACHMENT D: TITLE V EQUIPMENT TABLE

ATTACHMENT E: EMISSION UNIT FORM

ATTACHMENT E - Emission Unit Form

Emission Unit Description

| | | |
|---------------------------------------|---|---|
| Emission unit ID number: 1S | Emission unit name: HF Alky Unit Fugitive Emissions (WV Scope) | List any control devices associated with this emission unit: NA |
|---------------------------------------|---|---|

Provide a description of the emission unit (type, method of operation, design parameters, etc.):
Area source emissions from fugitive equipment leak components in West Virginia associated with the Propane Cavern.

| | | |
|--|--|------------------------------------|
| Manufacturer: NA | Model number: NA | Serial number: NA |
| Construction date: August 1979 (Start of Construction) | Installation date: Late 1980 (Start of Construction) | Modification date(s): NA |

Design Capacity (examples: furnaces - tons/hr, tanks - gallons): NA

| | | |
|---|---|---|
| Maximum Hourly Throughput: NA | Maximum Annual Throughput: NA | Maximum Operating Schedule: 8,760 hours |
|---|---|---|

Fuel Usage Data (fill out all applicable fields)

| | |
|---|---|
| Does this emission unit combust fuel? ___ Yes <input checked="" type="checkbox"/> No | If yes, is it? NA ___ Indirect Fired ___ Direct Fired |
|---|---|

| | |
|--|---|
| Maximum design heat input and/or maximum horsepower rating: NA | Type and Btu/hr rating of burners: NA |
|--|---|

List the primary fuel type(s) and if applicable, the secondary fuel type(s). For each fuel type listed, provide the maximum hourly and annual fuel usage for each.
NA

Describe each fuel expected to be used during the term of the permit.

| Fuel Type | Max. Sulfur Content | Max. Ash Content | BTU Value |
|-----------|---------------------|------------------|-----------|
| NA | | | |

Emissions Data

| Criteria Pollutants | Potential Emissions | |
|---|---------------------|------|
| | PPH | TPY |
| Carbon Monoxide (CO) | - | - |
| Nitrogen Oxides (NO _x) | - | - |
| Lead (Pb) | - | - |
| Particulate Matter (PM _{2.5}) | - | - |
| Particulate Matter (PM ₁₀) | - | - |
| Total Particulate Matter (TSP) | - | - |
| Sulfur Dioxide (SO ₂) | - | - |
| Volatile Organic Compounds (VOC) | 0.86 | 3.78 |

| Hazardous Air Pollutants | Potential Emissions | |
|--|---------------------|-----|
| | PPH | TPY |
| | | |
| | | |
| Regulated Pollutants other than Criteria and HAP | Potential Emissions | |
| | PPH | TPY |
| NA | | |

List the method(s) used to calculate the potential emissions (include dates of any stack tests conducted, versions of software used, source and dates of emission factors, etc.).

VOC emissions are calculated based on the component count, refinery average emission factors from the EPA Protocol for Equipment Leak Emission Estimates, and an assumed control efficiency for implementing the NSPS Subpart VVa LDAR program required by NSPS Subpart GGGa. Emission factors are from Protocol for Equipment Leak Emission Estimates (EPA-453/R-95-017), U.S. EPA, November 1995, "Table 2-2: Refinery Average Emission Factors." Control efficiencies for light liquid and gas/vapor valves are taken from Protocol for Equipment Leak Emission Estimates (EPA-453/R-95-017), U.S. EPA, November 1995, "Table G-2: Determination of LDAR Control Effectiveness at Refinery Process Units" for HON LDAR rule (40 CFR Part 63 Subpart H) being developed at the time the protocol was drafted by EPA. The leak monitoring frequencies and leak detection thresholds under HON are similar to those under NSPS Subparts VVa, so the use of the HON LDAR control credits for the selected component types is appropriate.

Applicable Requirements

List all applicable requirements for this emission unit. For each applicable requirement, include the underlying rule/regulation citation and/or construction permit with the condition number. (Note: Title V permit condition numbers alone are not the underlying applicable requirements). If an emission limit is calculated based on the type of source and design capacity or if a standard is based on a design parameter, this information should also be included.

Pursuant to 40 CFR 60.592a(a), the permittee subject to the provisions of 40 CFR 60 Subpart GGGa shall comply with the requirements of 40 CFR 60.482-1a to 60.482-10a as soon as practicable, but no later than 180 days after initial startup.

Pursuant to 40 CFR 60.592a(b), for a given process unit, the permittee may elect to comply with the following requirements as an alternative to the requirements in 40 CFR 60.482-7a.

- (1) Comply with 40 CFR 60.483-1a.
- (2) Comply with 40 CFR 60.483-2a.
- (3) Comply with the Phase III provisions in 40 CFR 63.168, except the permittee may elect to follow the provisions in 40 CFR 60.482-7a(f) instead of 40 CFR 63.168 for any valve that is designated as being leakless.

Pursuant to 40 CFR 60.482-1a(e), equipment that the permittee designates as being in VOC service less than 300 hr/yr is excluded from the requirements of 40 CFR 60.482-2a through 60.482-11a if it is identified as required in 40 CFR 60.486a(e)(6) and it meets any of the conditions specified in paragraphs 40 CFR 60.482-1a(e)(1) through (3):

- (1) The equipment is in VOC service only during startup and shutdown, excluding startup and shutdown between batches of the same campaign for a batch process.
- (2) The equipment is in VOC service only during process malfunctions or other emergencies.
- (3) The equipment is backup equipment that is in VOC service only when the primary equipment is out of service.

Pursuant to 40 CFR 60.482-6a(a)(1), each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in 40 CFR 60.482-6a(d) and (e).

Pursuant to 40 CFR 60.482-6a(a)(2), the cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring process fluid flow through the open-ended valve or line.

Pursuant to 40 CFR 60.482-6a(b), each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the process fluid end is closed before the second valve is closed.

Pursuant to 40 CFR 60.482-6a(c), when a double block-and-bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with 40 CFR 60.482-6a(a) at all other times.

Pursuant to 40 CFR 60.482-6a(d), open-ended valves or lines in an emergency shutdown system which are designed to open automatically in the event of a process upset are exempt from the requirements of 40 CFR 60.482-6a(a), (b), and (c).

Pursuant to 40 CFR 60.482-6a(e), open-ended valves or lines containing materials which would present an explosion, serious overpressure, or other safety hazard if capped or equipped with a double block and bleed system as specified in 40 CFR 60.482-6a(a) through (c) are exempt from the requirements of 40 CFR 60.482-6a(a) through (c).

Pursuant to 40 CFR 60.482-9a(b), delay of repair of equipment will be allowed for equipment which is isolated from the process and which does not remain in VOC service.

Pursuant to 40 CFR 60.482-9a(c), delay of repair for valves and connectors will be allowed if:

- (1) The permittee demonstrates that emissions of purged material resulting from immediate repair are greater than the fugitive emissions likely to result from delay of repair, and
- (2) When repair procedures are effected, the purged material is collected and destroyed or recovered in a control device complying with 40 CFR 60.482-10a.

Pursuant to 40 CFR 60.482-9a(e), delay of repair beyond a process unit shutdown will be allowed for a valve, if valve assembly replacement is necessary during the process unit shutdown, valve assembly supplies have been depleted, and valve assembly supplies had been sufficiently stocked before the supplies were depleted. Delay of repair beyond the next process unit shutdown will not be allowed unless the next process unit shutdown occurs sooner than 6 months after the first process unit shutdown.

Pursuant to 40 CFR 60.482-9a(f), when delay of repair is allowed for a leaking valve or connector that remains in service, the valve or connector may be considered to be repaired and no longer subject to delay of repair requirements if two consecutive monthly monitoring instrument readings are below the leak definition.

Pursuant to 40 CFR 60.482-4a(c), any pressure relief device that is routed to a process or fuel gas system or equipped with a closed vent system capable of capturing and transporting leakage through the pressure relief device to a control device as described in 40 CFR 60.482-10a is exempted from the requirements of 40 CFR 60.482-4a(a) and (b).

Pursuant to 40 CFR 60.482-5a(a) and (b), each sampling connection system shall be equipped with a closed-vent system, except as provided in 40 CFR 60.482-1a(c) and 40 CFR 60.482-5a (c). Gases displaced during filling of the sample container are not required to be collected or captured. Each closed-vent system shall be designed and operated to capture and transport all the purged process fluid to a control device that complies with the requirements of 40 CFR 60.482-10a.

Pursuant to 40 CFR 60.593a(g), connectors in gas/vapor or light liquid service are exempt from the requirements in 40 CFR 60.482-11a, provided the permittee complies with 40 CFR 60.482-8a for all connectors, not just those in heavy liquid service.

Permit Shield

For all applicable requirements listed above, provide monitoring/testing/recordkeeping/reporting which shall be used to demonstrate compliance. If the method is based on a permit or rule, include the condition number or citation. (Note: Each requirement listed above must have an associated method of demonstrating compliance. If there is not already a required method in place, then a method must be proposed.)

Pursuant to 40 CFR 60.482-1a(e), equipment that the permittee designates as being in VOC service less than 300 hr/yr is excluded from the requirements of 40 CFR 60.482-2a through 60.482-11a if it is identified as required in 40 CFR 60.486a(e)(6) and it meets any of the conditions specified in paragraphs 40 CFR 60.482-1a(e)(1) through (3):

- (1) The equipment is in VOC service only during startup and shutdown, excluding startup and shutdown between batches of the same campaign for a batch process.
- (2) The equipment is in VOC service only during process malfunctions or other emergencies.
- (3) The equipment is backup equipment that is in VOC service only when the primary equipment is out of service.

Pursuant to 40 CFR 60.482-6a(a)(1), each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in 40 CFR 60.482-6a(d) and (e).

Pursuant to 40 CFR 60.482-6a(a)(2), the cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring process fluid flow through the open-ended valve or line.

Pursuant to 40 CFR 60.482-6a(b), each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the process fluid end is closed before the second valve is closed.

Pursuant to 40 CFR 60.482-6a(c), when a double block-and-bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with 40 CFR 60.482-6a(a) at all other times.

Pursuant to 40 CFR 60.482-6a(d), open-ended valves or lines in an emergency shutdown system which are designed to open automatically in the event of a process upset are exempt from the requirements of 40 CFR 60.482-6a(a), (b), and (c).

Pursuant to 40 CFR 60.482-6a(e), open-ended valves or lines containing materials which would present an explosion, serious overpressure, or other safety hazard if capped or equipped with a double block and bleed system as specified in 40 CFR 60.482-6a(a) through (c) are exempt from the requirements of 40 CFR 60.482-6a(a) through (c).

Pursuant to 40 CFR 60.482-7a(a)(1), each valve shall be monitored monthly to detect leaks by the methods specified in 40 CFR 60.485a(b) and shall comply with 40 CFR 60.482-7a(b) through (e), except as provided in 40 CFR 60.482-7a(f), (g), and (h) and 40 CFR 60.483-1a and 60.483-2a.

Pursuant to 40 CFR 60.482-7a(a)(2), a valve that begins operation in gas/vapor service or light liquid service after the initial startup date for the process unit must be monitored according to 40 CFR 60.482-7a(a)(2)(i) or (ii), except for a valve that replaces a leaking valve and except as provided in 40 CFR 60.482-7a(f), (g), and (h) and 40 CFR 60.483-1a and 60.483-2a.

Pursuant to 40 CFR 60.482-9a(a), delay of repair of equipment for which leaks have been detected will be allowed if repair within 15 days is technically infeasible without a process unit shutdown. Repair of this equipment shall occur before the end of the next process unit shutdown. Monitoring to verify repair must occur within 15 days after startup of the process unit.

Pursuant to 40 CFR 60.482-9a(b), delay of repair of equipment will be allowed for equipment which is isolated from the process and which does not remain in VOC service.

Pursuant to 40 CFR 60.482-9a(c), delay of repair for valves and connectors will be allowed if:

- (1) The permittee demonstrates that emissions of purged material resulting from immediate repair are greater than the fugitive emissions likely to result from delay of repair, and

(2) When repair procedures are effected, the purged material is collected and destroyed or recovered in a control device complying with 40 CFR 60.482–10a.

Pursuant to 40 CFR 60.482-9a(e), delay of repair beyond a process unit shutdown will be allowed for a valve, if valve assembly replacement is necessary during the process unit shutdown, valve assembly supplies have been depleted, and valve assembly supplies had been sufficiently stocked before the supplies were depleted. Delay of repair beyond the next process unit shutdown will not be allowed unless the next process unit shutdown occurs sooner than 6 months after the first process unit shutdown.

Pursuant to 40 CFR 60.482-9a(f), when delay of repair is allowed for a leaking valve or connector that remains in service, the valve or connector may be considered to be repaired and no longer subject to delay of repair requirements if two consecutive monthly monitoring instrument readings are below the leak definition.

Pursuant to 40 CFR 60.593a(g) and 40 CFR 60.482–8a(a), if evidence of a potential leak is found by visual, audible, olfactory, or any other detection method at connectors in gas/vapor or light liquid service, the permittee shall follow either one of the following procedures:

(1) The permittee shall monitor the equipment within 5 days by the method specified in 40 CFR 60.485a(b) and shall comply with the requirements of 40 CFR 60.482–8a(b) through (d) of this section.

(2) The permittee shall eliminate the visual, audible, olfactory, or other indication of a potential leak within 5 calendar days of detection. Pursuant to 40 CFR 60.592a(e), the permittee shall comply with the provisions of 40 CFR 60.486a and 60.487a.

Are you in compliance with all applicable requirements for this emission unit? Yes No

If no, complete the **Schedule of Compliance Form** as **ATTACHMENT F**.

ATTACHMENT F: SCHEDULE OF COMPLIANCE FORM

This application form is required if a facility indicated noncompliance with any of the applicable requirements identified in the permit application. If the facility is in compliance with the applicable requirements, this form is not required, and as such, it has not been included in this application.

ATTACHMENT G: AIR POLLUTION CONTROL DEVICE FORM

This application form is to be completed for each control device listed in the Title V Equipment Table Form (Attachment D). There are no control devices located at the propane cavern facility, and as such, this form has not been included in this application.

ATTACHMENT H: COMPLIANCE ASSURANCE MONITORING PLAN FORM

As detailed in Section 2.4, CAM is not applicable to the propane cavern facility. A CAM Plan Form has been included in this application to formally indicate CAM is not applicable.

ATTACHMENT H - Compliance Assurance Monitoring (CAM) Plan Form

For definitions and information about the CAM rule, please refer to 40 CFR Part 64. Additional information (including guidance documents) may also be found at <http://www.epa.gov/ttn/emc/cam.html>

CAM APPLICABILITY DETERMINATION

1) Does the facility have a PSEU (Pollutant-Specific Emissions Unit considered separately with respect to **EACH** regulated air pollutant) that is subject to CAM (40 CFR Part 64), which must be addressed in this CAM plan submittal? To determine applicability, a PSEU must meet **all** of the following criteria (*If No, then the remainder of this form need not be completed*): YES NO

- a. The PSEU is located at a major source that is required to obtain a Title V permit;
- b. The PSEU is subject to an emission limitation or standard for the applicable regulated air pollutant that is **NOT** exempt;

LIST OF EXEMPT EMISSION LIMITATIONS OR STANDARDS:

- NSPS (40 CFR Part 60) or NESHAP (40 CFR Parts 61 and 63) proposed after 11/15/1990.
 - Stratospheric Ozone Protection Requirements.
 - Acid Rain Program Requirements.
 - Emission Limitations or Standards for which a WVDEP Division of Air Quality Title V permit specifies a continuous compliance determination method, as defined in 40 CFR §64.1.
 - An emission cap that meets the requirements specified in 40 CFR §70.4(b)(12).
- c. The PSEU uses an add-on control device (as defined in 40 CFR §64.1) to achieve compliance with an emission limitation or standard;
 - d. The PSEU has potential pre-control device emissions of the applicable regulated air pollutant that are equal to or greater than the Title V Major Source Threshold Levels; AND
 - e. The PSEU is **NOT** an exempt backup utility power emissions unit that is municipally-owned.

BASIS OF CAM SUBMITTAL

2) Mark the appropriate box below as to why this CAM plan is being submitted as part of an application for a Title V permit:

- RENEWAL APPLICATION.** **ALL** PSEUs for which a CAM plan has **NOT** yet been approved need to be addressed in this CAM plan submittal.
- INITIAL APPLICATION** (submitted after 4/20/98). **ONLY** large PSEUs (i. e., PSEUs with potential post-control device emissions of an applicable regulated air pollutant that are equal to or greater than Major Source Threshold Levels) need to be addressed in this CAM plan submittal.
- SIGNIFICANT MODIFICATION TO LARGE PSEUs.** **ONLY** large PSEUs being modified after 4/20/98 need to be addressed in this cam plan submittal. For large PSEUs with an approved CAM plan, **Only** address the appropriate monitoring requirements affected by the significant modification.

3) ^a BACKGROUND DATA AND INFORMATION

Complete the following table for all PSEUs that need to be addressed in this CAM plan submittal. This section is to be used to provide background data and information for each PSEU in order to supplement the submittal requirements specified in 40 CFR §64.4. If additional space is needed, attach and label accordingly.

| PSEU DESIGNATION | DESCRIPTION | POLLUTANT | CONTROL DEVICE | ^b EMISSION LIMITATION or STANDARD | ^c MONITORING REQUIREMENT |
|--------------------------------|-------------------|-----------|----------------|--|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| EXAMPLE Boiler No. 1 | Wood-Fired Boiler | PM | Multiclone | 45CSR§2-4.1.c.; 9.0 lb/hr | Monitor pressure drop across multiclone: Weekly inspection of multiclone |

^a If a control device is common to more than one PSEU, one monitoring plan may be submitted for the control device with the affected PSEUs identified and any conditions that must be maintained or monitored in accordance with 40 CFR §64.3(a). If a single PSEU is controlled by more than one control device similar in design and operation, one monitoring plan for the applicable control devices may be submitted with the applicable control devices identified and any conditions that must be maintained or monitored in accordance with 40 CFR §64.3(a).

^b Indicate the emission limitation or standard for any applicable requirement that constitutes an emission limitation, emission standard, or standard of performance (as defined in 40 CFR §64.1).

^c Indicate the monitoring requirements for the PSEU that are required by an applicable regulation or permit condition.

CAM MONITORING APPROACH CRITERIA

Complete this section for EACH PSEU that needs to be addressed in this CAM plan submittal. This section may be copied as needed for each PSEU. This section is to be used to provide monitoring data and information for EACH indicator selected for EACH PSEU in order to meet the monitoring design criteria specified in 40 CFR §64.3 and §64.4. If more than two indicators are being selected for a PSEU or if additional space is needed, attach and label accordingly with the appropriate PSEU designation, pollutant, and indicator numbers.

| 4a) PSEU Designation: | 4b) Pollutant: | 4c) ^a Indicator No. 1: | 4d) ^a Indicator No. 2: |
|--|----------------|-----------------------------------|-----------------------------------|
| 5a) GENERAL CRITERIA Describe the <u>MONITORING APPROACH</u> used to measure the indicators: | | | |
| ^b Establish the appropriate <u>INDICATOR RANGE</u> or the procedures for establishing the indicator range which provides a reasonable assurance of compliance: | | | |
| 5b) PERFORMANCE CRITERIA Provide the <u>SPECIFICATIONS FOR OBTAINING REPRESENTATIVE DATA</u> , such as detector location, installation specifications, and minimum acceptable accuracy: | | | |
| ^c For new or modified monitoring equipment, provide <u>VERIFICATION PROCEDURES</u> , including manufacturer's recommendations, <u>TO CONFIRM THE OPERATIONAL STATUS</u> of the monitoring: | | | |
| Provide <u>QUALITY ASSURANCE AND QUALITY CONTROL (QA/QC) PRACTICES</u> that are adequate to ensure the continuing validity of the data, (i.e., daily calibrations, visual inspections, routine maintenance, RATA, etc.): | | | |
| ^d Provide the <u>MONITORING FREQUENCY</u> : | | | |
| Provide the <u>DATA COLLECTION PROCEDURES</u> that will be used: | | | |
| Provide the <u>DATA AVERAGING PERIOD</u> for the purpose of determining whether an excursion or exceedance has occurred: | | | |

^a Describe all indicators to be monitored which satisfies 40 CFR §64.3(a). Indicators of emission control performance for the control device and associated capture system may include measured or predicted emissions (including visible emissions or opacity), process and control device operating parameters that affect control device (and capture system) efficiency or emission rates, or recorded findings of inspection and maintenance activities.

^b Indicator Ranges may be based on a single maximum or minimum value or at multiple levels that are relevant to distinctly different operating conditions, expressed as a function of process variables, expressed as maintaining the applicable indicator in a particular operational status or designated condition, or established as interdependent between more than one indicator. For CEMS, COMS, or PEMS, include the most recent certification test for the monitor.

^c The verification for operational status should include procedures for installation, calibration, and operation of the monitoring equipment, conducted in accordance with the manufacturer's recommendations, necessary to confirm the monitoring equipment is operational prior to the commencement of the required monitoring.

^d Emission units with post-control PTE ≥ 100 percent of the amount classifying the source as a major source (i.e., Large PSEU) must collect four or more values per hour to be averaged. A reduced data collection frequency may be approved in limited circumstances. Other emission units must collect data at least once per 24 hour period.

RATIONALE AND JUSTIFICATION

Complete this section for EACH PSEU that needs to be addressed in this CAM plan submittal. This section may be copied as needed for each PSEU. This section is to be used to provide rationale and justification for the selection of EACH indicator and monitoring approach and EACH indicator range in order to meet the submittal requirements specified in 40 CFR §64.4.

6a) PSEU Designation:

6b) Regulated Air Pollutant:

7) **INDICATORS AND THE MONITORING APPROACH:** Provide the rationale and justification for the selection of the indicators and the monitoring approach used to measure the indicators. Also provide any data supporting the rationale and justification. Explain the reasons for any differences between the verification of operational status or the quality assurance and control practices proposed, and the manufacturer's recommendations. (If additional space is needed, attach and label accordingly with the appropriate PSEU designation and pollutant):

8) **INDICATOR RANGES:** Provide the rationale and justification for the selection of the indicator ranges. The rationale and justification shall indicate how EACH indicator range was selected by either a COMPLIANCE OR PERFORMANCE TEST, a TEST PLAN AND SCHEDULE, or by ENGINEERING ASSESSMENTS. Depending on which method is being used for each indicator range, include the specific information required below for that specific indicator range. (If additional space is needed, attach and label accordingly with the appropriate PSEU designation and pollutant):

- COMPLIANCE OR PERFORMANCE TEST (Indicator ranges determined from control device operating parameter data obtained during a compliance or performance test conducted under regulatory specified conditions or under conditions representative of maximum potential emissions under anticipated operating conditions. Such data may be supplemented by engineering assessments and manufacturer's recommendations). The rationale and justification shall INCLUDE a summary of the compliance or performance test results that were used to determine the indicator range, and documentation indicating that no changes have taken place that could result in a significant change in the control system performance or the selected indicator ranges since the compliance or performance test was conducted.
- TEST PLAN AND SCHEDULE (Indicator ranges will be determined from a proposed implementation plan and schedule for installing, testing, and performing any other appropriate activities prior to use of the monitoring). The rationale and justification shall INCLUDE the proposed implementation plan and schedule that will provide for use of the monitoring as expeditiously as practicable after approval of this CAM plan, except that in no case shall the schedule for completing installation and beginning operation of the monitoring exceed 180 days after approval.
- ENGINEERING ASSESSMENTS (Indicator Ranges or the procedures for establishing indicator ranges are determined from engineering assessments and other data, such as manufacturers' design criteria and historical monitoring data, because factors specific to the type of monitoring, control device, or PSEU make compliance or performance testing unnecessary). The rationale and justification shall INCLUDE documentation demonstrating that compliance testing is not required to establish the indicator range.

RATIONALE AND JUSTIFICATION:

ATTACHMENT I: SUPPORTING EMISSIONS DOCUMENTATION

Attachment I. Supporting Calculations

Table I-1. Propane Cavern Annual Potential Emissions

| Title V Emission Unit ID | Catlettsburg Unit ID | Emission Unit Description | GHG Emissions (tpy, CO ₂ e) | NO _x Emissions (tpy) | CO Emissions (tpy) | VOC Emissions (tpy) | PM/PM ₁₀ /PM _{2.5} Emissions (tpy) | SO ₂ Emissions (tpy) | Total HAP/TAP Emissions (tpy) |
|--|-------------------------|--|--|---------------------------------------|--------------------------|---------------------------|--|---------------------------------------|--|
| 1S | 2-036 | HF Alky Unit Fugitive Emissions (WV Scope) | - | - | - | 3.78 | - | - | - |
| Total Annual Potential Emissions (WV Scope) | | | - | - | - | 3.78 | - | - | - |

I-1. Equipment Leak Component Potential Emissions Calculations

> Documentation of the component counts and emission factors used in the potential emissions calculations for the equipment leak components is provided in this section.

I-1.1 Equipment Leak Component (ELC) Count for the Project

> The following table documents the ELCs organized by component and service type.

| Component Type | Service Type | Propane Cavern Components for HF Alky Unit in WV (1S, 2-036) (#) |
|------------------------------------|--------------|---|
| Valves | Light Liquid | 174 |
| Valves | Heavy Liquid | 10 |
| Valves | Gas/Vapor | 86 |
| Pump Seals | Light Liquid | 0 |
| Pump Seals | Heavy Liquid | 0 |
| Compressor Seals | Gas | 0 |
| Atmospheric Pressure Relief Valves | Gas | 0 |
| Atmospheric Pressure Relief Valves | Light Liquid | 0 |
| Atmospheric Pressure Relief Valves | Heavy Liquid | 0 |
| Connectors | All | 809 |
| Drains | Drains | 0 |
| TOTAL | | 1,079 |

I-1.2 ELC VOC Potential Emissions Calculations for WV

> The following table documents the potential VOC and HAP/TAP emissions resulting from the ELC in WV. VOC emissions are calculated based on the component count, refinery average emission factors from the EPA *Protocol for Equipment Leak Emission Estimates*, and an assumed control efficiency for implementing the NSPS Subpart VVa LDAR program required by Subpart GGGa.

| Component Type | Service Type | VOC Emission Factor ¹ | | Component Count (#) | Uncontrolled VOC Emission Rate ² | | LDAR Control Efficiency ³ (%) | Controlled VOC Emission Rate ² | |
|------------------------|--------------|----------------------------------|---------------|---------------------|---|-------------|--|---|-------------|
| | | (kg/hr/comp.) | (lb/hr/comp.) | | (lb/hr) | (tpy) | | (lb/hr) | (tpy) |
| Valves | Light Liquid | 0.0109 | 0.0240 | 174 | 4.2 | 18.3 | 95% | 0.21 | 0.92 |
| Valves | Heavy Liquid | 0.00023 | 0.00051 | 10 | 0.01 | 0.02 | 0% | 0.01 | 0.02 |
| Valves | Gas/Vapor | 0.0268 | 0.0591 | 86 | 5.08 | 22.3 | 96% | 0.20 | 0.89 |
| Pump Seals | Light Liquid | 0.114 | 0.251 | 0 | 0.00 | 0.00 | 88% | 0.00 | 0.00 |
| Pump Seals | Heavy Liquid | 0.021 | 0.046 | 0 | 0.00 | 0.00 | 0% | 0.00 | 0.00 |
| Compressor Seals | Gas | 0.636 | 1.402 | 0 | 0.00 | 0.00 | 0% | 0.00 | 0.00 |
| Pressure Relief Valves | Gas | 0.16 | 0.35 | 0 | 0.00 | 0.00 | 0% | 0.00 | 0.00 |
| Pressure Relief Valves | Light Liquid | 0.0109 | 0.0240 | 0 | 0.00 | 0.00 | 0% | 0.00 | 0.00 |
| Pressure Relief Valves | Heavy Liquid | 0.00023 | 0.00051 | 0 | 0.00 | 0.00 | 0% | 0.00 | 0.00 |
| Connectors | All | 0.00025 | 0.00055 | 809 | 0.45 | 1.95 | 0% | 0.45 | 1.95 |
| Drains | Drains | 0.0291 | 0.0641 | 0 | 0.00 | 0.00 | 0% | 0.00 | 0.00 |
| TOTAL | | - | - | 1,079 | 9.7 | 42.5 | - | 0.86 | 3.78 |

¹ Emission factors, except for process drains, are from *Protocol for Equipment Leak Emission Estimates* (EPA-453/R-95-017), U.S. EPA, November 1995, "Table 2-2: Refinery Average Emission Factors." The emission factor for process drains is based on AP-42 Section 5.1, Table 5.1-3 (January 1995 Ed.). No emission factors for light and heavy liquid PRVs are provided in the EPA protocol, so the emission factors for light and heavy liquid valves are used for these PRVs.

² Annual emission rates assume the components are in service 8,760 hours per year.

³ Control efficiencies for light liquid and gas/vapor valves and light liquid pumps are taken from *Protocol for Equipment Leak Emission Estimates* (EPA-453/R-95-017), U.S. EPA, November 1995, "Table G-2: Determination of LDAR Control Effectiveness at Refinery Process Units" for HON LDAR rule (40 CFR Part 63 Subpart H) being developed at the time the protocol was drafted by EPA. The leak monitoring frequencies and leak detection thresholds under HON are similar to those under NSPS Subparts VVa, so the use of the HON LDAR control credits for the selected component types is appropriate.