

625 Liberty Ave,
Suite 1700
Pittsburgh PA 15222
www.eqt.com



CERTIFIED MAIL # 7015 1660 0000 9399 6376

August 25, 2016

Mr. William Durham, Director
West Virginia Department of Environmental Protection
Division of Air Quality
601 57th Street, SE
Charleston, West Virginia, 25304

**RE: EQT Production Company, OXF-149 & OXF-150 Well Pads
Doddridge County, WV
G70C Permit Application
G70-A013A; Plant ID No. 017-00040**

Dear Mr. Durham:

On May 5, 2016, after discussions with the Jerry Williams, EQT Production Company (EQT) withdrew a permit application for a G70C permit for the OXF-149/150 wellpads. EQT is submitting two separate G70C permit applications for the wellpads covered under G70-A013A. Please note that the original permit application satisfied the deadline requirement under the Consent Order CO-R13-E-2016-04 (Consent Order). EQT will continue to operate under the current permit until the new permits are issued.

Enclosed are two electronic copies and one hardcopy of the OXF-149 G70C application and two electronic copies and one hardcopy OXF-150 G70C application. If possible, we request that Jerry Williams work with EQT on this proposed G70C application to facilitate the permitting process. If you have any questions concerning this permitting action, please contact Alex Bosiljevac at (412) 395-3699 or by email at abosiljevac@eqt.com.

Sincerely,

A handwritten signature in blue ink, appearing to read 'RAB' with a large, sweeping flourish extending to the right.

R. Alex Bosiljevac
EQT Production



PROJECT REPORT

**EQT Production
OXF 150 Wellpad**

G70-C Permit Application



Where energy meets innovation.

TRINITY CONSULTANTS
4500 Brooktree Drive
Suite 103
Wexford, PA 15090
(724) 935-2611

July 2016

Trinity 
Consultants

Environmental solutions delivered uncommonly well

TABLE OF CONTENTS

1. INTRODUCTION	4
1.1. Facility and Project Description	4
1.2. Source Status	5
1.3. G70-C APPLICATION ORGANIZATION	5
2. SAMPLE EMISSION SOURCE CALCULATIONS	6
3. REGULATORY DISCUSSION	7
3.1. Prevention of Significant Deterioration (PSD) Source Classification	7
3.2. Title V Operating Permit Program	7
3.3. New Source Performance Standards	8
3.3.1. NSPS Subparts D, Da, Db, and Dc – Steam Generating Units	8
3.3.2. NSPS Subpart K, Ka, and Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids	8
3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution	8
3.3.4. NSPS Subpart OOOOa—Crude Oil and Natural Gas Production, Transmission, and Distribution	8
3.3.5. Non-Applicability of All Other NSPS	9
3.4. National Emission Standards for Hazardous Air Pollutants (NESHAP)	9
3.4.1. NESHAP Subpart HH — Oil and Natural Gas Production Facilities	9
3.4.2. NESHAP Subpart JJJJJ - Industrial, Commercial, and Institutional Boilers	10
3.5. West Virginia SIP Regulations	10
3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers	10
3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor	10
3.5.3. 45 CSR 6: To Prevent and Control the Air Pollution from the Combustion of Refuse	10
3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources	10
3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter	10
3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks	11
3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants	11
3.5.8. Non-Applicability of Other SIP Rules	11
4. G70-C APPLICATION FORMS	12
ATTACHMENT A: SINGLE SOURCE DETERMINATION	
ATTACHMENT B: SITING CRITERIA WAIVER (NOT APPLICABLE)	
ATTACHMENT C: BUSINESS CERTIFICATE	
ATTACHMENT D: PROCESS FLOW DIAGRAM	
ATTACHMENT E: PROCESS DESCRIPTION	
ATTACHMENT F: PLOT PLAN	
ATTACHMENT G: AREA MAP	

ATTACHMENT H: APPLICABILITY FORM
ATTACHMENT I: EMISSION UNITS TABLE
ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET
ATTACHMENT K: GAS WELL DATA SHEET
ATTACHMENT L: STORAGE VESSEL DATA SHEET
ATTACHMENT M: HEATERS DATA SHEET
ATTACHMENT N: ENGINES DATA SHEET (NOT APPLICABLE)
ATTACHMENT O: TRUCK LOADING DATA SHEET
ATTACHMENT P: GLYCOL DEHYDRATOR DATA SHEET (NOT APPLICABLE)
ATTACHMENT Q: PNEUMATIC CONTROLLER DATA SHEET (NOT APPLICABLE)
ATTACHMENT R: AIR POLLUTION CONTROL DEVICE DATA SHEET
ATTACHMENT S: EMISSION CALCULATIONS
ATTACHMENT T: EMISSION SUMMARY SHEET
ATTACHMENT U: CLASS I LEGAL ADVERTISEMENT
ATTACHMENT V: GENERAL PERMIT REGISTRATION APPLICATION FEE

1. INTRODUCTION

EQT Production Company (EQT) is submitting this Class II General Permit (G70-C) to the West Virginia Department of Environmental Protection (WVDEP) for the construction and operation of new equipment at an existing natural gas production well pad, OXF-150, located in Doddridge County, West Virginia. The wellpad is currently permitted under General Permit G70-A031A with nearby wellpad OXF-149. The two pads were previously aggregated due to a shared tank battery located in close proximity to both wellpads. Since the initial aggregation determination, the tank battery has been removed. As such, WVDEP has determined that the wellpads will no longer be considered a single stationary source, and has requested that individual permit applications be submitted for all future permitting actions.

1.1. FACILITY AND PROJECT DESCRIPTION

The OXF-150 wellpad is an existing natural gas production facility. Natural gas and liquids (including water and condensate) are extracted from deposits underneath the surface. Natural gas is transported from the wells to a gas line for additional processing and compression, as necessary. The liquids produced are stored in storage vessels.

The OXF 150 pads currently consists of the following equipment

- > Six (6) 400 barrel (bbl) storage tanks for condensate/water(produced fluids) controlled by one (1) combustor, rated at 11.66 MMBtu/hr ;
- > Five (5) line heaters, each rated at 1.54 MMBtu/hr heat input;
- > Two (2) thermoelectric generators (TEGs), each rated at 0.013 MMBtu/hr heat input;
- > One (1) 140 bbl storage tanks for sand and produced fluids from the sand separator (vapors from these tanks may be controlled by combustors but are not represented as controlled in this application);
- > Produced fluid truck loading; and
- > Associated piping and components.

As part of this application, EQT seeks to permit the following equipment at the OXF-150 pad:

- > One (1) new combustor rated at 11.66 MMBtu/hr.

Additionally, EQT requests that the department consolidate all existing equipment associated with this wellpad and their requirements under the current G70-A031A permit in the proposed G70-C permit.

A process flow diagram is included as Attachment D. A comparison of the potential emissions of the proposed and existing equipment at the wellpad in comparison with G70-C emission limits is provided in Table 1. Facility emissions are well below the permit limits. Note that in accordance with condition 1.1.1. of the G70-C permit, fugitive emissions are not considered in determining eligibility of the permit.

Table 1 - Comparison of Wellpad Potential Emissions to G70-C Permit Emission Limits

Pollutant	Wellpad Potential Annual Emissions (tpy)	G70-C Maximum Annual Emission Limits (tpy)
Nitrogen Oxides	13.28	50
Carbon Monoxide	11.15	80
Volatile Organic Compounds	10.37	80
Particulate Matter – 10/2.5	1.01	20
Sulfur Dioxide	0.08	20
Individual HAP (n-hexane) ¹	0.96	8
Total HAP ¹	1.42	20

1. Includes fugitive emissions

1.2. SOURCE STATUS

WVDEP must make stationary source determinations on a case-by-case basis using the guidance under the Clean Air Act (CAA) and EPA's and WVDEP's implementing regulations. The definition of stationary source in 40 CFR 51.166(b) includes the following:

“(6) Building, structure, facility, or installation means all of the pollutant emitting activities which belong to the same industrial grouping, are located on or more contiguous or adjacent properties, and are under control of the same person (or persons under common control).”

OXF 149 and 150 are separate wellpads that are functionally independent of each other. The pads are separated by approximately 0.5 miles and the production of each wellpad is independent of the other. WVDEP had previously determined that the OXF-149 and OXF-150 wellpads should be aggregated as a single stationary source since both sites shared a common loading battery area. Since the loading battery storage tanks have been removed, WVDEP has determined that the wellpads will no longer be considered a single stationary source with respect to permitting programs, including Title V and Prevention of Significant Deterioration (PSD). As discussed in this application, the facility is a minor source of air emissions with respect to New Source Review (NSR) and Title V Permitting.

1.3. G70-C APPLICATION ORGANIZATION

This West Virginia Code of State Regulations, Title 45 (CSR) Series 13 (45 CSR 13) G70-C permit application is organized as follows:

- > Attachment A: Single Source Determination;
- > Attachment B: Siting Criteria Waiver **(Not Applicable)**;
- > Attachment C: Business Certificate;
- > Attachment D: Process Flow Diagram;
- > Attachment E: Process Description;
- > Attachment F: Plot Plan;
- > Attachment G: Area Map;
- > Attachment H: Applicability Form;
- > Attachment I: Emission Units Table;
- > Attachment J: Fugitive Emissions Summary Sheet;
- > Attachment K: Gas Well Data Sheet;
- > Attachment L: Storage Vessel Data Sheet;
- > Attachment M: Heaters Data Sheet;
- > Attachment N: Engines Data Sheet **(Not Applicable)**;
- > Attachment O: Truck Loading Data Sheet;
- > Attachment P: Glycol Dehydrator Data Sheet **(Not Applicable)**;
- > Attachment Q: Pneumatic Controller Data Sheet **(Not Applicable)**;
- > Attachment R: Air Pollution Control Device Data Sheet;
- > Attachment S: Emission Calculations;
- > Attachment T: Emission Summary Sheet;
- > Attachment U: Class I Legal Advertisement; and
- > Attachment V: General Permit Registration Application Fee.

2. SAMPLE EMISSION SOURCE CALCULATIONS

The characteristics of air emissions from the natural gas production operations, along with the methodology for calculating emissions, are briefly described in this section of the application. Detailed emission calculations are presented in Attachment S of this application.

Emissions from this project will result from natural gas combustion in the line heaters, combustors and TEGs, as well as storage of organic liquids in storage tanks and loading of organic liquids into tank trucks. In addition, fugitive emissions will result from component leaks from the operation of the station. The methods by which emissions from each of these source types, as well as the existing source types, are calculated are summarized below.

- > **Line Heaters, Enclosed Combustors and TEGs:** Potential emissions of criteria pollutants and hazardous air pollutants (HAPs) are calculated using U.S. EPA's AP-42 factors for natural gas external combustion.¹ These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.²
- > **Fugitive Equipment Leaks:** Emissions of VOC and HAPs from leaking equipment components have been estimated using facility estimated component counts and types along with emission factors from the *Protocol for Equipment Leak Emission Estimates, EPA 453/R-95-017, November 1995*. Emission factors used are based on average measured TOC from component types indicated. Greenhouse gas emissions from component leaks are calculated according to the procedures in 40 CFR 98 Subpart W.³ Pneumatic devices at the wellpad are intermittent bleed and are assumed to be in operation 1/3 of the year.
- > **Storage Tanks:** Working, breathing and flashing emissions of VOC and HAPs from the storage tanks at the facility are calculated using Bryan Research & Engineering ProMax® Software. Controlled calculations assume an overall control efficiency (capture and destruction) of 98%. The throughput for the produced fluids tanks are based on the maximum annualized monthly condensate and produced water at the OXF-150 well pad (i.e., the maximum monthly throughput for the pad times 12), and includes a safety factor of 1.09. The composition for the analysis was from a sample taken at OXF-150. Emissions of VOC and HAPs from the sand separator tank are calculated using E&P TANK v2.0. The produced fluids throughput is calculated as follows:

$$\text{Throughput} \left(\frac{\text{bbl}}{\text{day}} \right) = \left(\text{Condensate Throughput} \left(\frac{\text{bbl}}{\text{month}} \right) + \left(\text{Produced Water Throughput} \left(\frac{\text{bbl}}{\text{month}} \right) \right) \right) * \frac{12 \left(\frac{\text{months}}{\text{year}} \right)}{365 \left(\frac{\text{days}}{\text{year}} \right)} \times 1.09$$

- > **Tank Truck Loading:** Uncontrolled emissions of VOC and HAPs from the loading of organic liquids from storage tanks to tank truck are calculated using Bryan Research Engineering ProMax® Software. Truck loading is controlled by the enclosed combustors. U.S. EPA's AP-42 Chapter 5 Section 2 factors were used for capture efficiency.⁴
- > **Haul Roads:** Fugitive dust emitted from facility roadways has been estimated using projected vehicle miles traveled along with U.S. EPA's AP-42 factors for unpaved haul roads.⁵

¹ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 1.4, Natural Gas Combustion, Supplement D, July 1998.

² 40 CFR 98 Subpart C, *General Stationary Fuel Combustion Sources*, Tables C-1 and C-2.

³ 40 CFR 98 Subpart W, *Petroleum and Natural Gas Systems*, Section 98.233(r), *Population Count and Emission Factors*.

⁴ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 5.2, Transportation And Marketing Of Petroleum Liquids, June 2008.

⁵ U.S. EPA, AP 42, Fifth Edition, Volume I, Section 13.2.2, Unpaved Roads, November 2006.

3. REGULATORY DISCUSSION

This section documents the applicability determinations made for Federal and State air quality regulations. In this section, applicability or non-applicability of the following regulatory programs is addressed:

- > Prevention of Significant Deterioration (PSD) permitting;
- > Title V of the 1990 Clean Air Act Amendments;
- > New Source Performance Standards (NSPS);
- > National Emission Standards for Hazardous Air Pollutants (NESHAP); and
- > West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-C permit application forms.

In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the wellpad. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the wellpad. Regulations that are categorically non-applicable are not discussed (e.g., NSPS Subpart J, Standards of Performance for Petroleum Refineries).

3.1. PREVENTION OF SIGNIFICANT DETERIORATION (PSD) SOURCE CLASSIFICATION

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration (PSD) and new and modified sources of non-attainment pollutants under Non-Attainment New Source Review (NNSR). PSD and NNSR regulations apply when a major source makes a change, such as installing new equipment or modifying existing equipment, and a significant increase in emissions results from the change. The wellpad will remain a minor source with respect to the NSR program after the project since potential emissions are below all the NNSR/PSD thresholds. As such, NNSR/PSD permitting is not triggered by this construction activity. EQT will monitor future construction activities at the site closely and will compare any future increase in emissions with the NSR/PSD thresholds to ensure these activities will not trigger this program.

3.2. TITLE V OPERATING PERMIT PROGRAM

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in West Virginia Code of State Regulations (CSR) 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP, and 100 tpy of all other regulated pollutants.⁶ The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility after the proposed project. Therefore, the wellpad is not a major source for Title V purposes.

⁶ On June 23, 2014, the U.S Supreme Court decision in the case of *Utility Air Regulatory Group v. EPA* effectively changed the permitting procedures for GHGs under the PSD and Title V programs.

3.3. NEW SOURCE PERFORMANCE STANDARDS

New Source Performance Standards (NSPS), located in 40 CFR 60, require new, modified, or reconstructed sources to control emissions to the level achievable by the best demonstrated technology as specified in the applicable provisions. Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability and non-applicability determinations for NSPS regulations of relevance to the wellpad. The following NSPS could potentially apply to the wellpad:

- > 40 CFR Part 60 Subparts D/Da/Db/Dc – Steam Generating Units
- > 40 CFR Part 60 Subpart K/Ka/Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids
- > 40 CFR Part 60 Subpart OOOO – Crude Oil and Natural Gas Production, Transmission, and Distribution
- > 40 CFR Part 60 Subpart OOOOa – Crude Oil and Natural Gas Facilities

3.3.1. NSPS Subparts D, Da, Db, and Dc – Steam Generating Units

These subparts apply to steam generating units of various sizes, all greater than 10 MMBtu/hr. The proposed project does not include any steam generating units with a heat input greater than 10 MMBtu/hr, therefore the requirements of these subparts do not apply.

3.3.2. NSPS Subpart K, Ka, and Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids

These subparts apply to storage tanks of certain sizes constructed, reconstructed, or modified during various time periods. Subpart K applies to storage tanks constructed, reconstructed, or modified prior to 1978, and Subpart Ka applies to those constructed, reconstructed, or modified prior to 1984. Both Subparts K and Ka apply to storage tanks with a capacity greater than 40,000 gallons. Subpart Kb applies to volatile organic liquid (VOL) storage tanks constructed, reconstructed, or modified after July 23, 1984 with a capacity equal to or greater than 75 m³ (~19,813 gallons). All of the tanks at the wellpad have a capacity of 19,813 gallons or less. As such, Subparts K, Ka, and Kb do not apply to the storage tanks at the wellpad.

3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution

Subpart OOOO, Standards of Performance for Crude Oil and Natural Gas Production, Transmission, and Distribution, applies to affected facilities that commenced construction, reconstruction, or modification after August 23, 2011 (see clarification below regarding dates). This NSPS was published in the Federal Register on August 16, 2012, and subsequently amended. The proposed project does not include any source categories under NSPS Subpart OOOO or change any prior determinations related to NSPS Subpart OOOO. Therefore, this subpart is not applicable to the proposed project.

3.3.4. NSPS Subpart OOOOa—Crude Oil and Natural Gas Production, Transmission, and Distribution

Subpart OOOOa, Standards of Performance for Crude Oil and Natural Gas Facilities, will apply to affected facilities that commenced construction, reconstruction, or modification after September 18, 2015. The regulation was published final in the Federal Register on June 3, 2016. The rule includes provisions for the following facilities:

- > Hydraulically fractured wells;
- > Centrifugal compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;
- > Reciprocating compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;

- > Continuous bleed natural gas-driven pneumatic controllers with a bleed rate of > 6 scfh located in the production, gathering, processing, or transmission and storage segments (excluding natural gas processing plants);
- > Continuous bleed natural gas-driven pneumatic controllers located at natural gas processing plants;
- > Pneumatic pumps located in the production and processing segments;
- > Storage vessels located in the production, gathering, processing, or transmission and storage segments;
- > The collection of fugitive emissions components at a well site;
- > The collection of fugitive emissions components at a compressor station; and
- > Sweetening units located onshore that process natural gas produced from either onshore or offshore wells.

There are six (6) produced fluid storage vessels and one (1) sand separator storage vessels at the wellpad. These tanks were installed prior to the applicability date of 0000a. Furthermore, the storage vessels will each have potential VOC emissions less than 6 tpy based on the permit application materials and enforceable limits to be included in the G70-C permit. As such, per 60.5365a(e), the tanks will not be storage vessel affected facilities under the rule.

Note that the proposed changes to the well pad do not meet the definition of modification under 60.5365a(i)(3)(i). Therefore, EQT will not be subject to the leak detection and repair program under 0000a.

The pneumatic controllers will potentially be subject to NSPS 0000a. Per 60.5365a(d)(1), a pneumatic controller affected facility is a single continuous bleed natural gas driven pneumatic controller operating at a natural gas bleed rate greater than 6 scfh. No pneumatic controllers installed will meet the definition of a pneumatic controller affected facility. Therefore, these units are not subject to the requirements of Subpart 0000a.

3.3.5. Non-Applicability of All Other NSPS

NSPS are developed for particular industrial source categories. Other than NSPS developed for natural gas processing plants (Subpart 0000) and the applicability of a particular NSPS to the wellpad can be readily ascertained based on the industrial source category covered. All other NSPS are categorically not applicable to the proposed project.

3.4. NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS (NESHAP)

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad is an Area (minor) source of HAP since its potential emissions of HAP are less than the 10/25 major source thresholds. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type. Besides 40 CFR 63 Subpart A (NESHAP Subpart A), which is similar to 40 CFR 60 Subpart A (NSPS Subpart A), the following NESHAP could potentially apply to the wellpad:

- > 40 CFR Part 63 Subpart HH – Oil and Natural Gas Production Facilities
- > 40 CFR Part 63 Subpart JJJJJ – Industrial, Commercial, and Institutional Boilers

3.4.1. NESHAP Subpart HH – Oil and Natural Gas Production Facilities

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad does not include a triethylene glycol dehydration unit; therefore the requirements of this subpart do not apply.

3.4.2. NESHAP Subpart JJJJJJ - Industrial, Commercial, and Institutional Boilers

This MACT standard applies to industrial, commercial, and institutional boilers of various sizes and fuel types at area sources. The line heaters at the wellpad are natural gas-fired and is specifically exempt from this subpart. Therefore, no sources at the wellpad are subject to any requirements under this subpart.

3.5. WEST VIRGINIA SIP REGULATIONS

The wellpad is potentially subject to regulations contained in the West Virginia Code of State Regulations, Chapter 45 (Code of State Regulations). The Code of State Regulations fall under two main categories, those regulations that are generally applicable (e.g., permitting requirements), and those that have specific applicability (e.g., PM standards for manufacturing equipment).

3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers

45 CSR 2 applies to fuel burning units, defined as equipment burning fuel “for the primary purpose of producing heat or power by indirect heat transfer”. The TEGs and line heaters are fuel burning units and therefore must comply with this regulation. Per 45 CSR 2-3, opacity of emissions from units shall not exceed 10 percent.

3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor

According to 45 CSR 4-3:

No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.

The wellpad is generally subject to this requirement. However, due to the nature of the process at the wellpad, production of objectionable odor from the wellpad during normal operation is unlikely.

3.5.3. 45 CSR 6: To Prevent and Control the Air Pollution from the Combustion of Refuse

45 CSR 6 applies to activities involving incineration of refuse, defined as “the destruction of combustible refuse by burning in a furnace designed for that purpose. For the purposes of this rule, the destruction of any combustible liquid or gaseous material by burning in a flare or flare stack, thermal oxidizer or thermal catalytic oxidizer stack shall be considered incineration.” The enclosed combustors are incinerators and therefore must comply with this regulation. Per 45 CSR 6-4.3, opacity of emissions from this unit shall not exceed 20 percent, except as provided by 4.4. PM emissions from this unit will not exceed the levels calculated in accordance with 6-4.1.

3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources

45 CSR 16-1 incorporates the federal Clean Air Act (CAA) standards of performance for new stationary sources set forth in 40 CFR Part 60 by reference. As such, by complying with all applicable requirements of 40 CFR Part 60 at the wellpad, EQT will be complying with 45 CSR 16.

3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter

According to 45 CSR 17-3.1:

No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property lines of the property on which the discharge originates or at any public or residential location, which causes or contributes to statutory air pollution.

Due to the nature of the activities at the wellpad, it is unlikely that fugitive particulate matter emissions will be emitted under normal operating conditions. However, EQT will take measures to ensure any fugitive particulate matter emissions will not cross the property boundary should any such emissions occur.

3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks

45 CSR 21-28 applies to any fixed roof petroleum liquid storage tank with a capacity greater than 40,000 gallons. The capacity of each storage tank at the wellpad is less than 40,000 gallons; therefore, 45 CSR 21-28 will not apply to the petroleum liquid storage tanks at the wellpad.

3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants

45 CSR 34-1 incorporates the federal Clean Air Act (CAA) national emissions standards for hazardous air pollutants (NESHAPs) as set forth in 40 CFR Parts 61 and 63 by reference. As noted above, no NESHAP are applicable.

3.5.8. Non-Applicability of Other SIP Rules

A thorough examination of the West Virginia SIP rules with respect to applicability at the wellpad reveals many SIP regulations that do not apply or impose additional requirements on operations. Such SIP rules include those specific to a particular type of industrial operation that is categorically not applicable to the wellpad.

4. G70-C APPLICATION FORMS

The WVDEP permit application forms contained in this application include all applicable G70-C application forms including the required attachments.



west virginia department of environmental protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25304
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-C GENERAL PERMIT REGISTRATION APPLICATION
PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION,
RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF
NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- CONSTRUCTION
MODIFICATION
RELOCATION
CLASS I ADMINISTRATIVE UPDATE
CLASS II ADMINISTRATIVE UPDATE

SECTION 1. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office): EQT Production Company

Federal Employer ID No. (FEIN): 25-0724685

Applicant's Mailing Address: 625 Liberty Avenue, Suite 1700

City: Pittsburgh

State: PA

ZIP Code: 15222

Facility Name: OXF-150 Wellpad

Operating Site Physical Address:

If none available, list road, city or town and zip of facility. Co Rte 11/4, West Union

City: West Union

Zip Code:

County: Doddridge

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):

Latitude: 39.223119° N

Longitude: -80.791219° W

SIC Code: 1311

DAQ Facility ID No. (For existing facilities)
017-00040

NAICS Code: 211111

CERTIFICATION OF INFORMATION

This G70-C General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. Any administratively incomplete or improperly signed or unsigned G70-C Registration Application will be returned to the applicant. Furthermore, if the G70-C forms are not utilized, the application will be returned to the applicant. No substitution of forms is allowed.

I hereby certify that Kenneth Kirk is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-C General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: [Signature]
Name and Title: Kenneth Kirk, Executive Vice President
Email: KKirk@eqt.com
Date: [Date]
Phone: [Phone]
Fax: [Fax]

If applicable:
Authorized Representative Signature:
Name and Title:
Email:
Date:
Phone:
Fax:

If applicable:
Environmental Contact
Name and Title: Alex Bosiljevac, Environmental Coordinator
Email: ABosiljevac@eqt.com
Date:
Phone: 412-395-3699
Fax: 412-395-7027

OPERATING SITE INFORMATION	
Briefly describe the proposed new operation and/or any change(s) to the facility: General permit application for an existing natural gas production well pad for the installation of one (1) enclosed combustor.	
Directions to the facility: From Charleston take 1-77 north to exit 176. Go east on US Route 50 approximately 40.6 miles. Take a right on Arnolds Creek Road (Co. Rt. 11). Go approximately 0.7 miles and turn left on Punkin Center Road (Co. Rt. 11/4) (Note google maps calls this "Left Fork Run Rd" but signage says "Punkin Center Road"). Continue for approximately 3.3 miles (road turns to dirt after 3.1 miles) and veer left to an access gate. After going through gate go 0.5 miles and cross a stream on the access road. After crossing the stream continue approximately 1.1 miles to the well pad.	
ATTACHMENTS AND SUPPORTING DOCUMENTS	
I have enclosed the following required documents:	
Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22). <input type="checkbox"/> Check attached to front of application. <input type="checkbox"/> I wish to pay by electronic transfer. Contact for payment (incl. name and email address): <input checked="" type="checkbox"/> I wish to pay by credit card. Contact for payment (incl. name and email address): R. Alex Bosiljevac, abosiljevac@eqt.com <input checked="" type="checkbox"/> \$500 (Construction, Modification, and Relocation) <input type="checkbox"/> \$300 (Class II Administrative Update) <input checked="" type="checkbox"/> \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ and/or OOOO ¹ <input type="checkbox"/> \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH ²	
¹ Only one NSPS fee will apply. ² Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ. <i>NSPS and NESHAP fees apply to new construction or if the source is being modified.</i>	
<input checked="" type="checkbox"/> Responsible Official or Authorized Representative Signature (if applicable)	
<input checked="" type="checkbox"/> Single Source Determination Form (must be completed in its entirety) – Attachment A	
<input type="checkbox"/> Siting Criteria Waiver (if applicable) – Attachment B	<input checked="" type="checkbox"/> Current Business Certificate – Attachment C
<input checked="" type="checkbox"/> Process Flow Diagram – Attachment D	<input checked="" type="checkbox"/> Process Description – Attachment E
<input checked="" type="checkbox"/> Plot Plan – Attachment F	<input checked="" type="checkbox"/> Area Map – Attachment G
<input checked="" type="checkbox"/> G70-C Section Applicability Form – Attachment H	<input checked="" type="checkbox"/> Emission Units/ERD Table – Attachment I
<input checked="" type="checkbox"/> Fugitive Emissions Summary Sheet – Attachment J	
<input checked="" type="checkbox"/> Gas Well Affected Facility Data Sheet (if applicable) – Attachment K	
<input checked="" type="checkbox"/> Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L	
<input checked="" type="checkbox"/> Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPUs, Heater Treaters, In-Line Heaters if applicable) – Attachment M	
<input type="checkbox"/> Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N	
<input checked="" type="checkbox"/> Tanker Truck Loading Data Sheet (if applicable) – Attachment O	
<input type="checkbox"/> Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P	
<input type="checkbox"/> Pneumatic Controllers Data Sheet – Attachment Q	
<input checked="" type="checkbox"/> Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment R	
<input checked="" type="checkbox"/> Emission Calculations (please be specific and include all calculation methodologies used) – Attachment S	
<input checked="" type="checkbox"/> Facility-wide Emission Summary Sheet(s) – Attachment T	
<input checked="" type="checkbox"/> Class I Legal Advertisement – Attachment U	
<input checked="" type="checkbox"/> One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments	

All attachments must be identified by name, divided into sections, and submitted in order.

ATTACHMENT A

Single Source Determination

ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL 3).

Is there a facility owned by or associated with the natural gas industry located within one (1) mile of the proposed facility? Yes No

If Yes, please complete the questionnaire on the following page (Attachment A).

Please provide a source aggregation analysis for the proposed facility below:

Please see discussion in the Application Report.


ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Answer each question with a detailed explanation to determine contiguous or adjacent properties which are under a common control and any support facilities. This section must be completed in its entirety.

Provide a map of contiguous or adjacent facilities (production facilities, compressor stations, dehydration facilities, etc.) which are under common control and those facilities that are not under common control but are support facilities. Please indicate the SIC code, permit number (if applicable), and the distance between facilities in question on the map.

Are the facilities owned by the same parent company or a subsidiary of the parent company? Provide the owners identity and the percentage of ownership of each facility. OXF-149, OXF-156, and OXF-138 are wholly owned by EQT Production Company.	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Does an entity such as a corporation have decision making authority over the operation of a second entity through a contractual agreement or voting interest? Please explain.	Yes <input type="checkbox"/> N/A	No <input type="checkbox"/>
Is there a contract for service relationship between the two (2) companies or, a support/dependency relationship that exists between the two (2) companies? Please explain.	Yes <input type="checkbox"/> N/A	No <input type="checkbox"/>
Do the facilities share common workforces, plant managers, security forces, corporate executive officers or board executives?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Will managers or other workers frequently shuttle back and forth to be involved actively at both facilities?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Do the facilities share common payroll activities, employee benefits, health plans, retirement funds, insurance coverage, or other administrative functions? Please explain.	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Does one (1) facility operation support the operation of the other facility?	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Is one (1) facility dependent on the other? If one (1) facility shuts down, what are the limitations on the other to pursue outside business? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Are there any financial arrangements between the two (2) entities?	Yes <input type="checkbox"/> N/A	No <input type="checkbox"/>
Are there any legal or lease agreements between the two (2) facilities?	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Do the facilities share products, byproducts, equipment, or other manufacturing or air pollution control device equipment? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Do all the pollutant-emitting activities at the facilities belong to the same SIC Code? Please provide the SIC Codes.	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>
Was the location of the new facility chosen primarily because of its proximity to the existing facility to integrate the operation of the two (2) facilities? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Will materials be routinely transferred between the two (2) facilities? Please explain the amount of transfer and how often the transfers take place and what percentages go to the various entities.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>
Does the facility influence production levels or compliance with environmental regulations at other facilities? Who accepts the responsibility for compliance with air quality requirements? Please explain.	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>

ATTACHMENT A: SINGLE SOURCE DETERMINATION MAP

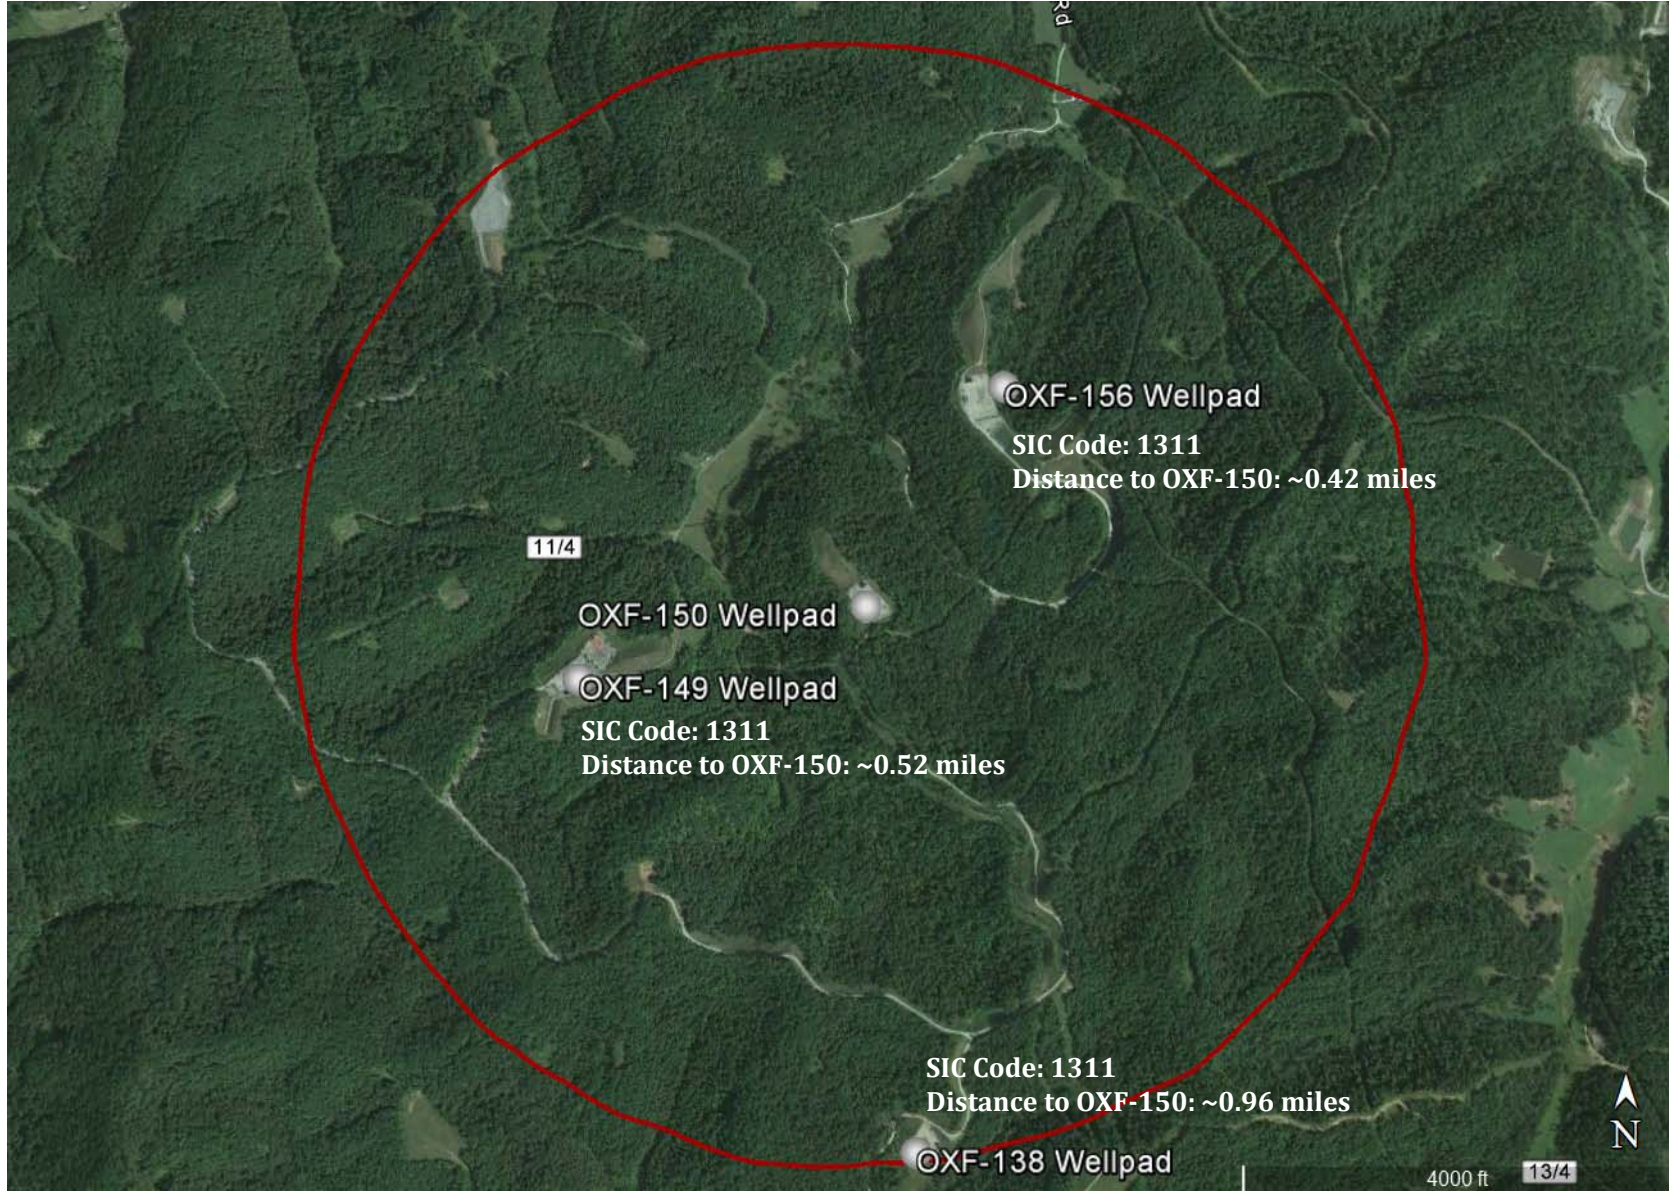

Note – red ring is a 1-mile radius from OXF-150

ATTACHMENT B

Siting Criteria Waiver *(Not Applicable)*

ATTACHMENT B - SITING CRITERIA WAIVER – NOT APPLICABLE

If applicable, please complete this form and it must be notarized.

**G70-C General Permit
Siting Criteria Waiver**

WV Division of Air Quality 300' Waiver

I _____ hereby
Print Name
acknowledge and agree that _____ will
General Permit Applicant's Name

construct an emission unit(s) at a natural gas production facility
that will be located within 300' of my dwelling and/or business.

I hereby offer this waiver of siting criteria to the West Virginia Department of Environmental Protection
Division of Air Quality as permission to construct, install and operate in such location.

Signed:

Signature Date

Signature Date

Taken, subscribed and sworn before me this ____ day of

_____, 20____.

My commission expires: _____

SEAL _____
Notary Public

ATTACHMENT C

Business Certificate

**WEST VIRGINIA
STATE TAX DEPARTMENT
BUSINESS REGISTRATION
CERTIFICATE**

ISSUED TO:
**EQT PRODUCTION COMPANY
625 LIBERTY AVE 1700
PITTSBURGH, PA 15222-3114**

BUSINESS REGISTRATION ACCOUNT NUMBER: 1022-8081

This certificate is issued on: 08/4/2010

*This certificate is issued by
the West Virginia State Tax Commissioner
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered
to conduct business in the State of West Virginia at the location above.*


This certificate is not transferrable and must be displayed at the location for which issued.
This certificate shall be permanent until cessation of the business for which the certificate of registration
was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of
this certificate displayed at every job site within West Virginia.

ATTACHMENT D

Process Flow Diagram

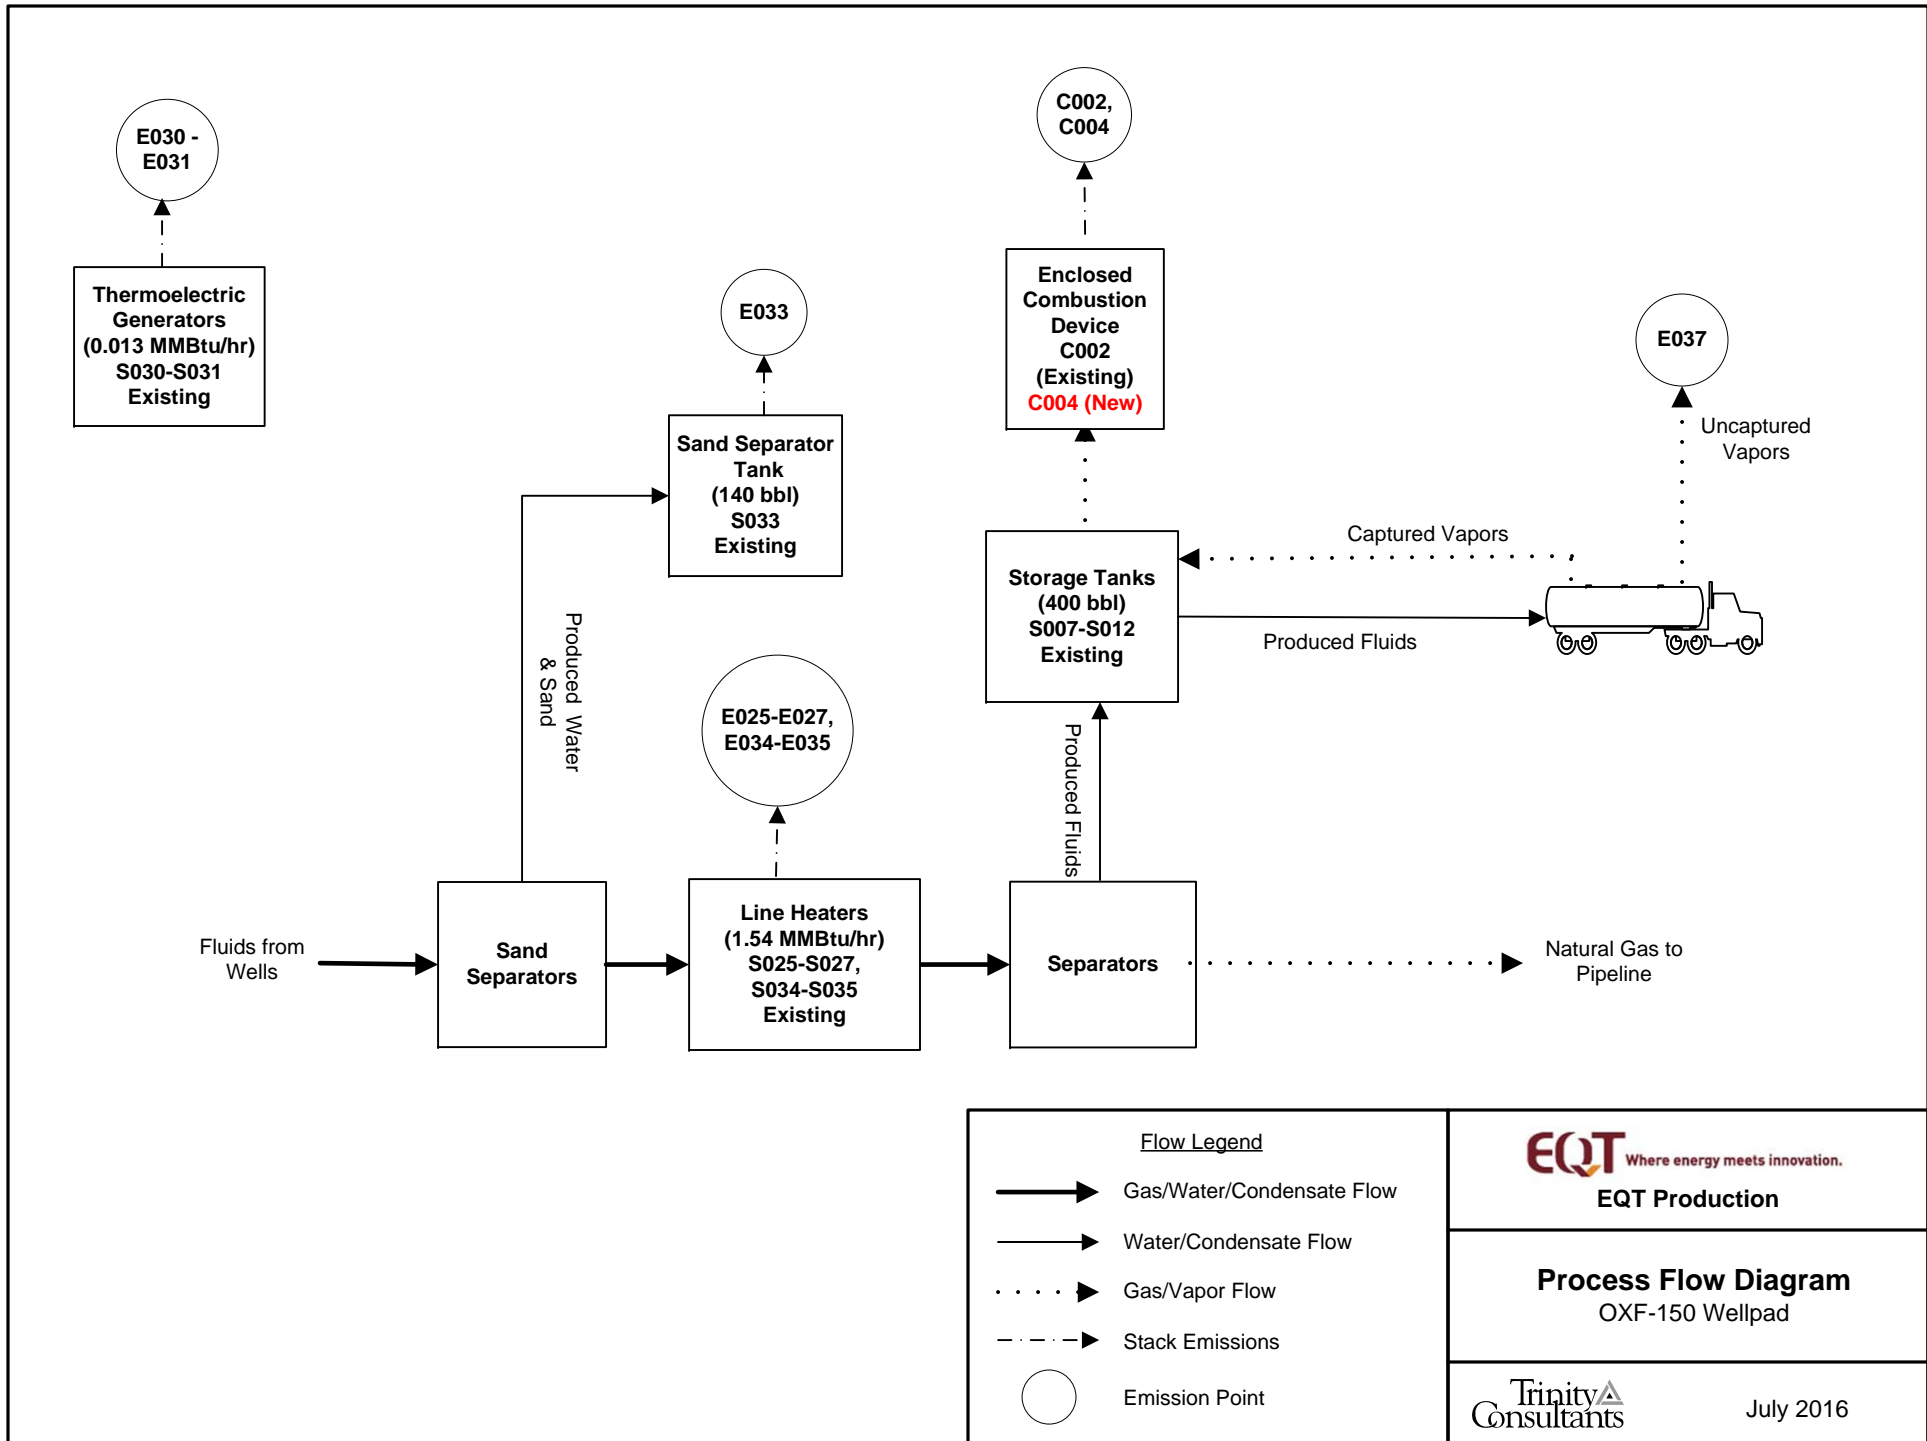

Flow Legend

- Gas/Water/Condensate Flow
- Water/Condensate Flow
- Gas/Vapor Flow
- Stack Emissions
- Emission Point



EQT Production

Process Flow Diagram

OXF-150 Wellpad



July 2016

ATTACHMENT E

Process Description

ATTACHMENT E: PROCESS DESCRIPTION

EQT is submitting this application to permit the installation and operation of one (1) enclosed combustor (C004) at the wellpad. Also, per correspondence from WVDEP, this application seeks to permit the OXF-150 wellpad, currently authorized under G70-A031A, as a separate facility under the G70-C

The OXF-150 wellpad consists of six (6) wells, each with the same basic operation. The incoming gas/liquid stream from the underground well will pass through a sand separator, where sand, water, and residual solids are displaced and transferred to the sand separator tank (S033). The gas stream will then pass through a line heater (S025-S027, S034-S035) to raise/maintain temperature of the stream and prevent hydrate formation. The stream will then pass through a high pressure separator, which will separate gas (natural gas from the separator is sent to the sales line) from liquids (condensate and produced water). The liquids are then transferred to the produced fluids tanks (S007-S012).


Emissions from the storage vessels are controlled by enclosed combustors (C002, C004). Once the tanks are filled, the contents are loaded into trucks for transport (S037). EQT utilizes vapor balancing in the truck loading operations, which means the vapors displaced by the filling of tanker trucks are routed back into the battery of tanks and ultimately to the combustor. Facility electricity is provided by thermoelectric generators (S030-S031).

A process flow diagram is included as Attachment D.


ATTACHMENT F

Plot Plan

Production Units w/ In-Line Heaters
(S025-S027, S034-S035)
1.54 MMBtu/hr each

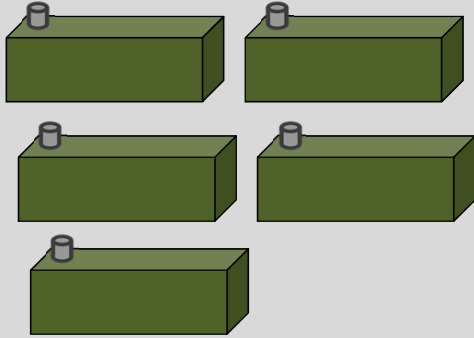

Thermoelectric Generators
(S030-S031)
0.013 MMBtu/hr





**NOTE: This diagram is not to scale.
Locations and distances between surface
equipment are not known at this time.**




Sand Separator Tank
140 bbl
(S033)

Wellheads (6)

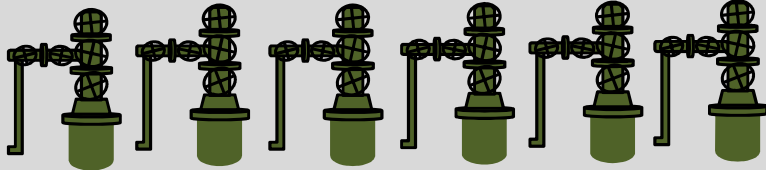

Combustors
(C002, C004)
11.66 MMBTU/hr

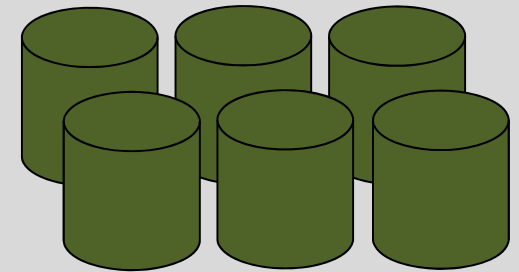

Produced Fluid Tanks
400 bbl each
(S007-S012)

Entrance to OXF-150

ATTACHMENT G

Area Map

ATTACHMENT G: AREA MAP



Figure 1 - Map of OXF-150 Location

Note – Ring represents 300 ft radius around wellpad equipment.

UTM Northing (KM)	4,341.558
UTM Easting (KM)	518.021
Elevation (m)	387

ATTACHMENT H
Applicability Form

ATTACHMENT H – G70-C SECTION APPLICABILITY FORM

**General Permit G70-C Registration
Section Applicability Form**

General Permit G70-C was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, centrifugal compressors, reciprocating compressors, reciprocating internal combustion engines (RICES), tank truck loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-C allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

GENERAL PERMIT G70-C APPLICABLE SECTIONS	
<input checked="" type="checkbox"/> Section 5.0	Gas Well Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water ¹
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO)
<input type="checkbox"/> Section 11.0	Centrifugal Compressor Affected Facility (NSPS, Subpart OOOO) ²
<input type="checkbox"/> Section 12.0	Reciprocating Compressor Affected Facility (NSPS, Subpart OOOO) ²
<input type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines, Microturbines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck Loading ³
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units ⁴

- 1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subpart OOOO control requirements or the applicable control device requirements of Section 8.
- 2 Applicants that are subject to Section 11 and 12 may also be subject to the applicable RICE requirements of Section 13.
- 3 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.
- 4 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

ATTACHMENT I

Emission Units Table

ATTACHMENT I – EMISSION UNITS / EMISSION REDUCTION DEVICES (ERD) TABLE

Include ALL emission units and air pollution control devices/ERDs that will be part of this permit application review. Do not include fugitive emission sources in this table. Deminimis storage tanks shall be listed in the Attachment L table. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Emission Unit ID ¹	Emission Point ID ²	Emission Unit Description	Year Installed	Manufac. Date ³	Design Capacity	Type ⁴ and Date of Change	Control Device(s) ⁵	ERD(s) ⁶
S007	C002, C004	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C002, C004	---
S008	C002, C004	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C002, C004	---
S009	C002, C004	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C002, C004	---
S010	C002, C004	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C002, C004	---
S011	C002, C004	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C002, C004	---
S012	C002, C004	Produced Fluid Storage Tank	2015	2015	400 bbl	Existing; No change	C002, C004	---
S025	E025	Line Heater	2014	2014	1.54 MMBtu/hr	Existing; No change	None	---
S026	E026	Line Heater	2014	2014	1.54 MMBtu/hr	Existing; No change	None	---
S027	E027	Line Heater	2014	2014	1.54 MMBtu/hr	Existing; No change	None	---
S034	E034	Line Heater	2015	2015	1.54 MMBtu/hr	Existing; No change	None	---
S035	E035	Line Heater	2015	2015	1.54 MMBtu/hr	Existing; No change	None	---
S030	E030	Thermoelectric Generator	2011-2014	2011-2014	0.013 MMBtu/hr	Existing; No change	None	---
S031	E031	Thermoelectric Generator	2011-2014	2011-2014	0.013 MMBtu/hr	Existing; No change	None	---
S033	E033	Sand Separator Storage Tank	2015	2015	140 bbl	Existing; No change	C002, C004 (Optional)	---
S037	E037 (Uncaptured) C002, C004 (Controlled, Captured)	Liquid Loading	2015	2015	17,859,450 gal/yr	Modified – Increased Throughput	C002, C004	---
C002	C002	Combustor	2015	2015	11.66 MMBtu/hr	Existing; No change	NA	---
C004	C004	Combustor	TBD	TBD	11.66 MMBtu/hr	New	NA	---

¹ For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation.

² For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

³ When required by rule

⁴ New, modification, removal, existing

⁵ For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

⁶ For ERDs use the following numbering system: 1D, 2D, 3D,... or other appropriate designation.

ATTACHMENT J

Fugitive Emissions Summary Sheet

ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions, etc.
Use extra pages for each associated source or equipment if necessary.

Source/Equipment: Fugitive Emissions

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections	<input type="checkbox"/> Infrared (FLIR) cameras	<input checked="" type="checkbox"/> Other (please describe) Will satisfy condition 4.1.4. of the G70-C	<input type="checkbox"/> None required		
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)		
					VOC	HAP	GHG (CO ₂ e)
Pumps	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	11	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input checked="" type="checkbox"/> Liquid <input type="checkbox"/> Both	2.02	0.06	0.38
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	294	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	2.81	0.09	29.06
Safety Relief Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	3.58	0.11	3.15
Open Ended Lines	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	20	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	0.05	<0.01	4.35
Sampling Connections	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	N/A	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	---	---	---
Connections (Not sampling)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1,289	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	3.78	0.12	14.15
Compressors	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	N/A	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	---	---	---
Flanges	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	(included in connections)	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	---	---	---
Other ¹	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	30	40 CFR 98 Subpart W	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	5.29	0.16	219.66

¹ Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e.g. pigging operations, equipment blowdowns, pneumatic controllers, etc.):
Pneumatic Controller count is 'Other' category. An estimate of Miscellaneous Gas Venting emissions are included in the Emission Calculations and serve to include such sources as compressor venting, pigging, vessel blowdowns and other sources.

Please indicate if there are any closed vent bypasses (include component): N/A

Specify all equipment used in the closed vent system (e.g. VRU, ERD, thief hatches, tanker truck loading, etc.) N/A

ATTACHMENT K

Gas Well Data Sheet

ATTACHMENT K – GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

API Number	Date of Flowback ¹	Date of Well Completion ²	Green Completion and/or Combustion Device
047-017-06390	01/03/2015	12/20/2014	Green
047-017-05889	01/30/2011	01/16/2011	Green
047-017-05892	01/20/2011	01/11/2011	Green
047-017-05893	01/24/2011	01/14/2011	Green
047-017-06388	01/03/2015	12/27/2014	Green
047-017-06389	01/04/2014	12/20/2014	Green

Note: If future wells are planned and no API number is available please list as PLANNED. If there are existing wells that commenced construction prior to August 23, 2011, please acknowledge as existing.

This is the same API (American Petroleum Institute) well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).

Every oil and gas well permitted in West Virginia since 1929 has been issued an API number. This API is used by agencies to identify and track oil and gas wells.

The API number has the following format: 047-001-00001

Where,

047 = State code. The state code for WV is 047.

001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).

00001= Well number. Each well will have a unique well number.

¹ Corresponds to the start date of flowback.

² Corresponds to the start date of the well completion process as defined in 40 CFR 60.5430.

ATTACHMENT L

Storage Vessel Data Sheet

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water . (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name OXF-150 Wellpad	2. Tank Name Produced Fluid Tanks (water and condensate)
3. Emission Unit ID number S007-S012	4. Emission Point ID number C002, C004
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> Was the tank manufactured after August 23, 2011? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: none <input type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other (Low Pressure Tower) <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

TANK INFORMATION

8. Design Capacity (<i>specify barrels or gallons</i>). Use the internal cross-sectional area multiplied by internal height. 400 bbls	
9A. Tank Internal Diameter (ft.) ~12	9B. Tank Internal Height (ft.) ~20
10A. Maximum Liquid Height (ft.) ~20	10B. Average Liquid Height (ft.) ~10
11A. Maximum Vapor Space Height (ft.) ~20	11B. Average Vapor Space Height (ft.) ~10
12. Nominal Capacity (<i>specify barrels or gallons</i>). This is also known as "working volume". 400 bbls	
13A. Maximum annual throughput (gal/yr) See attached emissions calculations for all throughput values	13B. Maximum daily throughput (gal/day) See attached emissions calculations for all throughput values
14. Number of tank turnovers per year See attached emissions calculations for all throughput values	15. Maximum tank fill rate (gal/min) See attached emissions calculations for all throughput values
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input checked="" type="checkbox"/> vertical <input type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input checked="" type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical <input type="checkbox"/> Other (describe)	

PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply: <input type="checkbox"/> Does Not Apply <input type="checkbox"/> Rupture Disc (psig) <input type="checkbox"/> Inert Gas Blanket of _____ <input type="checkbox"/> Carbon Adsorption ¹ <input checked="" type="checkbox"/> Vent to Vapor Combustion Device ¹ (vapor combustors, flares, thermal oxidizers, enclosed combustors) <input checked="" type="checkbox"/> Conservation Vent (psig) <input type="checkbox"/> Condenser ¹ 0.5 oz Vacuum Setting 12.5 oz Pressure Setting <input checked="" type="checkbox"/> Emergency Relief Valve (psig) Vacuum Setting 14.4 oz Pressure Setting (one per tank) <input type="checkbox"/> Thief Hatch Weighted <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No – Cashco Lockdown Hatch ¹ Complete appropriate Air Pollution Control Device Sheet									
20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method ¹
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See attached Emissions Calculation for all values									

¹ EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded or riveted			
21A. Shell Color: Green	21B. Roof Color: Green	21C. Year Last Painted: New	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): Must be listed for tanks using VRUs with closed vent system.			
24. Is the tank a Vertical Fixed Roof Tank ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft): 0.06	
25. Complete item 25 for Floating Roof Tanks <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type (<i>check one</i>): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (<i>check one</i>) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
SITE INFORMATION - Not Applicable: Tank calculations performed using ProMax software			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft ² -day):		35. Atmospheric Pressure (psia):	
LIQUID INFORMATION - Not Applicable: Tank calculations performed using ProMax software			
36. Avg. daily temperature range of bulk liquid (°F):		36A. Minimum (°F):	36B. Maximum (°F):
37. Avg. operating pressure range of tank (psig):		37A. Minimum (psig):	37B. Maximum (psig):
38A. Minimum liquid surface temperature (°F):		38B. Corresponding vapor pressure (psia):	
39A. Avg. liquid surface temperature (°F):		39B. Corresponding vapor pressure (psia):	
40A. Maximum liquid surface temperature (°F):		40B. Corresponding vapor pressure (psia):	
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From: To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name OXF-150 Wellpad	2. Tank Name Sand Separator Tank
3. Emission Unit ID number S033	4. Emission Point ID number E033
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> Was the tank manufactured after August 23, 2011? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: <input type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other (Low Pressure Tower) <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

TANK INFORMATION

8. Design Capacity <i>(specify barrels or gallons)</i> . Use the internal cross-sectional area multiplied by internal height. 140 bbls	
9A. Tank Internal Diameter (ft.) ~10	9B. Tank Internal Height (ft.) ~10
10A. Maximum Liquid Height (ft.) ~10	10B. Average Liquid Height (ft.) ~5
11A. Maximum Vapor Space Height (ft.) ~10	11B. Average Vapor Space Height (ft.) ~5
12. Nominal Capacity <i>(specify barrels or gallons)</i> . This is also known as “working volume”. 140 bbls	
13A. Maximum annual throughput (gal/yr) See attached emissions calculations for all throughput values	13B. Maximum daily throughput (gal/day) See attached emissions calculations for all throughput values
14. Number of tank turnovers per year See attached emissions calculations for all throughput values	15. Maximum tank fill rate (gal/min) See attached emissions calculations for all throughput values
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input type="checkbox"/> vertical <input checked="" type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical	

PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply:	
<input checked="" type="checkbox"/> Does Not Apply	<input type="checkbox"/> Rupture Disc (psig)
<input type="checkbox"/> Inert Gas Blanket of _____	<input type="checkbox"/> Carbon Adsorption ¹
<input type="checkbox"/> Vent to Vapor Combustion Device ¹ (vapor combustors, flares, thermal oxidizers, enclosed combustors)	
<input type="checkbox"/> Conservation Vent (psig)	<input type="checkbox"/> Condenser ¹
Vacuum Setting Pressure Setting	
<input type="checkbox"/> Emergency Relief Valve (psig)	
Vacuum Setting Pressure Setting	
<input type="checkbox"/> Thief Hatch Weighted <input type="checkbox"/> Yes <input type="checkbox"/> No	
¹ Complete appropriate Air Pollution Control Device Sheet	

20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method ¹
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See attached Emissions Calculation for all values									

¹ EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION			
21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded			
21A. Shell Color: Gray	21B. Roof Color: Gray	21C. Year Last Painted: New	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): Must be listed for tanks using VRUs with closed vent system.			
24. Is the tank a Vertical Fixed Roof Tank ? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft):	
25. Complete item 25 for Floating Roof Tanks <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type (check one): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (check one) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
SITE INFORMATION - Not Applicable: Tank calculations performed using E&P Tank software			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft ² -day):		35. Atmospheric Pressure (psia):	
LIQUID INFORMATION - Not Applicable: Tank calculations performed using E&P Tank software			
36. Avg. daily temperature range of bulk liquid (°F):		36A. Minimum (°F):	36B. Maximum (°F):

37. Avg. operating pressure range of tank (psig):	37A. Minimum (psig):	37B. Maximum (psig):
38A. Minimum liquid surface temperature (°F):	38B. Corresponding vapor pressure (psia):	
39A. Avg. liquid surface temperature (°F):	39B. Corresponding vapor pressure (psia):	
40A. Maximum liquid surface temperature (°F):	40B. Corresponding vapor pressure (psia):	
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.		
41A. Material name and composition:		
41B. CAS number:		
41C. Liquid density (lb/gal):		
41D. Liquid molecular weight (lb/lb-mole):		
41E. Vapor molecular weight (lb/lb-mole):		
41F. Maximum true vapor pressure (psia):		
41G. Maximum Reid vapor pressure (psia):		
41H. Months Storage per year. From: To:		
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.		

STORAGE TANK DATA TABLE

List all deminimis storage tanks (i.e. lube oil, glycol, diesel etc.)

Source ID # ¹	Status ²	Content ³	Volume ⁴
Not Applicable			

1. Enter the appropriate Source Identification Numbers (Source ID #) for each storage tank located at the compressor station. Tanks should be designated T01, T02, T03, etc.
2. Enter storage tank Status using the following:
 EXIST Existing Equipment
 NEW Installation of New Equipment
 REM Equipment Removed
3. Enter storage tank content such as condensate, pipeline liquids, glycol (DEG or TEG), lube oil, diesel, mercaptan etc.
4. Enter the maximum design storage tank volume in gallons.

ATTACHMENT M

Heaters Data Sheet

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO 40CFR60
SUBPART DC
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID# ¹	Emission Point ID# ²	Emission Unit Description (manufacturer, model #)	Year Installed/ Modified	Type ³ and Date of Change	Maximum Design Heat Input (MMBTU/hr) ⁴	Fuel Heating Value (BTU/scf) ⁵
S025	E025	Line Heater	2014	Existing; No change	1.54	1,050
S026	E026	Line Heater	2014	Existing; No change	1.54	1,050
S027	E027	Line Heater	2014	Existing; No change	1.54	1,050
S034	E034	Line Heater	2015	Existing; No change	1.54	1,050
S035	E035	Line Heater	2015	Existing; No change	1.54	1,050
S030	E030	Thermoelectric Generator	2011-2014	Existing; No change	0.013	1,050
S031	E031	Thermoelectric Generator	2011-2014	Existing; No change	0.013	1,050

¹ Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.

² Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

³ New, modification, removal

⁴ Enter design heat input capacity in MMBtu/hr.

⁵ Enter the fuel heating value in BTU/standard cubic foot.

ATTACHMENT N

Engines Data Sheet *(Not Applicable)*

ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET
NOT APPLICABLE

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*

Emission Unit ID# ¹							
Engine Manufacturer/Model							
Manufacturers Rated bhp/rpm							
Source Status ²							
Date Installed/ Modified/Removed/Relocated ³							
Engine Manufactured /Reconstruction Date ⁴							
Check all applicable Federal Rules for the engine (include EPA Certificate of Conformity if applicable) ⁵		<input type="checkbox"/> 40CFR60 Subpart JJJ <input type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources	<input type="checkbox"/> 40CFR60 Subpart JJJ <input type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources	<input type="checkbox"/> 40CFR60 Subpart JJJ <input type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources			
Engine Type ⁶							
APCD Type ⁷							
Fuel Type ⁸							
H ₂ S (gr/100 scf)							
Operating bhp/rpm							
BSFC (BTU/bhp-hr)							
Hourly Fuel Throughput		ft ³ /hr gal/hr		ft ³ /hr gal/hr		ft ³ /hr gal/hr	
Annual Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)		MMft ³ /yr gal/yr		MMft ³ /yr gal/yr		MMft ³ /yr gal/yr	
Fuel Usage or Hours of Operation Metered		Yes <input type="checkbox"/> No <input type="checkbox"/>		Yes <input type="checkbox"/> No <input type="checkbox"/>		Yes <input type="checkbox"/> No <input type="checkbox"/>	
Calculation Methodology ⁹	Pollutant ¹⁰	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ¹¹	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ¹¹	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ¹¹
Manufacturer	NO _x						
Manufacturer	CO						
Manufacturer	VOC						
AP-42	SO ₂						
AP-42	PM ₁₀						
AP-42	Formaldehyde						
AP-42	Total HAPs						
40 CFR Part 98 Subpart C	GHG (CO ₂ e)						

1 Enter the appropriate Source Identification Number for each natural gas-fueled reciprocating internal combustion compressor/generator engine located at the compressor station. Multiple compressor engines should be designated CE-1, CE-2, CE-3 etc. Generator engines should be designated GE-1, GE-2, GE-3 etc. Microturbine generator engines should be designated MT-1, MT-2, MT-3 etc. If more than three (3) engines exist, please use additional sheets.

2 Enter the Source Status using the following codes:

NS	Construction of New Source (installation)	ES	Existing Source
MS	Modification of Existing Source	RS	Relocated Source

REM Removal of Source

- 3 Enter the date (or anticipated date) of the engine's installation (construction of source), modification, relocation or removal.
- 4 Enter the date that the engine was manufactured, modified or reconstructed.
- 5 Is the engine a certified stationary spark ignition internal combustion engine according to 40CFR60 Subpart IIII/IIII? If so, the engine and control device must be operated and maintained in accordance with the manufacturer's emission-related written instructions. You must keep records of conducted maintenance to demonstrate compliance, but no performance testing is required. If the certified engine is not operated and maintained in accordance with the manufacturer's emission-related written instructions, the engine will be considered a non-certified engine and you must demonstrate compliance as appropriate.

Provide a manufacturer's data sheet for all engines being registered.

- 6 Enter the Engine Type designation(s) using the following codes:
 - 2SLB Two Stroke Lean Burn 4SRB Four Stroke Rich Burn
 - 4SLB Four Stroke Lean Burn
- 7 Enter the Air Pollution Control Device (APCD) type designation(s) using the following codes:
 - A/F Air/Fuel Ratio IR Ignition Retard
 - HEIS High Energy Ignition System SIPC Screw-in Precombustion Chambers
 - PSC Prestratified Charge LEC Low Emission Combustion
 - NSCR Rich Burn & Non-Selective Catalytic Reduction OxCat Oxidation Catalyst
 - SCR Lean Burn & Selective Catalytic Reduction
- 8 Enter the Fuel Type using the following codes:
 - PQ Pipeline Quality Natural Gas RG Raw Natural Gas /Production Gas D Diesel
- 9 Enter the Potential Emissions Data Reference designation using the following codes. Attach all reference data used.
 - MD Manufacturer's Data AP AP-42
 - GR GRI-HAPCalc™ OT Other (please list)
- 10 Enter each engine's Potential to Emit (PTE) for the listed regulated pollutants in pounds per hour and tons per year. PTE shall be calculated at manufacturer's rated brake horsepower and may reflect reduction efficiencies of listed Air Pollution Control Devices. Emergency generator engines may use 500 hours of operation when calculating PTE. PTE data from this data sheet shall be incorporated in the *Emissions Summary Sheet*.
- 11 PTE for engines shall be calculated from manufacturer's data unless unavailable.

**Engine Air Pollution Control Device – NOT APPLICABLE
(Emission Unit ID# , use extra pages as necessary)**

Air Pollution Control Device Manufacturer’s Data Sheet included?

Yes No

See attached certification

NSCR

SCR

Oxidation Catalyst

Provide details of process control used for proper mixing/control of reducing agent with gas stream:

Manufacturer:

Model #:

Design Operating Temperature:

Design gas volume: scfm

Service life of catalyst:

Provide manufacturer data? Yes No

Volume of gas handled:

Operating temperature range for NSCR/Ox Cat:
From °F to °F

Reducing agent used, if any:

Ammonia slip (ppm):

Pressure drop against catalyst bed (delta P):

Provide description of warning/alarm system that protects unit when operation is not meeting design conditions:

Is temperature and pressure drop of catalyst required to be monitored per 40CFR63 Subpart ZZZZ?

Yes No

How often is catalyst recommended or required to be replaced (hours of operation)?

How often is performance test required?

Initial

Annual

Every 8,760 hours of operation

Field Testing Required

No performance test required. If so, why (please list any maintenance required and the applicable sections in NSPS/GACT, Per 40 CFR §60.4243(a)(1), EQT must maintain the certified engine and control device according to the manufacturer’s emission related written instructions and keep records of conducted maintenance to demonstrate compliance, but no performance testing is required.

ATTACHMENT O

Truck Loading Data Sheet

ATTACHMENT O – TANKER TRUCK LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks. Use extra pages if necessary.

Truck Loadout Collection Efficiencies

The following applicable capture efficiencies of a truck loadout are allowed:

- For tanker trucks passing the MACT level annual leak test – 99.2%
- For tanker trucks passing the NSPS level annual leak test – 98.7%
- For tanker trucks not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: S037	Emission Point ID#: E037 (Uncaptured) C002, C004 (Controlled, Captured)	Year Installed/Modified: 2015		
Emission Unit Description: Uncaptured losses from loading of produced fluids into tanker trucks				
Loading Area Data				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks loading at one (1) time: 1		
Are tanker trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. Trucks utilize vapor recovery lines to route displaced vapors back into battery of tanks.				
Are any of the following truck loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck passing a NSPS level annual leak test? <input checked="" type="checkbox"/> Closed System to tanker truck not passing an annual leak test and has vapor return?				
Projected Maximum Operating Schedule (for rack or transfer point as a whole)				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	Varies	Varies	Varies	Varies
Days/week	7	7	7	7
Bulk Liquid Data (use extra pages as necessary)				
Liquid Name	Produced Fluids			
Max. Daily Throughput (1000 gal/day)	See attached emissions calculations for all throughput values			
Max. Annual Throughput (1000 gal/yr)	See attached emissions calculations for all throughput values			
Loading Method ¹	SP			
Max. Fill Rate (gal/min)	Varies			
Average Fill Time (min/loading)	Varies			
Max. Bulk Liquid Temperature (°F)	See ProMax results			
True Vapor Pressure ²	See ProMax results			
Cargo Vessel Condition ³	U			

Control Equipment or Method ⁴		VB, ECD (captured loading losses)		
Max. Collection Efficiency (%)		70		
Max. Control Efficiency (%)		98		
Max.VOC Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Max.HAP Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Estimation Method ⁵		AP-42 Section 5.2 Methodology (via ProMax)		

- 1 BF Bottom Fill SP Splash Fill SUB Submerged Fill
- 2 At maximum bulk liquid temperature
- 3 B Ballasted Vessel C Cleaned U Uncleaned (dedicated service)
O Other (describe)
- 4 List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)
CA Carbon Adsorption VB Dedicated Vapor Balance (closed system)
ECD Enclosed Combustion Device F Flare
TO Thermal Oxidization or Incineration
- 5 EPA EPA Emission Factor in AP-42 MB Material Balance
TM Test Measurement based upon test data submittal O Other (describe)

ATTACHMENT P

Glycol Dehydrator Data Sheet *(Not Applicable)*

**ATTACHMENT P – GLYCOL DEHYDRATION UNIT
DATA SHEET – NOT APPLICABLE**

Complete this data sheet for each Glycol Dehydration Unit, Reboiler, Flash Tank and/or Regenerator at the facility. Include gas sample analysis and GRI- GLYCalc™ input and aggregate report. Use extra pages if necessary.

Manufacturer:		Model:			
Max. Dry Gas Flow Rate:		Reboiler Design Heat Input			
Design Type: <input type="checkbox"/> TEG <input type="checkbox"/> DEG <input type="checkbox"/> EG		Source Status ¹ :			
Date Installed/Modified/Removed ² :		Regenerator Still Vent APCD/ERD ³ :			
Control Device/ERD ID# ³ :		Fuel HV (BTU/scf):			
H ₂ S Content (gr/100 scf):		Operation (hours/year):			
Pump Rate (gpm):					
Water Content (wt %) in: Wet Gas: Dry Gas:					
Is the glycol dehydration unit exempt from 40CFR63 Section 764(d)? <input type="checkbox"/> Yes <input type="checkbox"/> No: If Yes, answer the following:					
The actual annual average flowrate of natural gas to the glycol dehydration unit is less than 85 thousand standard cubic meters per day, as determined by the procedures specified in §63.772(b)(1) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
The actual average emissions of benzene from the glycol dehydration unit process vent to the atmosphere are less than 0.90 megagram per year (1 ton per year), as determined by the procedures specified in §63.772(b)(2) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is the glycol dehydration unit located within an Urbanized Area (UA) or Urban Cluster (UC)? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is a lean glycol pump optimization plan being utilized? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler and mixed with fuel. <input type="checkbox"/> Yes <input type="checkbox"/> No					
What happens when temperature controller shuts off fuel to the reboiler? <input type="checkbox"/> Still vent emissions to the atmosphere. <input type="checkbox"/> Still vent emissions stopped with valve. <input type="checkbox"/> Still vent emissions to glow plug. <input type="checkbox"/> None of the above: Still vent emissions are controlled by an enclosed combustor					
Please indicate if the following equipment is present. <input type="checkbox"/> Flash Tank <input type="checkbox"/> Burner management system that continuously burns condenser or flash tank vapors					
Control Device Technical Data					
Pollutants Controlled		Manufacturer's Guaranteed Control Efficiency (%)			
Emissions Data					
Emission Unit ID / Emission Point ID ⁴	Description	Calculation Methodology ⁵	PTE ⁶	Controlled Maximum Hourly Emissions (lb/hr)	Controlled Maximum Annual Emissions (tpy)

- 1 Enter the Source Status using the following codes:
NS Construction of New Source ES Existing Source
MS Modification of Existing Source
- 2 Enter the date (or anticipated date) of the glycol dehydration unit's installation (construction of source), modification or removal.
- 3 Enter the Air Pollution Control Device (APCD)/Emission Reduction Device (ERD) type designation using the following codes and the device ID number:
NA None CD Condenser FL Flare
CC Condenser/Combustion Combination TO Thermal Oxidizer O Other (please list)
- 4 Enter the appropriate Emission Unit ID Numbers and Emission Point ID Numbers for the glycol dehydration unit reboiler vent and glycol regenerator still vent. The glycol dehydration unit reboiler vent and glycol regenerator still vent should be designated RBV-1 and RSV-1, respectively. If the compressor station incorporates multiple glycol dehydration units, a Glycol Dehydration Emission Unit Data Sheet shall be completed for each, using Source Identification RBV-2 and RSV-2, RBV-3 and RSV-3, etc.
- 5 Enter the Potential Emissions Data Reference designation using the following codes:
MD Manufacturer's Data AP AP-42
GR GRI-GLYCalc™ OT Other (please list)
- 6 Enter the Reboiler Vent and Glycol Regenerator Still Vent Potential to Emit (PTE) for the listed regulated pollutants in lbs per hour and tons per year. The Glycol Regenerator Still Vent potential emissions may be determined using the most recent version of the thermodynamic software model GRI-GLYCalc™ (Radian International LLC & Gas Research Institute). **Attach all referenced Potential Emissions Data (or calculations) and the GRI-GLYCalc™ Aggregate Calculations Report (shall include emissions reports, equipment reports, and stream reports) to this Glycol Dehydration Emission Unit Data Sheet(s). Backup pumps do not have to be considered as operating for purposes of PTE.** This PTE data shall be incorporated in the Emissions Summary Sheet.

ATTACHMENT Q

Pneumatic Controller Data Sheet *(Not Applicable)*

**ATTACHMENT Q – PNEUMATIC CONTROLLERS
DATA SHEET**

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011?

Yes No

Please list approximate number.

ATTACHMENT R

Air Pollution Control Device Data Sheet

**ATTACHMENT R – AIR POLLUTION CONTROL DEVICE /
EMISSION REDUCTION DEVICE SHEETS**

Complete the applicable air pollution control device sheets for each flare, vapor combustor, thermal oxidizer, condenser, adsorption system, vapor recovery unit, BTEX Eliminator, Reboiler with and without Glow Plug, etc. at the facility. Use extra pages if necessary.

Emissions calculations must be performed using the most conservative control device efficiency.

The following five (5) rows are only to be completed if registering an alternative air pollution control device.

Emission Unit ID: Not Applicable	Make/Model:
Primary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No
Secondary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No

VAPOR COMBUSTION (Including Enclosed Combustors)

General Information

Control Device ID#: C002, C004	Installation Date: C002 installed 2015 <input checked="" type="checkbox"/> New (C004) <input type="checkbox"/> Modified <input type="checkbox"/> Relocated
Maximum Rated Total Flow Capacity ~7,860 scfh ~188,380 scfd	Maximum Design Heat Input (from mfg. spec sheet) 11.66 MMBTU/hr
Design Heat Content 1,500 BTU/scf	

Control Device Information

Type of Vapor Combustion Control?		
<input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Thermal Oxidizer	<input type="checkbox"/> Elevated Flare	<input type="checkbox"/> Ground Flare
Manufacturer: LEED Fabrication Model: Enclosed Combustor 48"	Hours of operation per year? 8,760	

List the emission units whose emissions are controlled by this vapor control device (Emission Point ID# S007-S012, S037)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
S007-S012	Produced Fluid Tanks		
S037	Liquid Loading		

If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.

Assist Type (Flares only)	Flare Height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input checked="" type="checkbox"/> Non	~25 feet	~4 feet	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Provide determination.

Waste Gas Information

Maximum Waste Gas Flow Rate 130 (scfm)	Heat Value of Waste Gas Stream Varies BTU/ft ³	Exit Velocity of the Emissions Stream Varies (ft/s)
--	--	--

Provide an attachment with the characteristics of the waste gas stream to be burned.

Pilot Gas Information

Number of Pilot Lights 1	Fuel Flow Rate to Pilot Flame per Pilot 50 scfh	Heat Input per Pilot 0.05 MMBTU/hr	Will automatic re-ignition be used? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
-----------------------------	---	---------------------------------------	--

If automatic re-ignition is used, please describe the method.

Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	If Yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input type="checkbox"/> Other:
---	---

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate).* See attached information on unit

Additional information attached? Yes No
 Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11(b) and performance testing.

CONDENSER – Not Applicable

General Information

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Manufacturer:	Model:	Control Device Name:
Control Efficiency (%):		
Manufacturer's required temperature range for control efficiency. °F		
Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:		
Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.		
Additional information attached? <input type="checkbox"/> Yes <input type="checkbox"/> No Please attach copies of manufacturer's data sheets.		
Is condenser routed to a secondary APCD or ERD? <input type="checkbox"/> Yes <input type="checkbox"/> No		

ADSORPTION SYSTEM – Not Applicable

General Information

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Manufacturer:	Model:	Control Device Name:
Design Inlet Volume: scfm	Adsorbent charge per adsorber vessel and number of adsorber vessels:	
Length of Mass Transfer Zone supplied by the manufacturer:	Adsorber diameter: ft	Adsorber area: ft ²
Adsorbent type and physical properties:	Overall Control Efficiency (%):	
Working Capacity of Adsorbent (%):		

Operating Parameters

Inlet volume: scfm @ °F	
Adsorption time per adsorption bed (life expectancy):	Breakthrough Capacity (lbs of VOC/100 lbs of adsorbent):
Temperature range of carbon bed adsorber. °F - °F	

Control Device Technical Data

Pollutants Controlled	Manufacturer's Guaranteed Control Efficiency (%)

Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:

Has the control device been tested by the manufacturer and certified?

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.

Additional information attached? Yes No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

VAPOR RECOVERY UNIT – Not Applicable

General Information

Emission Unit ID#:

Installation Date:

New

Modified

Relocated

Device Information

Manufacturer:

Model:

List the emission units whose emissions are controlled by this vapor recovery unit (Emission Point ID# NA)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description

If this vapor recovery unit controls emissions from more than six (6) emission units, please attach additional pages.

Additional information attached? Yes No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

The registrant may claim a capture and control efficiency of 95 % (which accounts for 5% downtime) for the vapor recovery unit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup flare that meet the requirements of Section 8.1.2 of this general permit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup VRU.



**Environmental Control Equipment
Data Sheet**

Item/Tag No.:		Page	1	of	2
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Client:		Supplier:	LEED FABRICATION		
Site:		Model No.:	L30-0011-00		
Unit/Lease:		Remarks:			

GENERAL

1 Design Code:		NDE:	LEED Fabrication Standards		
2 Service:		Customer Specs:	<input type="checkbox"/> Yes		
3 Description:	Standard Dual Stage 48 High Efficiency Combustor		<input checked="" type="checkbox"/> No		

PROCESS DATA

Gas Composition:	mol %	Process Conditions:		
		Variable	Value	Units
4 Methane		Flow Rate	Up to 140	Mscfd
5 Ethane		Pressure	Up to 12	oz/in2
6 Propane		Temperature		°F
7 I-Butane		Molecular Weight		
8 n-Butane		Process/Waste Stream	<input checked="" type="checkbox"/> Gas	<input type="checkbox"/> Liquid
9 I-Pentane		Detailed Process Description / Process Notes:		
10 n-Pentane		1. Turndown 10:1. Based on an expected normal operating rate indicated above.		
11 n-Hexane		2. DRE: 98 % operating at design conditions		
12 CO2		3. Burner Pressure Drop: Min. 0.10 oz/in2		
13 N2				
14 Helium				
15 H2O				
16 C7				
17 C8				
18 C9				
19 C10				
20 C11+				
21 TOTAL				
Other Components:	PPMV	Available Utilities:		
22 H2S		Fuel / Pilot Gas	Min. 30psig Natural Gas /Propane 40-50 SCFH	
23 Benzene		Instrument Air	NA	
24 Toluene		Power	120 V / 60 Hz or Solar Power	
25 E-Benzene		Steam	NA	
26 Xylene		Purge Gas		

DESIGN DATA

27 Ambient Temperatures:		Noise Performance Requirements:	Under 85 dBA	
28 Low, °F	-20	Structural Design Code:		
29 High, °F	120	Wind Design Code:	ASCE	
30 Design Conditions:	Pressure/Temperature			
31 Max. Relative Humidity, %	90	Pressure/Speed	100 mph	
32 Elevation (ASL), ft		Category		
33 Area Classification:	Class I Div 2	Seismic Design Code:		
34 Electrical Design Code:	NEC	Location		

EQUIPMENT SPECIFICATION


35 Type:	<input type="checkbox"/> Elevated <input checked="" type="checkbox"/> Enclosed	Equipment Design:		
36	<input type="checkbox"/> Above Ground	Component	Material / Size / Rating / Other	
37	<input checked="" type="checkbox"/> Stack <input type="checkbox"/> Multiple Stack	Burner		
38	<input type="checkbox"/> Portable / Trailer	Burner Tip / Assist Gas Burner	304 SS	
39		Burner Body	Carbon Steel	
40 Smokeless By:	<input type="checkbox"/> Steam <input type="checkbox"/> Assist Air	Pilot		
41	<input type="checkbox"/> Gas Assist <input checked="" type="checkbox"/> Staging	Pilot Tip	304 SS	
42		Pilot Line(s)	Carbon Steel	
43 Stack:	<input checked="" type="checkbox"/> Self Supporting	Firebox / Stack		
44 Flare Burner:	<input type="checkbox"/> Non-Smokeless <input checked="" type="checkbox"/> Smokeless <input type="checkbox"/> Gas Assist	Shell	Carbon Steel	
45 Pilot:	<input checked="" type="checkbox"/> Intermittent <input type="checkbox"/> Continuous	Piping	Carbon Steel	
46 Pilot Air Inspirator:	<input checked="" type="checkbox"/> Local <input type="checkbox"/> Remote	Nozzles	Carbon Steel	
47 Pilot Flame Control:	<input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (Thermocouple)	Flanges	Carbon Steel	
48		Insulation	Blanket	
49 Pilot Ignition:	<input type="checkbox"/> Flamefront Generator <input checked="" type="checkbox"/> Inspiring Ignitor	Insulation Pins	304 SS	
50	<input type="checkbox"/> Electronic <input checked="" type="checkbox"/> Automatic <input type="checkbox"/> Manual	Refractory	NA	
51	<input type="checkbox"/> With Pilot Flame Control	Refractory Anchors	NA	
52	<input type="checkbox"/> With Auto Pilot Re-Ignition	Ladders and Platforms	NA	
53		Stack Sample Connections	Per EPA requirements	
54 Pilot Ignition Backup:	<input type="checkbox"/> Manual Specify: i.e Piezo-Electric	Sight Glass	2	
55	<input type="checkbox"/> Battery Pack	Other		



**Environmental Control Equipment
Data Sheet**

Item/Tag No.:		Page	2	of	3
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Remarks:	-	Supplier:	LEED FABRICATION		
		Model No.:	L30-0011-00		

EQUIPMENT SPECIFICATION

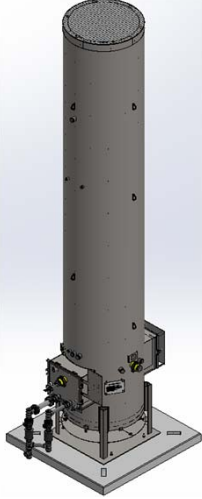56	Flame Detection:	<input type="checkbox"/> Thermocouple	<input checked="" type="checkbox"/> Ionization Rod	Auxiliary Equipment	
57		<input type="checkbox"/> UV Scanner		Valves	NA
58	General Configuration:			Blowers	NA
59				Dampers	NA
60				Inlet KO / Liquid Seal	NA
61				Flame / Detonation Arrestor	Yes
62				Instrumentation & Controls	
63				Solenoids / Shut-Off Valves	Check with Sales for available config.
64				Flow Meters	NA
65				Calorimeter	NA
66				Pressure Switches/Transmitters	NA
67				Thermocouples	Check with Sales for available config.
68				Temperature Switches/Transmitters	NA
69				BMS	Check with Sales for available config.
70		CEMS	NA		
71		Other	NA		
72					
73					
74					
75					

FABRICATION AND INSPECTION

76	Special requirements	<input type="checkbox"/> Skid Mounted	<input checked="" type="checkbox"/> Concrete Pad	Equipment Info	
77		<input type="checkbox"/> Other		Component	Weight / Dimensions
78				Burner	
79	Inspection	<input checked="" type="checkbox"/> Vendor Standard		Burner Assembly	
80		<input type="checkbox"/> Other. Specify:		Stack	
81	Material Certification	<input checked="" type="checkbox"/> Vendor Standard		Stack Assembly	48" OD x 25' H
82		<input type="checkbox"/> MTR		Pilot Tip	
83		<input type="checkbox"/> Certificate of Compliance		Pilot Line(s)	
84		<input type="checkbox"/> Other (Specify):		Stack Assembly	
85	NDE	<input checked="" type="checkbox"/> Vendor Standard		Auxiliary Equipment	
86		<input type="checkbox"/> Radiography. Specify:		Blowers	
87		<input type="checkbox"/> Ultrasonic. Specify:		Inlet KO / Liquid Seal	
88		<input type="checkbox"/> Liquid Penetrant.		Flame / Detonation Arrestor	
89		<input type="checkbox"/> Magnetic Particles.		Skid	
90		<input type="checkbox"/> PMI. Specify:		Instrumentation & Controls	
91		<input type="checkbox"/> Other. Specify:		BMS	
92	Surface Preparation	<input checked="" type="checkbox"/> Vendor Standard		Control Panel	
93		<input type="checkbox"/> Other. Specify:			
94	Paint System	<input checked="" type="checkbox"/> Vendor Standard			
95		<input type="checkbox"/> Other. Specify:			
96	Finished Color	<input checked="" type="checkbox"/> Vendor Standard			
97		<input type="checkbox"/> Other. Specify:			
98					
99					

Additional Notes:




Environmental Control Equipment
Data Sheet

Item/Tag No.:		Page	3	of	3
Project No.:		Revision:	B		
		Date:	27 February 2014		
Project:		By:	JS		
P.O. No.:	-	Checked:	SG		
RFQ No.:	-	Approved:	MS		
Ref. P&ID:	-	Supplier:	LEED FABRICATION		
Remarks:	-	Model No.:	L30-0011-00		

Client:	
Site:	
Unit/Lease:	

GENERAL ARRANGEMENT

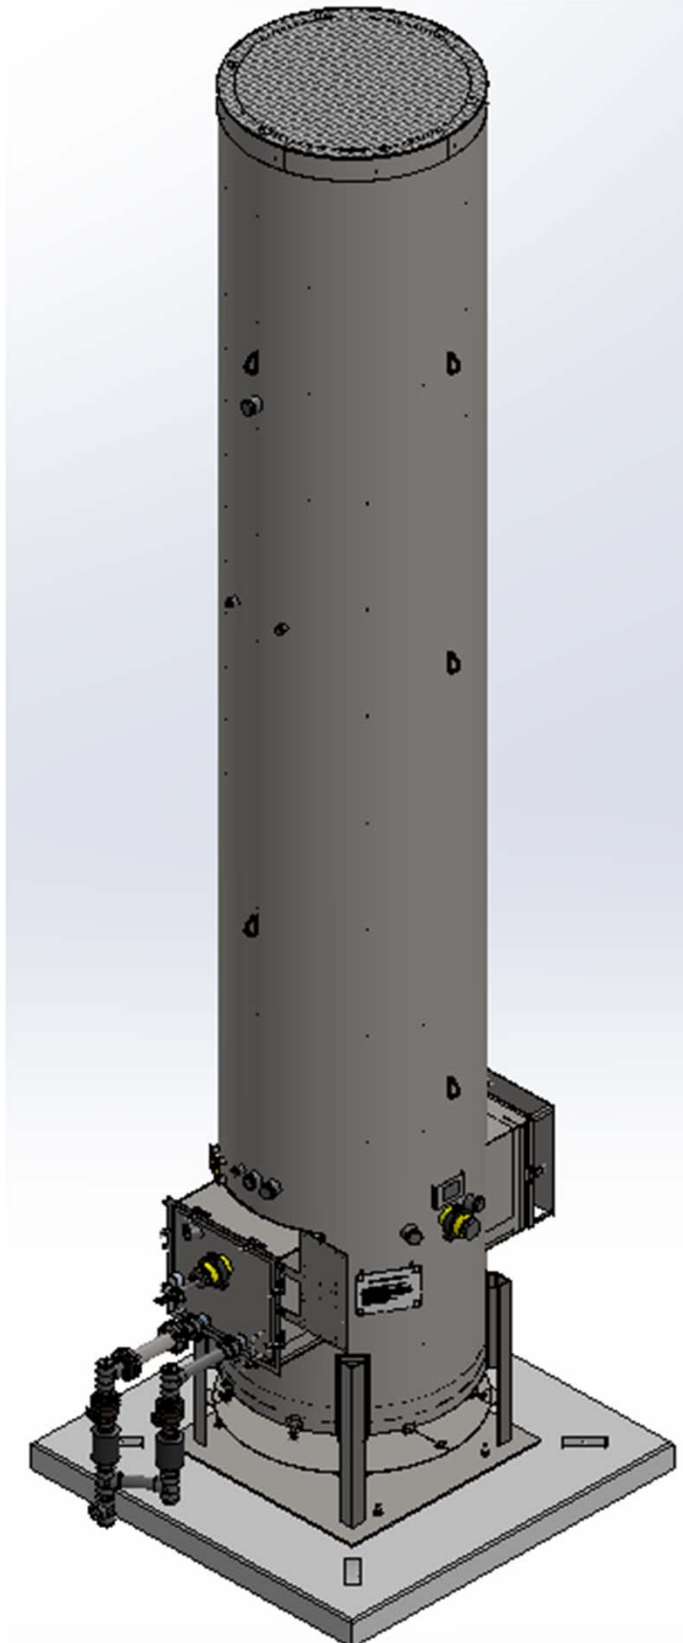

§ MMBTU/hr values are calculated based on 1500 BTU/scf gas

Flare Size	# of Orifices (N)	Pressure (OZ/in ²)	m ³ /s	mSCFD	MMBTU/hr
18	2	1	0.0021	6.34	0.39
18	2	2	0.0029	8.97	0.56
18	2	3	0.0036	10.99	0.68
18	2	4	0.0042	12.69	0.78
18	2	5	0.0046	14.18	0.88
18	2	6	0.0051	15.54	0.96
18	2	7	0.0055	16.78	1.04
18	2	8	0.0059	17.94	1.11
18	2	9	0.0062	19.03	1.18
18	2	10	0.0066	20.06	1.24
18	2	11	0.0069	21.04	1.30
18	2	12	0.0072	21.97	1.36
18	2	13	0.0075	22.87	1.42
18	2	14	0.0078	23.73	1.47
18	2	15	0.0081	24.57	1.52
18	2	16	0.0083	25.37	1.57
18	2	17	0.0086	26.15	1.62
18	2	18	0.0088	26.91	1.67
24	4	1	0.0042	12.69	0.78
24	4	2	0.0059	17.94	1.11
24	4	3	0.0072	21.97	1.36
24	4	4	0.0083	25.37	1.57
24	4	5	0.0093	28.37	1.76
24	4	6	0.0102	31.08	1.92
24	4	7	0.0110	33.56	2.08
24	4	8	0.0118	35.88	2.22
24	4	9	0.0125	38.06	2.35
24	4	10	0.0131	40.12	2.48
24	4	11	0.0138	42.08	2.60
24	4	12	0.0144	43.95	2.72
24	4	13	0.0150	45.74	2.83
24	4	14	0.0156	47.47	2.94
24	4	15	0.0161	49.13	3.04
24	4	16	0.0166	50.75	3.14
24	4	17	0.0171	52.31	3.24
24	4	18	0.0176	53.82	3.33
36	10	1	0.0104	31.72	1.96
36	10	2	0.0147	44.85	2.78
36	10	3	0.0180	54.93	3.40

36	10	4	0.0208	63.43	3.92
36	10	5	0.0232	70.92	4.39
36	10	6	0.0255	77.69	4.81
36	10	7	0.0275	83.91	5.19
36	10	8	0.0294	89.71	5.55
36	10	9	0.0312	95.15	5.89
36	10	10	0.0329	100.29	6.21
36	10	11	0.0345	105.19	6.51
36	10	12	0.0360	109.87	6.80
36	10	13	0.0375	114.35	7.08
36	10	14	0.0389	118.67	7.34
36	10	15	0.0403	122.83	7.60
36	10	16	0.0416	126.86	7.85
36	10	17	0.0429	130.77	8.09
36	10	18	0.0441	134.56	8.33
48	14	1	0.0146	44.40	2.75
48	14	2	0.0206	62.79	3.89
48	14	3	0.0252	76.91	4.76
48	14	4	0.0291	88.80	5.49
48	14	5	0.0325	99.29	6.14
48	14	6	0.0356	108.76	6.73
48	14	7	0.0385	117.48	7.27
48	14	8	0.0412	125.59	7.77
48	14	9	0.0437	133.21	8.24
48	14	10	0.0460	140.41	8.69
48	14	11	0.0483	147.27	9.11
48	14	12	0.0504	153.81	9.52
48	14	13	0.0525	160.09	9.91
48	14	14	0.0545	166.14	10.28
48	14	15	0.0564	171.97	10.64
48	14	16	0.0582	177.61	10.99
48	14	17	0.0600	183.07	11.33
48	14	18	0.0617	188.38	11.66



Enclosed (Passive Swirl) Flare Flow Rates

$$Q = \left[C_d A \cdot \sqrt{\frac{2 \left(\frac{P}{16} \right) R}{\rho}} \right] N$$

Convert to mSCFD
 $(Q \cdot M \cdot 24) / 1000$

3/8" Orifice: Dia = 0.00635 m
 Area = 3.16692E-05 m² 6894.757 Conversion from PSI to Pa (R)
 Cd = 1 127132.8 m³/s to ft³/hr (M)
 Density = 0.8 kg/m³

Flare Size	# of Orifices (N)	Pressure (OZ/in ²)	m ³ /s	mSCFD	99% Combustion Efficiency
18	2	1	0.00207892	6.34316015	6.28
18	2	2	0.00294003	8.97058312	8.88
18	2	3	0.00360079	10.98667566	10.88
18	2	4	0.00415783	12.68632031	12.56
18	2	5	0.00464860	14.18373729	14.04
18	2	6	0.00509228	15.53750573	15.38
18	2	7	0.00550029	16.78242429	16.61
18	2	8	0.00588006	17.94116623	17.76
18	2	9	0.00623675	19.02948046	18.84
18	2	10	0.00657411	20.05883365	19.86
18	2	11	0.00689498	21.03788221	20.83
18	2	12	0.00720157	21.97335133	21.75
18	2	13	0.00749564	22.87058918	22.64
18	2	14	0.00777859	23.73393204	23.50
18	2	15	0.00805160	24.56695363	24.32
18	2	16	0.00831566	25.37264061	25.12
18	2	17	0.00857159	26.15351931	25.89
18	2	18	0.00882009	26.91174935	26.64
24	4	1	0.00415783	12.68632031	12.56
24	4	2	0.00588006	17.94116623	17.76
24	4	3	0.00720157	21.97335133	21.75
24	4	4	0.00831566	25.37264061	25.12
24	4	5	0.00929719	28.36747459	28.08
24	4	6	0.01018456	31.07501146	30.76
24	4	7	0.01100059	33.56484858	33.23
24	4	8	0.01176012	35.88233246	35.52
24	4	9	0.01247349	38.05896092	37.68
24	4	10	0.01314822	40.11766729	39.72
24	4	11	0.01378996	42.07576442	41.66
24	4	12	0.01440315	43.94670266	43.51
24	4	13	0.01499127	45.74117836	45.28
24	4	14	0.01555718	47.46786408	46.99
24	4	15	0.01610321	49.13390727	48.64
24	4	16	0.01663132	50.74528122	50.24
24	4	17	0.01714318	52.30703862	51.78
24	4	18	0.01764018	53.82349870	53.29
36	10	1	0.01039458	31.71580076	31.40
36	10	2	0.01470015	44.85291558	44.40
36	10	3	0.01800394	54.93337832	54.38
36	10	4	0.02078915	63.43160153	62.80
36	10	5	0.02324298	70.91868647	70.21
36	10	6	0.02546141	77.68752865	76.91
36	10	7	0.02750147	83.91212145	83.07

36	10	8	0.02940030	89.70583116	88.81
36	10	9	0.03118373	95.14740229	94.20
36	10	10	0.03287054	100.29416823	99.29
36	10	11	0.03447491	105.18941106	104.14
36	10	12	0.03600787	109.86675665	108.77
36	10	13	0.03747818	114.35294589	113.21
36	10	14	0.03889295	118.66966020	117.48
36	10	15	0.04025802	122.83476817	121.61
36	10	16	0.04157831	126.86320305	125.59
36	10	17	0.04285794	130.76759655	129.46
36	10	18	0.04410046	134.55874674	133.21
48	14	1	0.01455241	44.40212107	43.96
48	14	2	0.02058021	62.79408181	62.17
48	14	3	0.02520551	76.90672965	76.14
48	14	4	0.02910482	88.80424214	87.92
48	14	5	0.03254017	99.28616105	98.29
48	14	6	0.03564597	108.76254012	107.67
48	14	7	0.03850205	117.47697003	116.30
48	14	8	0.04116043	125.58816363	124.33
48	14	9	0.04365722	133.20636321	131.87
48	14	10	0.04601875	140.41183552	139.01
48	14	11	0.04826488	147.26517548	145.79
48	14	12	0.05041102	153.81345931	152.28
48	14	13	0.05246945	160.09412425	158.49
48	14	14	0.05445012	166.13752428	164.48
48	14	15	0.05636123	171.96867543	170.25
48	14	16	0.05820963	177.60848427	175.83
48	14	17	0.06000112	183.07463517	181.24
48	14	18	0.06174064	188.38224544	186.50

ATTACHMENT S

Emission Calculations

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Facility-Wide Emission Summary - Controlled

Wells	6	per pad	Carbon equivalent emissions (CO ₂ e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:
Storage Tanks	6	per pad	CO ₂ 1
Sand Separator Tank	1	per pad	CH ₄ 25
Line Heaters	5	per pad	N ₂ O 298
TEGs	2	per pad	
Dehy Reboiler	0	per pad	
Glycol Dehy	0	per pad	
Dehy Drip Tank	0	per pad	
Dehy Combustor	0	per pad	
Compressor	0	per pad	
High Pressure Separator	6	per pad	
Low Pressure Separator	0	per pad	
Vapor Recovery Unit	0	per pad	
Tank Combustor	2	per pad	
Length of lease road	5,410	feet	

Emission Point ID #	Emission Source ID#s	Emission Source Description	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		CO ₂ e	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C002, C004	S007-S012	Storage Vessels	---	---	---	---	2.16	9.47	---	---	---	---	---	---	13.41	58.72
C002, C004	S037	Captured Liquid Loading	---	---	---	---	1.53	0.40	---	---	---	---	---	---	---	---
C002	C002	Tank Combustor	1.15	5.03	0.96	4.22	2.8E-04	1.2E-03	0.01	0.03	0.09	0.38	0.09	0.38	1,371.10	6,005.43
C004	C004	Tank Combustor	1.15	5.03	0.96	4.22	2.8E-04	1.2E-03	0.01	0.03	0.09	0.38	0.09	0.38	1,371.10	6,005.43
C002	S007-S012, S037, C002	---	1.15	5.03	0.96	4.22	1.85	4.93	0.01	0.03	0.09	0.38	0.09	0.38	1,377.81	6,034.79
C004	S007-S012, S037, C004	---	1.15	5.03	0.96	4.22	1.85	4.93	0.01	0.03	0.09	0.38	0.09	0.38	1,377.81	6,034.79
E025	S025	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E026	S026	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E027	S027	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E034	S034	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E035	S035	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E030	S030	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E031	S031	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E033	S033	Sand Separator Tank	---	---	---	---	0.07	0.32	---	---	---	---	---	---	0.50	2.20
E037	S037	Uncaptured Liquid Loading	---	---	---	---	32.82	8.53	---	---	---	---	---	---	---	---
---	---	Fugitives	---	---	---	---	---	17.53	---	---	---	---	---	---	---	270.76
---	---	Haul Roads	---	---	---	---	---	---	---	---	5.07	---	0.51	---	---	---
Facility Total			3.03	13.28	2.55	11.15	36.63	36.43	0.02	0.08	0.23	6.08	0.23	1.52	3,660.06	16,301.81
Facility Total (excluding fugitive emissions)			3.03	13.28	2.55	11.15	3.81	10.37	0.02	0.08	0.23	1.01	0.23	1.01	3,660.06	16,031.05

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Facility-Wide Emission Summary - Controlled

Emission Point ID #	Emission Source ID#s	Emission Source Description	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		n-Hexane		Total HAP	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C002, C004	S007-S012	Storage Vessels	---	---	2.6E-03	1.1E-02	5.8E-03	2.5E-02	2.7E-04	1.2E-03	2.5E-03	1.1E-02	0.07	0.32	0.10	0.44
C002, C004	S037	Captured Liquid Loading	---	---	1.1E-03	3.0E-04	2.4E-03	6.4E-04	1.2E-04	3.2E-05	1.6E-03	4.2E-04	0.05	0.01	0.06	0.02
C002	C002	Tank Combustor	---	---	---	---	---	---	---	---	---	---	---	---	---	---
C004	C004	Tank Combustor	---	---	---	---	---	---	---	---	---	---	---	---	---	---
C002	S007-S012, S037, C002		---	---	1.9E-03	5.8E-03	4.1E-03	1.3E-02	2.0E-04	6.1E-04	2.1E-03	5.8E-03	0.06	0.17	0.08	0.23
C004	S007-S012, S037, C004		---	---	1.9E-03	5.8E-03	4.1E-03	1.3E-02	2.0E-04	6.1E-04	2.1E-03	5.8E-03	0.06	0.17	0.08	0.23
E025	S025	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E026	S026	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E027	S027	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E034	S034	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E035	S035	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E030	S030	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E031	S031	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E033	S033	Sand Separator Tank	---	---	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	1.0E-03	<0.01	2.0E-03	1.0E-02
E037	S037	Uncaptured Liquid Loading	---	---	0.02	0.01	0.05	0.01	2.6E-03	6.8E-04	3.5E-02	9.1E-03	1.02	0.27	1.33	0.35
---	---	Fugitives	---	---	---	0.01	---	0.02	---	<0.01	---	0.01	---	0.29	---	0.55
---	---	Haul Roads	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Facility Total			5.5E-04	2.4E-03	0.03	0.03	0.06	0.06	3.0E-03	1.9E-03	0.04	0.03	1.16	0.96	1.51	1.42
Facility Total (excluding fugitive emissions)			5.5E-04	2.4E-03	3.7E-03	0.01	8.3E-03	2.6E-02	3.9E-04	1.2E-03	4.2E-03	1.2E-02	0.14	0.39	0.18	0.53

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name: EOT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Produced Fluids Storage Vessels

Potential Throughput

Operational Hours 8,760 hrs/yr
 Maximum Condensate Throughput¹ 3,103 bbl/month
 Maximum Produced Water Throughput¹ 32,333 bbl/month

¹ Based on the highest monthly throughput recorded at the site (July 2015). Includes a safety factor of 9%.

Overall Control Efficiency of Combustor 98%

Storage Tanks - Uncontrolled

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	26.814	117.447	26.814	117.447
Ethane	<0.001	<0.001	<0.001	<0.001	31.111	136.264	31.111	136.264
Propane	0.263	1.151	1.585	6.943	35.525	155.600	37.373	163.694
Isobutane	0.065	0.285	0.393	1.720	9.699	42.480	10.156	44.485
n-Butane	0.149	0.651	0.897	3.929	22.669	99.290	23.715	103.870
Isopentane	0.060	0.261	0.360	1.576	9.253	40.530	9.673	42.367
n-Pentane	0.058	0.253	0.349	1.528	9.114	39.920	9.521	41.701
n-Hexane	0.022	0.094	0.130	0.570	3.553	15.560	3.704	16.224
Cyclohexane	0.001	0.006	0.009	0.038	0.289	1.267	0.299	1.311
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	0.024	0.106	0.146	0.638	4.368	19.130	4.537	19.873
n-Octane	0.008	0.034	0.047	0.206	1.453	6.366	1.508	6.606
n-Nonane	0.002	0.007	0.010	0.044	0.330	1.446	0.342	1.497
n-Decane	0.002	0.009	0.012	0.052	0.414	1.812	0.428	1.873
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	0.033	0.144	0.198	0.866	5.304	23.230	5.534	24.240
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	0.001	0.002	0.003	0.014	0.125	0.547	0.128	0.563
Toluene	0.001	0.005	0.007	0.029	0.283	1.238	0.290	1.272
Ethylbenzene	5.5E-05	2.4E-04	3.3E-04	0.001	0.013	0.057	0.013	0.059
m-Xylene	0.001	0.003	0.004	0.019	0.122	0.536	0.127	0.558
Isooctane	0.004	0.018	0.024	0.106	0.716	3.138	0.745	3.262
Total VOC Emissions:	0.69	3.03	4.17	18.28	103.23	452.15	108.10	473.46
Total HAP Emissions:	2.8E-02	0.12	0.17	0.74	4.81	21.08	5.01	21.94

¹ Uncontrolled emissions calculation using Promax (sum of produced water and condensate). Non-methane emissions are taken from the tank emissions stencil. Methane emissions are taken from the flash stream composition.

² Composition of condensate from OXF-149 sample from 04/29/2013.

Company Name: EOT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Produced Fluids Storage Vessels

Storage Tanks - Controlled

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy			lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	0.536	2.349	0.536	2.349
Ethane	<0.001	<0.001	<0.001	<0.001	0.622	2.725	0.622	2.725
Propane	0.005	0.023	0.032	0.139	0.711	3.112	0.747	3.274
Isobutane	0.001	0.006	0.008	0.034	0.194	0.850	0.203	0.890
n-Butane	0.003	0.013	0.018	0.079	0.453	1.986	0.474	2.077
Isopentane	0.001	0.005	0.007	0.032	0.185	0.811	0.193	0.847
n-Pentane	0.001	0.005	0.007	0.031	0.182	0.798	0.190	0.834
n-Hexane	4.3E-04	0.002	0.003	0.011	0.071	0.311	0.074	0.324
Cyclohexane	2.9E-05	1.3E-04	1.7E-04	0.001	0.006	0.025	0.006	0.026
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	4.8E-04	0.002	0.003	0.013	0.087	0.383	0.091	0.397
n-Octane	1.6E-04	0.001	0.001	0.004	0.029	0.127	0.030	0.132
n-Nonane	3.3E-05	1.5E-04	2.0E-04	0.001	0.007	0.029	0.007	0.030
n-Decane	3.9E-05	1.7E-04	2.4E-04	0.001	0.008	0.036	0.009	0.037
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	0.001	0.003	0.004	0.017	0.106	0.465	0.111	0.485
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	1.0E-05	4.5E-05	6.2E-05	2.7E-04	0.002	0.011	0.003	0.011
Toluene	2.2E-05	9.7E-05	1.3E-04	0.001	0.006	0.025	0.006	0.025
Ethylbenzene	1.1E-06	4.9E-06	6.7E-06	2.9E-05	2.6E-04	0.001	2.7E-04	0.001
m-Xylene	1.5E-05	6.5E-05	8.9E-05	3.9E-04	0.002	0.011	0.003	0.011
Isooctane	8.1E-05	3.5E-04	4.9E-04	0.002	0.014	0.063	0.015	0.065
Total VOC Emissions:	1.4E-02	0.06	0.08	0.37	2.06	9.04	2.16	9.47
Total HAP Emissions:	5.6E-04	2.5E-03	3.4E-03	1.5E-02	9.6E-02	0.42	0.10	0.44

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Sand Separator Tank

Throughput Parameter	Value	Units
Tank Capacity	5,880	gallons
Operational Hours	8,760	hrs/yr
Throughput	280	bbl/month
Percent Produced Water	50%	
Total Produced Water Throughput	140	bbl/month

¹ Conservatively assumes 2 turnovers/month of sand and produced water.

Description	Potential Throughput (gal/yr)
Produced Water and Sand	141,120

Sand Separator Tank (140 bbl) - Uncontrolled (Per tank) ^{2,3}

Constituent	Total Emissions ¹	
	lb/hr	tpy
Methane	0.020	0.088
Ethane	0.032	0.140
Propane	0.033	0.143
Isobutane	0.008	0.035
n-Butane	0.017	0.073
Isopentane	0.006	0.026
n-Pentane	0.005	0.022
Hexanes	0.002	0.007
Heptanes	0.002	0.007
Octane	<0.001	0.002
Nonane	<0.001	<0.001
Decane	<0.001	<0.001
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
n-Hexane	0.001	0.005
2,2,4-Trimethylpentane	<0.001	<0.001
Total HC Emissions:	0.126	0.552
Total VOC Emissions:	0.074	0.323
Total HAP Emissions:	0.002	0.010

² E&P TANK 2.0 calculates working, breathing and flashing losses and reports the sum as one total.

³ E&P TANK v2.0 emission calculations are based on 4/29/2013 condensate sample from OXF-149 wellpad

Company Name: EQT Production, LLC
Facility Name: OXF 150 Pad
Project Description: G70-C Application

Sand Separator Tank

Sand Separator Tank (140 bbl) - Controlled (Per tank)

Constituent	Total Emissions	
	lb/hr	tpy
Methane	0.020	0.088
Ethane	0.032	0.140
Propane	0.033	0.143
Isobutane	0.008	0.035
n-Butane	0.017	0.073
Isopentane	0.006	0.026
n-Pentane	0.005	0.022
Hexanes	0.002	0.007
Heptanes	0.002	0.007
Octane	<0.001	0.002
Nonane	<0.001	<0.001
Decane	<0.001	<0.001
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
n-Hexane	0.001	0.005
2,2,4-Trimethylpentane	<0.001	<0.001
Total Emissions:	0.126	0.550
Total VOC Emissions:	0.074	0.323
Total HAP Emissions:	0.002	0.010

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Tank Combustor

Source Designation:	C002 & C004
Pilot Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Pilot Rating (MMBtu/hr)	0.05
Combustor Rating (MMBtu/hr) ¹	11.66
Combustor Rating (Mscfd) ¹	188.38
Combustor Rating (scf/hr)	7849.17
Pilot Fuel Consumption (scf/hr):	50.00
Potential Annual Hours of Operation (hr/yr):	8,760

¹ Maximum heat input for 48" model from Leed Enclosed Combustor Operations Manual

Enclosed Combustor Emissions

Pollutant	Emission Factors ² (lb/MMBtu)	Combustor		Pilot		Total	
		(lb/hr)	(tpy)	(lb/hr)	(tpy)	(lb/hr)	(tpy)
NO _x	0.10	1.14	5.01	5.1E-03	0.02	1.15	5.03
CO	0.08	0.96	4.21	4.3E-03	0.02	0.96	4.22
VOC	5.4E-03	---	---	2.8E-04	1.2E-03	0.00	0.00
SO ₂	5.9E-04	0.01	0.03	3.1E-05	1.4E-04	0.01	0.03
PM/PM ₁₀	0.01	0.09	0.38	3.9E-04	1.7E-03	0.09	0.38
CO ₂	117.00	1364.189	5975.146	6.14	26.90	1370.33	6002.05
CH ₄	2.2E-03	---	---	1.2E-04	5.1E-04	0.00	0.00
N ₂ O	2.2E-04	2.6E-03	0.01	1.2E-05	5.1E-05	2.6E-03	0.01

² Emission factors from AP-42 Ch. 1.4 for natural gas combustion were used as they were determined to be most representative of the process. Ch. 5.3 (Natural Gas Processing) was consulted, however, factors contained there are appropriate for amine gas sweetening processes, which is not the case at the wellpad. Also, Ch. 13.5 (Industrial Flares) was consulted, but since the control device in this case is an enclosed combustor vs. an elevated flare, these factors were also determined to be inappropriate.

Combustor Maximum Loading:

$$\frac{7849.17 \text{ scf}}{\text{hr}} \times \frac{\text{lb-mol}}{379.5 \text{ scf}} = \frac{20.43 \text{ lb}}{\text{lb-mol}} = 422.65 \text{ lb/hr}$$

Company Name: EQT Production, LLC
Facility Name: OXF 150 Pad
Project Description: G70-C Application

Line Heaters

Source Designation:	S025-S027, S034-S035
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.54
Fuel Consumption (MMscf/hr):	1.47E-03
Potential Annual Hours of Operation (hr/yr):	8,760

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{1,4}	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	0.15	0.64
CO	84	0.12	0.54
VOC	5.5	0.01	0.04
SO ₂	0.6	8.8E-04	3.9E-03
PM Total	7.6	0.01	0.05
PM Condensable	5.7	0.01	0.04
PM ₁₀ (Filterable)	1.9	2.8E-03	0.01
PM _{2.5} (Filterable)	1.9	2.8E-03	0.01
Lead	5.00E-04	7.3E-07	3.2E-06
CO ₂	117.0	180.00	788.38
CH ₄	2.21E-03	3.4E-03	1.5E-02
N ₂ O	2.21E-04	3.4E-04	1.5E-03

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
HAPs:			
2-Methylnaphthalene	2.4E-05	3.5E-08	1.5E-07
3-Methylchloranthrene	1.8E-06	2.6E-09	1.2E-08
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.3E-08	1.0E-07
Acenaphthene	1.8E-06	2.6E-09	1.2E-08
Acenaphthylene	1.8E-06	2.6E-09	1.2E-08
Anthracene	2.4E-06	3.5E-09	1.5E-08
Benz(a)anthracene	1.8E-06	2.6E-09	1.2E-08
Benzene	2.1E-03	3.1E-06	1.3E-05
Benzo(a)pyrene	1.2E-06	1.8E-09	7.7E-09
Benzo(b)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Benzo(g,h,i)perylene	1.2E-06	1.8E-09	7.7E-09
Benzo(k)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Chrysene	1.8E-06	2.6E-09	1.2E-08
Dibenzo(a,h) anthracene	1.2E-06	1.8E-09	7.7E-09
Dichlorobenzene	1.2E-03	1.8E-06	7.7E-06
Fluoranthene	3.0E-06	4.4E-09	1.9E-08
Fluorene	2.8E-06	4.1E-09	1.8E-08
Formaldehyde	7.5E-02	1.1E-04	4.8E-04
Hexane	1.8E+00	2.6E-03	1.2E-02
Indo(1,2,3-cd)pyrene	1.8E-06	2.6E-09	1.2E-08
Naphthalene	6.1E-04	8.9E-07	3.9E-06
Phenanthrene	1.7E-05	2.5E-08	1.1E-07
Pyrene	5.0E-06	7.3E-09	3.2E-08
Toluene	3.4E-03	5.0E-06	2.2E-05
Arsenic	2.0E-04	2.9E-07	1.3E-06
Beryllium	1.2E-05	1.8E-08	7.7E-08
Cadmium	1.1E-03	1.6E-06	7.1E-06
Chromium	1.4E-03	2.1E-06	9.0E-06
Cobalt	8.4E-05	1.2E-07	5.4E-07
Manganese	3.8E-04	5.6E-07	2.4E-06
Mercury	2.6E-04	3.8E-07	1.7E-06
Nickel	2.1E-03	3.1E-06	1.3E-05
Selenium	2.4E-05	3.5E-08	1.5E-07
Total HAP		2.8E-03	1.2E-02

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: OXF 150 Pad
Project Description: G70-C Application

Thermoelectric Generators

Source Designation:	S030-S031
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr) ¹	0.013
Fuel Consumption (MMscf/hr):	1.23E-05
Potential Annual Hours of Operation (hr/yr):	8,760

¹ Global Thermoelectric specification sheet states 311 ft³/day at 1000 BTU/ft³.

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{2,5}	Potential Emissions	
		(lb/hr) ³	(tons/yr) ⁴
NO _x	100	1.2E-03	0.01
CO	84	1.0E-03	4.5E-03
VOC	5.5	6.8E-05	3.0E-04
SO ₂	0.6	7.4E-06	3.2E-05
PM Total	7.6	9.4E-05	4.1E-04
PM Condensable	5.7	7.0E-05	3.1E-04
PM ₁₀ (Filterable)	1.9	2.3E-05	1.0E-04
PM _{2.5} (Filterable)	1.9	2.3E-05	1.0E-04
Lead	5.00E-04	6.2E-09	2.7E-08
CO ₂	116.9	1.51	6.64
CH ₄	2.21E-03	2.9E-05	1.3E-04
N ₂ O	2.21E-04	2.9E-06	1.3E-05

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Thermoelectric Generators

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ²	Potential Emissions	
		(lb/hr) ³	(tons/yr) ⁴
HAPs:			
2-Methylnaphthalene	2.4E-05	3.0E-10	1.3E-09
3-Methylchloranthrene	1.8E-06	2.2E-11	9.7E-11
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.0E-10	8.6E-10
Acenaphthene	1.8E-06	2.2E-11	9.7E-11
Acenaphthylene	1.8E-06	2.2E-11	9.7E-11
Anthracene	2.4E-06	3.0E-11	1.3E-10
Benz(a)anthracene	1.8E-06	2.2E-11	9.7E-11
Benzene	2.1E-03	2.6E-08	1.1E-07
Benzo(a)pyrene	1.2E-06	1.5E-11	6.5E-11
Benzo(b)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Benzo(g,h,i)perylene	1.2E-06	1.5E-11	6.5E-11
Benzo(k)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Chrysene	1.8E-06	2.2E-11	9.7E-11
Dibenzo(a,h) anthracene	1.2E-06	1.5E-11	6.5E-11
Dichlorobenzene	1.2E-03	1.5E-08	6.5E-08
Fluoranthene	3.0E-06	3.7E-11	1.6E-10
Fluorene	2.8E-06	3.5E-11	1.5E-10
Formaldehyde	7.5E-02	9.3E-07	4.1E-06
Hexane	1.8E+00	2.2E-05	9.7E-05
Indo(1,2,3-cd)pyrene	1.8E-06	2.2E-11	9.7E-11
Naphthalene	6.1E-04	7.5E-09	3.3E-08
Phenanthrene	1.7E-05	2.1E-10	9.2E-10
Pyrene	5.0E-06	6.2E-11	2.7E-10
Toluene	3.4E-03	4.2E-08	1.8E-07
Arsenic	2.0E-04	2.5E-09	1.1E-08
Beryllium	1.2E-05	1.5E-10	6.5E-10
Cadmium	1.1E-03	1.4E-08	5.9E-08
Chromium	1.4E-03	1.7E-08	7.6E-08
Cobalt	8.4E-05	1.0E-09	4.5E-09
Manganese	3.8E-04	4.7E-09	2.1E-08
Mercury	2.6E-04	3.2E-09	1.4E-08
Nickel	2.1E-03	2.6E-08	1.1E-07
Selenium	2.4E-05	3.0E-10	1.3E-09
Total HAP		2.3E-05	1.0E-04

² Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

³ Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

⁴ Annual Emissions (tons/yr)_{potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁵ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Liquid Loading

Throughput 17,859,450 gal/yr
 Capture Efficiency 70% non-tested tanker trucks
 Control Efficiency 98% Combustor destruction efficiency

Liquid Loading Emissions

	Uncontrolled Emissions		Uncaptured Emissions		Controlled Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Propane	41.538	10.800	12.462	3.240	0.582	0.151
Isobutane	10.292	2.676	3.088	0.803	0.144	0.037
n-Butane	23.515	6.114	7.055	1.834	0.329	0.086
Isopentane	9.435	2.453	2.830	0.736	0.132	0.034
n-Pentane	9.146	2.378	2.744	0.713	0.128	0.033
n-Hexane	3.411	0.887	1.023	0.266	0.048	0.012
Cyclohexane	0.227	0.059	0.068	0.018	0.003	0.001
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	3.816	0.992	1.145	0.298	0.053	0.014
n-Octane	1.232	0.320	0.370	0.096	0.017	0.004
n-Nonane	0.263	0.068	0.079	0.020	0.004	0.001
n-Decane	0.312	0.081	0.094	0.024	0.004	0.001
n-Undecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Dodecane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	5.185	1.348	1.555	0.404	0.073	0.019
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	0.081	0.021	0.024	0.006	0.001	3.0E-04
Toluene	0.175	0.045	0.052	0.014	0.002	0.001
Ethylbenzene	0.009	0.002	0.003	0.001	1.2E-04	3.2E-05
m-Xylene	0.117	0.030	0.035	0.009	0.002	4.2E-04
Isooctane	0.637	0.166	0.191	0.050	0.009	0.002
Total VOC Emissions:	109.390	28.441	32.817	8.532	1.531	0.398
Total HAP Emissions:	4.429	1.151	1.329	0.345	0.062	0.016

¹ Uncontrolled emissions calculation using Promax (sum of produced water and condensate).

² Hourly emissions assume two hours of loading per day, five days per week.

Company Name: EOT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Fugitive Emissions

Fugitive Emissions from Component Leaks

Facility Equipment Type ¹	Valves	Connectors	Open-Ended Lines	Pressure Relief Devices
Wellhead	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line heaters	14	65	2	1
Dehydrators	24	90	2	2

¹ Table W-1B to Subpart W of Part 98 —Default Average Component Counts for Major Onshore Natural Gas Production

Fugitive VOC/Total Emissions from Component Leaks

Equipment Type	Service	Emission Factors ¹ (kg/hr/source)	Facility Equipment Count ² (units)	TOC Annual Fugitive Emissions (tpy)	Weight Fraction VOC	Weight Fraction HAP	VOC Emissions ³ (tpy)	HAP Emissions ³ (tpy)
Pumps	Light Liquid	0.01990	11	2.02	1.00	0.03	2.02	0.06
Compressor	Gas	0.22800	0	---	0.17	0.01	---	---
Valves	Gas	0.00597	294	16.95	0.17	0.01	2.81	0.09
Pressure Relief Valves	Gas	0.10400	22	21.59	0.17	0.01	3.58	0.11
Open-Ended Lines	All	0.00170	20	0.32	0.17	0.01	0.05	1.7E-03
Connectors	All	0.00183	1,289	22.77	0.17	0.01	3.78	0.12
Intermittent Pneumatic Devices ⁴	Gas	13.5	30	---	---	---	5.29	0.16
Emission Totals:				63.65	---	---	17.53	0.55

¹ U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCM factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A. Pneumatic assumes operation 1/3 of the year.

² Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

³ Potential emissions VOC/HAP (tpy) = Emission factor (kg/hr/source) * Number of Sources * Weight % VOC/HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

⁴ Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Company Name: EOT Production, LLC
Facility Name: OXF 150 Pad
Project Description: G70-C Application

Fugitive Emissions

Fugitive Specific HAP Emissions from Component Leaks

Equipment Type	Service	Emission Factors ¹ (kg/hr/source)	Facility Equipment Count ² (units)	TOC Annual Fugitive Emissions (tpy)	Benzene Emissions ³ (tpy)	Toluene Emissions ³ (tpy)	Ethylbenzene Emissions ³ (tpy)	Xylene Emissions ³ (tpy)	n-Hexane Emissions ⁴ (tpy)
Pumps	Light Liquid	0.01990	11	2.02	1.5E-04	3.6E-04	<0.01	2.1E-04	0.01
Compressor	Gas	0.22800	0	---	---	---	<0.01	---	---
Valves	Gas	0.00597	294	16.95	1.3E-03	3.1E-03	<0.01	1.8E-03	0.05
Pressure Relief Valves	Gas	0.10400	22	21.59	1.7E-03	3.9E-03	<0.01	2.2E-03	0.07
Open-Ended Lines	All	0.00170	20	0.32	2.4E-05	5.8E-05	<0.01	3.3E-05	9.9E-04
Connectors	All	0.00183	1,289	22.77	1.7E-03	4.1E-03	<0.01	2.4E-03	0.07
Intermittent Pneumatic Devices ⁴	Gas	13.5	30	---	2.4E-03	0.01	<0.01	3.3E-03	0.10
Emission Totals:				63.65	0.01	0.02	<0.01	0.01	0.29

¹ U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCOMI factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A. Pneumatic assumes operation 1/3 of the year.

² Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

³ Potential emissions HAP (tpy) = Emission factor (kg/hr/source) * Number of Sources * Weight % HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

⁴ Potential emissions HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

GHG Fugitive Emissions from Component Leaks

Component	Component Count	GHG Emission Factor ¹ (scf/hr/component)	CH ₄ Emissions ^{2,3} (tpy)	CO ₂ Emissions ^{2,3} (tpy)	CO ₂ e Emissions ⁴ (tpy)
Pumps	11	0.01	0.02	1.0E-04	0.38
Compressor	0	4.17	---	---	---
Valves	294	0.027	1.16	0.01	29.06
Pressure Relief Devices	22	0.04	0.13	8.5E-04	3.15
Open-Ended Lines	20	0.061	0.17	1.2E-03	4.35
Connectors	1,289	0.003	0.57	3.8E-03	14.15
Intermittent Pneumatic Devices	30	6	8.78	0.06	219.66
Total			10.83	0.07	270.76

¹ Population emission factors for gas service in the Eastern U.S. from *Table W-1A of Subpart W - Default Whole Gas Emission Factors for Onshore Production*, 40 CFR 98, Subpart W (Table W-6 for compressor). Pneumatic assumes operation 1/3 of the year.

² Calculated in accordance with Equations W-32a, W-35 and W-36 in Subpart W of 40 CFR 98. See footnote 4 above for sample calculation.

³ Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Mole fractions of CH₄ and CO₂ based on gas analysis:

CH ₄ :	79%	CO ₂ :	0.20%
-------------------	-----	-------------------	-------

⁴ Carbon equivalent emissions (CO₂e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:

Carbon Dioxide (CO ₂):	1
Methane (CH ₄):	25

Company Name: EQT Production, LLC
 Facility Name: OXF 150 Pad
 Project Description: G70-C Application

Haul Roads

Estimated Potential Road Fugitive Emissions

Unpaved Road Emissions

Unpaved Roads: $E \text{ (lb/VMT)} = k(s/12)^a(W/3)^b \cdot [(365-p)/365]$

	PM	PM₁₀	PM_{2.5}	
k Factor (lb/VMT)	4.9	1.5	0.15	AP-42 Table 13.2.2-2 (Final, 11/06)
Silt content, s	4.8	%		AP-42 Table 13.2.2-1 (11/06), for Sand and Gravel Processing
Number of Rain Days, p	150			AP-42 Figure 13.2.1-2
a	0.7	0.9	0.9	AP-42 Table 13.2.2-2 (Final, 11/06)
b	0.45	0.45	0.45	AP-42 Table 13.2.2-2 (Final, 11/06)

Description	Weight of Empty Truck (tons)	Weight of Truck w/ Max Load (tons)	Mean Vehicle Weight (tons)	Length of Unpaved Road Traveled (mile)	Trips Per Year	Mileage Per Year	Control (%)	Emissions (tpy)		
								PM	PM ₁₀	PM _{2.5}
Liquids Hauling	20	40	30	1.02	4,465	9,150	0	19.60	4.99	0.50
Employee Vehicles	3	3	3	1.02	200	410	0	0.31	0.08	0.01
Total Potential Emissions								19.91	5.07	0.51

Company Name: EQT Production, LLC
Facility Name: OXF 150 Pad
Project Description: G70-C Application

Gas Analysis


Sample Location: OXF 121 Gas Analysis
Sample Date: 5/29/2013
HHV (Btu/scf): 1,216 Note: A conservatively low BTU content of 1,050 was used for calculations

Constituent	Natural Gas Stream Speciation (Mole %)	Molecular Weight	Molar Weight	Average Weight Fraction	Natural Gas Stream Speciation (Wt. %)
Carbon Dioxide	0.195	44.01	0.09	0.00	0.420
Nitrogen	0.532	28.01	0.15	0.01	0.729
Methane	78.965	16.04	12.67	0.62	61.983
Ethane	13.780	30.07	4.14	0.20	20.278
Propane	4.195	44.10	1.85	0.09	9.053
Isobutane	0.507	58.12	0.29	0.01	1.442
n-Butane	1.013	58.12	0.59	0.03	2.881
Isopentane	0.249	72.15	0.18	0.01	0.879
n-Pentane	0.239	72.15	0.17	0.01	0.844
Cyclopentane	<0.001	70.1	0.0	0.0	0.000
n-Hexane	0.073	86.18	0.06	0.00	0.308
Cyclohexane	0.011	84.16	0.01	0.00	0.045
Other Hexanes	0.113	86.18	0.10	0.00	0.477
Heptanes	0.079	100.21	0.08	0.00	0.387
Methylcyclohexane	<0.001	98.19	0.00	0.00	0.000
2,2,4-Trimethylpentane	0.031	114.23	0.04	0.00	0.173
Benzene*	0.002	78.11	0.00	0.00	0.008
Toluene*	0.004	92.14	0.00	0.00	0.018
Ethylbenzene*	<0.001	106.17	0.00	0.00	0.000
Xylenes*	0.002	106.16	0.00	0.00	0.010
C8 + Heavies	0.010	130.80	0.01	0.00	0.064
Totals	100.000		20.43	1.00	100

TOC (Total)	99.27	98.85
VOC (Total)	6.53	16.59
HAP (Total)	0.11	0.52

OXF-150 Plant Schematic

Client Name:	EQT	Job:
Location:	OXF-150	
Flowsheet:	OXF-150	

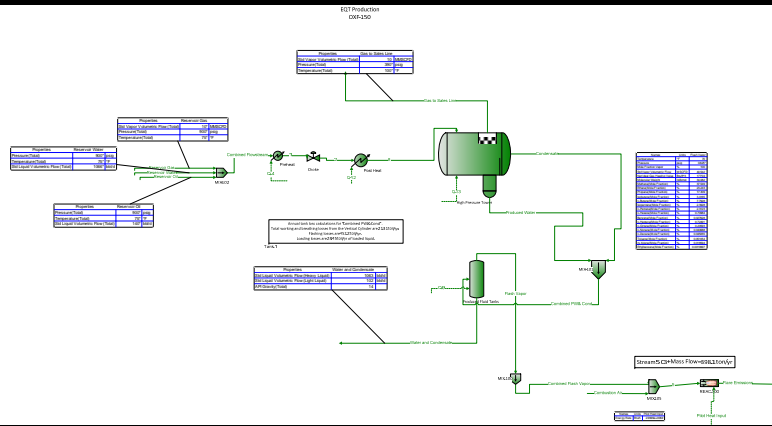

* User Specified Values
? Extrapolated or Approximate Values

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	OXF-150	
Flowsheet:	OXF-150	

Connections

	Combined Flash Vapor	Combined PW & Cond	Gas to Sales Line	Produced Water	Reservoir Gas
From Block	MIX-100	MIX-101	High Pressure Tower	High Pressure Tower	--
To Block	MIX-105	Produced Fluid Tanks	--	MIX-101	MIX-102

Stream Composition

Mole Fraction	Combined Flash Vapor	Combined PW & Cond	Gas to Sales Line	Produced Water	Reservoir Gas
Nitrogen	0.00101085	5.17637E-06	0.00529365	1.52342E-06	0.00532 *
Methane	0.375493	0.00194325	0.786266	0.000418201	0.78965 *
CO2	0.00442145	2.56049E-05	0.00193453	1.71997E-05	0.00195 *
Ethane	0.23243	0.00127498	0.137466	6.93123E-05	0.1378 *
Propane	0.173094	0.00113018	0.0419959	1.79516E-05	0.04195 *
Isobutane	0.0341653	0.000299775	0.00513479	7.5987E-07	0.00507 *
n-Butane	0.077928	0.000810271	0.0102842	3.57215E-06	0.01013 *
Isopentane	0.0239283	0.000468511	0.00263106	4.88481E-07	0.00249 *
n-Pentane	0.023123	0.000568077	0.00250902	4.73339E-07	0.00239 *
n-Hexane	0.00709839	0.00051478	0.0008149	5.77231E-08	0.00073 *
Methylcyclopentane	0	0	0	0	0 *
Benzene	0.000276276	2.1763E-05	3.06232E-05	9.77375E-07	2E-05 *
Cyclohexane	0.000590755	5.39944E-05	6.67258E-05	6.55344E-08	0.00011 *
n-Heptane	0.00724905	0.00161508	0.00100505	4.38458E-08	0.00079 *
n-Octane	0.00205929	0.00151619	0.000351221	1.267E-08	3E-05 *
n-Nonane	0.000406876	0.000965777	8.48335E-05	7.77809E-09	4E-05 *
n-Decane	0.000450549	0.00345751	0.000119948	6.74595E-09	3E-05 *
n-Undecane	0	0	0	0	0 *
Dodecane	0	0	0	0	0 *
Water	0.0237586	0.98421	0.00257964	0.999467	0 *
Triethylene Glycol	0	0	0	0	0 *
Oxygen	0	0	0	0	0 *
Argon	0	0	0	0	0 *
Carbon Monoxide	0	0	0	0	0 *
Cyclopentane	0	0	0	0	0 *
Isohexane	0.0107499	0.000571787	0.00118893	9.6954E-08	0.00113 *
3-Methylpentane	0	0	0	0	0 *
Neohexane	0	0	0	0	0 *
2,3-Dimethylbutane	0	0	0	0	0 *
Methylcyclohexane	0	0	0	0	0 *
Isooctane	0.00104982	0.000215506	0.000141634	1.29364E-09	0.00031 *
Decane, 2-Methyl-	0	0	0	0	0 *
Toluene	0.000510541	0.00012999	6.72555E-05	1.5759E-06	4E-05 *
m-Xylene	0.000185945	0.000185185	3.12539E-05	5.83162E-07	2E-05 *
Ethylbenzene	1.99968E-05	1.65771E-05	3.2381E-06	5.66748E-08	0 *

Mass Flow	Combined Flash Vapor lb/h	Combined PW & Cond lb/h	Gas to Sales Line lb/h	Produced Water lb/h	Reservoir Gas lb/h
Nitrogen	0.126052	0.126778	163.507	0.0367412	163.633 *
Methane	26.8144	27.2554	13907.7	5.77595	13909.1 *
CO2	0.866176	0.985197	93.8724	0.651679	94.2271 *
Ethane	31.1106	33.5178	4557.53	1.79431	4549.5 *
Propane	33.9761	43.571	2041.82	0.681498	2031.06 *
Isobutane	8.83941	15.2332	329.064	0.0380232	323.552 *
n-Butane	20.1619	41.1743	659.063	0.178747	646.467 *
Isopentane	7.68488	29.5531	209.303	0.030342	197.253 *
n-Pentane	7.42622	35.8335	199.594	0.0294015	189.331 *
n-Hexane	2.72294	38.7845	77.4287	0.00428253	69.0718 *
Methylcyclopentane	0	0	0	0	0 *

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 3.2.15289.0
 Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report
All Streams
Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	OXF-150	
Flowsheet:	OXF-150	

Mass Flow	Combined Flash Vapor lb/h	Combined PW & Cond lb/h	Gas to Sales Line lb/h	Produced Water lb/h	Reservoir Gas lb/h
Benzene	0.0960629	1.48624	2.63744	0.0657272	1.71531 *
Cyclohexane	0.221313	3.97287	6.19173	0.00474831	10.1646 *
n-Heptane	3.23335	141.49	111.04	0.00378243	86.9156 *
n-Octane	1.0471	151.419	44.2354	0.00124601	3.76262 *
n-Nonane	0.232291	108.294	11.9966	0.000858845	5.63286 *
n-Decane	0.285356	430.096	18.8172	0.000826341	4.68668 *
n-Undecane	0	0	0	0	0 *
Dodecane	0	0	0	0	0 *
Water	1.90527	15501.8	51.2408	15501.6	0 *
Triethylene Glycol	0	0	0	0	0 *
Oxygen	0	0	0	0	0 *
Argon	0	0	0	0	0 *
Carbon Monoxide	0	0	0	0	0 *
Cyclopentane	0	0	0	0	0 *
Isohexane	4.12367	43.0795	112.967	0.0071931	106.919 *
3-Methylpentane	0	0	0	0	0 *
Neohexane	0	0	0	0	0 *
2,3-Dimethylbutane	0	0	0	0	0 *
Methylcyclohexane	0	0	0	0	0 *
Isooctane	0.533807	21.5223	17.8384	0.00012722	38.8804 *
Decane, 2-Methyl-	0	0	0	0	0 *
Toluene	0.209395	10.4714	6.83255	0.125007	4.04665 *
m-Xylene	0.0878741	17.1886	3.65848	0.0533013	2.33134 *
Ethylbenzene	0.00945011	1.53866	0.379041	0.00518011	0 *

Volumetric Flow	Combined Flash Vapor ft ³ /h	Combined PW & Cond gpm	Gas to Sales Line ft ³ /h	Produced Water gpm	Reservoir Gas ft ³ /h
Nitrogen	1.67897	0.000453689	89.7857	0.000100729	41.4668
Methane	620.745	0.176102	12434.6	0.0288873	5015.35
CO2	7.28259	0.00156178	28.7521	0.0010408	9.95737
Ethane	380.685	0.149049	1869.4	0.00610817	500.335
Propane	281.327	0.169086	497.785	0.00198055	64.538
Isobutane	55.1778	0.0550803	54.3771	0.00010094	0.384116
n-Butane	125.638	0.144206	103.124	0.000468406	-6.54661
Isopentane	38.3329	0.0969346	22.6864	7.3974E-05	-5.72225
n-Pentane	36.9928	0.116573	21.0086	7.18097E-05	-6.21306
n-Hexane	11.2591	0.119399	5.40839	9.93605E-06	-3.39274
Methylcyclopentane	0	0	0	0	0
Benzene	0.441114	0.00333371	0.234612	0.000124024	-0.0722475
Cyclohexane	0.940272	0.0102643	0.471323	9.70876E-06	-0.467609
n-Heptane	11.4109	0.419663	4.9099	8.48709E-06	-5.29476
n-Octane	3.21504	0.432717	1.18085	2.70698E-06	-0.252608
n-Nonane	0.629465	0.300768	0.131468	1.82138E-06	-0.417402
n-Decane	0.691419	1.17193	-0.0179169	1.72451E-06	-0.364296
n-Undecane	0	0	0	0	0
Dodecane	0	0	0	0	0
Water	39.1921	31.1879	39.1499	31.1881	0
Triethylene Glycol	0	0	0	0	0
Oxygen	0	0	0	0	0
Argon	0	0	0	0	0
Carbon Monoxide	0	0	0	0	0
Cyclopentane	0	0	0	0	0
Isohexane	17.0801	0.134119	8.3632	1.67152E-05	-4.70031
3-Methylpentane	0	0	0	0	0
Neohexane	0	0	0	0	0
2,3-Dimethylbutane	0	0	0	0	0
Methylcyclohexane	0	0	0	0	0
Isooctane	1.6504	0.0624323	0.69003	2.7362E-07	-2.04722
Decane, 2-Methyl-	0	0	0	0	0

* User Specified Values
? Extrapolated or Approximate Values

ProMax 3.2.15289.0
Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	OXF-150	
Flowsheet:	OXF-150	

Volumetric Flow	Combined Flash Vapor ft ³ /h	Combined PW & Cond gpm	Gas to Sales Line ft ³ /h	Produced Water gpm	Reservoir Gas ft ³ /h
Toluene	0.808078	0.0237807	0.395467	0.000233416	-0.227243
m-Xylene	0.291894	0.0391166	0.135027	9.87012E-05	-0.149181
Ethylbenzene	0.0314257	0.00349196	0.0146896	9.54094E-06	0

Stream Properties

Property	Units	Combined Flash Vapor	Combined PW & Cond	Gas to Sales Line	Produced Water	Reservoir Gas
Temperature	°F	70	100	100 *	100	75 *
Pressure	psig	0.625	390	390 *	390	900 *
Mole Fraction Vapor		1	0	1	0	0.999974
Mole Fraction Light Liquid		0	0.0152778	0	1	2.61384E-05
Mole Fraction Heavy Liquid		0	0.984722	0	0	0
Mass Density	lb/ft ³	0.0927627	59.7932	1.4903	61.9279	4.00958
Mass Flow	lb/h	151.714	16698.4	22626.7	15511.1	22438.3
Vapor Volumetric Flow	ft ³ /h	1635.5	279.269	15182.6	250.47	5596.17
Liquid Volumetric Flow	gpm	203.907	34.818	1892.9	31.2275	697.704
Std Vapor Volumetric Flow	MMSCFD	0.0405416	7.96267	10.042	7.84102	10 *
Std Liquid Volumetric Flow	sgpm	0.679496	34.6361	133.007	31.0434	132.468
Specific Gravity		1.17677	0.9587	0.708548	0.992927	
API Gravity			14.8419		10.0523	
Net Ideal Gas Heating Value	Btu/ft ³	1775.88	69.6658	1119.27	0.565458	1117.55
Net Liquid Heating Value	Btu/lb	19633.2	389.3	20637.5	-1047.23	20695.2

Remarks

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	OXF-150	
Flowsheet:	OXF-150	

Connections

	Reservoir Oil			
From Block	--			
To Block	MIX-102			

Stream Composition

Mole Fraction	Reservoir Oil			
Nitrogen	0 *			
Methane	0.1033 *			
CO2	0.00092 *			
Ethane	0.08874 *			
Propane	0.07913 *			
Isobutane	0.02292 *			
n-Butane	0.05941 *			
Isopentane	0.03703 *			
n-Pentane	0.04103 *			
n-Hexane	0.03513 *			
Methylcyclopentane	0 *			
Benzene	0.00198 *			
Cyclohexane	0 *			
n-Heptane	0.10614 *			
n-Octane	0.10788 *			
n-Nonane	0.05741 *			
n-Decane	0.2005 *			
n-Undecane	0 *			
Dodecane	0 *			
Water	0 *			
Triethylene Glycol	0 *			
Oxygen	0 *			
Argon	0 *			
Carbon Monoxide	0 *			
Cyclopentane	0 *			
Isohexane	0.03661 *			
3-Methylpentane	0 *			
Neohexane	0 *			
2,3-Dimethylbutane	0 *			
Methylcyclohexane	0 *			
Isooctane	0.00027 *			
Decane, 2-Methyl-	0 *			
Toluene	0.00924 *			
m-Xylene	0.0112 *			
Ethylbenzene	0.00116 *			

Mass Flow	Reservoir Oil lb/h			
Nitrogen	0 *			
Methane	25.8055 *			
CO2	0.630487 *			
Ethane	41.5509 *			
Propane	54.3348 *			
Isobutane	20.7443 *			
n-Butane	53.7704 *			
Isopentane	41.603 *			
n-Pentane	46.0969 *			
n-Hexane	47.1414 *			
Methylcyclopentane	0 *			
Benzene	2.40837 *			
Cyclohexane	0 *			
n-Heptane	165.614 *			
n-Octane	191.892 *			
n-Nonane	114.658 *			

* User Specified Values

? Extrapolated or Approximate Values

ProMax 3.2.15289.0
Copyright © 2002-2015 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	OXF-150	
Flowsheet:	OXF-150	

Mass Flow	Reservoir Oil lb/h				
n-Decane	444.227 *				
n-Undecane	0 *				
Dodecane	0 *				
Water	0 *				
Triethylene Glycol	0 *				
Oxygen	0 *				
Argon	0 *				
Carbon Monoxide	0 *				
Cyclopentane	0 *				
Isohexane	49.1275 *				
3-Methylpentane	0 *				
Neohexane	0 *				
2,3-Dimethylbutane	0 *				
Methylcyclohexane	0 *				
Isooctane	0.480264 *				
Decane, 2-Methyl-	0 *				
Toluene	13.2573 *				
m-Xylene	18.5157 *				
Ethylbenzene	1.9177 *				

Volumetric Flow	Reservoir Oil gpm				
Nitrogen	0				
Methane	0.164455				
CO2	0.000935998				
Ethane	0.177988				
Propane	0.203271				
Isobutane	0.0723755				
n-Butane	0.182186				
Isopentane	0.132315				
n-Pentane	0.145589				
n-Hexane	0.141316				
Methylcyclopentane	0				
Benzene	0.00534535				
Cyclohexane	0				
n-Heptane	0.479415				
n-Octane	0.536163				
n-Nonane	0.311782				
n-Decane	1.18625				
n-Undecane	0				
Dodecane	0				
Water	0				
Triethylene Glycol	0				
Oxygen	0				
Argon	0				
Carbon Monoxide	0				
Cyclopentane	0				
Isohexane	0.148751				
3-Methylpentane	0				
Neohexane	0				
2,3-Dimethylbutane	0				
Methylcyclohexane	0				
Isooctane	0.00135776				
Decane, 2-Methyl-	0				
Toluene	0.0296862				
m-Xylene	0.0415341				
Ethylbenzene	0.0042889				

Client Name:		EQT	Job:		
Location:		OXF-150			
Flowsheet:		OXF-150			
Stream Properties					
Property	Units	Reservoir Oil			
Temperature	°F	75 *			
Pressure	psig	900 *			
Mole Fraction Vapor		0			
Mole Fraction Light Liquid		1			
Mole Fraction Heavy Liquid		0			
Mass Density	lb/ft ³	41.9391			
Mass Flow	lb/h	1333.78			
Vapor Volumetric Flow	ft ³ /h	31.8027			
Liquid Volumetric Flow	gpm	3.96501			
Std Vapor Volumetric Flow	MMSCFD	0.141823			
Std Liquid Volumetric Flow	sgpm	4.08333 *			
Specific Gravity		0.672435			
API Gravity		76.5036			
Net Ideal Gas Heating Value	Btu/ft ³	4363.51			
Net Liquid Heating Value	Btu/lb	19177.2			
Remarks					

Energy Stream Report

Client Name:	EQT	Job:
Location:	OXF-150	
Flowsheet:	OXF-150	

Energy Streams

Energy Stream	Energy Rate	Power	From Block	To Block
Pilot Heat Input	2.99988E+06 * Btu/h	1179 * hp	--	REAC-100

Remarks

User Value Sets Report

Client Name:	EQT	Job:
Location:	OXF-150	

Tank-1

User Value [TotalLosses]

* Parameter	21.3086 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [WorkingLosses]

* Parameter	3.04645 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [StandingLosses]

* Parameter	0.50498 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [LoadingLosses]

* Parameter	28.4454 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

User Value [FlashingLosses]

* Parameter	452.155 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

Remarks

This User Value Set was programmatically generated. GUID={0511AF0C-026D-4690-8095-2CBDEB1C7684}

* Project Setup Information

*

Project File : \\tsclient\Z\Client\EQT Corporation\West
Virginia\WV Wells\163901.0058 WV Wells 2016\OXF 149-150\02 Draft\2016-0307 OXF
149-150 Wellpad Application\Attachment N - Emission
Calculations\20160310_DRAFT_EQT_OXF14-150_Sand Sep Tank.ept
Flowsheet Selection : Oil Tank with Separator
Calculation Method : RVP Distillation
Control Efficiency : 0.0%
Known Separator Stream : Low Pressure Oil
Entering Air Composition : No

Filed Name : OXF 150
Well Name : Sand Separator Tank
Well ID : OXF-149 Condensate Sample
Date : 2016.03.10

* Data Input

*

Separator Pressure : 320.00 [psig]
Separator Temperature : 60.00 [F]
Ambient Pressure : 14.70 [psia]
Ambient Temperature : 70.00 [F]
C10+ SG : 0.8024
C10+ MW : 210.576

-- Low Pressure Oil

No.	Component	mol %
1	H2S	0.0000
2	O2	0.0000
3	CO2	0.0920
4	N2	0.0000
5	C1	10.3300
6	C2	8.8740
7	C3	7.9130
8	i-C4	2.2920
9	n-C4	5.9410
10	i-C5	3.7030
11	n-C5	4.1030
12	C6	3.6610
13	C7	10.6140
14	C8	10.7880
15	C9	5.7410
16	C10+	20.0500
17	Benzene	0.1980
18	Toluene	0.9240
19	E-Benzene	0.1160
20	Xylenes	1.1200
21	n-C6	3.5130
22	224Trimethylp	0.0270

-- Sales Oil

Production Rate : 0.1 [bbl/day]
Days of Annual Operation : 365 [days/year]

API Gravity : 56.11
 Reid Vapor Pressure : 10.60 [psia]

 * Calculation Results
 *

-- Emission Summary

Item	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]	E&P
Page 1					
TANK					
Total HAPs	0.010	0.002	0.010	0.002	
Total HC	0.552	0.126	0.552	0.126	
VOCs, C2+	0.464	0.106	0.464	0.106	
VOCs, C3+	0.323	0.074	0.323	0.074	

Uncontrolled Recovery Info.

Vapor	33.7500	x1E-3	[MSCFD]
HC Vapor	33.6500	x1E-3	[MSCFD]
GOR	337.50		[SCF/bbl]

-- Emission Composition

No	Component	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
1	H2S	0.000	0.000	0.000	0.000
2	O2	0.000	0.000	0.000	0.000
3	CO2	0.002	0.000	0.002	0.000
4	N2	0.000	0.000	0.000	0.000
5	C1	0.088	0.020	0.088	0.020
6	C2	0.140	0.032	0.140	0.032
7	C3	0.143	0.033	0.143	0.033
8	i-C4	0.035	0.008	0.035	0.008
9	n-C4	0.073	0.017	0.073	0.017
10	i-C5	0.026	0.006	0.026	0.006
11	n-C5	0.022	0.005	0.022	0.005
12	C6	0.007	0.002	0.007	0.002
13	C7	0.007	0.002	0.007	0.002
14	C8	0.002	0.000	0.002	0.000
15	C9	0.000	0.000	0.000	0.000
16	C10+	0.000	0.000	0.000	0.000
17	Benzene	0.000	0.000	0.000	0.000
18	Toluene	0.000	0.000	0.000	0.000
19	E-Benzene	0.000	0.000	0.000	0.000
20	Xylenes	0.000	0.000	0.000	0.000
21	n-C6	0.005	0.001	0.005	0.001
22	224Trimethylp	0.000	0.000	0.000	0.000
	Total	0.550	0.126	0.550	0.126

-- Stream Data

No.	Component	MW	LP Oil	Flash Oil	Sale Oil	Flash Gas	W&S
Gas	Total Emissions		mol %	mol %	mol %	mol %	mol
1	H2S	34.80	0.0000	0.0000	0.0000	0.0000	
0.0000	0.0000						
2	O2	32.00	0.0000	0.0000	0.0000	0.0000	
0.0000	0.0000						
3	CO2	44.01	0.0920	0.0060	0.0001	0.3030	
0.2695	0.3013						

4	N2	28.01	0.0000	0.0000	0.0000	0.0000
0.0000	0.0000					
5	C1	16.04	10.3300	0.2188	0.0000	35.1483
9.8854	33.8466					
6	C2	30.07	8.8740	1.1428	0.1436	27.8504
45.2926	28.7492					
7	C3	44.10	7.9130	3.1683	2.6468	19.5591
26.2078	19.9017					
8	i-C4	58.12	2.2920	1.7024	1.6483	3.7393
4.0924	3.7575					
9	n-C4	58.12	5.9410	5.2118	5.1424	7.7308
8.2786	7.7590					
10	i-C5	72.15	3.7030	4.3039	4.3484	2.2280
2.3393	2.2337					
11	n-C5	72.15	4.1030	5.0206	5.0902	1.8508
1.9436	1.8556					
12	C6	86.16	3.6610	4.9381	5.0373	0.5262
0.5556	0.5277					
13	C7	100.20	10.6140	14.7477	15.0702	0.4677
0.4983	0.4692					
14	C8	114.23	10.7880	15.1282	15.4674	0.1347
0.1451	0.1353					
15	C9	128.28	5.7410	8.0709	8.2530	0.0222
0.0259	0.0224					
16	C10+	210.58	20.0500	28.2185	28.8572	0.0001
0.0001	0.0001					
17	Benzene	78.11	0.1980	0.2703	0.2759	0.0206
0.0219	0.0207					
18	Toluene	92.13	0.9240	1.2905	1.3191	0.0244
0.0261	0.0245					
19	E-Benzene	106.17	0.1160	0.1629	0.1666	0.0009
0.0010	0.0009					
20	Xylenes	106.17	1.1200	1.5732	1.6087	0.0075
0.0081	0.0075					
21	n-C6	86.18	3.5130	4.7873	4.8865	0.3851
0.4077	0.3862					
22	224Trimethylp	114.24	0.0270	0.0376	0.0384	0.0009
0.0010	0.0009					

MW		98.36	124.65	126.60	33.83
38.71	34.09				
Stream Mole Ratio		1.0000	0.7105	0.6948	0.2895
0.0157	0.3052				
Heating Value	[BTU/SCF]				1957.33
2221.01	1970.91				
Gas Gravity	[Gas/Air]				1.17
1.34	1.18				
Bubble Pt. @ 100F	[psia]	412.67	26.87	13.10	

Page 2-----E&P

TANK

RVP @ 100F	[psia]	105.20	15.66	10.93
Spec. Gravity @ 100F		0.659	0.690	0.691

**LAFAYETTE AREA LABORATORY**4790 N.E. EVANGELINE THRUWAY
CARENCRO, LA 70520
PHONE (337) 896-3055
FAX (337) 896-3077

Certificate of Analysis : 13050027-001A

Company:	Gas Analytical Services	For:	Gas Analytical Services
Well:	Oxford 149 Pad		Alan Ball
Field:	EQT Midstream		PO Box 1028
Sample of:	Condensate		
Conditions:	320 @ N.G.		Bridgeport, WV, 26330
Sampled by:	RM-GAS		
Sample date:	4/29/2013	Report Date:	5/13/2013
Remarks:	Cylinder No.: GAS		
Remarks:	Well 512480		

<u>Analysis: (GPA 2186M)</u>	<u>Mol. %</u>	<u>MW</u>	<u>Wt. %</u>	<u>Sp. Gravity</u>	<u>L.V. %</u>
Nitrogen	0.000	28.013	0.000	0.8094	0.000
Methane	10.330	16.043	1.686	0.3000	3.891
Carbon Dioxide	0.092	44.010	0.041	0.8180	0.035
Ethane	8.874	30.070	2.715	0.3562	5.271
Propane	7.913	44.097	3.551	0.5070	4.842
Iso-butane	2.292	58.123	1.356	0.5629	1.666
N-butane	5.941	58.123	3.514	0.5840	4.162
Iso-pentane	3.703	72.150	2.719	0.6244	3.011
N-pentane	4.103	72.150	3.013	0.6311	3.302
i-Hexanes	3.661	86.177	3.170	0.6795	3.308
n-Hexane	3.513	85.648	3.083	0.6640	3.191
2,2,4 trimethylpentane	0.027	114.231	0.030	0.6967	0.031
Benzene	0.198	78.114	0.144	0.8846	0.123
Heptanes	10.614	97.459	10.576	0.7048	10.397
Toluene	0.924	92.141	0.795	0.8719	0.690
Octanes	10.788	107.237	11.986	0.7433	11.205
E-benzene	0.116	106.167	0.054	0.8718	0.100
M-,O-,P-xylene	1.120	106.167	1.207	0.8731	0.966
Nonanes	5.741	121.906	7.394	0.7646	6.765
Decanes Plus	20.050	210.576	42.966	0.8024	37.044
	-----		-----		-----
	100.000		100.000		100.000

Calculated Values	Total Sample	Decanes Plus
Specific Gravity at 60 °F	0.6917	0.8024
Api Gravity at 60 °F	73.054	44.854
Molecular Weight	98.266	210.576
Pounds per Gallon (in Vacuum)	5.767	6.690
Pounds per Gallon (in Air)	5.761	6.682
Cu. Ft. Vapor per Gallon @ 14.73 psia	22.324	12.028

Southern Petroleum Laboratories, Inc.

**LAFAYETTE AREA LABORATORY**4790 N.E. EVANGELINE THRUWAY
CARENCRO, LA 70520
PHONE (337) 896-3055
FAX (337) 896-3077

Certificate of Analysis : 13050027-001A

Company:	Gas Analytical Services	For:	Gas Analytical Services
Well:	Oxford 149 Pad		Alan Ball
Field:	EQT Midstream		PO Box 1028
Sample of:	Condensate		
Conditions:	320 @ N.G.		Bridgeport, WV, 26330
Sampled by:	RM-GAS		
Sample date:	4/29/2013	Report Date:	5/13/2013
Remarks:	Cylinder No.: GAS		
Remarks:	Well 512480		

<u>Analysis: (GPA 2103M)</u>	<u>Mol. %</u>	<u>MW</u>	<u>Wt. %</u>	<u>Sp. Gravity</u>	<u>L.V. %</u>
Nitrogen	0.000	28.013	0.000	0.8094	0.000
Methane	10.330	16.043	1.686	0.3000	3.891
Carbon Dioxide	0.092	44.010	0.041	0.8180	0.035
Ethane	8.874	30.070	2.715	0.3562	5.271
Propane	7.913	44.097	3.551	0.5070	4.842
Iso-butane	2.292	58.123	1.356	0.5629	1.666
N-butane	5.941	58.123	3.514	0.5840	4.162
Iso-pentane	3.703	72.150	2.719	0.6244	3.011
N-pentane	4.103	72.150	3.013	0.6311	3.302
Hexanes	7.174	85.648	6.253	0.6655	6.499
Heptanes Plus	49.578	97.459	75.152	0.7048	67.321
	-----		-----		-----
	100.000		100.000		100.000

Calculated Values	Total Sample	Heptanes Plus
Specific Gravity at 60 °F	0.6917	0.7740
Api Gravity at 60 °F	73.054	51.311
Molecular Weight	98.266	148.955
Pounds per Gallon (in Vacuum)	5.767	6.453
Pounds per Gallon (in Air)	5.761	6.446
Cu. Ft. Vapor per Gallon @ 14.73 psia	22.324	16.479
Standing-Katz Density (lb. / ft ³)		



Southern Petroleum Laboratories, Inc.



Certificate of Analysis
 Number: 2030-13050027-001A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 07, 2013

Station Name: Oxford 149 Pad
 Station Location: EQT Midstream
 Cylinder No: GAS

Sampled By: RM-GAS
 Sample Of: Condensate Spot
 Sample Date: 04/29/2013 12:30
 Sample Conditions: 320 psig

Analytical Data

Test	Method	Result	Units	Detection Limit	Lab Tech.	Analysis Date
Color-Visual	Proprietary	STRAW			AR	05/07/2013
API Gravity @ 60° F	ASTM D-5002	60.09	°		AR	05/07/2013
Specific Gravity @ 60/60° F	ASTM D-5002	0.7386			AR	05/07/2013
Density @ 60° F	ASTM D-5002	0.7378	g/ml		AR	05/07/2013
Shrinkage Factor	Proprietary	0.8679			AR	05/07/2013
Flash Factor	Proprietary	263.1562	Cu. Ft./S.T. Bbl		AR	05/07/2013



Hydrocarbon Laboratory Manager

Quality Assurance:

The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
 Number: 2030-13050229-003A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512425
 Station Location: EQT Production
 Sample Point: Submeter
 Cylinder No: GAS
 Analyzed: 05/29/2013 13:24:38 by CC

Sampled By: RM-GAS
 Sample Of: Gas
 Sample Date: 05/20/2013 13:15
 Sample Conditions: 379 psig
 Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia		
Nitrogen	0.532	0.729		GPM TOTAL C2+	5.661
Carbon Dioxide	0.195	0.420			
Methane	78.965	61.996			
Ethane	13.780	20.278	3.697		
Propane	4.195	9.053	1.159		
Iso-Butane	0.507	1.442	0.166		
n-Butane	1.013	2.881	0.320		
Iso-Pentane	0.249	0.879	0.091		
n-Pentane	0.239	0.844	0.087		
i-Hexanes	0.113	0.461	0.045		
n-Hexane	0.073	0.304	0.030		
Benzene	0.002	0.008	0.001		
Cyclohexane	0.011	0.044	0.004		
i-Heptanes	0.057	0.266	0.025		
n-Heptane	0.022	0.106	0.010		
Toluene	0.004	0.017	0.001		
i-Octanes	0.031	0.168	0.015		
n-Octane	0.003	0.017	0.002		
Ethylbenzene	NIL	NIL	NIL		
Xylenes	0.002	0.007	0.001		
i-Nonanes	0.003	0.027	0.002		
n-Nonane	0.001	0.006	0.001		
Decane Plus	0.003	0.047	0.004		
	<u>100.000</u>	<u>100.000</u>	<u>5.661</u>		



Certificate of Analysis
 Number: 2030-13050229-003A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512425
 Station Location: EQT Production
 Sample Point: Submeter
 Cylinder No: GAS
 Analyzed: 05/29/2013 13:24:38 by CC

Sampled By: RM-GAS
 Sample Of: Gas
 Sample Date: 05/20/2013 13:15
 Sample Conditions: 379 psig
 Method: GPA 2286

Physical Properties	Total	C10+
Calculated Molecular Weight	20.43	163.67
GPA 2172-09 Calculation:		
Calculated Gross BTU per ft³ @ 14.73 psia & 60°F		
Real Gas Dry BTU	1239.6	8669.4
Water Sat. Gas Base BTU	1218.5	8518.5
Relative Density Real Gas	0.7077	5.6511
Compressibility Factor	0.9966	

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
 Number: 2030-13050229-003A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512425
 Station Location: EQT Production
 Sample Point: Submeter
 Cylinder No: GAS
 Analyzed: 05/29/2013 13:24:38 by CC

Sampled By: RM-GAS
 Sample Of: Gas
 Sample Date: 05/20/2013 13:15
 Sample Conditions: 379 psig
 Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia		
Nitrogen	0.532	0.729		GPM TOTAL C2+	5.661
Carbon Dioxide	0.195	0.420		GPM TOTAL C3+	1.964
Methane	78.965	61.996		GPM TOTAL iC5+	0.319
Ethane	13.780	20.278	3.697		
Propane	4.195	9.053	1.159		
Iso-butane	0.507	1.442	0.166		
n-Butane	1.013	2.881	0.320		
Iso-pentane	0.249	0.879	0.091		
n-Pentane	0.239	0.844	0.087		
Hexanes Plus	0.325	1.478	0.141		
	100.000	100.000	5.661		

Physical Properties	Total	C6+
Relative Density Real Gas	0.7077	3.2076
Calculated Molecular Weight	20.43	92.90
Compressibility Factor	0.9966	

GPA 2172-09 Calculation:

Calculated Gross BTU per ft³ @ 14.73 psia & 60°F

Real Gas Dry BTU	1239.6	5071.5
Water Sat. Gas Base BTU	1218.5	4983.2

Comments: H2O Mol% : 1.740 ; Wt% : 1.538

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.



Certificate of Analysis
 Number: 2030-13050229-003A

Carencro Laboratory
 4790 NE Evangeline Thruway
 Carencro, LA 70520

Alan Ball
 Gas Analytical Services
 PO Box 1028
 Bridgeport, WV 26330

May 29, 2013

Station Name: 512425
 Station Location: EQT Production
 Sample Point: Submeter
 Cylinder No: GAS
 Analyzed: 05/29/2013 13:24:38 by CC

Sampled By: RM-GAS
 Sample Of: Gas
 Sample Date: 05/20/2013 13:15
 Sample Conditions: 379 psig
 Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia		
Nitrogen	0.532	0.729		GPM TOTAL C2+	5.661
Carbon Dioxide	0.195	0.420		GPM TOTAL C3+	1.964
Methane	78.965	61.995		GPM TOTAL iC5+	0.319
Ethane	13.780	20.278	3.697		
Propane	4.195	9.053	1.159		
Iso-Butane	0.507	1.442	0.166		
n-Butane	1.013	2.882	0.320		
Iso-Pentane	0.249	0.879	0.091		
n-Pentane	0.239	0.844	0.087		
Hexanes	0.186	0.765	0.075		
Heptanes Plus	0.139	0.713	0.066		
	<u>100.000</u>	<u>100.000</u>	<u>5.661</u>		

Physical Properties	Total	C7+
Relative Density Real Gas	0.7077	3.5343
Calculated Molecular Weight	20.43	102.36
Compressibility Factor	0.9966	
GPA 2172-09 Calculation:		
Calculated Gross BTU per ft³ @ 14.73 psia & 60°F		
Real Gas Dry BTU	1239.6	5520.5
Water Sat. Gas Base BTU	1218.5	5424.5
Comments: H2O Mol% : 1.740 ; Wt% : 1.538		

Hydrocarbon Laboratory Manager

Quality Assurance: The above analyses are performed in accordance with ASTM, UOP, GPA guidelines for quality assurance, unless otherwise stated.

ATTACHMENT T

Emission Summary Sheet

ATTACHMENT T – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID# (Emission Source ID)	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		GHG (CO ₂ e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C002 (S007-S012, S037, C002)	1.15	5.03	0.96	4.22	1.85	4.93	0.01	0.03	0.09	0.38	0.09	0.38	1,377.81	6,034.79
C004 (S007-S012, S037, C004)	1.15	5.03	0.96	4.22	1.85	4.93	0.01	0.03	0.09	0.38	0.09	0.38	1,377.81	6,034.79
E025 (S025)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E026 (S026)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E027 (S027)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E034 (S034)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E035 (S035)	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	180.18	789.20
E030 (S030)	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E031 (S031)	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	1.52	6.64
E033 (S033)	---	---	---	---	0.07	0.32	---	---	---	---	---	---	0.50	2.20
E037 (S037)	---	---	---	---	0.07	0.32	---	---	---	---	---	---	0.50	2.20
Fugitives	---	---	---	---	32.82	8.53	---	---	---	---	---	---	---	---
Haul Roads	---	---	---	---	---	17.53	---	---	---	---	---	---	---	270.76
Facility Total	3.03	13.28	2.55	11.15	36.63	36.43	0.02	0.08	0.23	6.08	0.23	1.52	3,660.06	16,301.81
Facility Total (excl. fugitives)	3.03	13.28	2.55	11.15	3.81	10.37	0.02	0.08	0.23	1.01	0.23	1.01	3,660.06	16,031.05

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT T – FACILITY-WIDE HAP CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C002 (S007-S012, S037, C002)	---	---	1.9E-03	5.8E-03	4.1E-03	1.3E-02	2.0E-04	6.1E-04	2.1E-03	5.8E-03	0.06	0.17	0.08	0.23
C004 (S007-S012, S037, C004)	---	---	1.9E-03	5.8E-03	4.1E-03	1.3E-02	2.0E-04	6.1E-04	2.1E-03	5.8E-03	0.06	0.17	0.08	0.23
E025 (S025)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E026 (S026)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E027 (S027)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E034 (S034)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E035 (S035)	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E030 (S030)	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E031 (S031)	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E033 (E033)	---	---	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	1.0E-03	<0.01	2.0E-03	1.0E-02
E037 (S037)	---	---	0.02	0.01	0.05	0.01	2.6E-03	6.8E-04	3.5E-02	9.1E-03	1.02	0.27	1.33	0.35
Fugitives	---	---	---	0.01	---	0.02	---	<0.01	---	0.01	---	0.29	---	0.55
Haul Roads	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Facility Total	5.5E-04	2.4E-03	0.03	0.03	0.06	0.06	3.0E-03	1.9E-03	0.04	0.03	1.16	0.96	1.51	1.42
Facility Total (excl. fugitives)	5.5E-04	2.4E-03	3.7E-03	0.01	8.3E-03	2.6E-02	3.9E-04	1.2E-03	4.2E-03	1.2E-02	0.14	0.39	0.18	0.53

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT U

Class I Legal Advertisement

RECOMMENDED PUBLIC NOTICE TEMPLATE

AIR QUALITY PERMIT NOTICE Notice of Application

Notice is given that EQT Production Company has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a Class II General Permit to convert the current G70-A General Permit Registration into a G70-C Permit Registration for the natural gas production facility OXF-150 located off of County Route 11/4 in Doddridge County, West Virginia approximately 5 miles Southwest of West Union, WV. The latitude and longitude coordinates are: 39.22312 N, -80.79122 W. The project includes the installation of one (1) enclosed combustor at the site.

The applicant estimates the potential to discharge the following Regulated Air Pollutants will be:

Pollutant	Emissions in tpy (tons per year)
NOx	13.28
CO	11.15
VOC	10.37
SO ₂	0.08
PM	1.01
Total HAPs	1.42
Carbon Dioxide Equivalent (CO ₂ e)	16,031.05

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57th Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the **(Day)** day of **(Month)**, 2016.

By: EQT Production Company
Kenneth Kirk, Executive Vice President
625 Liberty Ave Suite 1700
Pittsburgh, PA 15222

ATTACHMENT V

General Permit Registration Application Fee