



625 Liberty Ave, Suite
1700
Pittsburgh PA 15222
www.eqt.com

TEL: (412) 395-3699

R. Alex Bosiljevac
Environmental
Coordinator

January 11, 2017

Mr. William F. Durham, Director
West Virginia Department of Environmental Protection
Division of Air Quality
601 57th Street, SE
Charleston, West Virginia, 25304

**RE: G70-D General Permit Registration Application
EQT Production Company
WEU-1 Natural Gas Production Site
Permit No. R13-3050A, Plant ID No. 017-00051**

Dear Director Durham:

Enclosed are one (1) original hard copy and two (2) complete PDFs included on CD-ROM of a G70-D General Permit Registration Application for the WEU-1 natural gas production site. A legal advertisement will be published in Doddridge Independent the next few days and proof of publication will be forwarded as soon as it is received. Please contact me for payment of the application fee by credit card.


If you have any questions concerning this permit application, please contact me at (412) 395-3699 or by email at abosiljevac@eqt.com.

Sincerely,

A handwritten signature in blue ink, appearing to read 'RAB' followed by a large, stylized flourish.

R. Alex Bosiljevac
EQT Corporation

Enclosures

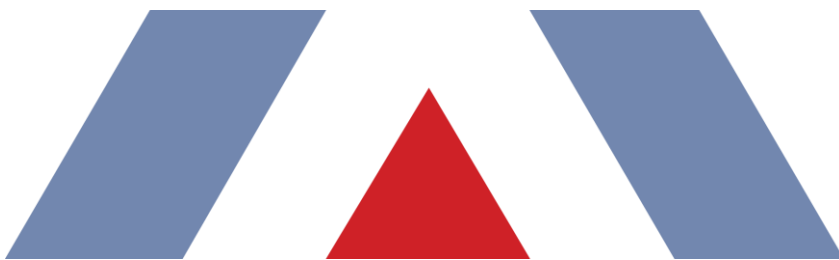

PROJECT REPORT

**EQT Production
WEU-1 Wellpad**

G70-D Permit Application



Where energy meets innovation.

TRINITY CONSULTANTS
4500 Brooktree Drive
Suite 103
Wexford, PA 15090
(724) 935-2611

November 2016

Trinity 
Consultants

Environmental solutions delivered uncommonly well

TABLE OF CONTENTS

1. INTRODUCTION	4
1.1. Facility and Project Description	4
1.2. Source Status	5
1.3. G70-D APPLICATION ORGANIZATION	5
2. SAMPLE EMISSION SOURCE CALCULATIONS	6
3. REGULATORY DISCUSSION	7
3.1. Prevention of Significant Deterioration (PSD) Source Classification	7
3.2. Title V Operating Permit Program	7
3.3. New Source Performance Standards	8
3.3.1. NSPS Subparts D, Da, Db, and Dc – Steam Generating Units	8
3.3.2. NSPS Subpart K, Ka, and Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids	8
3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution	8
3.3.4. NSPS Subpart OOOOa—Crude Oil and Natural Gas Production, Transmission, and Distribution	8
3.3.5. Non-Applicability of All Other NSPS	9
3.4. National Emission Standards for Hazardous Air Pollutants (NESHAP)	9
3.4.1. NESHAP Subpart HH — Oil and Natural Gas Production Facilities	9
3.4.2. NESHAP Subpart JJJJJ - Industrial, Commercial, and Institutional Boilers	10
3.5. West Virginia SIP Regulations	10
3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers	10
3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor	10
3.5.3. 45 CSR 6: To Prevent and Control the Air Pollution from the Combustion of Refuse	10
3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources	10
3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter	10
3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks	11
3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants	11
3.5.8. Non-Applicability of Other SIP Rules	11
4. G70-D APPLICATION FORMS	12
ATTACHMENT A: SINGLE SOURCE DETERMINATION	
ATTACHMENT B: SITING CRITERIA WAIVER (NOT APPLICABLE)	
ATTACHMENT C: BUSINESS CERTIFICATE	
ATTACHMENT D: PROCESS FLOW DIAGRAM	
ATTACHMENT E: PROCESS DESCRIPTION	
ATTACHMENT F: PLOT PLAN	
ATTACHMENT G: AREA MAP	

ATTACHMENT H: APPLICABILITY FORM
ATTACHMENT I: EMISSION UNITS TABLE
ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET
ATTACHMENT K: GAS WELL DATA SHEET
ATTACHMENT L: STORAGE VESSEL DATA SHEET
ATTACHMENT M: HEATERS DATA SHEET
ATTACHMENT N: ENGINES DATA SHEET (NOT APPLICABLE)
ATTACHMENT O: TRUCK LOADING DATA SHEET
ATTACHMENT P: GLYCOL DEHYDRATOR DATA SHEET (NOT APPLICABLE)
ATTACHMENT Q: PNEUMATIC CONTROLLER DATA SHEET
ATTACHMENT R: PNEUMATIC PUMP DATA SHEET
ATTACHMENT S: AIR POLLUTION CONTROL DEVICE DATA SHEET
ATTACHMENT T: EMISSION CALCULATIONS
ATTACHMENT U: EMISSION SUMMARY SHEET
ATTACHMENT V: CLASS I LEGAL ADVERTISEMENT
ATTACHMENT W: GENERAL PERMIT REGISTRATION APPLICATION FEE

1. INTRODUCTION

EQT Production Company (EQT) is submitting this Class II General Permit (G70-D) to the West Virginia Department of Environmental Protection (WVDEP) for the construction and operation of new equipment at an existing natural gas production well pad, WEU-1, located in Doddridge County, West Virginia. The wellpad is currently permitted under R13-3050A. This general permit application is to replace the existing twenty-one (21) condensate storage tanks (S001-S021) for eight (8) new 400 bbl. storage vessels and also convert the existing R13 permit to a G70-D .

1.1. FACILITY AND PROJECT DESCRIPTION

The WEU-1 wellpad is an existing natural gas production facility. Natural gas and liquids (including water and condensate) are extracted from deposits underneath the surface. Natural gas is transported from the wells to a gas line for additional processing and compression, as necessary. The liquids produced are stored in storage vessels.

The OXF 121 wellpad currently consists of the following equipment:

- > Twenty-one (21) 210 barrel (bbl) storage tanks for condensate/water (produced fluids) controlled by one (1) combustor, rated at 11.66 MMBtu/hr;
- > Six (6) line heaters that include, two (2) rated at 1.54 MMBtu/hr heat input, two (2) rated at 0.77 MMBtu/hr, one (1) rated at 3.08 MMBtu/hr and one (1) rated at 1.15 MMBtu/hr
- > Two (2) thermoelectric generators (TEGs), each rated at 0.013 MMBtu/hr heat input;
- > Produced fluid truck loading; and
- > Associated piping and components

The WEU-1 pad, after the proposed change, will consist of the following equipment:

- > Eight (8) 400 barrel (bbl) storage tanks for condensate/water(produced fluids) controlled by the aforementioned enclosed flare, rated at 11.66 MMBtu/hr ;

Additionally, EQT requests that the department consolidate all existing equipment associated with this wellpad and their requirements under the current R13-3050A permit in the proposed G70-D permit.

A process flow diagram is included as Attachment D. A comparison of the potential emissions of the proposed and existing equipment at the wellpad in comparison with G70-D emission limits is provided in Table 1. Facility emissions are well below the permit limits. Note that in accordance with condition 1.1.1. of the G70-D permit, fugitive emissions are not considered in determining eligibility of the permit.

Table 1 - Comparison of Wellpad Potential Emissions to G70-D Permit Emission Limits

Pollutant	Wellpad Potential Annual Emissions (tpy)	G70-D Maximum Annual Emission Limits (tpy)
Nitrogen Oxides	8.73	50
Carbon Monoxide	7.33	80
Volatile Organic Compounds	15.38	80
Particulate Matter – 10/2.5	0.66	20
Sulfur Dioxide	0.05	20
Individual HAP (n-hexane) ¹	0.88	8
Total HAP ¹	2.06	20

1. Includes fugitive emissions

1.2. SOURCE STATUS

WVDEP must make stationary source determinations on a case-by-case basis using the guidance under the Clean Air Act (CAA) and EPA's and WVDEP's implementing regulations. The definition of stationary source in 40 CFR 51.166(b) includes the following:

“(6) Building, structure, facility, or installation means all of the pollutant emitting activities which belong to the same industrial grouping, are located on or more contiguous or adjacent properties, and are under control of the same person (or persons under common control).”

Other additional pollutant emitting facilities should be aggregated with the WEU-1 Pad for air permitting purposes if, and only if, all three elements of the “stationary source” definition above are fulfilled.

WVDEP determined that the WEU-1 pad is a separate stationary source when the current permit was issued. There are no Marcellus facilities within a quarter-mile radius of the WEU-1 Pad. Therefore, the WEU-1 pad should continue to be considered a separate stationary source with respect to permitting programs, including Title V and Prevention of Significant Deterioration (PSD). As discussed in this application, the facility is a minor source of air emissions with respect to New Source Review (NSR) and Title V Permitting.

1.3. G70-D APPLICATION ORGANIZATION

This West Virginia Code of State Regulations, Title 45 (CSR) Series 13 (45 CSR 13) G70-D permit application is organized as follows:

- > Attachment A: Single Source Determination;
- > Attachment B: Siting Criteria Waiver **(Not Applicable)**;
- > Attachment C: Business Certificate;
- > Attachment D: Process Flow Diagram;
- > Attachment E: Process Description;
- > Attachment F: Plot Plan;
- > Attachment G: Area Map;
- > Attachment H: Applicability Form;
- > Attachment I: Emission Units Table;
- > Attachment J: Fugitive Emissions Summary Sheet;
- > Attachment K: Gas Well Data Sheet;
- > Attachment L: Storage Vessel Data Sheet;
- > Attachment M: Heaters Data Sheet;
- > Attachment N: Engines Data Sheet **(Not Applicable)**;
- > Attachment O: Truck Loading Data Sheet;
- > Attachment P: Glycol Dehydrator Data Sheet **(Not Applicable)**;
- > Attachment Q: Pneumatic Controller Data Sheet;
- > Attachment R: Pneumatic Pump Data Sheet;
- > Attachment S: Air Pollution Control Device Data Sheet;
- > Attachment T: Emission Calculations;
- > Attachment U: Emission Summary Sheet;
- > Attachment V: Class I Legal Advertisement; and
- > Attachment W: General Permit Registration Application Fee.

2. SAMPLE EMISSION SOURCE CALCULATIONS

The characteristics of air emissions from the natural gas production operations, along with the methodology for calculating emissions, are briefly described in this section of the application. Detailed emission calculations are presented in Attachment S of this application.

Emissions from this project will result from natural gas combustion in the line heaters, combustor and TEGs, as well as storage of organic liquids in storage tanks and loading of organic liquids into tank trucks. In addition, fugitive emissions will result from component leaks from the operation of the station. The methods by which emissions from each of these source types, as well as the existing source types, are calculated are summarized below.

- > **Line Heaters, Enclosed Combustors and TEGs:** Potential emissions of criteria pollutants and hazardous air pollutants (HAPs) are calculated using U.S. EPA's AP-42 factors for natural gas external combustion.¹ These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.²
- > **Fugitive Equipment Leaks:** Emissions of VOC and HAPs from leaking equipment components have been estimated using facility estimated component counts and types along with emission factors from the *Protocol for Equipment Leak Emission Estimates, EPA 453/R-95-017, November 1995*. Emission factors used are based on average measured TOC from component types indicated. Greenhouse gas emissions from component leaks are calculated according to the procedures in 40 CFR 98 Subpart W.³ Pneumatic devices at the wellpad are intermittent bleed and are assumed to be in operation 1/3 of the year.
- > **Storage Tanks:** Working, breathing and flashing emissions of VOC and HAPs from the storage tanks at the facility are calculated using Bryan Research & Engineering ProMax® Software. Controlled calculations assume an overall control efficiency (capture and destruction) of 95%. The throughput for the produced fluids tanks are based on the maximum annualized monthly condensate and produced water at the WEU-1 well pad (i.e., the maximum monthly throughput for the pad times 12), and includes a safety factor of 1.45. The produced fluids throughput is calculated as follows:
$$\text{Throughput} \left(\frac{\text{bbl}}{\text{day}} \right) = \left(\text{Condensate Throughput} \left(\frac{\text{bbl}}{\text{month}} \right) + \left(\text{Produced Water Throughput} \left(\frac{\text{bbl}}{\text{month}} \right) \right) \right) * \frac{12 \left(\frac{\text{months}}{\text{year}} \right)}{365 \left(\frac{\text{days}}{\text{year}} \right)} \times 1.45$$
- > **Tank Truck Loading:** Uncontrolled emissions of VOC and HAPs from the loading of organic liquids from storage tanks to tank truck are calculated using Bryan Research Engineering ProMax® Software. Truck loading is controlled by the enclosed combustors. U.S. EPA's AP-42 Chapter 5 Section 2 factors were used for capture efficiency.⁴
- > **Haul Roads:** Fugitive dust emitted from facility roadways has been estimated using projected vehicle miles traveled along with U.S. EPA's AP-42 factors for unpaved haul roads.⁵

¹ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 1.4, Natural Gas Combustion, Supplement D, July 1998.

² 40 CFR 98 Subpart C, *General Stationary Fuel Combustion Sources*, Tables C-1 and C-2.

³ 40 CFR 98 Subpart W, *Petroleum and Natural Gas Systems*, Section 98.233(r), *Population Count and Emission Factors*.

⁴ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 5.2, Transportation And Marketing Of Petroleum Liquids, June 2008.

⁵ U.S. EPA, AP 42, Fifth Edition, Volume I, Section 13.2.2, Unpaved Roads, November 2006.

3. REGULATORY DISCUSSION

This section documents the applicability determinations made for Federal and State air quality regulations. In this section, applicability or non-applicability of the following regulatory programs is addressed:

- > Prevention of Significant Deterioration (PSD) permitting;
- > Title V of the 1990 Clean Air Act Amendments;
- > New Source Performance Standards (NSPS);
- > National Emission Standards for Hazardous Air Pollutants (NESHAP); and
- > West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-D permit application forms.

In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the wellpad. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the wellpad. Regulations that are categorically non-applicable are not discussed (e.g., NSPS Subpart J, Standards of Performance for Petroleum Refineries).

3.1. PREVENTION OF SIGNIFICANT DETERIORATION (PSD) SOURCE CLASSIFICATION

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration (PSD) and new and modified sources of non-attainment pollutants under Non-Attainment New Source Review (NNSR). PSD and NNSR regulations apply when a major source makes a change, such as installing new equipment or modifying existing equipment, and a significant increase in emissions results from the change. The wellpad will remain a minor source with respect to the NSR program after the project since potential emissions are below all the NNSR/PSD thresholds. As such, NNSR/PSD permitting is not triggered by this construction activity. EQT will monitor future construction activities at the site closely and will compare any future increase in emissions with the NSR/PSD thresholds to ensure these activities will not trigger this program.

3.2. TITLE V OPERATING PERMIT PROGRAM

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in West Virginia Code of State Regulations (CSR) 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP, and 100 tpy of all other regulated pollutants.⁶ The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility after the proposed project. Therefore, the wellpad is not a major source for Title V purposes.

⁶ On June 23, 2014, the U.S Supreme Court decision in the case of *Utility Air Regulatory Group v. EPA* effectively changed the permitting procedures for GHGs under the PSD and Title V programs.

3.3. NEW SOURCE PERFORMANCE STANDARDS

New Source Performance Standards (NSPS), located in 40 CFR 60, require new, modified, or reconstructed sources to control emissions to the level achievable by the best demonstrated technology as specified in the applicable provisions. Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability and non-applicability determinations for NSPS regulations of relevance to the wellpad. The following NSPS could potentially apply to the wellpad:

- > 40 CFR Part 60 Subparts D/Da/Db/Dc – Steam Generating Units
- > 40 CFR Part 60 Subpart K/Ka/Kb – Storage Vessels for Petroleum Liquids/Volatile Organic Liquids
- > 40 CFR Part 60 Subpart OOOO – Crude Oil and Natural Gas Production, Transmission, and Distribution
- > 40 CFR Part 60 Subpart OOOOa – Crude Oil and Natural Gas Facilities

3.3.1. NSPS Subparts D, Da, Db, and Dc - Steam Generating Units

These subparts apply to steam generating units of various sizes, all greater than 10 MMBtu/hr. The proposed project does not include any steam generating units with a heat input greater than 10 MMBtu/hr, therefore the requirements of these subparts do not apply.

3.3.2. NSPS Subpart K, Ka, and Kb - Storage Vessels for Petroleum Liquids/Volatile Organic Liquids

These subparts apply to storage tanks of certain sizes constructed, reconstructed, or modified during various time periods. Subpart K applies to storage tanks constructed, reconstructed, or modified prior to 1978, and Subpart Ka applies to those constructed, reconstructed, or modified prior to 1984. Both Subparts K and Ka apply to storage tanks with a capacity greater than 40,000 gallons. Subpart Kb applies to volatile organic liquid (VOL) storage tanks constructed, reconstructed, or modified after July 23, 1984 with a capacity equal to or greater than 75 m³ (~19,813 gallons). The proposed tanks at the wellpad each have a capacity of 19,813 gallons or less. As such, Subparts K, Ka, and Kb do not apply to the storage tanks at the wellpad.

3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution

Subpart OOOO, Standards of Performance for Crude Oil and Natural Gas Production, Transmission, and Distribution, applies to affected facilities that commenced construction, reconstruction, or modification after August 23, 2011 (see clarification below regarding dates). This NSPS was published in the Federal Register on August 16, 2012, and subsequently amended. The proposed project does not include any source categories under NSPS Subpart OOOO or change any prior determinations related to NSPS Subpart OOOO. Therefore, this subpart is not applicable to the proposed project.

3.3.4. NSPS Subpart OOOOa—Crude Oil and Natural Gas Production, Transmission, and Distribution

Subpart OOOOa, Standards of Performance for Crude Oil and Natural Gas Facilities, will apply to affected facilities that commenced construction, reconstruction, or modification after September 18, 2015. The regulation was published final in the Federal Register on June 3, 2016. The rule includes provisions for the following facilities:

- > Hydraulically fractured wells;
- > Centrifugal compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;
- > Reciprocating compressors located between the wellhead and the point of custody transfer to the natural gas distribution segment;

- > Continuous bleed natural gas-driven pneumatic controllers with a bleed rate of > 6 scfh located in the production, gathering, processing, or transmission and storage segments (excluding natural gas processing plants);
- > Continuous bleed natural gas-driven pneumatic controllers located at natural gas processing plants;
- > Pneumatic pumps located in the production and processing segments;
- > Storage vessels located in the production, gathering, processing, or transmission and storage segments;
- > The collection of fugitive emissions components at a well site;
- > The collection of fugitive emissions components at a compressor station; and
- > Sweetening units located onshore that process natural gas produced from either onshore or offshore wells.

The proposed project will include eight (8) produced fluid storage vessels at the wellpad. These tanks will each have potential VOC emissions less than 6 tpy based on the permit application materials and enforceable limits to be included in the G70-D permit. As such, per 60.5365a(e), the tanks will not be storage vessel affected facilities under the rule.

Note that the proposed changes to the well pad do not meet the definition of modification under 60.5365a(i)(3)(i). Therefore, EQT will not be subject to the leak detection and repair program under 0000a.

The pneumatic controllers will potentially be subject to NSPS 0000a. Per 60.5365a(d)(1), a pneumatic controller affected facility is a single continuous bleed natural gas driven pneumatic controller operating at a natural gas bleed rate greater than 6 scfh. No pneumatic controllers installed will meet the definition of a pneumatic controller affected facility. Therefore, these units are not subject to the requirements of Subpart 0000a.

3.3.5. Non-Applicability of All Other NSPS

NSPS are developed for particular industrial source categories. Other than NSPS developed for natural gas processing plants (Subpart 0000) and the applicability of a particular NSPS to the wellpad can be readily ascertained based on the industrial source category covered. All other NSPS are categorically not applicable to the proposed project.

3.4. NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS (NESHAP)

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad is an Area (minor) source of HAP since its potential emissions of HAP are less than the 10/25 major source thresholds. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type. Besides 40 CFR 63 Subpart A (NESHAP Subpart A), which is similar to 40 CFR 60 Subpart A (NSPS Subpart A), the following NESHAP could potentially apply to the wellpad:

- > 40 CFR Part 63 Subpart HH – Oil and Natural Gas Production Facilities
- > 40 CFR Part 63 Subpart JJJJJ – Industrial, Commercial, and Institutional Boilers

3.4.1. NESHAP Subpart HH – Oil and Natural Gas Production Facilities

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad does not include a triethylene glycol dehydration unit; therefore the requirements of this subpart do not apply.

3.4.2. NESHAP Subpart JJJJJJ - Industrial, Commercial, and Institutional Boilers

This MACT standard applies to industrial, commercial, and institutional boilers of various sizes and fuel types at area sources. The line heaters at the wellpad are natural gas-fired and is specifically exempt from this subpart. Therefore, no sources at the wellpad are subject to any requirements under this subpart.

3.5. WEST VIRGINIA SIP REGULATIONS

The wellpad is potentially subject to regulations contained in the West Virginia Code of State Regulations, Chapter 45 (Code of State Regulations). The Code of State Regulations fall under two main categories, those regulations that are generally applicable (e.g., permitting requirements), and those that have specific applicability (e.g., PM standards for manufacturing equipment).

3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers

45 CSR 2 applies to fuel burning units, defined as equipment burning fuel “for the primary purpose of producing heat or power by indirect heat transfer”. The TEGs and line heaters are fuel burning units and therefore must comply with this regulation. Per 45 CSR 2-3, opacity of emissions from units shall not exceed 10 percent.

3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor

According to 45 CSR 4-3:

No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.

The wellpad is generally subject to this requirement. However, due to the nature of the process at the wellpad, production of objectionable odor from the wellpad during normal operation is unlikely.

3.5.3. 45 CSR 6: To Prevent and Control the Air Pollution from the Combustion of Refuse

45 CSR 6 applies to activities involving incineration of refuse, defined as “the destruction of combustible refuse by burning in a furnace designed for that purpose. For the purposes of this rule, the destruction of any combustible liquid or gaseous material by burning in a flare or flare stack, thermal oxidizer or thermal catalytic oxidizer stack shall be considered incineration.” The enclosed combustor is an incinerator and therefore must comply with this regulation. Per 45 CSR 6-4.3, opacity of emissions from this unit shall not exceed 20 percent, except as provided by 4.4. PM emissions from this unit will not exceed the levels calculated in accordance with 6-4.1.

3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources

45 CSR 16-1 incorporates the federal Clean Air Act (CAA) standards of performance for new stationary sources set forth in 40 CFR Part 60 by reference. As such, by complying with all applicable requirements of 40 CFR Part 60 at the wellpad, EQT will be complying with 45 CSR 16.

3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter

According to 45 CSR 17-3.1:

No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property lines of the property on which the discharge originates or at any public or residential location, which causes or contributes to statutory air pollution.

Due to the nature of the activities at the wellpad, it is unlikely that fugitive particulate matter emissions will be emitted under normal operating conditions. However, EQT will take measures to ensure any fugitive particulate matter emissions will not cross the property boundary should any such emissions occur.

3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks

45 CSR 21-28 applies to any fixed roof petroleum liquid storage tank with a capacity greater than 40,000 gallons. The capacity of each proposed storage tank at the wellpad is less than 40,000 gallons; therefore, 45 CSR 21-28 will not apply to the storage tanks at the wellpad.

3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants

45 CSR 34-1 incorporates the federal Clean Air Act (CAA) national emissions standards for hazardous air pollutants (NESHAPs) as set forth in 40 CFR Parts 61 and 63 by reference. As noted above, no NESHAP are applicable.

3.5.8. Non-Applicability of Other SIP Rules

A thorough examination of the West Virginia SIP rules with respect to applicability at the wellpad reveals many SIP regulations that do not apply or impose additional requirements on operations. Such SIP rules include those specific to a particular type of industrial operation that is categorically not applicable to the wellpad.

4. G70-D APPLICATION FORMS

The WVDEP permit application forms contained in this application include all applicable G70-D application forms including the required attachments.



west virginia department of environmental protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25 4
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-D GENERAL PERMIT REGISTRATION APPLICATION

PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION,
RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF
NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- | | |
|---|---|
| <input checked="" type="checkbox"/> CONSTRUCTION (UPDATE) | <input type="checkbox"/> CLASS I ADMINISTRATIVE UPDATE |
| <input type="checkbox"/> MODIFICATION | <input type="checkbox"/> CLASS II ADMINISTRATIVE UPDATE |
| <input type="checkbox"/> RELOCATION | |

SECTION 1. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office): EQT Production Company

Federal Employer ID No. (FEIN): 25-0724685

Applicant's Mailing Address: 625 Liberty Avenue, Suite 1700

City: Pittsburgh

State: PA

ZIP Code: 15222

Facility Name: WEU 1

Operating Site Physical Address:

If none available, list road, city or town and zip of facility.

City: West Union

Zip Code: 26456

County: Doddridge

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):

Latitude: 39°26591

Longitude: 80°77898

SIC Code: 1311

NAICS Code: 211111

DAQ Facility ID No. (For existing facilities)

017-00051

CERTIFICATION OF INFORMATION

This G70-D General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. **Any administratively incomplete or improperly signed or unsigned G70-D Registration Application will be returned to the applicant. Furthermore, if the G70-D forms are not utilized, the application will be returned to the applicant. No substitution of forms is allowed.**

I hereby certify that Michael Gavin is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-D General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: 

Name and Title: Michael Gavin, Vice President

Phone:

Fax:

Email: gavinm@eqt.com

Date: 12/20/16

If applicable:

Authorized Representative Signature: _____

Name and Title:

Phone:

Fax:

Email:

Date:

If applicable:

Environmental Contact

Name and Title: Alex Bosiljevac, Environmental Coordinator

Phone: 412-395-3699

Fax: 412-395-7027

Email: ABosiljevac@eqt.com

Date:

OPERATING SITE INFORMATION	
Briefly describe the proposed new operation and/or any change(s) to the facility: General permit application for an existing natural gas production well pad and installation of eight (8) 400 barrel produced fluids tanks which will replace the existing storage tanks at the facility.	
Directions to the facility: From West Union, WV. Head north on Neely Avenue toward Marie St. Turn right at the 1 st cross street onto Marie St/Old U.S. 50 E and continue for 0.2 miles. Turn right onto Davis St/Old U.S 50 E. Turn right onto WV-18S and continue for 0.6 miles. Turn right onto US.50 W and continue for 1.2 miles. Turn left onto Bulldog road and continue for 0.8 miles, the wellpad will be on your left.	
ATTACHMENTS AND SUPPORTING DOCUMENTS	
I have enclosed the following required documents:	
Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22).	
<input type="checkbox"/> Check attached to front of application. <input type="checkbox"/> I wish to pay by electronic transfer. Contact for payment (incl. name and email address): <input checked="" type="checkbox"/> I wish to pay by credit card. Contact for payment (incl. name and email address): R. Alex Bosiljevac, abosiljevac@eqt.com	
<input checked="" type="checkbox"/> \$500 (Construction, Modification, and Relocation) <input type="checkbox"/> \$300 (Class II Administrative Update) <input checked="" type="checkbox"/> \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ, OOOO and/or OOOOa ¹ <input type="checkbox"/> \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH ²	
¹ Only one NSPS fee will apply. ² Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ. <i>NSPS and NESHAP fees apply to new construction or if the source is being modified.</i>	
<input checked="" type="checkbox"/> Responsible Official or Authorized Representative Signature (if applicable)	
<input checked="" type="checkbox"/> Single Source Determination Form (must be completed) – Attachment A	
<input type="checkbox"/> Siting Criteria Waiver (if applicable) – Attachment B	<input checked="" type="checkbox"/> Current Business Certificate – Attachment C
<input checked="" type="checkbox"/> Process Flow Diagram – Attachment D	<input checked="" type="checkbox"/> Process Description – Attachment E
<input checked="" type="checkbox"/> Plot Plan – Attachment F	<input checked="" type="checkbox"/> Area Map – Attachment G
<input checked="" type="checkbox"/> G70-D Section Applicability Form – Attachment H	<input checked="" type="checkbox"/> Emission Units/ERD Table – Attachment I
<input checked="" type="checkbox"/> Fugitive Emissions Summary Sheet – Attachment J	
<input checked="" type="checkbox"/> Gas Well Affected Facility Data Sheet (if applicable) – Attachment K	
<input checked="" type="checkbox"/> Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L	
<input checked="" type="checkbox"/> Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPUs, Heater Treaters, In-Line Heaters if applicable) – Attachment M	
<input type="checkbox"/> Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N	
<input checked="" type="checkbox"/> Tanker Truck/Rail Car Loading Data Sheet (if applicable) – Attachment O	
<input type="checkbox"/> Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P	
<input checked="" type="checkbox"/> Pneumatic Controllers Data Sheet – Attachment Q	
<input checked="" type="checkbox"/> Pneumatic Pump Data Sheet – Attachment R	
<input checked="" type="checkbox"/> Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment S	
<input checked="" type="checkbox"/> Emission Calculations (please be specific and include all calculation methodologies used) – Attachment T	
<input checked="" type="checkbox"/> Facility-wide Emission Summary Sheet(s) – Attachment U	
<input checked="" type="checkbox"/> Class I Legal Advertisement – Attachment V	
<input checked="" type="checkbox"/> One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments	

All attachments must be identified by name, divided into sections, and submitted in order.

ATTACHMENT A

Single Source Determination

ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL 3).

The Source Determination Rule for the oil and gas industry was published in the Federal Register on June 3, 2016 and will become effective on August 2, 2016. EPA defined the term “adjacent” and stated that equipment and activities in the oil and gas sector that are under common control will be considered part of the same source if they are located on the same site or on sites that share equipment and are within ¼ mile of each other.

Is there equipment and activities in the same industrial grouping (defined by SIC code)?

Yes No

Is there equipment and activities under the control of the same person/people?

Yes No

Is there equipment and activities located on the same site or on sites that share equipment and are within ¼ mile of each other?

Yes No

ATTACHMENT B

Siting Criteria Waiver *(Not Applicable)*

ATTACHMENT B - SITING CRITERIA WAIVER - NOT APPLICABLE

If applicable, please complete this form and it must be notarized.

**G70-D General Permit
Siting Criteria Waiver**

WV Division of Air Quality 300' Waiver

I _____ hereby
Print Name
acknowledge and agree that _____ will
General Permit Applicant's Name

construct an emission unit(s) at a natural gas production facility
that will be located within 300' of my dwelling and/or business.

I hereby offer this waiver of siting criteria to the West Virginia Department of Environmental Protection
Division of Air Quality as permission to construct, install and operate in such location.

Signed:

Signature Date

Signature Date

Taken, subscribed and sworn before me this _____ day of

_____, 20____.

My commission expires: _____

SEAL _____
Notary Public

ATTACHMENT C

Business Certificate

ATTACHMENT C – CURRENT BUSINESS CERTIFICATE

If the applicant is a resident of West Virginia, the applicant should provide a copy of the current Business Registration Certificate issued to them from the West Virginia Secretary of State's Office. If the applicant is not a resident of the State of West Virginia, the registrant should provide a copy of the Certificate of Authority/Authority of LLC/Registration. This information is required for all sources to operate a business in West Virginia regardless of whether it is a construction, modification, or administrative update.

If you are a new business to West Virginia and have applied to the West Virginia Secretary of State's Office for a business license, please include a copy of your application.

Please note: Under the West Virginia Bureau of Employment Programs, 96CSR1, the DAQ may not grant, issue, or renew approval of any permit, general permit registration, or Certificate to Operate to any employing unit whose account is in default with the Bureau of Employment Programs Unemployment Compensation Division.

**WEST VIRGINIA
STATE TAX DEPARTMENT
BUSINESS REGISTRATION
CERTIFICATE**

ISSUED TO:
**EQT PRODUCTION COMPANY
625 LIBERTY AVE 1700
PITTSBURGH, PA 15222-3114**

BUSINESS REGISTRATION ACCOUNT NUMBER: 1022-8081

This certificate is issued on: 08/4/2010

*This certificate is issued by
the West Virginia State Tax Commissioner
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered
to conduct business in the State of West Virginia at the location above.*

This certificate is not transferrable and must be displayed at the location for which issued.
This certificate shall be permanent until cessation of the business for which the certificate of registration
was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of
this certificate displayed at every job site within West Virginia.

ATTACHMENT D


Process Flow Diagram

ATTACHMENT D – PROCESS FLOW DIAGRAM

Provide a diagram or schematic that supplements the process description of the operation. The process flow diagram must show all sources, components or facets of the operation in an understandable line sequence of operation. The process flow diagram should include the emission unit ID numbers, the pollution control device ID numbers, and the emission point ID numbers consistent with references in other attachments of the application. For a proposed modification, clearly identify the process areas, emission units, emission points, and/or control devices that will be modified, and specify the nature and extent of the modification.

Use the following guidelines to ensure a complete process flow diagram:

- The process flow diagram shall logically follow the entire process from beginning to end.
- Identify each emission source and air pollution control device with proper and consistent emission unit identification numbers, emission point identification numbers, and control device identification numbers.
- The process flow lines may appear different for clarity. For example, dotted lines may be used for vapor flow and solid lines used for liquid flow and arrows for direction of flow.
- The process flow lines may be color coded. For example: new or modified equipment may be red; old or existing equipment may be blue; different stages of preparation such as raw material may be green; and, finished product or refuse, another color.

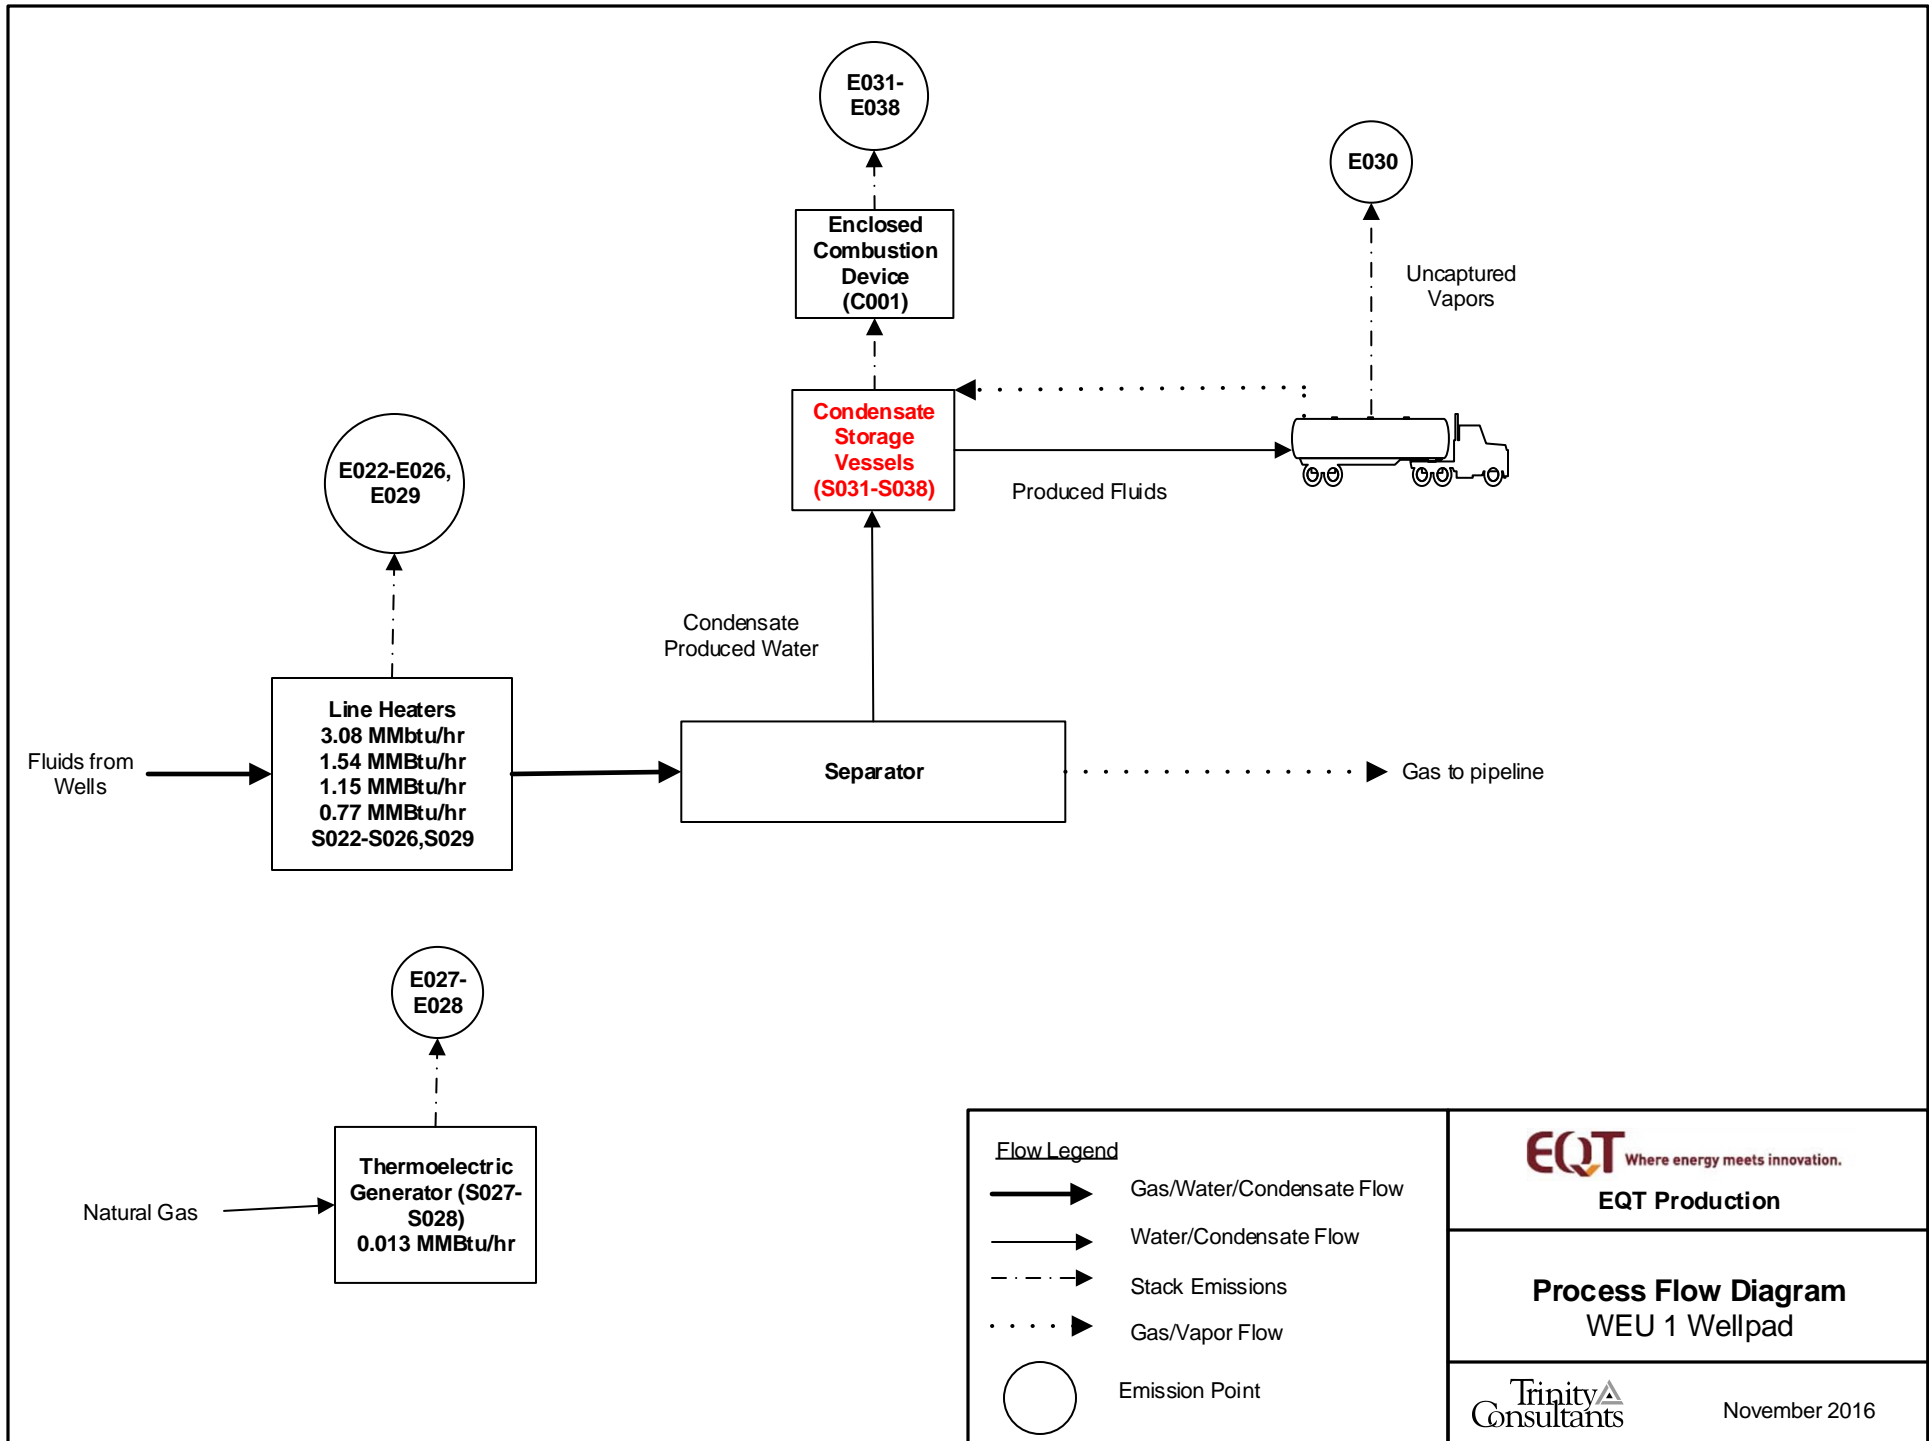

EQT Where energy meets innovation.

EQT Production

Process Flow Diagram
WEU 1 Wellpad

Trinity
Consultants

November 2016

ATTACHMENT E

Process Description

ATTACHMENT E – PROCESS DESCRIPTION

Provide a detailed written description of the operation for which the applicant is seeking a permit. The process description is used in conjunction with the process flow diagram to provide the reviewing engineer a complete understanding of the activity at the operation. Describe in detail and order the complete process operation.

Use the following guidelines to ensure a complete Process Description:

- The process flow diagram should be prepared first and used as a guide when preparing the process description. The written description shall follow the logical order of the process flow diagram.
- All emission sources, emission points, and air pollution control devices must be included in the process description.
- When modifications are proposed, describe the modifications and the effect the changes will have on the emission sources, emission points, control devices and the potential emissions.
- Proper emission source ID numbers must be used consistently in the process description, the process flow diagram, the emissions calculations, and the emissions summary information provided.
- Include any additional information that may facilitate the reviewers understanding of the process operation.

The process description is required for all sources regardless of whether it is a construction, modification, or administrative update.

ATTACHMENT E - PROCESS DESCRIPTION

EQT is submitting this application to permit the installation of eight (8) 400 bbl condensate tanks to replace the existing twenty-one (21) 210 bbl storage tanks at the wellpad. The WEU-1 wellpad is currently authorized to operate under R13-3050A.

The WEU-1 wellpad consists of seven (7) wells, each with the basic operation. The incoming gas/liquid stream from the underground well will pass through a line heater (S022-S026, S029) to raise/maintain temperature of the stream and prevent hydrate formation. The stream will then pass through a high pressure separator, which will separate gas (natural gas from the separator is sent to the sales line) from liquids (condensate and produced water). The liquids are then transferred to the produced fluids tank (S001-S021)

Emissions from the storage vessels are controlled by a single enclosed combustor (C001). Once the tanks are filled, the contents are loaded into trucks for transport (S030). EQT utilizes vapor balancing in the truck loading operations, which means the vapors displaced by the filling of tanker trucks are routed back into the battery of tanks and ultimately to the combustor. Facility electricity is provided by a pair of thermoelectric generators (S027-S028) respectively.

A process flow diagram is included as Attachment D.

ATTACHMENT F

Plot Plan

ATTACHMENT F – PLOT PLAN

Provide an accurately scaled and detailed Plot Plan showing the locations of all emission units, emission points, and air pollution control devices. Show all emission units, affected facilities, enclosures, buildings and plant entrances and exits from the nearest public road(s) as appropriate. Note height, width and length of proposed or existing buildings and structures.


A scale between 1"=10' and 1"=200' should be used with the determining factor being the level of detail necessary to show operation or plant areas, affected facilities, emission unit sources, transfer points, etc. An overall small scale plot plan (e.g., 1"=300') should be submitted in addition to larger scale plot plans for process or activity areas (e.g., 1"=50') if the plant is too large to allow adequate detail on a single plot plan. Process or activity areas may be grouped for the enlargements as long as sufficient detail is shown.

Use the following guidelines to ensure a complete Plot Plan:


- Facility name
- Company name
- Company facility ID number (for existing facilities)
- Plot scale, north arrow, date drawn, and submittal date.
- Facility boundary lines
- Base elevation
- Lat/Long reference coordinates from the area map and corresponding reference point elevation
- Location of all point sources labeled with proper and consistent source identification numbers

This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Production Units w/
In-Line Heaters
(5)
S022-S026, S029


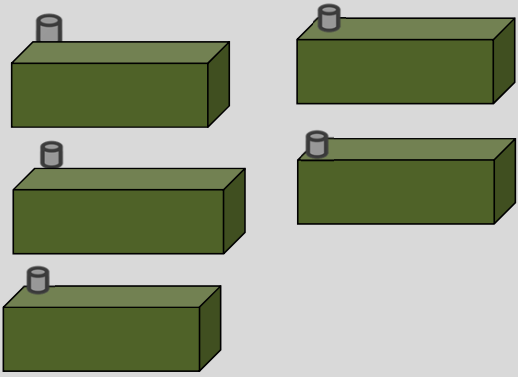


Thermoelectric
Generators
(2)
S027-S28



**NOTE: This diagram is not to scale.
Locations and distances between surface
equipment are not known at this time.**

Wellheads (7)

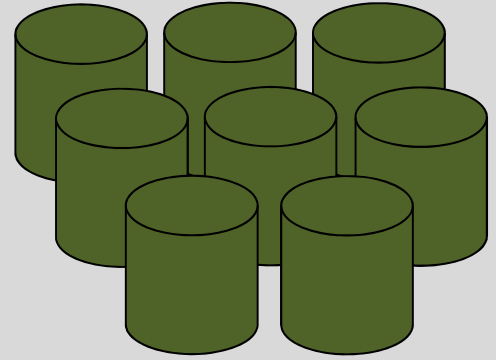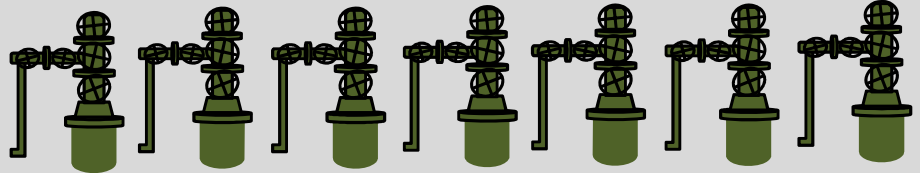

Produced Fluid Tanks
400 bbl
(8)
S031-S038

Combustor
11.66 MMBtu/hr
C001

Entrance to WEU 1 pad

ATTACHMENT G

Area Map

ATTACHMENT G – AREA MAP

Provide an Area Map showing the current or proposed location of the operation. On this map, identify plant or operation property lines, access roads and any adjacent dwelling, business, public building, school, church, cemetery, community or institutional building or public park within a 300' boundary circle of the collective emission units.

Please provide a 300' boundary circle on the map surrounding the proposed emission units collectively.

This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

ATTACHMENT G



Figure 1 - Map of WEU-1 Location

Note – Ring represents 300 ft radius around wellpad equipment.

UTM Northing (KM)	4,346.309
UTM Easting (KM)	519.066
Elevation (m)	344

ATTACHMENT H
Applicability Form

ATTACHMENT H – G70-D SECTION APPLICABILITY FORM

**General Permit G70-D Registration
Section Applicability Form**

General Permit G70-D was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, pneumatic pumps, reciprocating internal combustion engines (RICEs), tank truck/rail car loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-D allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

GENERAL PERMIT G70-D APPLICABLE SECTIONS	
<input checked="" type="checkbox"/> Section 5.0	Gas and Oil Well Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water ¹
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input checked="" type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO/OOOOa and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input type="checkbox"/> Section 11.0	Pneumatic Pump Affected Facility (NSPS, Subpart OOOOa)
<input type="checkbox"/> Section 12.0	Fugitive Emissions GHG and VOC Standards (NSPS, Subpart OOOOa)
<input type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck/Rail Car Loading ²
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units ³

- 1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subparts OOOO or OOOOa control requirements or the applicable control device requirements of Section 8.
- 2 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.
- 3 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

ATTACHMENT I

Emission Units Table

ATTACHMENT I – EMISSION UNITS / EMISSION REDUCTION DEVICES (ERD) TABLE

Include ALL emission units and air pollution control devices/ERDs that will be part of this permit application review. Do not include fugitive emission sources in this table. Deminimis storage tanks shall be listed in the Attachment L table. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Emission Unit ID ¹	Emission Point ID ²	Emission Unit Description	Year Installed	Manufac. Date ³	Design Capacity	Type ⁴ and Date of Change	Control Device(s) ⁵	ERD(s) ⁶
S001	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S002	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S003	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S004	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S005	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S006	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S007	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S008	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S009	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S010	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S011	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S012	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S013	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S014	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S015	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S016	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S017	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S018	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S019	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S020	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S021	C001	Produced Fluid Storage Tank	2011	2011	210 bbl	Existing – To be removed	C001	--
S022	E022	Line Heater	2011	2011	3.08 MMBtu/hr	Existing; No change	Existing; No change	--
S023	E023	Line Heater	2011	2011	1.54 MMBtu/hr	Existing; No change	Existing; No change	--
S024	E024	Line Heater	2011	2011	1.15 MMBtu/hr	Existing; No change	Existing; No change	--
S025	E025	Line Heater	2011	2011	0.77 MMBtu/hr	Existing; No change	Existing; No change	--
S026	E026	Line Heater	2011	2011	0.77 MMBtu/hr	Existing; No change	Existing; No change	--

S027	E027	Thermoelectric Generator	2011	2011	0.013 MMBtu/hr	Existing; No change	None	--
S028	E028	Thermoelectric Generator	2011	2011	0.013 MMBtu/hr	Existing; No change	None	--
S029	E029	Line Heater	2011	2011	1.54 MMBtu/hr	Existing; No change	Existing; No change	--
S030	E030 (Uncaptured) C001 (Controlled, Captured)	Uncaptured Liquid Loading	2011/2016	2011/2016	2,851,380	Modified; Increased Throughput	C001	--
C001	C001	Combustor	2011	2011	11.66 MMBtu/hr	Existing; No change	N/A	--
S031- S038	C001	Eight (8) Produced Fluids Tanks	TBD	TBD	400 bbl (each)	New	C001	

¹ For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation.

² For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

³ When required by rule

⁴ New, modification, removal, existing

⁵ For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

⁶ For ERDs use the following numbering system: 1D, 2D, 3D,... or other appropriate designation.

ATTACHMENT J

Fugitive Emissions Summary Sheet

ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions, etc.
Use extra pages for each associated source or equipment if necessary.

Source/Equipment: Fugitive Emissions

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections	<input type="checkbox"/> Infrared (FLIR) cameras	<input checked="" type="checkbox"/> Other (please describe) Will satisfy condition 12.1.1 of the G70-D	<input type="checkbox"/> None required		
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)		
					VOC	HAP	GHG (methane, CO _{2e})
Pumps	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	12	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input checked="" type="checkbox"/> Liquid <input type="checkbox"/> Both	2.31	0.10	0.45
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	347	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	2.85	0.12	34.97
Safety Relief Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	25	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	3.58	0.15	3.74
Open Ended Lines	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	24	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	0.06	2.3E-03	5.47
Sampling Connections	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	N/A	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	--	--	--
Connections (Not sampling)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	1,520	U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (EPA-453/R-95-017, 1995).	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	3.83	0.16	17.04
Compressors	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	N/A	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	--	--	--
Flanges	<input type="checkbox"/> Yes <input type="checkbox"/> No	---	(included in connections)	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	--	--	--
Other ¹	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	35	40 CFR 98 Subpart W	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	5.19	0.22	261.64

¹ Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e.g. pigging operations, equipment blowdowns, pneumatic controllers, etc.):
Pneumatic Controller count is 'Other' category. An estimate of Miscellaneous Gas Venting emissions are included in the Emission Calculations and serve to include such sources as compressor venting, pigging, vessel blowdowns and other sources.

Please indicate if there are any closed vent bypasses (include component): N/A

Specify all equipment used in the closed vent system (e.g. VRU, ERD, thief hatches, tanker truck/rail car loading, etc.) N/A

ATTACHMENT K

Gas Well Data Sheet

ATTACHMENT K – GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

API Number	Date of Flowback	Date of Well Completion	Green Completion and/or Combustion Device	Subject to OOOO or OOOOa?
47-017-05910	4/26/2011	3/19/2011	Green	No
47-017-05907	4/28/2011	3/22/2011	Green	No
47-017-05911	4/18/2011	3/17/2011	Green	No
47-017-05909	4/26/2011	3/14/2011	Green	No
47-017-05958	4/18/2011	3/11/2011	Green	No
47-017-05959	4/22/2011	3/13/2011	Green	No
47-017-05908	4/22/2011	3/15/2011	Green	No

Note: If future wells are planned and no API number is available please list as PLANNED. If there are existing wells that commenced construction prior to August 23, 2011, please acknowledge as existing.

This is the same API (American Petroleum Institute) well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).

Every oil and gas well permitted in West Virginia since 1929 has been issued an API number. This API is used by agencies to identify and track oil and gas wells.

The API number has the following format: 047-001-00001

Where,

- 047 = State code. The state code for WV is 047.*
- 001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).*
- 00001= Well number. Each well will have a unique well number.*

ATTACHMENT L

Storage Vessel Data Sheet

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water. (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name WEU 1 Wellpad	2. Tank Name Produced Fluid Tanks (water and condensate)
3. Emission Unit ID number S031-S038	4. Emission Point ID number C001
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> N/A (new tanks) Was the tank manufactured after August 23, 2011 and on or before September 18, 2015? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Was the tank manufactured after September 18, 2015? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i>	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

TANK INFORMATION

8. Design Capacity (<i>specify barrels or gallons</i>). Use the internal cross-sectional area multiplied by internal height. 400 bbls	
9A. Tank Internal Diameter (ft.) 12	9B. Tank Internal Height (ft.) 20
10A. Maximum Liquid Height (ft.) 20	10B. Average Liquid Height (ft.) 10
11A. Maximum Vapor Space Height (ft.) 20	11B. Average Vapor Space Height (ft.) 10
12. Nominal Capacity (<i>specify barrels or gallons</i>). This is also known as “working volume”. 400 bbls	
13A. Maximum annual throughput (gal/yr) See attached emissions calculations	13B. Maximum daily throughput (gal/day) See attached emissions calculations
14. Number of tank turnovers per year See attached emissions calculations	15. Maximum tank fill rate (gal/min) See attached emissions calculations
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input checked="" type="checkbox"/> vertical <input type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical <input type="checkbox"/> Other (describe)	

PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply: <input type="checkbox"/> Does Not Apply <input type="checkbox"/> Rupture Disc (psig) <input type="checkbox"/> Inert Gas Blanket of _____ <input type="checkbox"/> Carbon Adsorption ¹ <input checked="" type="checkbox"/> Vent to Vapor Combustion Device ¹ (vapor combustors, flares, thermal oxidizers, enclosed combustors) <input checked="" type="checkbox"/> Conservation Vent (psig) <input type="checkbox"/> Condenser ¹ 0.5 oz Vacuum Setting 12.5 oz Pressure Setting <input checked="" type="checkbox"/> Emergency Relief Valve (psig) Vacuum Setting 14.4 oz Pressure Setting <input type="checkbox"/> Thief Hatch Weighted <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No – Cashco Lockdown Hatch ¹ Complete appropriate Air Pollution Control Device Sheet									
20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method ¹
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See attached Emissions Calculation for all values									

¹ EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

TANK CONSTRUCTION AND OPERATION INFORMATION

21. Tank Shell Construction: <input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded			
21A. Shell Color: Green	21B. Roof Color: Green	21C. Year Last Painted: New	
22. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?	
23. Operating Pressure Range (psig): Must be listed for tanks using VRUs with closed vent system.			
24. Is the tank a Vertical Fixed Roof Tank ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft): 0.06	
25. Complete item 25 for Floating Roof Tanks <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type (<i>check one</i>): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (<i>check one</i>) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
27. Closed Vent System with VRU? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
28. Closed Vent System with Enclosed Combustor? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
SITE INFORMATION - Not Applicable: Tank calculations performed using ProMax software			
29. Provide the city and state on which the data in this section are based:			
30. Daily Avg. Ambient Temperature (°F):		31. Annual Avg. Maximum Temperature (°F):	
32. Annual Avg. Minimum Temperature (°F):		33. Avg. Wind Speed (mph):	
34. Annual Avg. Solar Insulation Factor (BTU/ft ² -day):		35. Atmospheric Pressure (psia):	
LIQUID INFORMATION - Not Applicable: Tank calculations performed using ProMax software			
36. Avg. daily temperature range of bulk liquid (°F):		36A. Minimum (°F):	36B. Maximum (°F):
37. Avg. operating pressure range of tank (psig):		37A. Minimum (psig):	37B. Maximum (psig):
38A. Minimum liquid surface temperature (°F):		38B. Corresponding vapor pressure (psia):	
39A. Avg. liquid surface temperature (°F):		39B. Corresponding vapor pressure (psia):	
40A. Maximum liquid surface temperature (°F):		40B. Corresponding vapor pressure (psia):	
41. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
41A. Material name and composition:			
41B. CAS number:			
41C. Liquid density (lb/gal):			
41D. Liquid molecular weight (lb/lb-mole):			
41E. Vapor molecular weight (lb/lb-mole):			
41F. Maximum true vapor pressure (psia):			
41G. Maximum Reid vapor pressure (psia):			
41H. Months Storage per year. From: To:			
42. Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations.			

STORAGE TANK DATA TABLE

List all deminimis storage tanks (i.e. lube oil, glycol, diesel etc.)

Source ID # ¹	Status ²	Content ³	Volume ⁴
Not Applicable			

1. Enter the appropriate Source Identification Numbers (Source ID #) for each storage tank located at the well site. Tanks should be designated T01, T02, T03, etc.
2. Enter storage tank Status using the following:
 - EXIST Existing Equipment
 - NEW Installation of New Equipment
 - REM Equipment Removed
3. Enter storage tank content such as condensate, pipeline liquids, glycol (DEG or TEG), lube oil, diesel, mercaptan etc.
4. Enter the maximum design storage tank volume in gallons.

ATTACHMENT M

Heaters Data Sheet

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO
40CFR60 SUBPART DC
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID# ¹	Emission Point ID# ²	Emission Unit Description (manufacturer, model #)	Year Installed/Modified	Type ³ and Date of Change	Maximum Design Heat Input (MMBTU/hr) ⁴	Fuel Heating Value (BTU/scf) ⁵
S022	E022	Line Heater	2011	Existing; No Change	3.08	1,050
S023	E023	Line Heater	2011	Existing; No Change	1.54	1,050
S029	E029	Line Heater	2011	Existing; No Change	1.54	1,050
S024	E024	Line Heater	2011	Existing; No Change	1.15	1,050
S025	E025	Line Heater	2011	Existing; No Change	0.77	1,050
S026	E026	Line Heater	2011	Existing; No Change	0.77	1,050
S027	E027	Thermoelectric Generator	2011	Existing; No Change	0.013	1,193
S028	E028	Thermoelectric Generator	2011	Existing; No Change	0.013	1,193

¹ Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.

² Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

³ New, modification, removal

⁴ Enter design heat input capacity in MMBtu/hr.

⁵ Enter the fuel heating value in BTU/standard cubic foot.

ATTACHMENT N

Engines Data Sheet *(Not Applicable)*

ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET
NOT APPLICABLE

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*

Emission Unit ID# ¹							
Engine Manufacturer/Model							
Manufacturers Rated bhp/rpm							
Source Status ²							
Date Installed/ Modified/Removed/Relocated ³							
Engine Manufactured /Reconstruction Date ⁴							
Check all applicable Federal Rules for the engine (include EPA Certificate of Conformity if applicable) ⁵		<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources	<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources	<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources			
Engine Type ⁶							
APCD Type ⁷							
Fuel Type ⁸							
H ₂ S (gr/100 scf)							
Operating bhp/rpm							
BSFC (BTU/bhp-hr)							
Hourly Fuel Throughput		ft ³ /hr gal/hr		ft ³ /hr gal/hr		ft ³ /hr gal/hr	
Annual Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)		MMft ³ /yr gal/yr		MMft ³ /yr gal/yr		MMft ³ /yr gal/yr	
Fuel Usage or Hours of Operation Metered		Yes <input type="checkbox"/> No <input type="checkbox"/>		Yes <input type="checkbox"/> No <input type="checkbox"/>		Yes <input type="checkbox"/> No <input type="checkbox"/>	
Calculation Methodology ⁹	Pollutant ¹⁰	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ¹¹	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ¹¹	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ¹¹
	NO _x						
	CO						
	VOC						
	SO ₂						
	PM ₁₀						
	Formaldehyde						
	Total HAPs						
	GHG (CO ₂ e)						

1 Enter the appropriate Source Identification Number for each natural gas-fueled reciprocating internal combustion engine/generator engine located at the well site. Multiple engines should be designated CE-1, CE-2, CE-3 etc. Generator engines should be designated GE-1, GE-2, GE-3 etc. Microturbine generator engines should be designated MT-1, MT-2, MT-3 etc. If more than three (3) engines exist, please use additional sheets.

2 Enter the Source Status using the following codes:

- | | | | |
|----|---|----|------------------|
| NS | Construction of New Source (installation) | ES | Existing Source |
| MS | Modification of Existing Source | RS | Relocated Source |

REM Removal of Source

- 3 Enter the date (or anticipated date) of the engine's installation (construction of source), modification, relocation or removal.
- 4 Enter the date that the engine was manufactured, modified or reconstructed.
- 5 Is the engine a certified stationary spark ignition internal combustion engine according to 40CFR60 Subpart IIII/JJJJ? If so, the engine and control device must be operated and maintained in accordance with the manufacturer's emission-related written instructions. You must keep records of conducted maintenance to demonstrate compliance, but no performance testing is required. If the certified engine is not operated and maintained in accordance with the manufacturer's emission-related written instructions, the engine will be considered a non-certified engine and you must demonstrate compliance as appropriate.

Provide a manufacturer's data sheet for all engines being registered.

- 6 Enter the Engine Type designation(s) using the following codes:

2SLB Two Stroke Lean Burn	4SRB Four Stroke Rich Burn
4SLB Four Stroke Lean Burn	
- 7 Enter the Air Pollution Control Device (APCD) type designation(s) using the following codes:

A/F Air/Fuel Ratio	IR Ignition Retard
HEIS High Energy Ignition System	SIPC Screw-in Precombustion Chambers
PSC Prestratified Charge	LEC Low Emission Combustion
NSCR Rich Burn & Non-Selective Catalytic Reduction	OxCat Oxidation Catalyst
SCR Lean Burn & Selective Catalytic Reduction	
- 8 Enter the Fuel Type using the following codes:

PQ Pipeline Quality Natural Gas	RG Raw Natural Gas /Production Gas	D Diesel
---------------------------------	------------------------------------	----------
- 9 Enter the Potential Emissions Data Reference designation using the following codes. Attach all reference data used.

MD Manufacturer's Data	AP AP-42	
GR GRI-HAPCalc™	OT Other	(please list)
- 10 Enter each engine's Potential to Emit (PTE) for the listed regulated pollutants in pounds per hour and tons per year. PTE shall be calculated at manufacturer's rated brake horsepower and may reflect reduction efficiencies of listed Air Pollution Control Devices. Emergency generator engines may use 500 hours of operation when calculating PTE. PTE data from this data sheet shall be incorporated in the *Emissions Summary Sheet*.
- 11 PTE for engines shall be calculated from manufacturer's data unless unavailable.

**Engine Air Pollution Control Device NOT APPLICABLE
(Emission Unit ID# , use extra pages as necessary)**

Air Pollution Control Device Manufacturer's Data Sheet included?
Yes No

NSCR SCR Oxidation Catalyst

Provide details of process control used for proper mixing/control of reducing agent with gas stream:

Manufacturer:

Model #:

Design Operating Temperature:

Design gas volume: scfm

Service life of catalyst:

Provide manufacturer data? Yes No

Volume of gas handled: acfm at °F

Operating temperature range for NSCR/Ox Cat:
From °F to °F

Reducing agent used, if any:

Ammonia slip (ppm):

Pressure drop against catalyst bed (delta P):

Provide description of warning/alarm system that protects unit when operation is not meeting design conditions:

Is temperature and pressure drop of catalyst required to be monitored per 40CFR63 Subpart ZZZZ?

Yes No

How often is catalyst recommended or required to be replaced (hours of operation)?

How often is performance test required?

Initial

Annual

Every 8,760 hours of operation

Field Testing Required

No performance test required. If so, why (please list any maintenance required and the applicable sections in NSPS/GACT,

ATTACHMENT O

Truck Loading Data Sheet

ATTACHMENT O – TANKER TRUCK/RAIL CAR LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks/rail cars. Use extra pages if necessary.

Truck/Rail Car Loadout Collection Efficiencies

The following applicable capture efficiencies of a truck/rail car loadout are allowed:

- For tanker trucks/rail cars passing the MACT level annual leak test – 99.2%
- For tanker trucks/rail cars passing the NSPS level annual leak test – 98.7%
- For tanker trucks/rail cars not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking/rail car company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: S030	Emission Point ID#: E030	Year Installed/Modified: 2011/2016		
Emission Unit Description: Uncaptured losses from loading of produced fluids into tanker trucks				
Loading Area Data				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks/rail cars loading at one (1) time: 1		
Are tanker trucks/rail cars pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. N/A				
Are any of the following truck/rail car loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck/rail car passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car passing a NSPS level annual leak test? <input checked="" type="checkbox"/> Closed System to tanker truck/rail car not passing an annual leak test and has vapor return?				
Projected Maximum Operating Schedule (for rack or transfer point as a whole)				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	As Needed	As Needed	As Needed	As Needed
Days/week	As Needed	As Needed	As Needed	As Needed
Bulk Liquid Data (use extra pages as necessary)				
Liquid Name	Produced Fluids			
Max. Daily Throughput (1000 gal/day)	See attached emissions calculations for all throughput values			
Max. Annual Throughput (1000 gal/yr)	See attached emissions calculations for all throughput values			
Loading Method ¹	SP			
Max. Fill Rate (gal/min)	Varies			
Average Fill Time (min/loading)	Varies			
Max. Bulk Liquid Temperature (°F)	See ProMax results			
True Vapor Pressure ²	See ProMax results			
Cargo Vessel Condition ³	U			
Control Equipment or Method ⁴	VB			
Max. Collection Efficiency (%)	70%			

Max. Control Efficiency (%)		95%		
Max.VOC Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Max.HAP Emission Rate	Loading (lb/hr)	See attached emission calculations for breakdown		
	Annual (ton/yr)	See attached emission calculations for breakdown		
Estimation Method ⁵		EPA via ProMax		

- 1 BF Bottom Fill SP Splash Fill SUB Submerged Fill
- 2 At maximum bulk liquid temperature
- 3 B Ballasted Vessel C Cleaned U Uncleaned (dedicated service)
- O Other (describe)
- 4 List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)
- CA Carbon Adsorption VB Dedicated Vapor Balance (closed system)
- ECD Enclosed Combustion Device F Flare
- TO Thermal Oxidization or Incineration
- 5 EPA EPA Emission Factor in AP-42 MB Material Balance
- TM Test Measurement based upon test data submittal O Other (describe)

ATTACHMENT P

Glycol Dehydrator Data Sheet *(Not Applicable)*

**ATTACHMENT P – GLYCOL DEHYDRATION UNIT
DATA SHEET - NOT APPLICABLE**

Complete this data sheet for each Glycol Dehydration Unit, Reboiler, Flash Tank and/or Regenerator at the facility. Include gas sample analysis and GRI- GLYCalc™ input and aggregate report. Use extra pages if necessary.

Manufacturer:		Model:			
Max. Dry Gas Flow Rate: mmscf/day		Reboiler Design Heat Input: MMBTU/hr			
Design Type: <input type="checkbox"/> TEG <input type="checkbox"/> DEG <input type="checkbox"/> EG		Source Status ¹ :			
Date Installed/Modified/Removed ² :		Regenerator Still Vent APCD/ERD ³ :			
Control Device/ERD ID# ³ :		Fuel HV (BTU/scf):			
H ₂ S Content (gr/100 scf):		Operation (hours/year):			
Pump Rate (gpm):					
Water Content (wt %) in: Wet Gas:		Dry Gas:			
Is the glycol dehydration unit exempt from 40CFR63 Section 764(d)? <input type="checkbox"/> Yes <input type="checkbox"/> No: If Yes, answer the following:					
The actual annual average flowrate of natural gas to the glycol dehydration unit is less than 85 thousand standard cubic meters per day, as determined by the procedures specified in §63.772(b)(1) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
The actual average emissions of benzene from the glycol dehydration unit process vent to the atmosphere are less than 0.90 megagram per year (1 ton per year), as determined by the procedures specified in §63.772(b)(2) of this subpart. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is the glycol dehydration unit located within an Urbanized Area (UA) or Urban Cluster (UC)? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Is a lean glycol pump optimization plan being utilized? <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler. <input type="checkbox"/> Yes <input type="checkbox"/> No					
Recycling the glycol dehydration unit back to the flame zone of the reboiler and mixed with fuel. <input type="checkbox"/> Yes <input type="checkbox"/> No					
What happens when temperature controller shuts off fuel to the reboiler? <input type="checkbox"/> Still vent emissions to the atmosphere. <input type="checkbox"/> Still vent emissions stopped with valve. <input type="checkbox"/> Still vent emissions to glow plug.					
Please indicate if the following equipment is present. <input type="checkbox"/> Flash Tank <input type="checkbox"/> Burner management system that continuously burns condenser or flash tank vapors					
Control Device Technical Data					
Pollutants Controlled		Manufacturer's Guaranteed Control Efficiency (%)			
Emissions Data					
Emission Unit ID / Emission Point ID ⁴	Description	Calculation Methodology ⁵	PTE ⁶	Controlled Maximum Hourly Emissions (lb/hr)	Controlled Maximum Annual Emissions (tpy)
	Reboiler Vent		NO _x		
			CO		
			VOC		
			SO ₂		
			PM ₁₀		
			GHG (CO ₂ e)		
		GRI-GlyCalc™	VOC		

	Glycol Regenerator Still Vent	GRI-GlyCalc™	Benzene		
		GRI-GlyCalc™	Toluene		
		GRI-GlyCalc™	Ethylbenzene		
		GRI-GlyCalc™	Xylenes		
		GRI-GlyCalc™	n-Hexane		
	Glycol Flash Tank	GRI-GlyCalc™	VOC		
		GRI-GlyCalc™	Benzene		
		GRI-GlyCalc™	Toluene		
		GRI-GlyCalc™	Ethylbenzene		
		GRI-GlyCalc™	Xylenes		
		GRI-GlyCalc™	n-Hexane		

- 1 Enter the Source Status using the following codes:
NS Construction of New Source ES Existing Source
MS Modification of Existing Source
- 2 Enter the date (or anticipated date) of the glycol dehydration unit's installation (construction of source), modification or removal.
- 3 Enter the Air Pollution Control Device (APCD)/Emission Reduction Device (ERD) type designation using the following codes and the device ID number:
NA None CD Condenser FL Flare
CC Condenser/Combustion Combination TO Thermal Oxidizer O Other (please list)
- 4 Enter the appropriate Emission Unit ID Numbers and Emission Point ID Numbers for the glycol dehydration unit reboiler vent and glycol regenerator still vent. The glycol dehydration unit reboiler vent and glycol regenerator still vent should be designated RBV-1 and RSV-1, respectively. If the well site incorporates multiple glycol dehydration units, a Glycol Dehydration Emission Unit Data Sheet shall be completed for each, using Source Identification RBV-2 and RSV-2, RBV-3 and RSV-3, etc.
- 5 Enter the Potential Emissions Data Reference designation using the following codes:
MD Manufacturer's Data AP AP-42
GR GRI-GLYCalc™ OT Other (please list)
- 6 Enter the Reboiler Vent and Glycol Regenerator Still Vent Potential to Emit (PTE) for the listed regulated pollutants in lbs per hour and tons per year. The Glycol Regenerator Still Vent potential emissions may be determined using the most recent version of the thermodynamic software model GRI-GLYCalc™ (Radian International LLC & Gas Research Institute). **Attach all referenced Potential Emissions Data (or calculations) and the GRI-GLYCalc™ Aggregate Calculations Report (shall include emissions reports, equipment reports, and stream reports) to this Glycol Dehydration Emission Unit Data Sheet(s). Backup pumps do not have to be considered as operating for purposes of PTE.** This PTE data shall be incorporated in the Emissions Summary Sheet.

ATTACHMENT Q

Pneumatic Controller Data Sheet

**ATTACHMENT Q – PNEUMATIC CONTROLLERS
DATA SHEET**

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list approximate number.

ATTACHMENT R

Pneumatic Pump Data Sheet

**ATTACHMENT R – PNEUMATIC PUMP
DATA SHEET**

**Are there any natural gas-driven diaphragm pumps located at a well site that
commenced construction, modification or reconstruction after September 18,
2015?**

Yes No

Please list.

Source ID #	Date	Pump Make/Model	Pump Size

ATTACHMENT S

Air Pollution Control Device Data Sheet

**ATTACHMENT S – AIR POLLUTION CONTROL DEVICE /
EMISSION REDUCTION DEVICE SHEETS**

Complete the applicable air pollution control device sheets for each flare, vapor combustor, thermal oxidizer, condenser, adsorption system, vapor recovery unit, BTEX Eliminator, Reboiler with and without Glow Plug, etc. at the facility. Use extra pages if necessary.

Emissions calculations must be performed using the most conservative control device efficiency.

The following five (5) rows are only to be completed if registering an alternative air pollution control device.

Emission Unit ID:	Make/Model:
Primary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No
Secondary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No

VAPOR COMBUSTION (Including Enclosed Combustors)

General Information

Control Device ID#: C001	Installation Date: 2010 <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Maximum Rated Total Flow Capacity ~7,860 scfh ~188,380 scfd	Maximum Design Heat Input (from mfg. spec sheet) 11.66 MMBTU/hr	Design Heat Content 1,500 BTU/scf

Control Device Information

Type of Vapor Combustion Control?		
<input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Thermal Oxidizer	<input type="checkbox"/> Elevated Flare	<input type="checkbox"/> Ground Flare
Manufacturer: Leed Fabrication Model: Enclosed Combustor 48''	Hours of operation per year? 8760	

List the emission units whose emissions are controlled by this vapor control device (Emission Point ID# E030, E031-E038)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
S031-S038	Produced Fluid Tanks		
S030	Liquid Loading		

If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.

Assist Type (Flares only)	Flare Height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input checked="" type="checkbox"/> Non	~25 feet	~4 feet	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Provide determination.

Waste Gas Information

Maximum Waste Gas Flow Rate 130 (scfm)	Heat Value of Waste Gas Stream Varies BTU/ft ³	Exit Velocity of the Emissions Stream Varies (ft/s)
---	--	--

Provide an attachment with the characteristics of the waste gas stream to be burned.

Pilot Gas Information

Number of Pilot Lights 1	Fuel Flow Rate to Pilot Flame per Pilot 50 scfh	Heat Input per Pilot 0.05 BTU/hr	Will automatic re-ignition be used? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
-----------------------------	---	-------------------------------------	---

If automatic re-ignition is used, please describe the method.

Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	If Yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input type="checkbox"/> Other:
---	---

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate).* See attached information on unit.

Additional information attached? Yes No
Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11(b) and performance testing.

CONDENSER – NOT APPLICABLE

General Information

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Manufacturer:	Model:	Control Device Name:
Control Efficiency (%):		
Manufacturer's required temperature range for control efficiency. °F		
Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:		
Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.		
Additional information attached? <input type="checkbox"/> Yes <input type="checkbox"/> No Please attach copies of manufacturer's data sheets.		
Is condenser routed to a secondary APCD or ERD? <input type="checkbox"/> Yes <input type="checkbox"/> No		

ADSORPTION SYSTEM – NOT APPLICABLE

General Information

Control Device ID#:	Installation Date: <input type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Manufacturer:	Model:	Control Device Name:
Design Inlet Volume: scfm	Adsorbent charge per adsorber vessel and number of adsorber vessels:	
Length of Mass Transfer Zone supplied by the manufacturer:	Adsorber diameter: ft	Adsorber area: ft ²
Adsorbent type and physical properties:	Overall Control Efficiency (%):	
Working Capacity of Adsorbent (%):		

Operating Parameters

Inlet volume: scfm @ °F	
Adsorption time per adsorption bed (life expectancy):	Breakthrough Capacity (lbs of VOC/100 lbs of adsorbent):
Temperature range of carbon bed adsorber. °F - °F	

Control Device Technical Data

Pollutants Controlled	Manufacturer's Guaranteed Control Efficiency (%)

Describe the warning and/or alarm system that protects against operation when unit is not meeting the design requirements:

Has the control device been tested by the manufacturer and certified?

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty.

Additional information attached? Yes No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

VAPOR RECOVERY UNIT – NOT APPLICABLE

General Information

Emission Unit ID#:

Installation Date:

New Modified Relocated

Device Information

Manufacturer:

Model:

List the emission units whose emissions are controlled by this vapor recovery unit (Emission Point ID#)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description

If this vapor recovery unit controls emissions from more than six (6) emission units, please attach additional pages.

Additional information attached? Yes No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

The registrant may claim a capture and control efficiency of 95 % (which accounts for 5% downtime) for the vapor recovery unit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup flare that meet the requirements of Section 8.1.2 of this general permit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup VRU.



**Environmental Control Equipment
Data Sheet**

Item/Tag No.:		Page	1	of	2
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Client:		Supplier:	LEED FABRICATION		
Site:		Model No.:	L30-0011-00		
Unit/Lease:		Remarks:			

GENERAL

1 Design Code:		NDE:	LEED Fabrication Standards		
2 Service:		Customer Specs:	<input type="checkbox"/> Yes		
3 Description:	Standard Dual Stage 48 High Efficiency Combustor		<input checked="" type="checkbox"/> No		

PROCESS DATA

Gas Composition:	mol %	Process Conditions:		
		Variable	Value	Units
4 Methane		Flow Rate	Up to 140	Mscfd
5 Ethane		Pressure	Up to 12	oz/in2
6 Propane		Temperature		°F
7 I-Butane		Molecular Weight		
8 n-Butane		Process/Waste Stream	<input checked="" type="checkbox"/> Gas	<input type="checkbox"/> Liquid
9 I-Pentane		Detailed Process Description / Process Notes:		
10 n-Pentane		1. Turndown 10:1. Based on an expected normal operating rate indicated above.		
11 n-Hexane		2. DRE: 98 % operating at design conditions		
12 CO2		3. Burner Pressure Drop: Min. 0.10 oz/in2		
13 N2				
14 Helium				
15 H2O				
16 C7				
17 C8				
18 C9				
19 C10				
20 C11+				
21 TOTAL				
Other Components:	PPMV	Available Utilities:		
22 H2S		Fuel / Pilot Gas	Min. 30psig Natural Gas /Propane 40-50 SCFH	
23 Benzene		Instrument Air	NA	
24 Toluene		Power	120 V / 60 Hz or Solar Power	
25 E-Benzene		Steam	NA	
26 Xylene		Purge Gas		

DESIGN DATA

27 Ambient Temperatures:		Noise Performance Requirements:	Under 85 dBA	
28 Low, °F	-20	Structural Design Code:		
29 High, °F	120	Wind Design Code:	ASCE	
30 Design Conditions:	Pressure/Temperature			
31 Max. Relative Humidity, %	90	Pressure/Speed	100 mph	
32 Elevation (ASL), ft		Category		
33 Area Classification:	Class I Div 2	Seismic Design Code:		
34 Electrical Design Code:	NEC	Location		

EQUIPMENT SPECIFICATION


35 Type:	<input type="checkbox"/> Elevated <input checked="" type="checkbox"/> Enclosed	Equipment Design:		
36	<input type="checkbox"/> Above Ground	Component	Material / Size / Rating / Other	
37	<input checked="" type="checkbox"/> Stack <input type="checkbox"/> Multiple Stack	Burner		
38	<input type="checkbox"/> Portable / Trailer	Burner Tip / Assist Gas Burner	304 SS	
39		Burner Body	Carbon Steel	
40 Smokeless By:	<input type="checkbox"/> Steam <input type="checkbox"/> Assist Air	Pilot		
41	<input type="checkbox"/> Gas Assist <input checked="" type="checkbox"/> Staging	Pilot Tip	304 SS	
42		Pilot Line(s)	Carbon Steel	
43 Stack:	<input checked="" type="checkbox"/> Self Supporting	Firebox / Stack		
44 Flare Burner:	<input type="checkbox"/> Non-Smokeless <input checked="" type="checkbox"/> Smokeless <input type="checkbox"/> Gas Assist	Shell	Carbon Steel	
45 Pilot:	<input checked="" type="checkbox"/> Intermittent <input type="checkbox"/> Continuous	Piping	Carbon Steel	
46 Pilot Air Inspirator:	<input checked="" type="checkbox"/> Local <input type="checkbox"/> Remote	Nozzles	Carbon Steel	
47 Pilot Flame Control:	<input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (Thermocouple)	Flanges	Carbon Steel	
48		Insulation	Blanket	
49 Pilot Ignition:	<input type="checkbox"/> Flamefront Generator <input checked="" type="checkbox"/> Inspiring Ignitor	Insulation Pins	304 SS	
50	<input type="checkbox"/> Electronic <input checked="" type="checkbox"/> Automatic <input type="checkbox"/> Manual	Refractory	NA	
51	<input type="checkbox"/> With Pilot Flame Control	Refractory Anchors	NA	
52	<input type="checkbox"/> With Auto Pilot Re-Ignition	Ladders and Platforms	NA	
53		Stack Sample Connections	Per EPA requirements	
54 Pilot Ignition Backup:	<input type="checkbox"/> Manual Specify: i.e Piezo-Electric	Sight Glass	2	
55	<input type="checkbox"/> Battery Pack	Other		



**Environmental Control Equipment
Data Sheet**

Item/Tag No.:		Page	2	of	3
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Remarks:	-	Supplier:	LEED FABRICATION		
		Model No.:	L30-0011-00		

EQUIPMENT SPECIFICATION

56	Flame Detection:	<input type="checkbox"/> Thermocouple	<input checked="" type="checkbox"/> Ionization Rod	Auxiliary Equipment	
57		<input type="checkbox"/> UV Scanner		Valves	NA
58	General Configuration:			Blowers	NA
59				Dampers	NA
60				Inlet KO / Liquid Seal	NA
61				Flame / Detonation Arrestor	Yes
62				Instrumentation & Controls	
63				Solenoids / Shut-Off Valves	Check with Sales for available config.
64				Flow Meters	NA
65				Calorimeter	NA
66				Pressure Switches/Transmitters	NA
67				Thermocouples	Check with Sales for available config.
68				Temperature Switches/Transmitters	NA
69				BMS	Check with Sales for available config.
70		CEMS	NA		
71		Other	NA		
72					
73					
74					
75					

FABRICATION AND INSPECTION

76	Special requirements	<input type="checkbox"/> Skid Mounted	<input checked="" type="checkbox"/> Concrete Pad	Equipment Info	
77		<input type="checkbox"/> Other		Component	Weight / Dimensions
78				Burner	
79	Inspection	<input checked="" type="checkbox"/> Vendor Standard		Burner Assembly	
80		<input type="checkbox"/> Other. Specify:		Stack	
81	Material Certification	<input checked="" type="checkbox"/> Vendor Standard		Stack Assembly	48" OD x 25' H
82		<input type="checkbox"/> MTR		Pilot Tip	
83		<input type="checkbox"/> Certificate of Compliance		Pilot Line(s)	
84		<input type="checkbox"/> Other (Specify):		Stack Assembly	
85	NDE	<input checked="" type="checkbox"/> Vendor Standard		Auxiliary Equipment	
86		<input type="checkbox"/> Radiography. Specify:		Blowers	
87		<input type="checkbox"/> Ultrasonic. Specify:		Inlet KO / Liquid Seal	
88		<input type="checkbox"/> Liquid Penetrant.		Flame / Detonation Arrestor	
89		<input type="checkbox"/> Magnetic Particles.		Skid	
90		<input type="checkbox"/> PMI. Specify:		Instrumentation & Controls	
91		<input type="checkbox"/> Other. Specify:		BMS	
92	Surface Preparation	<input checked="" type="checkbox"/> Vendor Standard		Control Panel	
93		<input type="checkbox"/> Other. Specify:			
94	Paint System	<input checked="" type="checkbox"/> Vendor Standard			
95		<input type="checkbox"/> Other. Specify:			
96	Finished Color	<input checked="" type="checkbox"/> Vendor Standard			
97		<input type="checkbox"/> Other. Specify:			
98					
99					

Additional Notes:




Environmental Control Equipment
Data Sheet

Item/Tag No.:		Page	3	of	3
Project No.:		Revision:	B		
		Date:	27 February 2014		
Project:		By:	JS		
P.O. No.:	-	Checked:	SG		
RFQ No.:	-	Approved:	MS		
Ref. P&ID:	-	Supplier:	LEED FABRICATION		
Remarks:	-	Model No.:	L30-0011-00		

Client:	
Site:	
Unit/Lease:	

GENERAL ARRANGEMENT

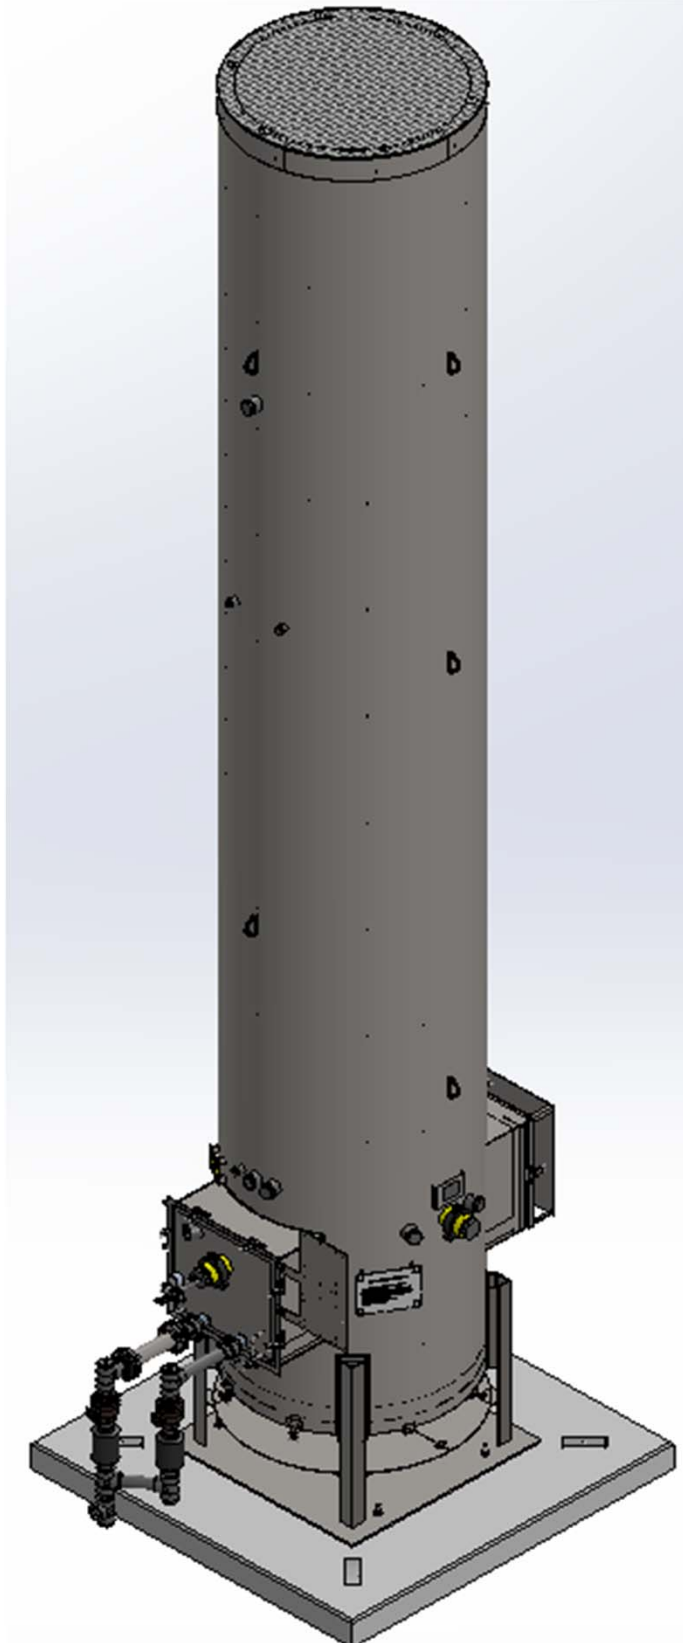

ATTACHMENT T

Emission Calculations

ATTACHMENT T – EMISSIONS CALCULATIONS

Provide detailed potential to emit (PTE) emission calculations for criteria and hazardous air pollutants (HAPs) for each emission point identified in the application. For hazardous air pollutants and volatile organic compounds (VOCs), the speciated emission calculations must be included.

Use the following guidelines to ensure complete emission calculations:

- All emission sources and fugitive emissions are included in the emission calculations, as well as all methods used to calculate the emissions.
- Proper emission point identification numbers and APCD and ERD identification numbers are used consistently in the emission calculations that are used throughout the application.
- A printout of the emission summary sheets is attached to the registration application.
- Printouts of any modeling must be included with the emission calculations. The modeling printout must show all inputs/outputs or assumptions that the modeled emissions are based upon.
- If emissions are provided from the manufacturer, the manufacturer's documentation and/or certified emissions must also be included.
- The emission calculations results must match the emissions provided on the emissions summary sheet.
- If calculations are based on a compositional analysis of the gas, attach the laboratory analysis. Include the following information: the location that the sample was taken (and whether the sample was taken from the actual site or a representative site); the date the sample was taken; and, if the sample is considered representative, the reasons that it is considered representative (same gas field, same formation and depth, distance from actual site, etc.).
- Provide any additional clarification as necessary. Additional clarification or information is especially helpful when reviewing modeling calculations to assist the engineer in understanding the basis of assumptions and/or inputs.

Please follow specific guidance provided on the emissions summary sheet when providing the calculations.

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Facility-Wide Emission Summary - Controlled

Wells	7	per pad	Carbon equivalent emissions (CO ₂ e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:
Storage Tanks	8	per pad	CO ₂ 1
Sand Separator Tank	0	per pad	CH ₄ 25
Line Heaters	6	per pad	N ₂ O 298
TEGs	2	per pad	
Dehy Reboiler	0	per pad	
Glycol Dehy	0	per pad	
Dehy Drip Tank	0	per pad	
Dehy Combustor	0	per pad	
Compressor	0	per pad	
High Pressure Separator	7	per pad	
Low Pressure Separator	0	per pad	
Vapor Recovery Unit	0	per pad	
Tank Combustor	1	per pad	
Length of lease road	7,850	feet	

Emission Point ID #	Emission Source ID#s	Emission Source Description	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		CH ₄		CO ₂ e	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001	S031-S038	Storage Vessels	---	---	---	---	3.08	13.49	---	---	---	---	---	---	0.59	2.60	14.85	65.05
C001	S030	Captured Liquid Loading	---	---	---	---	0.68	0.18	---	---	---	---	---	---	---	---	---	---
C001	C001	Tank Combustor	1.15	5.03	0.96	4.22	2.8E-04	1.2E-03	0.01	0.03	0.09	0.38	0.09	0.38	1.2E-04	5.1E-04	1,371.10	6,005.43
C001	S031-S038, S030	---	1.15	5.03	0.96	4.22	3.76	13.67	0.01	0.03	0.09	0.38	0.09	0.38	0.59	2.60	1,385.95	6,070.48
E022	S022	Line Heater	0.29	1.28	0.25	1.08	0.02	0.07	1.8E-03	7.7E-03	0.02	0.10	0.02	0.10	0.01	0.03	360.36	1,578.39
E023	S023	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	3.4E-03	0.01	180.18	789.20
E029	S029	Line Heater	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	3.4E-03	0.01	180.18	789.20
E024	S024	Line Heater	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	2.5E-03	0.01	135.14	591.90
E025	S025	Line Heater	0.07	0.32	0.06	0.27	4.0E-03	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	1.7E-03	0.01	90.09	394.60
E026	S026	Line Heater	0.07	0.32	0.06	0.27	4.0E-03	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	1.7E-03	0.01	90.09	394.60
E027	S027	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	2.9E-05	1.3E-04	1.52	6.64
E028	S028	TEG	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	2.9E-05	1.3E-04	1.52	6.64
E030	S030	Uncaptured Liquid Loading	---	---	---	---	5.83	1.51	---	---	---	---	---	---	---	---	---	---
---	---	Fugitives	---	---	---	---	---	17.81	---	---	---	---	---	---	---	12.93	---	323.30
---	---	Haul Roads	---	---	---	---	---	---	---	---	1.27	---	0.13	---	---	---	---	---
Facility Total			1.99	8.73	1.67	7.33	9.63	33.20	0.01	0.05	0.15	1.94	0.15	0.79	0.61	15.62	2,425.03	10,944.95
Facility Total (excluding fugitive emissions)			1.99	8.73	1.67	7.33	9.63	15.38	0.01	0.05	0.15	0.66	0.15	0.66	0.61	2.69	2,425.03	10,621.64

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Facility-Wide Emission Summary - Controlled

Emission Point ID #	Emission Source ID#s	Emission Source Description	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		n-Hexane		BTEX		Total HAP	
			lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001	S031-S038	Storage Vessels	---	---	3.8E-03	1.7E-02	8.5E-03	3.7E-02	2.9E-04	1.3E-03	5.0E-03	2.2E-02	0.11	0.50	0.02	0.08	0.26	1.13
C001	S030	Captured Liquid Loading	---	---	4.8E-04	1.3E-04	1.0E-03	2.7E-04	3.8E-05	9.8E-06	8.5E-04	2.2E-04	0.02	0.01	2.4E-03	6.2E-04	0.05	0.01
C001	C001	Tank Combustor	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
C001	S031-S038, S030		---	---	4.3E-03	1.7E-02	9.5E-03	3.8E-02	3.2E-04	1.3E-03	5.9E-03	2.2E-02	0.14	0.50	0.02	0.08	0.31	1.14
E022	S022	Line Heater	2.2E-04	9.6E-04	6.2E-06	2.7E-05	1.0E-05	4.4E-05	---	---	---	---	5.3E-03	0.02	1.6E-05	7.1E-05	5.5E-03	0.02
E023	S023	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	8.1E-06	3.5E-05	2.8E-03	0.01
E029	S029	Line Heater	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	8.1E-06	3.5E-05	2.8E-03	0.01
E024	S024	Line Heater	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	6.0E-06	2.6E-05	2.1E-03	0.01
E024	S024	Line Heater	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	4.0E-06	1.8E-05	1.4E-03	0.01
E025	S025	Line Heater	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	4.0E-06	1.8E-05	1.4E-03	0.01
E027	S027	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	6.8E-08	3.0E-07	2.3E-05	1.0E-04
E028	S028	TEG	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	6.8E-08	3.0E-07	2.3E-05	1.0E-04
E030	S030	Uncaptured Liquid Loading	---	---	4.1E-03	1.1E-03	0.01	2.3E-03	3.2E-04	8.4E-05	7.3E-03	1.9E-03	0.20	0.05	0.02	0.01	0.42	0.11
---	---	Fugitives	---	---	---	0.01	---	0.03	---	<0.01	---	0.03	---	0.26	---	0.06	---	0.74
---	---	Haul Roads	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Facility Total			6.3E-04	2.8E-03	0.01	0.03	0.02	0.07	6.5E-04	1.3E-03	0.01	0.05	0.35	0.88	0.04	0.15	0.75	2.06
Facility Total (excluding fugitive emissions)			6.3E-04	2.8E-03	8.4E-03	0.02	1.8E-02	4.0E-02	6.5E-04	1.3E-03	1.3E-02	2.4E-02	0.35	0.62	0.04	0.08	0.75	1.32

1. Emissions routed to combustors are divided evenly by the total number of combustors (i.e., Combustor Point Emissions = [storage tanks emissions + captured loading emissions] / [number of combustors] + combustor emissions). However, emissions can be routed to either combustor.

Company Name: EOT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Produced Fluids Storage Vessels
--

Potential Throughput

Operational Hours 8,760 hrs/yr
 Maximum Condensate Throughput¹ 47 bbl/day
 Maximum Produced Water Throughput¹ 139 bbl/day

¹ Based on the highest monthly throughput recorded at the site (March 2013). Includes a safety factor of 45%.

Overall Control Efficiency of Combustor 95%

Storage Tanks - Uncontrolled

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	11.881	52.040	11.881	52.040
Ethane	<0.001	<0.001	<0.001	<0.001	17.242	75.522	17.242	75.522
Propane	0.396	1.736	0.768	3.364	18.927	82.900	20.091	88.000
Isobutane	0.103	0.451	0.200	0.874	5.459	23.910	5.761	25.235
n-Butane	0.219	0.959	0.424	1.858	11.685	51.180	12.328	53.997
Isopentane	0.093	0.409	0.181	0.792	5.269	23.080	5.543	24.281
n-Pentane	0.084	0.369	0.163	0.714	4.918	21.540	5.165	22.623
n-Hexane	0.037	0.161	0.071	0.311	2.164	9.477	2.271	9.949
Cyclohexane	0.004	0.020	0.009	0.038	0.358	1.569	0.371	1.626
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	0.042	0.183	0.081	0.354	2.699	11.820	2.821	12.356
n-Octane	0.004	0.017	0.007	0.032	0.256	1.122	0.267	1.171
n-Nonane	0.004	0.016	0.007	0.032	0.266	1.163	0.277	1.211
n-Decane	0.001	0.005	0.002	0.009	0.083	0.362	0.086	0.375
n-Undecane	7.2E-05	3.1E-04	1.4E-04	0.001	0.006	0.026	0.006	0.027
Dodecane	2.9E-05	1.3E-04	5.6E-05	2.5E-04	0.003	0.011	0.003	0.012
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	0.059	0.257	0.114	0.499	3.537	15.490	3.709	16.246
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	0.001	0.003	0.001	0.007	0.074	0.325	0.076	0.335
Toluene	0.002	0.007	0.003	0.014	0.165	0.725	0.170	0.746
Ethylbenzene	6.1E-05	2.7E-04	1.2E-04	0.001	0.006	0.024	0.006	0.025
m-Xylene	0.001	0.006	0.003	0.012	0.097	0.423	0.101	0.440
Isooctane	0.038	0.168	0.074	0.325	2.425	10.620	2.537	11.113
Total VOC Emissions:	1.09	4.77	2.11	9.24	58.39	255.77	61.59	269.77
Total HAP Emissions:	7.9E-02	0.35	0.15	0.67	4.93	21.59	5.16	22.61

¹ Uncontrolled emissions calculation using Promax (sum of produced water and condensate). Non-methane emissions are taken from the tank emissions stencil. Methane emissions are taken from the flash stream composition.

² Composition of condensate from WEU-8 sample from 07/30/2014.

Company Name: EOT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Produced Fluids Storage Vessels

Storage Tanks - Controlled

	Breathing		Working		Flashing		Total Emissions	
	lb/hr	tpy			lb/hr	tpy	lb/hr	tpy
Methane	<0.001	<0.001	<0.001	<0.001	0.594	2.602	0.594	2.602
Ethane	<0.001	<0.001	<0.001	<0.001	0.862	3.776	0.862	3.776
Propane	0.020	0.087	0.038	0.168	0.946	4.145	1.005	4.400
Isobutane	0.005	0.023	0.010	0.044	0.273	1.196	0.288	1.262
n-Butane	0.011	0.048	0.021	0.093	0.584	2.559	0.616	2.700
Isopentane	0.005	0.020	0.009	0.040	0.263	1.154	0.277	1.214
n-Pentane	0.004	0.018	0.008	0.036	0.246	1.077	0.258	1.131
n-Hexane	0.002	0.008	0.004	0.016	0.108	0.474	0.114	0.497
Cyclohexane	2.2E-04	0.001	4.3E-04	0.002	0.018	0.078	0.019	0.081
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	0.002	0.009	0.004	0.018	0.135	0.591	0.141	0.618
n-Octane	1.9E-04	0.001	3.7E-04	0.002	0.013	0.056	0.013	0.059
n-Nonane	1.9E-04	0.001	3.6E-04	0.002	0.013	0.058	0.014	0.061
n-Decane	5.4E-05	2.4E-04	1.0E-04	4.6E-04	0.004	0.018	0.004	0.019
n-Undecane	3.6E-06	1.6E-05	7.0E-06	3.1E-05	2.9E-04	0.001	3.0E-04	0.001
Dodecane	1.5E-06	6.4E-06	2.8E-06	1.2E-05	1.3E-04	0.001	1.3E-04	0.001
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	0.003	0.013	0.006	0.025	0.177	0.775	0.185	0.812
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	3.8E-05	1.7E-04	7.5E-05	3.3E-04	0.004	0.016	0.004	0.017
Toluene	8.2E-05	3.6E-04	1.6E-04	0.001	0.008	0.036	0.009	0.037
Ethylbenzene	3.0E-06	1.3E-05	5.9E-06	2.6E-05	2.8E-04	0.001	2.9E-04	0.001
m-Xylene	6.8E-05	3.0E-04	1.3E-04	0.001	0.005	0.021	0.005	0.022
Isooctane	0.002	0.008	0.004	0.016	0.121	0.531	0.127	0.556
Total VOC Emissions:	5.4E-02	0.24	0.11	0.46	2.92	12.79	3.08	13.49
Total HAP Emissions:	3.9E-03	1.7E-02	7.6E-03	3.3E-02	2.5E-01	1.08	0.26	1.13

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Tank Combustor

Source Designation:	C001
Pilot Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Pilot Rating (MMBtu/hr)	0.05
Combustor Rating (MMBtu/hr) ¹	11.66
Combustor Rating (Mscfd) ¹	188.38
Combustor Rating (scf/hr)	7849.17
Pilot Fuel Consumption (scf/hr):	50.00
Potential Annual Hours of Operation (hr/yr):	8,760

¹ Maximum heat input for 48" model from Leed Enclosed Combustor Operations Manual

Enclosed Combustor Emissions

Pollutant	Emission Factors ² (lb/MMBtu)	Combustor		Pilot		Total	
		(lb/hr)	(tpy)	(lb/hr)	(tpy)	(lb/hr)	(tpy)
NO _x	0.10	1.14	5.01	5.1E-03	0.02	1.15	5.03
CO	0.08	0.96	4.21	4.3E-03	0.02	0.96	4.22
VOC	5.4E-03	---	---	2.8E-04	1.2E-03	0.00	0.00
SO ₂	5.9E-04	0.01	0.03	3.1E-05	1.4E-04	0.01	0.03
PM/PM ₁₀	0.01	0.09	0.38	3.9E-04	1.7E-03	0.09	0.38
CO ₂	117.00	1364.189	5975.146	6.14	26.90	1370.33	6002.05
CH ₄	2.2E-03	---	---	1.2E-04	5.1E-04	0.00	0.00
N ₂ O	2.2E-04	2.6E-03	0.01	1.2E-05	5.1E-05	2.6E-03	0.01

² Emission factors from AP-42 Ch. 1.4 for natural gas combustion were used as they were determined to be most representative of the process. Ch. 5.3 (Natural Gas Processing) was consulted, however, factors contained there are appropriate for amine gas sweetening processes, which is not the case at the wellpad. Also, Ch. 13.5 (Industrial Flares) was consulted, but since the control device in this case is an enclosed combustor vs. an elevated flare, these factors were also determined to be inappropriate.

Combustor Maximum Loading:

$$\frac{7849.17 \text{ scf}}{\text{hr}} \times \frac{\text{lb-mol}}{379.5 \text{ scf}} \times \frac{20.01 \text{ lb}}{\text{lb-mol}} = 413.81 \text{ lb/hr}$$

Company Name: EQT Production, LLC
Facility Name: WEU 1 Pad
Project Description: G70-D Application

Line Heaters

Source Designation:	S022
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	3.08
Fuel Consumption (MMscf/hr):	2.93E-03
Potential Annual Hours of Operation (hr/yr):	8,760

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{1,4}	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	0.29	1.28
CO	84	0.25	1.08
VOC	5.5	0.02	0.07
SO ₂	0.6	1.8E-03	7.7E-03
PM Total	7.6	0.02	0.10
PM Condensable	5.7	0.02	0.07
PM ₁₀ (Filterable)	1.9	0.01	0.02
PM _{2.5} (Filterable)	1.9	0.01	0.02
Lead	5.00E-04	1.5E-06	6.4E-06
CO ₂	117.0	359.99	1576.76
CH ₄	2.21E-03	6.8E-03	3.0E-02
N ₂ O	2.21E-04	6.8E-04	3.0E-03

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
HAPs:			
2-Methylnaphthalene	2.4E-05	7.0E-08	3.1E-07
3-Methylchloranthrene	1.8E-06	5.3E-09	2.3E-08
7,12-Dimethylbenz(a)anthracene	1.6E-05	4.7E-08	2.1E-07
Acenaphthene	1.8E-06	5.3E-09	2.3E-08
Acenaphthylene	1.8E-06	5.3E-09	2.3E-08
Anthracene	2.4E-06	7.0E-09	3.1E-08
Benz(a)anthracene	1.8E-06	5.3E-09	2.3E-08
Benzene	2.1E-03	6.2E-06	2.7E-05
Benzo(a)pyrene	1.2E-06	3.5E-09	1.5E-08
Benzo(b)fluoranthene	1.8E-06	5.3E-09	2.3E-08
Benzo(g,h,i)perylene	1.2E-06	3.5E-09	1.5E-08
Benzo(k)fluoranthene	1.8E-06	5.3E-09	2.3E-08
Chrysene	1.8E-06	5.3E-09	2.3E-08
Dibenzo(a,h) anthracene	1.2E-06	3.5E-09	1.5E-08
Dichlorobenzene	1.2E-03	3.5E-06	1.5E-05
Fluoranthene	3.0E-06	8.8E-09	3.9E-08
Fluorene	2.8E-06	8.2E-09	3.6E-08
Formaldehyde	7.5E-02	2.2E-04	9.6E-04
Hexane	1.8E+00	5.3E-03	2.3E-02
Indo(1,2,3-cd)pyrene	1.8E-06	5.3E-09	2.3E-08
Naphthalene	6.1E-04	1.8E-06	7.8E-06
Phenanthrene	1.7E-05	5.0E-08	2.2E-07
Pyrene	5.0E-06	1.5E-08	6.4E-08
Toluene	3.4E-03	1.0E-05	4.4E-05
Arsenic	2.0E-04	5.9E-07	2.6E-06
Beryllium	1.2E-05	3.5E-08	1.5E-07
Cadmium	1.1E-03	3.2E-06	1.4E-05
Chromium	1.4E-03	4.1E-06	1.8E-05
Cobalt	8.4E-05	2.5E-07	1.1E-06
Manganese	3.8E-04	1.1E-06	4.9E-06
Mercury	2.6E-04	7.6E-07	3.3E-06
Nickel	2.1E-03	6.2E-06	2.7E-05
Selenium	2.4E-05	7.0E-08	3.1E-07
Total HAP		5.5E-03	2.4E-02

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU 1 Pad
Project Description: G70-D Application

Line Heaters

Source Designation:	S023,S029
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.54
Fuel Consumption (MMscf/hr):	1.47E-03
Potential Annual Hours of Operation (hr/yr):	8,760

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{1,4}	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	0.15	0.64
CO	84	0.12	0.54
VOC	5.5	0.01	0.04
SO ₂	0.6	8.8E-04	3.9E-03
PM Total	7.6	0.01	0.05
PM Condensable	5.7	0.01	0.04
PM ₁₀ (Filterable)	1.9	2.8E-03	0.01
PM _{2.5} (Filterable)	1.9	2.8E-03	0.01
Lead	5.00E-04	7.3E-07	3.2E-06
CO ₂	117.0	180.00	788.38
CH ₄	2.21E-03	3.4E-03	1.5E-02
N ₂ O	2.21E-04	3.4E-04	1.5E-03

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
HAPs:			
2-Methylnaphthalene	2.4E-05	3.5E-08	1.5E-07
3-Methylchloranthrene	1.8E-06	2.6E-09	1.2E-08
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.3E-08	1.0E-07
Acenaphthene	1.8E-06	2.6E-09	1.2E-08
Acenaphthylene	1.8E-06	2.6E-09	1.2E-08
Anthracene	2.4E-06	3.5E-09	1.5E-08
Benz(a)anthracene	1.8E-06	2.6E-09	1.2E-08
Benzene	2.1E-03	3.1E-06	1.3E-05
Benzo(a)pyrene	1.2E-06	1.8E-09	7.7E-09
Benzo(b)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Benzo(g,h,i)perylene	1.2E-06	1.8E-09	7.7E-09
Benzo(k)fluoranthene	1.8E-06	2.6E-09	1.2E-08
Chrysene	1.8E-06	2.6E-09	1.2E-08
Dibenzo(a,h) anthracene	1.2E-06	1.8E-09	7.7E-09
Dichlorobenzene	1.2E-03	1.8E-06	7.7E-06
Fluoranthene	3.0E-06	4.4E-09	1.9E-08
Fluorene	2.8E-06	4.1E-09	1.8E-08
Formaldehyde	7.5E-02	1.1E-04	4.8E-04
Hexane	1.8E+00	2.6E-03	1.2E-02
Indo(1,2,3-cd)pyrene	1.8E-06	2.6E-09	1.2E-08
Naphthalene	6.1E-04	8.9E-07	3.9E-06
Phenanthrene	1.7E-05	2.5E-08	1.1E-07
Pyrene	5.0E-06	7.3E-09	3.2E-08
Toluene	3.4E-03	5.0E-06	2.2E-05
Arsenic	2.0E-04	2.9E-07	1.3E-06
Beryllium	1.2E-05	1.8E-08	7.7E-08
Cadmium	1.1E-03	1.6E-06	7.1E-06
Chromium	1.4E-03	2.1E-06	9.0E-06
Cobalt	8.4E-05	1.2E-07	5.4E-07
Manganese	3.8E-04	5.6E-07	2.4E-06
Mercury	2.6E-04	3.8E-07	1.7E-06
Nickel	2.1E-03	3.1E-06	1.3E-05
Selenium	2.4E-05	3.5E-08	1.5E-07
Total HAP		2.8E-03	1.2E-02

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU 1 Pad
Project Description: G70-D Application

Line Heaters

Source Designation:	S024
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	1.15
Fuel Consumption (MMscf/hr):	1.10E-03
Potential Annual Hours of Operation (hr/yr):	8,760

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{1,4}	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	0.11	0.48
CO	84	0.09	0.40
VOC	5.5	0.01	0.03
SO ₂	0.6	6.6E-04	2.9E-03
PM Total	7.6	0.01	0.04
PM Condensable	5.7	0.01	0.03
PM ₁₀ (Filterable)	1.9	2.1E-03	0.01
PM _{2.5} (Filterable)	1.9	2.1E-03	0.01
Lead	5.00E-04	5.5E-07	2.4E-06
CO ₂	117.0	135.00	591.29
CH ₄	2.21E-03	2.5E-03	1.1E-02
N ₂ O	2.21E-04	2.5E-04	1.1E-03

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
HAPs:			
2-Methylnaphthalene	2.4E-05	2.6E-08	1.2E-07
3-Methylchloranthrene	1.8E-06	2.0E-09	8.7E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.8E-08	7.7E-08
Acenaphthene	1.8E-06	2.0E-09	8.7E-09
Acenaphthylene	1.8E-06	2.0E-09	8.7E-09
Anthracene	2.4E-06	2.6E-09	1.2E-08
Benz(a)anthracene	1.8E-06	2.0E-09	8.7E-09
Benzene	2.1E-03	2.3E-06	1.0E-05
Benzo(a)pyrene	1.2E-06	1.3E-09	5.8E-09
Benzo(b)fluoranthene	1.8E-06	2.0E-09	8.7E-09
Benzo(g,h,i)perylene	1.2E-06	1.3E-09	5.8E-09
Benzo(k)fluoranthene	1.8E-06	2.0E-09	8.7E-09
Chrysene	1.8E-06	2.0E-09	8.7E-09
Dibenzo(a,h)anthracene	1.2E-06	1.3E-09	5.8E-09
Dichlorobenzene	1.2E-03	1.3E-06	5.8E-06
Fluoranthene	3.0E-06	3.3E-09	1.4E-08
Fluorene	2.8E-06	3.1E-09	1.3E-08
Formaldehyde	7.5E-02	8.2E-05	3.6E-04
Hexane	1.8E+00	2.0E-03	8.7E-03
Indo(1,2,3-cd)pyrene	1.8E-06	2.0E-09	8.7E-09
Naphthalene	6.1E-04	6.7E-07	2.9E-06
Phenanthrene	1.7E-05	1.9E-08	8.2E-08
Pyrene	5.0E-06	5.5E-09	2.4E-08
Toluene	3.4E-03	3.7E-06	1.6E-05
Arsenic	2.0E-04	2.2E-07	9.6E-07
Beryllium	1.2E-05	1.3E-08	5.8E-08
Cadmium	1.1E-03	1.2E-06	5.3E-06
Chromium	1.4E-03	1.5E-06	6.7E-06
Cobalt	8.4E-05	9.2E-08	4.0E-07
Manganese	3.8E-04	4.2E-07	1.8E-06
Mercury	2.6E-04	2.9E-07	1.3E-06
Nickel	2.1E-03	2.3E-06	1.0E-05
Selenium	2.4E-05	2.6E-08	1.2E-07
Total HAP		2.1E-03	9.1E-03

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU 1 Pad
Project Description: G70-D Application

Line Heaters

Source Designation:	S025,S026
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/scf):	1,050
Heat Input (MMBtu/hr)	0.77
Fuel Consumption (MMscf/hr):	7.33E-04
Potential Annual Hours of Operation (hr/yr):	8,760

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{1,4}	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	0.07	0.32
CO	84	0.06	0.27
VOC	5.5	4.0E-03	0.02
SO ₂	0.6	4.4E-04	1.9E-03
PM Total	7.6	0.01	0.02
PM Condensable	5.7	4.2E-03	0.02
PM ₁₀ (Filterable)	1.9	1.4E-03	0.01
PM _{2.5} (Filterable)	1.9	1.4E-03	0.01
Lead	5.00E-04	3.7E-07	1.6E-06
CO ₂	117.0	90.00	394.19
CH ₄	2.21E-03	1.7E-03	7.4E-03
N ₂ O	2.21E-04	1.7E-04	7.4E-04

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
HAPs:			
2-Methylnaphthalene	2.4E-05	1.8E-08	7.7E-08
3-Methylchloranthrene	1.8E-06	1.3E-09	5.8E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.2E-08	5.1E-08
Acenaphthene	1.8E-06	1.3E-09	5.8E-09
Acenaphthylene	1.8E-06	1.3E-09	5.8E-09
Anthracene	2.4E-06	1.8E-09	7.7E-09
Benz(a)anthracene	1.8E-06	1.3E-09	5.8E-09
Benzene	2.1E-03	1.5E-06	6.7E-06
Benzo(a)pyrene	1.2E-06	8.8E-10	3.9E-09
Benzo(b)fluoranthene	1.8E-06	1.3E-09	5.8E-09
Benzo(g,h,i)perylene	1.2E-06	8.8E-10	3.9E-09
Benzo(k)fluoranthene	1.8E-06	1.3E-09	5.8E-09
Chrysene	1.8E-06	1.3E-09	5.8E-09
Dibenzo(a,h) anthracene	1.2E-06	8.8E-10	3.9E-09
Dichlorobenzene	1.2E-03	8.8E-07	3.9E-06
Fluoranthene	3.0E-06	2.2E-09	9.6E-09
Fluorene	2.8E-06	2.1E-09	9.0E-09
Formaldehyde	7.5E-02	5.5E-05	2.4E-04
Hexane	1.8E+00	1.3E-03	5.8E-03
Indo(1,2,3-cd)pyrene	1.8E-06	1.3E-09	5.8E-09
Naphthalene	6.1E-04	4.5E-07	2.0E-06
Phenanthrene	1.7E-05	1.2E-08	5.5E-08
Pyrene	5.0E-06	3.7E-09	1.6E-08
Toluene	3.4E-03	2.5E-06	1.1E-05
Arsenic	2.0E-04	1.5E-07	6.4E-07
Beryllium	1.2E-05	8.8E-09	3.9E-08
Cadmium	1.1E-03	8.1E-07	3.5E-06
Chromium	1.4E-03	1.0E-06	4.5E-06
Cobalt	8.4E-05	6.2E-08	2.7E-07
Manganese	3.8E-04	2.8E-07	1.2E-06
Mercury	2.6E-04	1.9E-07	8.3E-07
Nickel	2.1E-03	1.5E-06	6.7E-06
Selenium	2.4E-05	1.8E-08	7.7E-08
Total HAP		1.4E-03	6.1E-03

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU 1 Pad
Project Description: G70-D Application

Thermoelectric Generators

Source Designation: S027-S028
 Fuel Used: Natural Gas
 Higher Heating Value (HHV) (Btu/scf): 1,050
 Heat Input (MMBtu/hr) ¹: 0.013
 Fuel Consumption (MMscf/hr): 1.23E-05
 Potential Annual Hours of Operation (hr/yr): 8,760

¹ Global Thermoelectric specification sheet states 311 ft³/day at 1000 BTU/ft³.

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ^{2,5}	Potential Emissions	
		(lb/hr) ³	(tons/yr) ⁴
NO _x	100	1.2E-03	0.01
CO	84	1.0E-03	4.5E-03
VOC	5.5	6.8E-05	3.0E-04
SO ₂	0.6	7.4E-06	3.2E-05
PM Total	7.6	9.4E-05	4.1E-04
PM Condensable	5.7	7.0E-05	3.1E-04
PM ₁₀ (Filterable)	1.9	2.3E-05	1.0E-04
PM _{2.5} (Filterable)	1.9	2.3E-05	1.0E-04
Lead	5.00E-04	6.2E-09	2.7E-08
CO ₂	116.9	1.51	6.64
CH ₄	2.21E-03	2.9E-05	1.3E-04
N ₂ O	2.21E-04	2.9E-06	1.3E-05

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Thermoelectric Generators

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ²	Potential Emissions	
		(lb/hr) ³	(tons/yr) ⁴
HAPs:			
2-Methylnaphthalene	2.4E-05	3.0E-10	1.3E-09
3-Methylchloranthrene	1.8E-06	2.2E-11	9.7E-11
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.0E-10	8.6E-10
Acenaphthene	1.8E-06	2.2E-11	9.7E-11
Acenaphthylene	1.8E-06	2.2E-11	9.7E-11
Anthracene	2.4E-06	3.0E-11	1.3E-10
Benz(a)anthracene	1.8E-06	2.2E-11	9.7E-11
Benzene	2.1E-03	2.6E-08	1.1E-07
Benzo(a)pyrene	1.2E-06	1.5E-11	6.5E-11
Benzo(b)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Benzo(g,h,i)perylene	1.2E-06	1.5E-11	6.5E-11
Benzo(k)fluoranthene	1.8E-06	2.2E-11	9.7E-11
Chrysene	1.8E-06	2.2E-11	9.7E-11
Dibenzo(a,h) anthracene	1.2E-06	1.5E-11	6.5E-11
Dichlorobenzene	1.2E-03	1.5E-08	6.5E-08
Fluoranthene	3.0E-06	3.7E-11	1.6E-10
Fluorene	2.8E-06	3.5E-11	1.5E-10
Formaldehyde	7.5E-02	9.3E-07	4.1E-06
Hexane	1.8E+00	2.2E-05	9.7E-05
Indo(1,2,3-cd)pyrene	1.8E-06	2.2E-11	9.7E-11
Naphthalene	6.1E-04	7.5E-09	3.3E-08
Phenanthrene	1.7E-05	2.1E-10	9.2E-10
Pyrene	5.0E-06	6.2E-11	2.7E-10
Toluene	3.4E-03	4.2E-08	1.8E-07
Arsenic	2.0E-04	2.5E-09	1.1E-08
Beryllium	1.2E-05	1.5E-10	6.5E-10
Cadmium	1.1E-03	1.4E-08	5.9E-08
Chromium	1.4E-03	1.7E-08	7.6E-08
Cobalt	8.4E-05	1.0E-09	4.5E-09
Manganese	3.8E-04	4.7E-09	2.1E-08
Mercury	2.6E-04	3.2E-09	1.4E-08
Nickel	2.1E-03	2.6E-08	1.1E-07
Selenium	2.4E-05	3.0E-10	1.3E-09
Total HAP		2.3E-05	1.0E-04

² Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, & 1.4-3

³ Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

⁴ Annual Emissions (tons/yr)_{potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁵ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Liquid Loading

Throughput 2,851,380 gal/yr
 Capture Efficiency 70% non-tested tanker trucks
 Control Efficiency 95% Combustor destruction efficiency

Liquid Loading Emissions

	Uncontrolled Emissions		Uncaptured Emissions		Controlled Emissions	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
Propane	7.073	1.839	2.122	0.552	0.248	0.064
Isobutane	1.838	0.478	0.551	0.143	0.064	0.017
n-Butane	3.908	1.016	1.172	0.305	0.137	0.036
Isopentane	1.665	0.433	0.500	0.130	0.058	0.015
n-Pentane	1.502	0.390	0.450	0.117	0.053	0.014
n-Hexane	0.654	0.170	0.196	0.051	0.023	0.006
Cyclohexane	0.080	0.021	0.024	0.006	0.003	0.001
Methylcyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
n-Heptane	0.744	0.194	0.223	0.058	0.026	0.007
n-Octane	0.067	0.018	0.020	0.005	0.002	0.001
n-Nonane	0.067	0.017	0.020	0.005	0.002	0.001
n-Decane	0.019	0.005	0.006	0.002	0.001	1.8E-04
n-Undecane	0.001	3.3E-04	3.8E-04	1.0E-04	4.5E-05	1.2E-05
Dodecane	0.001	1.4E-04	1.6E-04	4.1E-05	1.8E-05	4.7E-06
Triethylene Glycol	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Cyclopentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Isohexane	1.048	0.273	0.314	0.082	0.037	0.010
3-Methylpentane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Neohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
2,3-Dimethylbutane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Methylcyclohexane	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Decane, 2-Methyl-	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
Benzene	0.014	0.004	0.004	0.001	4.8E-04	1.3E-04
Toluene	0.029	0.008	0.009	0.002	0.001	2.7E-04
Ethylbenzene	0.001	2.8E-04	3.2E-04	8.4E-05	3.8E-05	9.8E-06
m-Xylene	0.024	0.006	0.007	0.002	0.001	2.2E-04
Isooctane	0.684	0.178	0.205	0.053	0.024	0.006
Total VOC Emissions:	19.420	5.049	5.826	1.515	0.680	0.177
Total HAP Emissions:	1.407	0.366	0.422	0.110	0.049	0.013

¹ Uncontrolled emissions calculation using Promax (sum of produced water and condensate).

² Hourly emissions assume two hours of loading per day, five days per week.

Company Name: EOT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Fugitive Emissions

Fugitive Emissions from Component Leaks

Facility Equipment Type ¹	Valves	Connectors	Open-Ended Lines	Pressure Relief Devices
Wellhead	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line heaters	14	65	2	1
Dehydrators	24	90	2	2

¹ Table W-1B to Subpart W of Part 98 — Default Average Component Counts for Major Onshore Natural Gas Production

Fugitive VOC/Total Emissions from Component Leaks

Equipment Type	Service	Emission Factors ¹ (kg/hr/source)	Facility Equipment Count ² (units)	TOC Annual Fugitive Emissions (tpy)	Weight Fraction VOC	Weight Fraction HAP	VOC Emissions ³ (tpy)	HAP Emissions ³ (tpy)
Pumps	Light Liquid	0.01990	12	2.31	1.00	0.04	2.31	0.10
Compressor	Gas	0.22800	0	---	0.14	0.01	---	---
Valves	Gas	0.00597	347	19.97	0.14	0.01	2.85	0.12
Pressure Relief Valves	Gas	0.10400	25	25.11	0.14	0.01	3.58	0.15
Open-Ended Lines	All	0.00170	24	0.39	0.14	0.01	0.06	2.3E-03
Connectors	All	0.00183	1,520	26.85	0.14	0.01	3.83	0.16
Intermittent Pneumatic Devices ⁴	Gas	13.5	35	---	---	---	5.19	0.22
Emission Totals:				74.63	---	---	17.81	0.74

¹ U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCM factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A. Pneumatic assumes operation 1/3 of the year.

² Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

³ Potential emissions VOC/HAP (tpy) = Emission factor (kg/hr/source) * Number of Sources * Weight % VOC/HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

⁴ Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Company Name: EOT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Fugitive Emissions

Fugitive Specific HAP Emissions from Component Leaks

Equipment Type	Service	Emission Factors ¹ (kg/hr/source)	Facility Equipment Count ² (units)	TOC Annual Fugitive Emissions (tpy)	Benzene Emissions ³ (tpy)	Toluene Emissions ³ (tpy)	Ethylbenzene Emissions ³ (tpy)	Xylene Emissions ³ (tpy)	n-Hexane Emissions ⁴ (tpy)
Pumps	Light Liquid	0.01990	12	2.31	1.8E-04	5.3E-04	<0.01	6.1E-04	0.01
Compressor	Gas	0.22800	0	---	---	---	<0.01	---	---
Valves	Gas	0.00597	347	19.97	1.6E-03	4.6E-03	<0.01	0.01	0.05
Pressure Relief Valves	Gas	0.10400	25	25.11	2.0E-03	0.01	<0.01	0.01	0.06
Open-Ended Lines	All	0.00170	24	0.39	3.1E-05	9.1E-05	<0.01	1.0E-04	9.3E-04
Connectors	All	0.00183	1,520	26.85	2.1E-03	0.01	<0.01	0.01	0.06
Intermittent Pneumatic Devices ⁴	Gas	13.5	35	---	2.8E-03	0.01	<0.01	0.01	0.09
Emission Totals:				74.63	0.01	0.03	<0.01	0.03	0.26

¹ U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCMF factors were used as it was representative of natural gas liquids extraction. The pneumatic controller value is from 40 CFR 98 Subpart W, Table W-1A. Pneumatic assumes operation 1/3 of the year.

² Assumes one pump for each tank and one meter per wellhead. Pressure relief valves count includes one Emergency Pressure Relief valve and one lock-down hatch for each storage tank. Pneumatic devices assume 5 per well. A 50% compliance margin is added to the component counts based on Subpart W counts.

³ Potential emissions HAP (tpy) = Emission factor (kg/hr/source) * Number of Sources * Weight % HAP x 2.2046 (lb/kg) x 8,760 (hr/yr) ÷ 2,000 (lb/ton)

⁴ Potential emissions HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

GHG Fugitive Emissions from Component Leaks

Component	Component Count	GHG Emission Factor ¹ scf/hr/component	CH ₄ Emissions ^{2,3} (tpy)	CO ₂ Emissions ^{2,3} (tpy)	CO ₂ e Emissions ⁴ (tpy)
Pumps	12	0.01	0.02	1.5E-04	0.45
Compressor	0	4.17	---	---	---
Valves	347	0.027	1.40	0.01	34.97
Pressure Relief Devices	25	0.04	0.15	1.2E-03	3.74
Open-Ended Lines	24	0.061	0.22	1.8E-03	5.47
Connectors	1,520	0.003	0.68	0.01	17.04
Intermittent Pneumatic Devices	35	6	10.46	0.09	261.64
Total			12.93	0.11	323.30

¹ Population emission factors for gas service in the Eastern U.S. from *Table W-1A of Subpart W - Default Whole Gas Emission Factors for Onshore Production*, 40 CFR 98, Subpart W (Table W-6 for compressor). Pneumatic assumes operation 1/3 of the year.

² Calculated in accordance with Equations W-32a, W-35 and W-36 in Subpart W of 40 CFR 98. See footnote 4 above for sample calculation.

³ Potential emissions VOC/HAP (tpy) = Gas volume vented (scf/yr) * Molar weight of natural gas (lb/lb-mol) * Weight % VOC/HAP ÷ 100 ÷ 379 (scf/lb-mol) ÷ 2,000 (lb/ton)

Mole fractions of CH₄ and CO₂ based on gas analysis:

CH₄: 81% CO₂: 0.24%

⁴ Carbon equivalent emissions (CO₂e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:

Carbon Dioxide (CO₂): 1
 Methane (CH₄): 25

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Haul Roads

Estimated Potential Road Fugitive Emissions

Unpaved Road Emissions

Unpaved Roads: $E \text{ (lb/VMT)} = k(s/12)^a(W/3)^b * [(365-p)/365]$

	PM	PM₁₀	PM_{2.5}	
k Factor (lb/VMT)	4.9	1.5	0.15	AP-42 Table 13.2.2-2 (Final, 11/06)
Silt content, s	4.8	%		AP-42 Table 13.2.2-1 (11/06), for Sand and Gravel Processing
Number of Rain Days, p	150			AP-42 Figure 13.2.1-2
a	0.7	0.9	0.9	AP-42 Table 13.2.2-2 (Final, 11/06)
b	0.45	0.45	0.45	AP-42 Table 13.2.2-2 (Final, 11/06)

Description	Weight of Empty Truck (tons)	Weight of Truck w/ Max Load (tons)	Mean Vehicle Weight (tons)	Length of Unpaved Road Traveled (mile)	Trips Per Year	Mileage Per Year	Control (%)	Emissions (tpy)		
								PM	PM ₁₀	PM _{2.5}
Liquids Hauling	20	40	30	1.49	713	2,120	0	4.54	1.16	0.12
Employee Vehicles	3	3	3	1.49	200	595	0	0.45	0.12	0.01
Total Potential Emissions								4.99	1.27	0.13

Company Name: EQT Production, LLC
 Facility Name: WEU 1 Pad
 Project Description: G70-D Application

Gas Analysis

Sample Location: WEU 1 Gas Analysis
 Sample Date: 5/29/2013
 HHV (Btu/scf): 1,216 Note: A conservatively low BTU content of 1,050 was used for calculations.

Constituent	Natural Gas Stream Speciation (Mole %)	Molecular Weight	Molar Weight	Average Weight Fraction	Natural Gas Stream Speciation (Wt. %)
Carbon Dioxide	0.240	44.01	0.11	0.01	0.528
Nitrogen	0.428	28.01	0.12	0.01	0.599
Methane	80.616	16.04	12.93	0.65	64.630
Ethane	13.296	30.07	4.00	0.20	19.983
Propane	3.541	44.10	1.56	0.08	7.805
Isobutane	0.426	58.12	0.25	0.01	1.237
n-Butane	0.746	58.12	0.43	0.02	2.167
Isopentane	0.191	72.15	0.14	0.01	0.689
n-Pentane	0.164	72.15	0.12	0.01	0.591
Cyclopentane	<0.001	70.1	0.0	0.0	0.000
n-Hexane	0.055	86.18	0.05	0.00	0.237
Cyclohexane	0.009	84.16	0.01	0.00	0.038
Other Hexanes	0.091	86.18	0.08	0.00	0.392
Heptanes	0.079	100.21	0.08	0.00	0.396
Methylcyclohexane	<0.001	98.19	0.00	0.00	0.000
2,2,4-Trimethylpentane	0.052	114.23	0.06	0.00	0.297
Benzene*	0.002	78.11	0.00	0.00	0.008
Toluene*	0.005	92.14	0.00	0.00	0.023
Ethylbenzene*	<0.001	106.17	0.00	0.00	0.000
Xylenes*	0.005	106.16	0.01	0.00	0.027
C8 + Heavies	0.054	130.80	0.07	0.00	0.353
Totals	100.000		20.01	1.00	100

TOC (Total)	99.33	98.87
VOC (Total)	5.42	14.26
HAP (Total)	0.12	0.59

ATTACHMENT U

Emission Summary Sheet

ATTACHMENT U – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		CH ₄		GHG (CO ₂ e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001 (S031-S038, S030)	1.15	5.03	0.96	4.22	3.76	13.67	0.01	0.03	0.09	0.38	0.09	0.38	0.59	2.60	1,385.95	6,070.48
E022	0.29	1.28	0.25	1.08	0.02	0.07	1.8E-03	7.7E-03	0.02	0.10	0.02	0.10	0.01	0.03	360.36	1,578.39
E023	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	0.00	0.01	180.18	789.20
E029	0.15	0.64	0.12	0.54	0.01	0.04	8.8E-04	3.9E-03	0.01	0.05	0.01	0.05	0.00	0.01	180.18	789.20
E024	0.11	0.48	0.09	0.40	0.01	0.03	6.6E-04	2.9E-03	0.01	0.04	0.01	0.04	0.00	0.01	135.14	591.90
E025	0.07	0.32	0.06	0.27	0.00	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	0.00	0.01	90.09	394.60
E026	0.07	0.32	0.06	0.27	0.00	0.02	4.4E-04	1.9E-03	0.01	0.02	0.01	0.02	0.00	0.01	90.09	394.60
E027	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	2.9E-05	1.3E-04	1.52	6.64
E028	1.2E-03	5.4E-03	1.0E-03	4.5E-03	6.8E-05	3.0E-04	7.4E-06	3.2E-05	9.4E-05	4.1E-04	9.4E-05	4.1E-04	2.9E-05	1.3E-04	1.52	6.64
E030	---	---	---	---	5.83	1.51	---	---	---	---	---	---	---	---	---	---
Fugitives	---	---	---	---	---	17.81	---	---	---	---	---	---	---	12.93	---	323.30
Haul Roads	---	---	---	---	---	---	---	---	---	1.27	---	0.13	---	---	---	---
Facility Total	1.99	8.73	1.67	7.33	9.63	33.20	0.01	0.05	0.15	1.94	0.15	0.79	0.61	15.62	2,425.03	10,944.95
Facility Total (excluding fugitive emissions)	1.99	8.73	1.67	7.33	9.63	15.38	0.01	0.05	0.15	0.66	0.15	0.66	0.61	2.69	2,425.03	10,621.64

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators. According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

ATTACHMENT U – FACILITY-WIDE HAP CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.


Emission Point ID#	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
C001 (S031-S038, S030)	---	---	4.3E-03	1.7E-02	9.5E-03	3.8E-02	3.2E-04	1.3E-03	5.9E-03	2.2E-02	0.14	0.50	0.31	1.14
E022	2.2E-04	9.6E-04	6.2E-06	2.7E-05	1.0E-05	4.4E-05	---	---	---	---	5.3E-03	0.02	5.5E-03	0.02
E023	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E029	1.1E-04	4.8E-04	3.1E-06	1.3E-05	5.0E-06	2.2E-05	---	---	---	---	2.6E-03	0.01	2.8E-03	0.01
E024	8.2E-05	3.6E-04	2.3E-06	1.0E-05	3.7E-06	1.6E-05	---	---	---	---	2.0E-03	0.01	2.1E-03	0.01
E025	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
E026	5.5E-05	2.4E-04	1.5E-06	6.7E-06	2.5E-06	1.1E-05	---	---	---	---	1.3E-03	0.01	1.4E-03	0.01
E027	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E028	9.3E-07	4.1E-06	2.6E-08	1.1E-07	4.2E-08	1.8E-07	---	---	---	---	2.2E-05	9.7E-05	2.3E-05	1.0E-04
E030	---	---	0.00	0.00	0.01	0.00	3.2E-04	8.4E-05	7.3E-03	1.9E-03	0.20	0.05	0.42	0.11
Fugitives	---	---	---	0.01	---	0.03	---	0.0E+00	---	0.03	---	0.26	---	0.74
Haul Roads	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Facility Total	6.3E-04	2.8E-03	0.01	0.03	0.02	0.07	6.5E-04	1.3E-03	0.01	0.05	0.35	0.88	0.75	2.06
Facility Total (excluding fugitive emissions)	6.3E-04	2.8E-03	8.4E-03	0.02	1.8E-02	4.0E-02	6.5E-04	1.3E-03	1.3E-02	2.4E-02	0.35	0.62	0.75	1.32

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

WEU-1 Plant Schematic

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	
Flowsheet:	WEU-1	

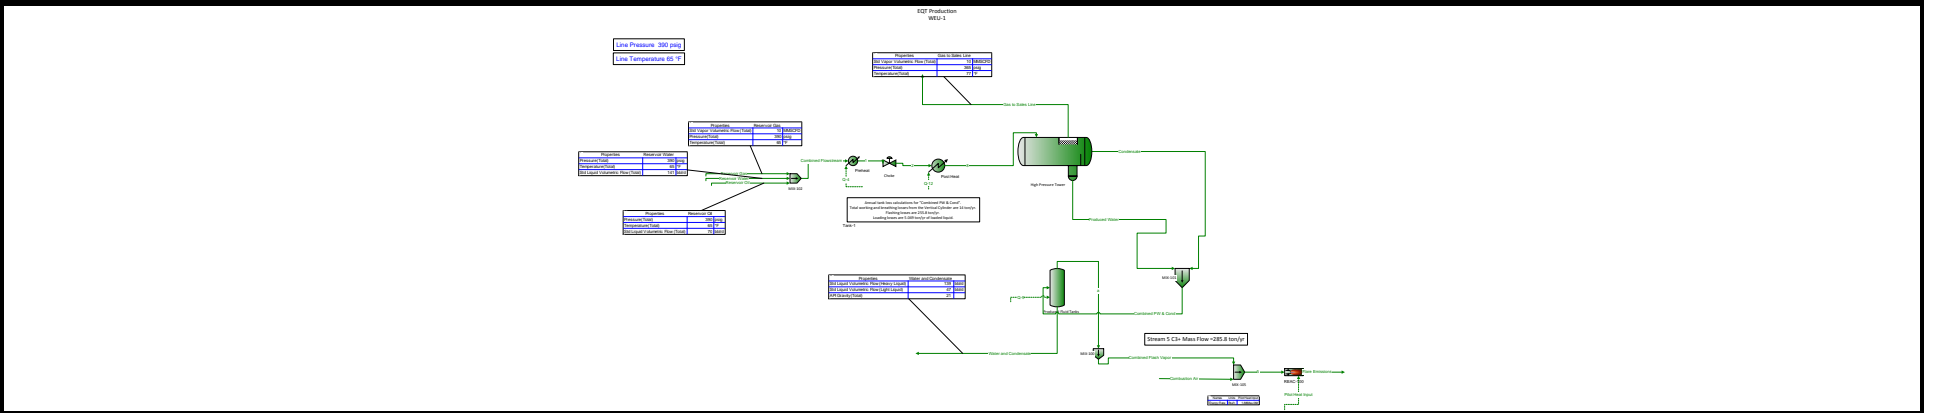

* User Specified Values
? Extrapolated or Approximate Values

Process Streams Report
All Streams
Tabulated by Total Phase

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	
Flowsheet:	WEU-1	

Connections

	Combined Flash Vapor	Combined PW & Cond	Gas to Sales Line	Reservoir Gas	Reservoir Oil
From Block	MIX-100	MIX-101	High Pressure Tower	--	--
To Block	MIX-105	Produced Fluid Tanks	--	MIX-102	MIX-102

Stream Composition

Mass Flow	Combined Flash Vapor lb/h	Combined PW & Cond lb/h	Gas to Sales Line lb/h	Reservoir Gas lb/h	Reservoir Oil lb/h
Nitrogen	0.0384303	0.0385533	131.607	131.645 *	0 *
Methane	11.8812	11.9976	14207.4	14200 *	19.4043 *
CO2	0.337381	0.351678	115.836	115.972 *	0.215389 *
Ethane	17.2424	18.1539	4402.05	4389.71 *	30.4942 *
Propane	19.4261	23.0981	1733.07	1714.42 *	41.7517 *
Isobutane	5.79705	8.47522	279.808	271.861 *	16.4224 *
n-Butane	12.6535	21.0519	496.133	476.076 *	41.1094 *
Isopentane	6.05098	16.1882	164.83	151.307 *	29.7115 *
n-Pentane	5.75286	18.2837	145.728	129.918 *	34.0938 *
n-Hexane	2.72285	22.7507	58.3909	52.0405 *	29.1011 *
Methylcyclopentane	0	0	0	0 *	0 *
Benzene	0.0926189	0.776418	1.94923	1.71531 *	1.01034 *
Cyclohexane	0.450676	4.29771	9.44691	8.31651 *	5.42812 *
n-Heptane	3.55926	84.166	78.8412	86.9158 *	76.0914 *
n-Octane	0.351132	25.2543	8.30854	13.7963 *	19.7665 *
n-Nonane	0.377625	84.0517	9.52054	42.2465 *	51.3257 *
n-Decane	0.120929	80.8796	3.43129	20.309 *	64.0019 *
n-Undecane	0.00888482	18.4498	0.278999	0 *	18.7288 *
Dodecane	0.00402168	24.3207	0.137867	0 *	24.4586 *
Water	1.83916	2030.4	26.8002	0 *	0 *
Triethylene Glycol	0	0	0	0 *	0 *
Oxygen	0	0	0	0 *	0 *
Argon	0	0	0	0 *	0 *
Carbon Monoxide	0	0	0	0 *	0 *
Cyclopentane	0	0	0	0 *	0 *
Isohexane	4.35208	26.8833	95.6868	86.1033 *	36.4668 *
3-Methylpentane	0	0	0	0 *	0 *
Neohexane	0	0	0	0 *	0 *
2,3-Dimethylbutane	0	0	0	0 *	0 *
Methylcyclohexane	0	0	0	0 *	0 *
Isooctane	3.1708	70.6446	70.9249	65.2189 *	76.3506 *
Decane, 2-Methyl-	0	0	0	0 *	0 *
Toluene	0.217184	5.34881	4.61348	5.05832 *	4.90397 *
m-Xylene	0.13197	10.9959	3.01594	5.82836 *	8.18351 *
Ethylbenzene	0.00756959	0.579673	0.171874	0 *	0.751547 *

Volumetric Flow	Combined Flash Vapor ft ³ /h	Combined PW & Cond gpm	Gas to Sales Line ft ³ /h	Reservoir Gas ft ³ /h	Reservoir Oil ft ³ /h
Nitrogen	0.549489	0.000141248	73.7052	67.8244	0
Methane	295.253	0.0780923	12925.4	11754.4	4.0912
CO2	3.04489	0.000541276	35.9631	32.3771	0.0081054
Ethane	226.5	0.0792927	1823.44	1606.84	1.54184
Propane	172.666	0.0878303	423.567	358.101	1.38104
Isobutane	38.8402	0.0299926	45.7306	36.6016	0.473693
n-Butane	84.6423	0.0722407	76.9897	59.7752	1.1406
Isopentane	32.4003	0.0520569	17.5726	12.2296	0.759837
n-Pentane	30.7608	0.0583383	14.9841	9.92215	0.864057
n-Hexane	12.0853	0.068775	3.88443	2.20484	0.694906
Methylcyclopentane	0	0	0	0	0

* User Specified Values
? Extrapolated or Approximate Values

ProMax 4.0.16071.0
Copyright © 2002-2016 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	
Flowsheet:	WEU-1	

Volumetric Flow	Combined Flash Vapor ft ³ /h	Combined PW & Cond gpm	Gas to Sales Line ft ³ /h	Reservoir Gas ft ³ /h	Reservoir Oil ft ³ /h
Benzene	0.456466	0.0017229	0.171846	0.101326	0.0176916
Cyclohexane	2.05506	0.0109186	0.695747	0.393086	0.108416
n-Heptane	13.48	0.245394	3.19732	1.92136	1.74806
n-Octane	1.15713	0.0710048	0.188837	0.210983	0.437312
n-Nonane	1.0981	0.229839	0.0625568	0.6649	1.10346
n-Decane	0.314432	0.217111	-0.0199272	0.363136	1.35006
n-Undecane	0.0208406	0.048682	-0.00445201	0	0.388279
Dodecane	0.00857818	0.0633879	-0.00342145	0	0.500792
Water	40.6122	4.06772	21.0407	0	0
Triethylene Glycol	0	0	0	0	0
Oxygen	0	0	0	0	0
Argon	0	0	0	0	0
Carbon Monoxide	0	0	0	0	0
Cyclopentane	0	0	0	0	0
Isohexane	19.3534	0.0821535	6.85161	4.13733	0.88068
3-Methylpentane	0	0	0	0	0
Neohexane	0	0	0	0	0
2,3-Dimethylbutane	0	0	0	0	0
Methylcyclohexane	0	0	0	0	0
Isooctane	10.5198	0.201394	2.51411	1.3062	1.71247
Decane, 2-Methyl-	0	0	0	0	0
Toluene	0.899792	0.0119824	0.255187	0.149214	0.0861987
m-Xylene	0.470567	0.0246753	0.103777	0.101055	0.143805
Ethylbenzene	0.0270127	0.00129709	0.00615684	0	0.0131618

Mole Fraction	Combined Flash Vapor	Combined PW & Cond	Gas to Sales Line	Reservoir Gas	Reservoir Oil
Nitrogen	0.000546709	1.15125E-05	0.00426558	0.00428 *	0 *
Methane	0.295147	0.006256	0.804099	0.80616 *	0.1384 *
CO2	0.00305507	6.68457E-05	0.0023898	0.0024 *	0.00056 *
Ethane	0.228521	0.0050504	0.132924	0.13296 *	0.11604 *
Propane	0.175565	0.00438183	0.0356851	0.03541 *	0.10834 *
Isobutane	0.0397478	0.00121979	0.00437104	0.00426 *	0.03233 *
n-Butane	0.0867591	0.00302987	0.00775038	0.00746 *	0.08093 *
Isopentane	0.033423	0.00187691	0.00207431	0.00191 *	0.04712 *
n-Pentane	0.0317763	0.00211987	0.00183392	0.00164 *	0.05407 *
n-Hexane	0.0125918	0.00220845	0.000615217	0.00055 *	0.03864 *
Methylcyclopentane	0	0	0	0 *	0 *
Benzene	0.000472531	8.31484E-05	2.26576E-05	2E-05 *	0.00148 *
Cyclohexane	0.00213407	0.000427178	0.000101919	9E-05 *	0.00738 *
n-Heptane	0.0141557	0.00702644	0.000714403	0.00079 *	0.08689 *
n-Octane	0.00122502	0.00184942	6.60414E-05	0.00011 *	0.0198 *
n-Nonane	0.00117337	0.0054821	6.7399E-05	0.0003 *	0.04579 *
n-Decane	0.000338711	0.00475516	2.18965E-05	0.00013 *	0.05147 *
n-Undecane	2.26524E-05	0.000987379	1.62064E-06	0 *	0.01371 *
Dodecane	9.40918E-06	0.00119439	7.34891E-07	0 *	0.01643 *
Water	0.0406842	0.942793	0.00135071	0 *	0 *
Triethylene Glycol	0	0	0	0 *	0 *
Oxygen	0	0	0	0 *	0 *
Argon	0	0	0	0 *	0 *
Carbon Monoxide	0	0	0	0 *	0 *
Cyclopentane	0	0	0	0 *	0 *
Isohexane	0.0201262	0.0026096	0.00100817	0.00091 *	0.04842 *
3-Methylpentane	0	0	0	0 *	0 *
Neohexane	0	0	0	0 *	0 *
2,3-Dimethylbutane	0	0	0	0 *	0 *
Methylcyclohexane	0	0	0	0 *	0 *
Isooctane	0.0110622	0.00517343	0.000563755	0.00052 *	0.07648 *
Decane, 2-Methyl-	0	0	0	0 *	0 *

* User Specified Values

? Extrapolated or Approximate Values

ProMax 4.0.16071.0
Copyright © 2002-2016 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report All Streams Tabulated by Total Phase						
Client Name:	EQT Production				Job: V1.0	
Location:	WEU 1 Wellpad					
Flowsheet:	WEU-1					
Mole Fraction	Combined Flash Vapor	Combined PW & Cond	Gas to Sales Line	Reservoir Gas	Reservoir Oil	
Toluene	0.000939369	0.000485614	4.54626E-05	5E-05 *	0.00609 *	
m-Xylene	0.000495384	0.000866414	2.57934E-05	5E-05 *	0.00882 *	
Ethylbenzene	2.84144E-05	4.56748E-05	1.46993E-06	0 *	0.00081 *	
Stream Properties						
Property	Units	Combined Flash Vapor	Combined PW & Cond	Gas to Sales Line	Reservoir Gas	Reservoir Oil
Temperature	°F	85	77.4688	77.4688	65 *	65 *
Pressure	psig	0	365	365	390 *	390 *
Mole Fraction Vapor		1	0	1	0.997911	0.0354067
Mole Fraction Light Liquid		0	0.0566614	0	0.00208894	0.964593
Mole Fraction Heavy Liquid		0	0.943339	0	0	0
Molecular Weight	lb/lbmol	38.4915	21.8117	20.0187	20.008	72.0598
Mass Density	lb/ft ³	0.0978374	56.0046	1.42463	1.57484	32.3862
Molar Flow	lbmol/h	2.5093	119.543	1101.37	1097.98	8.73957
Mass Flow	lb/h	96.5866	2607.44	22048	21968.4	629.772
Vapor Volumetric Flow	ft ³ /h	987.216	46.5576	15476.3	13949.6	19.4457
Liquid Volumetric Flow	gpm	123.081	5.80459	1929.52	1739.17	2.42439
Std Vapor Volumetric Flow	MMSCFD	0.0228537	1.08875	10.0309	10 *	0.0795966
Std Liquid Volumetric Flow	sgpm	0.404034	5.8321	131.596	131.274	2.04167 *
Specific Gravity		1.32901	0.897955	0.69119		
API Gravity			25.2698			
Net Ideal Gas Heating Value	Btu/ft ³	1981.39	245.742	1095.86	1096.63	3689.23
Net Liquid Heating Value	Btu/lb	19380.2	3416.49	20719.2	20746.3	19277.6
Remarks						

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	
Flowsheet:	WEU-1	

Connections

	Reservoir Water	Water and Condensate			
From Block	--	Produced Fluid Tanks			
To Block	MIX-102	--			

Stream Composition

Mass Flow	Reservoir Water lb/h	Water and Condensate lb/h			
Nitrogen	0 *	0.000122964			
Methane	0 *	0.116316			
CO2	0 *	0.0142973			
Ethane	0 *	0.911542			
Propane	0 *	3.67198			
Isobutane	0 *	2.67817			
n-Butane	0 *	8.39844			
Isopentane	0 *	10.1372			
n-Pentane	0 *	12.5308			
n-Hexane	0 *	20.0279			
Methylcyclopentane	0 *	0			
Benzene	0 *	0.683799			
Cyclohexane	0 *	3.84704			
n-Heptane	0 *	80.6068			
n-Octane	0 *	24.9031			
n-Nonane	0 *	83.6741			
n-Decane	0 *	80.7587			
n-Undecane	0 *	18.4409			
Dodecane	0 *	24.3167			
Water	2057.2 *	2028.56			
Triethylene Glycol	0 *	0			
Oxygen	0 *	0			
Argon	0 *	0			
Carbon Monoxide	0 *	0			
Cyclopentane	0 *	0			
Isohexane	0 *	22.5312			
3-Methylpentane	0 *	0			
Neohexane	0 *	0			
2,3-Dimethylbutane	0 *	0			
Methylcyclohexane	0 *	0			
Isooctane	0 *	67.4738			
Decane, 2-Methyl-	0 *	0			
Toluene	0 *	5.13163			
m-Xylene	0 *	10.864			
Ethylbenzene	0 *	0.572103			

Volumetric Flow	Reservoir Water gpm	Water and Condensate gpm			
Nitrogen	0	3.83232E-07			
Methane	0	0.000664007			
CO2	0	1.92952E-05			
Ethane	0	0.00369712			
Propane	0	0.013473			
Isobutane	0	0.00935569			
n-Butane	0	0.028451			
Isopentane	0	0.0326411			
n-Pentane	0	0.0400121			
n-Hexane	0	0.0611093			
Methylcyclopentane	0	0			
Benzene	0	0.00152484			

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 4.0.16071.0
 Copyright © 2002-2016 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report
All Streams
 Tabulated by Total Phase

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	
Flowsheet:	WEU-1	

Volumetric Flow	Reservoir Water gpm	Water and Condensate gpm			
Cyclohexane	0	0.00992461			
n-Heptane	0	0.238667			
n-Octane	0	0.0713879			
n-Nonane	0	0.233962			
n-Decane	0	0.222165			
n-Undecane	0	0.0499255			
Dodecane	0	0.0651093			
Water	4.11372	4.07057			
Triethylene Glycol	0	0			
Oxygen	0	0			
Argon	0	0			
Carbon Monoxide	0	0			
Cyclopentane	0	0			
Isohexane	0	0.0695256			
3-Methylpentane	0	0			
Neohexane	0	0			
2,3-Dimethylbutane	0	0			
Methylcyclohexane	0	0			
Isooctane	0	0.196566			
Decane, 2-Methyl-	0	0			
Toluene	0	0.0116847			
m-Xylene	0	0.0249256			
Ethylbenzene	0	0.00131085			

Mole Fraction	Reservoir Water	Water and Condensate			
Nitrogen	0 *	3.75058E-08			
Methane	0 *	6.19521E-05			
CO2	0 *	2.77584E-06			
Ethane	0 *	0.000259027			
Propane	0 *	0.000711529			
Isobutane	0 *	0.000393717			
n-Butane	0 *	0.00123465			
Isopentane	0 *	0.00120054			
n-Pentane	0 *	0.00148401			
n-Hexane	0 *	0.00198582			
Methylcyclopentane	0 *	0			
Benzene	0 *	7.47997E-05			
Cyclohexane	0 *	0.000390581			
n-Heptane	0 *	0.00687358			
n-Octane	0 *	0.0018628			
n-Nonane	0 *	0.00557448			
n-Decane	0 *	0.00484985			
n-Undecane	0 *	0.00100806			
Dodecane	0 *	0.0012198			
Water	1 *	0.962134			
Triethylene Glycol	0 *	0			
Oxygen	0 *	0			
Argon	0 *	0			
Carbon Monoxide	0 *	0			
Cyclopentane	0 *	0			
Isohexane	0 *	0.00223403			
3-Methylpentane	0 *	0			
Neohexane	0 *	0			
2,3-Dimethylbutane	0 *	0			
Methylcyclohexane	0 *	0			
Isooctane	0 *	0.00504717			
Decane, 2-Methyl-	0 *	0			
Toluene	0 *	0.000475885			

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 4.0.16071.0
 Copyright © 2002-2016 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

Process Streams Report All Streams Tabulated by Total Phase					
Client Name:	EQT Production			Job: V1.0	
Location:	WEU 1 Wellpad				
Flowsheet:	WEU-1				
Mole Fraction					
		Reservoir Water	Water and Condensate		
m-Xylene		0 *	0.000874369		
Ethylbenzene		0 *	4.60449E-05		
Stream Properties					
Property	Units	Reservoir Water	Water and Condensate		
Temperature	°F	65 *	85 *		
Pressure	psig	390 *	0		
Mole Fraction Vapor		0	0		
Mole Fraction Light Liquid		1	0.0378652		
Mole Fraction Heavy Liquid		0	0.962135		
Molecular Weight	lb/lbmol	18.0153	21.4541		
Mass Density	lb/ft ³	62.3481	57.3686		
Molar Flow	lbmol/h	114.192	117.034		
Mass Flow	lb/h	2057.2	2510.86		
Vapor Volumetric Flow	ft ³ /h	32.9955	43.7671		
Liquid Volumetric Flow	gpm	4.11372	5.45667		
Std Vapor Volumetric Flow	MMSCFD	1.04002	1.0659		
Std Liquid Volumetric Flow	sgpm	4.1125 *	5.42807		
Specific Gravity		0.999665	0.919826		
API Gravity		9.95161	21.3539		
Net Ideal Gas Heating Value	Btu/ft ³	0	208.529		
Net Liquid Heating Value	Btu/lb	-1059.76	2802.4		
Remarks					

Energy Stream Report

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	
Flowsheet:	WEU-1	

Energy Streams

Energy Stream	Energy Rate	Power	From Block	To Block
Pilot Heat Input	1.88676E+06 * Btu/h	741.524 * hp	--	REAC-100

Remarks

Flowsheet Environment SRK Environment					
Client Name:	EQT Production			Job: V1.0	
Location:	WEU 1 Wellpad				
Flowsheet:	WEU-1				
Environment Settings					
Number of Poynting Intervals	0	Phase Tolerance	0.01		
Gibbs Excess Model	77 °F	Emulsion Enabled	False		
Evaluation Temperature		Emulsion Enabled	False		
Freeze Out Temperature	10 °F	Emulsion Enabled	False		
Threshold Difference					
Components					
Component Name	Henry's Law Component	Phase Initiator	Component Name	Henry's Law Component	Phase Initiator
Nitrogen	False	False	Dodecane	False	False
Methane	False	False	Water	False	True
CO2	False	False	Triethylene Glycol	False	True
Ethane	False	False	Oxygen	False	False
Propane	False	False	Argon	False	False
Isobutane	False	False	Carbon Monoxide	False	False
n-Butane	False	False	Cyclopentane	False	False
Isopentane	False	False	Isohexane	False	False
n-Pentane	False	False	3-Methylpentane	False	False
n-Hexane	False	False	Neohexane	False	False
Methylcyclopentane	False	False	2,3-Dimethylbutane	False	False
Benzene	False	False	Methylcyclohexane	False	False
Cyclohexane	False	False	Isooctane	False	False
n-Heptane	False	False	Decane, 2-Methyl-	False	False
n-Octane	False	False	Toluene	False	False
n-Nonane	False	False	m-Xylene	False	False
n-Decane	False	False	Ethylbenzene	False	False
n-Undecane	False	False			
Physical Property Method Sets					
Liquid Molar Volume	COSTALD	Overall Package	SRK		
Stability Calculation	SRK	Vapor Package	SRK		
Light Liquid Package	SRK	Heavy Liquid Package	SRK		
Remarks					

Environments Report

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	

Project-Wide Constants

Atmospheric Pressure	14.6959 psia	Ideal Gas Reference Pressure	14.6959 psia
Ideal Gas Reference Temperature	60 °F	Ideal Gas Reference Volume	379.484 ft ³ /lbmol
Liquid Reference Temperature	60 °F		

Environment [SRK Environment]

Environment Settings

Number of Poynting Intervals	0	Phase Tolerance	0.01
Gibbs Excess Model	77 °F	Emulsion Enabled	False
Evaluation Temperature		Emulsion Enabled	False
Freeze Out Temperature	10 °F		
Threshold Difference			

Components

Component Name	Henry's Law Component	Phase Initiator	Component Name	Henry's Law Component	Phase Initiator
Nitrogen	False	False	Dodecane	False	False
Methane	False	False	Water	False	True
CO2	False	False	Triethylene Glycol	False	True
Ethane	False	False	Oxygen	False	False
Propane	False	False	Argon	False	False
Isobutane	False	False	Carbon Monoxide	False	False
n-Butane	False	False	Cyclopentane	False	False
Isopentane	False	False	Isohexane	False	False
n-Pentane	False	False	3-Methylpentane	False	False
n-Hexane	False	False	Neohexane	False	False
Methylcyclopentane	False	False	2,3-Dimethylbutane	False	False
Benzene	False	False	Methylcyclohexane	False	False
Cyclohexane	False	False	Isooctane	False	False
n-Heptane	False	False	Decane, 2-Methyl-	False	False
n-Octane	False	False	Toluene	False	False
n-Nonane	False	False	m-Xylene	False	False
n-Decane	False	False	Ethylbenzene	False	False
n-Undecane	False	False			

Physical Property Method Sets

Liquid Molar Volume	COSTALD	Overall Package	SRK
Stability Calculation	SRK	Vapor Package	SRK
Light Liquid Package	SRK	Heavy Liquid Package	SRK

Remarks

Calculator Report

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	

Simple Specifier 1

Source Code

CV1 = O2Reqd * 3.0 / O2Frac

Calculated Variable [CV1]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Combustion Air!Phases!Total!Properties!Molar Flow
Value	154.205
Unit	

Measured Variable [O2Reqd]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Combined Flash Vapor!Analyses!Combustion Analysis 1!Properties!Required Combustion Oxygen
Value	10.7671
Unit	

Measured Variable [O2Frac]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Combustion Air!Phases!Total!Composition!Mole Fraction!Oxygen
Value	0.20947
Unit	

Remarks

Simple Specifier 2

Source Code

CV1 = FV*HV

Calculated Variable [CV1]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!QStreams!Pilot Heat Input!Energy Rate
Value	1.88676E+06
Unit	

Measured Variable [FV]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Flash Vapor!Phases!Total!Properties!Std Vapor Volumetric Flow
Value	952.238
Unit	

Measured Variable [HV]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Flash Vapor!Phases!Total!Properties!Net Ideal Gas Heating Value
Value	1981.39
Unit	

Remarks

Simple Specifier 3

Source Code

CV1 = Pin

Calculated Variable [CV1]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Reservoir Gas!Phases!Total!Properties!Pressure
Value	390
Unit	

Calculator Report

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	

Measured Variable [Pin]

Source Moniker	ProMax:ProMax!Project!User Value Sets!Parameters!Line Pressure!Properties!Parameter
Value	390
Unit	

Remarks

Simple Specifier 4

Source Code

CV1 = Tin

Calculated Variable [CV1]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Reservoir Gas!Phases!Total!Properties!Temperature
Value	65
Unit	

Measured Variable [Tin]

Source Moniker	ProMax:ProMax!Project!User Value Sets!Parameters!Line Temperature!Properties!Parameter
Value	65
Unit	

Remarks

Simple Specifier 5

Source Code

CV1 = Tin

Calculated Variable [CV1]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Reservoir Oil!Phases!Total!Properties!Temperature
Value	65
Unit	

Measured Variable [Tin]

Source Moniker	ProMax:ProMax!Project!User Value Sets!Parameters!Line Temperature!Properties!Parameter
Value	65
Unit	

Remarks

Simple Specifier 6

Source Code

CV1 = Pin

Calculated Variable [CV1]

Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Reservoir Oil!Phases!Total!Properties!Pressure
Value	390

Calculator Report		
Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	
Unit		
Measured Variable [Pin]		
Source Moniker	ProMax:ProMax!Project!User Value Sets!Parameters!Line Pressure!Properties!Parameter	
Value	390	
Unit		
Remarks		
Simple Specifier 7		
Source Code		
CV1 = Tin		
Calculated Variable [CV1]		
Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Reservoir Water!Phases!Total!Properties!Temperature	
Value	65	
Unit		
Measured Variable [Tin]		
Source Moniker	ProMax:ProMax!Project!User Value Sets!Parameters!Line Temperature!Properties!Parameter	
Value	65	
Unit		
Remarks		
Simple Specifier 8		
Source Code		
CV1 = Pin		
Calculated Variable [CV1]		
Source Moniker	ProMax:ProMax!Project!Flowsheets!WEU-1!PStreams!Reservoir Water!Phases!Total!Properties!Pressure	
Value	390	
Unit		
Measured Variable [Pin]		
Source Moniker	ProMax:ProMax!Project!User Value Sets!Parameters!Line Pressure!Properties!Parameter	
Value	390	
Unit		
Remarks		

* User Specified Values
 ? Extrapolated or Approximate Values

User Value Sets Report

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	

Cn+ Flow/Frac.55

User Value [CnPlusSum]

* Parameter	285.786 ton/yr	Upper Bound	ton/yr
Lower Bound	ton/yr	* Enforce Bounds	False

Remarks

This User Value Set was programmatically generated. GUID={6F8309F1-C05A-4942-A867-311E1532159F}

Tank-1

User Value [BlockReady]

* Parameter	1	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [ShellLength]

* Parameter	20 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value [ShellDiam]

* Parameter	12 ft	Upper Bound	ft
* Lower Bound	0 ft	* Enforce Bounds	False

User Value [BreatherVP]

* Parameter	0.875 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [BreatherVacP]

* Parameter	-0.03125 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [DomeRadius]

Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

User Value [OpPress]

* Parameter	0 psig	Upper Bound	psig
Lower Bound	psig	* Enforce Bounds	False

User Value [AvgPercentLiq]

* Parameter	50 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [MaxPercentLiq]

* Parameter	90 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [AnnNetTP]

* Parameter	186.786 bbl/day	Upper Bound	bbl/day
* Lower Bound	0 bbl/day	* Enforce Bounds	False

User Value [OREff]

* Parameter	0 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value Sets Report

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	

User Value [MaxAvgT]

* Parameter	65.5 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [MinAvgT]

* Parameter	44 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [BulkLiqT]

* Parameter	59.09 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [AvgP]

* Parameter	14.2535 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [ThermI]

* Parameter	1123 Btu/ft ² /day	Upper Bound	Btu/ft ² /day
Lower Bound	Btu/ft ² /day	* Enforce Bounds	False

User Value [AvgWindSpeed]

* Parameter	6.3 mi/h	Upper Bound	mi/h
Lower Bound	mi/h	* Enforce Bounds	False

User Value [MaxHourlyLoadingRate]

* Parameter	7.78275 bbl/hr	Upper Bound	bbl/hr
* Lower Bound	0 bbl/hr	* Enforce Bounds	False

User Value [EntrainedOilFrac]

* Parameter	1 %	Upper Bound	%
Lower Bound	%	* Enforce Bounds	False

User Value [TurnoverRate]

* Parameter	23.5014	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [LLossSatFactor]

* Parameter	0.5	Upper Bound	
Lower Bound		* Enforce Bounds	False

User Value [AtmPressure]

* Parameter	14.2535 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [TVP]

* Parameter	5.18938 psia	Upper Bound	psia
Lower Bound	psia	* Enforce Bounds	False

User Value [AvgLiqSurfaceT]

* Parameter	65.0762 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

User Value [MaxLiqSurfaceT]

* Parameter	75.9425 °F	Upper Bound	°F
Lower Bound	°F	* Enforce Bounds	False

* User Specified Values
 ? Extrapolated or Approximate Values

ProMax 4.0.16071.0
 Copyright © 2002-2016 BRE Group, Ltd.

Licensed to Trinity Consultants, Inc. and Affiliates

User Value Sets Report

Client Name:	EQT Production	Job: V1.0
Location:	WEU 1 Wellpad	

User Value [TotalLosses]			
* Parameter	14.0009	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [WorkingLosses]			
* Parameter	1.15429	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [StandingLosses]			
* Parameter	0.595819	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [RimSealLosses]			
* Parameter	0	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [WithdrawalLoss]			
* Parameter	0	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [LoadingLosses]			
* Parameter	5.04913	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [MaxHourlyLoadingLoss]			
* Parameter	1.15277	lb/hr	Upper Bound
Lower Bound		lb/hr	* Enforce Bounds
			False

User Value [DeckFittingLosses]			
* Parameter	0	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [DeckSeamLosses]			
* Parameter	0	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [FlashingLosses]			
* Parameter	255.782	ton/yr	Upper Bound
Lower Bound		ton/yr	* Enforce Bounds
			False

User Value [GasMoleWeight]			
* Parameter	0.0572409	kg/mol	Upper Bound
Lower Bound		kg/mol	* Enforce Bounds
			False

Remarks
 This User Value Set was programmatically generated. GUID={0511AF0C-026D-4690-8095-2CBDEB1C7684}

Parameters

User Value [Line Temperature]			
* Parameter	65	°F	Upper Bound
Lower Bound		°F	* Enforce Bounds
			False

* User Specified Values
 ? Extrapolated or Approximate Values

		User Value Sets Report		
Client Name:	EQT Production			Job: V1.0
Location:	WEU 1 Wellpad			
User Value [Line Pressure]				
* Parameter	390 psig	Upper Bound		psig
Lower Bound	psig	* Enforce Bounds		False
Remarks				



LAFAYETTE LABORATORY
500 AMBASSADOR CAFFERY PKWY.
SCOTT, LOUISIANA 70583-1790
PHONE (337) 237-4775
FAX (337) 237-8005

Certificate of Analysis Number: 2011050029-001A

FOR: Gas Analytical Services
Chuck Honaker
PO Box 1028

Bridgeport, WV 26330

CUSTOMER: Gas Analytical Services
FIELD : EQT
LOCATION : 512509
SAMPLE POINT: Wellhead
REPORT DATE: 5/5/2011
SAMPLE DATE: 04/27/2011 09:00
SAMPLED BY: GR - GAS
MEMO:

TYPE: Gas
REPORT: C10+ (GPA Method 2286)
CYLINDER: GAS
PRESSURE: 290
TEMPERATURE: N.G.

<u>COMPONENT</u>	<u>MOL %</u>	<u>WEIGHT %</u>	<u>GPM's @ 14.73</u>
N2	0.415	0.562	
METHANE	77.726	60.388	
CO2	0.211	0.450	
ETHANE	14.780	21.523	3.952
PROPANE	4.513	9.638	1.243
I-BUTANE	0.534	1.501	0.175
N-BUTANE	1.064	2.993	0.335
I-PENTANE	0.243	0.848	0.089
N-PENTANE	0.244	0.852	0.088
I-HEXANES	0.103	0.431	0.042
N-HEXANE	0.073	0.272	0.026
BENZENE	0.001	0.006	NIL
CYCLOHEXANE	0.008	0.032	0.003
I-HEPTANES	0.029	0.144	0.013
N-HEPTANE	0.015	0.076	0.007
TOLUENE	0.003	0.012	0.001
I-OCTANES	0.021	0.118	0.011
N-OCTANE	0.003	0.017	0.002
*E-BENZENE	NIL	0.001	NIL
*m,o,&p-XYLENE	0.002	0.007	0.001
I-NONANES	NIL	0.021	0.002
N-NONANE	NIL	0.003	NIL
I-DECANES	NIL	0.003	0.001
N-DECANE	NIL	0.001	NIL
<u>I-UNDECANES +</u>	<u>0.012</u>	<u>0.101</u>	<u>0.009</u>
TOTALS	100.000	100.000	6.000



LAFAYETTE LABORATORY
 500 AMBASSADOR CAFFERY PKWY.
 SCOTT, LOUISIANA 70583-1790
 PHONE (337) 237-4775
 FAX (337) 237-8005

Certificate of Analysis Number: 2011050029-001A

FOR: Gas Analytical Services
 Chuck Honaker
 PO Box 1028

CUSTOMER: Gas Analytical Services
FIELD : EQT
LOCATION : 512509
SAMPLE POINT: Wellhead
REPORT DATE: 5/5/2011
SAMPLE DATE: 04/27/2011 09:00
SAMPLED BY: GR - GAS
MEMO:

Bridgeport, WV 26330

TYPE: Gas
REPORT: C6+
CYLINDER: GAS
PRESSURE: 290
TEMPERATURE: N.G.

<u>COMPONENT</u>	<u>MOL %</u>	<u>WEIGHT %</u>	<u>GPM's @ 14.73</u>
N2	0.415	0.562	
METHANE	77.726	60.388	
CO2	0.211	0.450	
ETHANE	14.780	21.523	3.952
PROPANE	4.513	9.638	1.243
I-BUTANE	0.534	1.501	0.175
N-BUTANE	1.064	2.993	0.335
I-PENTANE	0.243	0.848	0.089
N-PENTANE	0.244	0.852	0.088
<u>HEXANES PLUS</u>	<u>0.270</u>	<u>1.245</u>	<u>0.118</u>
TOTALS	100.000	100.000	6.000

CALCULATED VALUES
MOLECULAR WEIGHT

REAL DRY BTU AT 14.73 PSIA, 60°F
 REAL WET BTU AT 14.73 PSIA, 60°F

RELATIVE DENSITY

<u>TOTAL</u>	<u>C6+</u>	<u>C7+</u>
20.648	95.057	110.869

1252.9	5164.3	5877.3
1232.0	5075.3	5775.9

0.7149	3.2594	3.7537
--------	--------	--------

GPM's AT 14.73

<u>C2+</u>	<u>IC5+</u>
6.000	0.295

COMPRESSIBILITY FACTOR

0.9965



LAFAYETTE LABORATORY
 500 AMBASSADOR CAFFERY PKWY.
 SCOTT, LOUISIANA 70583-1790
 PHONE (337) 237-4775
 FAX (337) 237-8005

Certificate of Analysis Number: 2011050029-001A

FOR: Gas Analytical Services
 Chuck Honaker
 PO Box 1028
 Bridgeport, WV 26330

CUSTOMER: Gas Analytical Services
FIELD : EQT
LOCATION : 512509
SAMPLE POINT: Wellhead
REPORT DATE: 5/5/2011
SAMPLE DATE: 04/27/2011 09:00
SAMPLED BY: GR - GAS
MEMO:

TYPE: Gas
REPORT: C7+
CYLINDER: GAS
PRESSURE: 290
TEMPERATURE: N.G.

<u>COMPONENT</u>	<u>MOL %</u>	<u>WEIGHT %</u>	<u>GPM's @ 14.73</u>
N2	0.415	0.562	
METHANE	77.726	60.388	
CO2	0.211	0.450	
ETHANE	14.780	21.523	3.952
PROPANE	4.513	9.638	1.243
I-BUTANE	0.534	1.501	0.175
N-BUTANE	1.064	2.993	0.335
I-PENTANE	0.243	0.848	0.089
N-PENTANE	0.244	0.852	0.088
HEXANES	0.176	0.703	0.068
<u>HEPTANES PLUS</u>	<u>0.094</u>	<u>0.542</u>	<u>0.050</u>
TOTALS	100.000	100.000	6.000

CALCULATED VALUES
MOLECULAR WEIGHT

REAL DRY BTU AT 14.73 PSIA, 60°F
 REAL WET BTU AT 14.73 PSIA, 60°F

RELATIVE DENSITY

GPM's AT 14.73

COMPRESSIBILITY FACTOR

<u>TOTAL</u>	<u>C6+</u>	<u>C7+</u>
20.648	95.057	110.869
1252.9	5164.3	5877.3
1232.0	5075.3	5775.9
0.7149	3.2594	3.7537
	<u>C2+</u>	<u>IC5+</u>
	6.000	0.295
	0.9965	

ATTACHMENT V

Class I Legal Advertisement

ATTACHMENT V – CLASS I LEGAL ADVERTISEMENT

Publication of a proper Class I legal advertisement is a requirement of the G70-D registration process. In the event the applicant's legal advertisement fails to follow the requirements of 45CSR13, Section 8 or the requirements of Chapter 59, Article 3, of the West Virginia Code, the application will be considered incomplete and no further review of the application will occur until this is corrected.

The applicant, utilizing the format for the Class I legal advertisement example provided on the following page, shall have the legal advertisement appear a minimum of one (1) day in the newspaper most commonly read in the area where the facility exists or will be constructed. The notice must be published no earlier than five (5) working days of receipt by this office of your application. The original affidavit of publication must be received by this office no later than the last day of the public comment period.

The advertisement shall contain, at a minimum, the name of the applicant, the type and location of the source, the type and amount of air pollutants that will be discharged (excluding fugitive emissions), the nature of the permit being sought, the proposed start-up date for the source, and a contact telephone number for more information.

The location of the source should be as specific as possible starting with: 1.) the street address of the source; 2.) the nearest street or road; 3.) the nearest town or unincorporated area, 4.) the county, and 5.) latitude and longitude coordinates in decimal format.

Types and amounts of pollutants discharged **must include** all regulated pollutants (Nitrogen Oxides, Carbon Monoxide, Particulate Matter-2.5, Particulate Matter-10, Volatile Organic Compounds, Sulfur Dioxide, Carbon Dioxide Equivalents, Methane, Formaldehyde, Benzene, Toluene, Ethylbenzene, Xylenes, Hexane, Total Hazardous Air Pollutants and their potential to emit or the permit level being sought in units of tons per year.

In the event the 30th day is a Saturday, Sunday, or legal holiday, the comment period will be extended until 5:00 p.m. on the following regularly scheduled business day.

A list of qualified newspapers that are eligible to publish legal ads may be found:

<http://www.sos.wv.gov/elections/resource/Documents/Qualified%20Newspapers.pdf>

RECOMMENDED PUBLIC NOTICE TEMPLATE

AIR QUALITY PERMIT NOTICE Notice of Application

Notice is given that EQT Production Company has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a G70-D General Permit Registration for the natural gas production facility (WEU 1) located off Straight Fork in Doddridge County, West Virginia. The latitude and longitude coordinates are: 39.155750 N, -80.464117 W. The project involves the installation of eight (8) produced fluids tanks which will replace the existing twenty one (21) storage tanks at the site.

The applicant estimates the potential to discharge the following Regulated Air Pollutants will be:

Pollutant	Emissions in tpy (tons per year)
NOx	8.73
CO	7.33
VOC	15.38
SO ₂	0.05
PM	0.66
Formaldehyde	2.8E-03
BTEX	0.15
n-Hexane	0.88
Total HAPs	2.06
Carbon Dioxide Equivalents (CO ₂ e)	10,621.64

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57th Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the **(Day)** day of **(Month)**, 2016.

By: EQT Production Company
Mike Gavin, Vice President
625 Liberty Ave Suite 1700
Pittsburgh, PA 15222

ATTACHMENT W

General Permit Registration Application Fee