



May 10, 2017

Reference No. 082715

Ms. Beverly McKeone
Division of Air Quality
WV Department of Environmental Protection
601 57th Street, SE
Charleston, West Virginia 25304

Dear Ms. Beverly McKeone:

**Re: General Permit G70-D Modification Application
Strickling Well Pad
Antero Resources Corporation**

GHD Services Inc. (GHD) would like to submit this General Permit Modification application that we prepared on behalf of Antero Resources Corporation for an oil and gas facility identified as Strickling Well Pad.

A General Permit Registration Modification is requested due to the following planned operational changes:

1. Increase in production.
2. Addition of four wells
3. Addition of four GPU heaters
4. Addition of two produced water tanks
5. Addition of two enclosed combustors
6. Addition of ten line heaters
7. Addition of three HP Ford VRU engines
8. Addition of one LP Ford VRU engines
9. Addition of four vapor recovery towers (VRT)
10. Removal of one Kubota Engine
11. Removal of two condensate tanks

Please refer to Table 14 in Attachment S - Emissions Calculations for the summary of changes in emissions of regulated air pollutants that will result from the above operational changes.

Enclosed are the following documents:

- Original copy of the G70-D General Permit Modification Application.
- Two CD copies of the G70-D General Permit Modification Application.
- The application fee with check no. 476175 in the amount of \$1,500.00.



Please let us know if you have any questions or require additional information.

Sincerely,

GHD Services Inc.




A handwritten signature in black ink, appearing to read "Manuel Bautista". The signature is fluid and cursive, with the first name being more prominent.

Manuel Bautista

MB/ma/320

Encl.

cc: Barry Schatz, Antero Resources Corporation
Elizabeth McLaughlin, Antero Resources Corporation

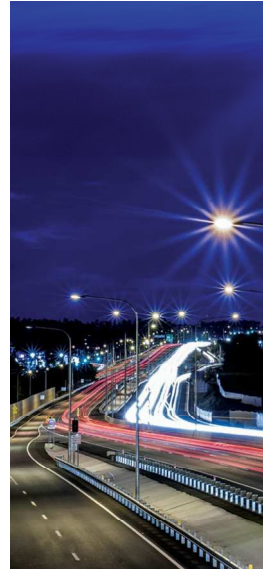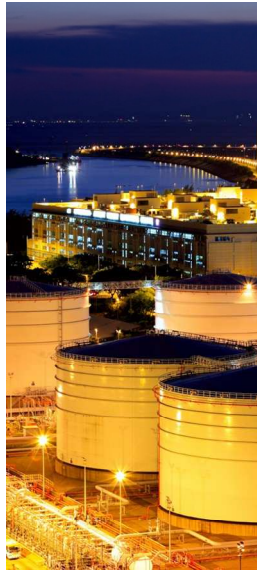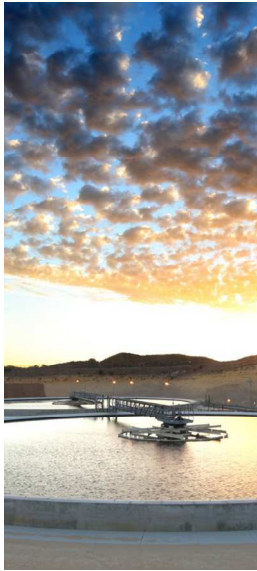

General Permit G70-D Modification Application

Increased production and the addition of four wells, four GPU Heaters, two produced water tanks, two enclosed combustors, ten Line Heaters, three HP Ford VRU engines, one LP Ford VRU engine, four VRTs; Removal of Kubota Engine and two condensate water tanks

Strickling Well Pad

Antero Resources Corporation

GHD
6320 Rothway Suite 100 Houston Texas 77040
082715 | Report No 320 | May 2017

Table of Contents

G70-D General Permit Modification

Attachment A	Single Source Determination Form
Attachment B	Siting Criteria Waiver – Not Applicable
Attachment C	Current Business Certificate
Attachment D	Process Flow Diagram
Attachment E	Process Description
Attachment F	Plot Plan
Attachment G	Area Map
Attachment H	G70-D Section Applicability Form
Attachment I	Emission Units/ERD Table
Attachment J	Fugitive Emissions Summary Sheet
Attachment K	Gas Well Affected Facility Data Sheet
Attachment L	Storage Vessels Data Sheet
Attachment M	Natural Gas Fired Fuel Burning Units Data Sheet
Attachment N	Internal Combustion Engine Data Sheet
Attachment O	Tanker Truck Loading Data Sheet
Attachment P	Glycol Dehydration Unit Sheet(s) – Not Applicable
Attachment Q	Pneumatic Controllers Data Sheet – Not Applicable
Attachment R	Pneumatic Pump Data Sheet – Not Applicable
Attachment S	Air Pollution Control Device/ Emissions Reduction Devices Sheets
Attachment T	Emission Calculations
Attachment U	Facility-wide Emissions Summary Sheets
Attachment V	Class I Legal Advertisement



west virginia department of environmental protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25304
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-D GENERAL PERMIT REGISTRATION APPLICATION

PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION, RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- CONSTRUCTION
- MODIFICATION
- RELOCATION
- CLASS I ADMINISTRATIVE UPDATE
- CLASS II ADMINISTRATIVE UPDATE

SECTION 1. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office): Antero Resources Corporation

Federal Employer ID No. (FEIN): 80-0162034

Applicant's Mailing Address: 1615 Wynkoop Street

City: Denver

State: CO

ZIP Code: 80202

Facility Name: Strickling Well Pad

Operating Site Physical Address: 2110 Nutter Frk

City: West Union

Zip Code: 26456

County: Doddridge

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):

Latitude: 39.33218

Longitude: -80.78376

SIC Code: 1311

DAQ Facility ID No. (For existing facilities)
017-00143

NAICS Code: 211111

CERTIFICATION OF INFORMATION

This G70-D General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. **Any administratively incomplete or improperly signed or unsigned G70-D Registration Application will be returned to the applicant. Furthermore, if the G70-D forms are not utilized, the application will be returned to the applicant. No substitution of forms is allowed.**

I hereby certify that Barry Schatz is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-D General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: _____

Name and Title:

Phone:

Fax:

Email:

Date:

If applicable:

Authorized Representative Signature: Barry Schatz

Name and Title: Barry Schatz/ Senior Environmental & Regulatory Manager Phone: 303-357-7276 Fax: 303-357-7315

Email: bschatz@anteroresources.com

Date: 5/10/2017

If applicable:

Environmental Contact

Name and Title:

Phone:

Fax:

Email:

Date:

OPERATING SITE INFORMATION	
Briefly describe the proposed new operation and/or any change(s) to the facility: Increased production and the addition of four wells, four GPU Heaters, two produced water tanks, two enclosed combustors, ten Line Heaters, three HP Ford VRU engines, one LP Ford VRU engine, four VRTs; Removal of Kubota Engine and two condensate water tanks.	
Directions to the facility: From the intersection of I-79 and Hwy 50 near Clarksburg, head west on Hwy 50 for ~ 29.9 miles, then turn RIGHT at WV-18N (Town of West Union Ahead). In ~0.6 miles, turn left onto Davis St/Old U.S. 50 W and follow for ~0.4 miles. Take the second right onto WV-18N/Sistersville Pike and follow for ~5.1 miles. Turn right onto Nutter Fork and follow for ~2.1 miles. Look for rig signs and lease road on the RIGHT. Follow lease road to location.	
ATTACHMENTS AND SUPPORTING DOCUMENTS	
I have enclosed the following required documents:	
Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22).	
<input checked="" type="checkbox"/> Check attached to front of application. <input type="checkbox"/> I wish to pay by electronic transfer. Contact for payment (incl. name and email address): <input type="checkbox"/> I wish to pay by credit card. Contact for payment (incl. name and email address):	
<input checked="" type="checkbox"/> \$500 (Construction, Modification, and Relocation) <input type="checkbox"/> \$300 (Class II Administrative Update) <input checked="" type="checkbox"/> \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ, OOOO and/or OOOOa ¹ <input type="checkbox"/> \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH ²	
¹ Only one NSPS fee will apply. ² Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ. <i>NSPS and NESHAP fees apply to new construction or if the source is being modified.</i>	
<input checked="" type="checkbox"/> Responsible Official or Authorized Representative Signature (if applicable)	
<input checked="" type="checkbox"/> Single Source Determination Form (must be completed in its entirety) – Attachment A	
<input type="checkbox"/> Siting Criteria Waiver (if applicable) – Attachment B	<input checked="" type="checkbox"/> Current Business Certificate – Attachment C
<input checked="" type="checkbox"/> Process Flow Diagram – Attachment D	<input checked="" type="checkbox"/> Process Description – Attachment E
<input checked="" type="checkbox"/> Plot Plan – Attachment F	<input checked="" type="checkbox"/> Area Map – Attachment G
<input checked="" type="checkbox"/> G70-D Section Applicability Form – Attachment H	<input checked="" type="checkbox"/> Emission Units/ERD Table – Attachment I
<input checked="" type="checkbox"/> Fugitive Emissions Summary Sheet – Attachment J	
<input checked="" type="checkbox"/> Gas Well Affected Facility Data Sheet (if applicable) – Attachment K	
<input checked="" type="checkbox"/> Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L	
<input checked="" type="checkbox"/> Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPUs, Heater Treaters, In-Line Heaters if applicable) – Attachment M	
<input checked="" type="checkbox"/> Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N	
<input checked="" type="checkbox"/> Tanker Truck Loading Data Sheet (if applicable) – Attachment O	
<input type="checkbox"/> Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P	
<input type="checkbox"/> Pneumatic Controllers Data Sheet – Attachment Q	
<input type="checkbox"/> Pneumatic Pump Data Sheet – Attachment R	
<input checked="" type="checkbox"/> Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment S	
<input checked="" type="checkbox"/> Emission Calculations (please be specific and include all calculation methodologies used) – Attachment T	
<input checked="" type="checkbox"/> Facility-wide Emission Summary Sheet(s) – Attachment U	
<input checked="" type="checkbox"/> Class I Legal Advertisement – Attachment V	
<input checked="" type="checkbox"/> One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments	

Attachment R
AUTHORITY OF CORPORATION
OR OTHER BUSINESS ENTITY (DOMESTIC OR FOREIGN)

TO: The West Virginia Department of Environmental Protection,
Division of Air Quality

DATE: January 23, 2015

ATTN.: Director

Corporation's / other business entity's Federal Employer I.D. Number 80-0162034

The undersigned hereby files with the West Virginia Department of Environmental Protection, Division of Air Quality, a permit application and hereby certifies that the said name is a trade name which is used in the conduct of an incorporated business or other business entity.

Further, the corporation or the business entity certifies as follows:

(1) Barry Schatz (is/are) the authorized representative(s) and in that capacity may represent the interest of the corporation or the business entity and may obligate and legally bind the corporation or the business entity.

(2) The corporation or the business entity is authorized to do business in the State of West Virginia.

(3) If the corporation or the business entity changes its authorized representative(s), the corporation or the business entity shall notify the Director of the West Virginia Department of Environmental Protection, Division of Air Quality, immediately upon such change.



President or Other Authorized Officer
(Vice President, Secretary, Treasurer or other
official in charge of a principal business function of
the corporation or the business entity)

(If not the President, then the corporation or the business entity must submit certified minutes or bylaws stating legal authority of other authorized officer to bind the corporation or the business entity).

Secretary

Name of Corporation or business entity

Attachment A

Single Source Determination Form

ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL3).

The Source Determination Rule for the oil and gas industry was published in the Federal Register on June 3, 2016 and will become effective on August 2, 2016. EPA defined the term “adjacent” and stated that equipment and activities in the oil and gas sector that are under common control will be considered part of the same source if they are located on the same site or on sites that share equipment and are within ¼ mile of each other.

Is there equipment and activities in the same industrial grouping (defined by SIC code)?

Yes No

Is there equipment and activities under the control of the same person/people?

Yes No

Is there equipment and activities located on the same site or on sites that share equipment and are within ¼ mile of each other?

Yes No

Strickling Well Pad calculation of potential to emit included all of the emission sources that belong to the same industrial grouping, are located on contiguous or adjacent properties, and are under the control of the same person. The nearest emission source that belong to the same industrial grouping and under the control of the same person, but not located on contiguous or adjacent property is Alexander Well Pad. This is approximately 0.44 miles northeast of the facility.

Attachment B

Siting Criteria Waiver

Attachment B

Siting Waiver

Strickling Well Pad

Antero Resources Corporation

Doddridge County, West Virginia

A Siting Waiver form is not required because there are no occupied dwelling structures within 300 feet of Strickling Well Pad.

Attachment C

Current Business Certificate

State of West Virginia



Certificate

I, Natalie E. Tennant, Secretary of State of the State of West Virginia, hereby certify that

ANTERO RESOURCES CORPORATION

a corporation formed under the laws of Delaware, which is authorized to transact business in West Virginia by a Certificate of Authority has filed in my office as required by the provisions of the West Virginia Code, a copy of an amendment to its Articles of Incorporation authenticated by the proper office of the state or country of its incorporation and was found to conform to law.

Therefore, I issue this

CERTIFICATE OF AMENDMENT TO CERTIFICATE OF AUTHORITY



*Given under my hand and the
Great Seal of the State of
West Virginia on this day of
June 10, 2013*

Natalie E. Tennant

Secretary of State

FILED

JUN 10 2013

Natalie E. Tennant
Secretary of State
1900 Kanawha Blvd E
Bldg 1, Suite 157-K
Charleston, WV 25305



IN THE OFFICE OF
SECRETARY OF STATE

Penney Barker, Manager
Corporations Division
Tel: (304)558-8000
Fax: (304)558-8381
Website: www.wvsos.com
E-mail: business@wvsos.com

**APPLICATION FOR
AMENDED CERTIFICATE
OF AUTHORITY**

Office Hours: Monday – Friday
8:30 a.m. – 5:00 p.m. ET

FILE ONE ORIGINAL
(Two if you want a filed
stamped copy returned to you)
FEE: \$25.00

**** In accordance with the provisions of the West Virginia Code, the undersigned corporation hereby ****
applies for an Amended Certificate of Authority and submits the following statement:

1. Name under which the corporation was authorized to transact business in WV: Antero Resources Appalachian Corporation
2. Date Certificate of Authority was issued in West Virginia: 6/25/2008
3. Corporate name has been changed to: Antero Resources Corporation
(Attach one Certified Copy of Name Change as filed in home State of Incorporation.)
4. Name the corporation elects to use in WV: Antero Resources Corporation
(due to home state name not being available)
5. Other amendments: _____
(attach additional pages if necessary)
6. Name and phone number of contact person. (This is optional, however, if there is a problem with the filing, listing a contact person and phone number may avoid having to return or reject the document.)
Alvyn A. Schopp (303) 367-7310
Contact Name Phone Number
7. Signature Information (See below *Important Legal Notice Regarding Signature):
Print Name of Signer: Alvyn A. Schopp Title/Capacity: Authorized Person
Signature: Date: June 10, 2013

***Important Legal Notice Regarding Signature:** Per West Virginia Code §31D-1-129. Penalty for signing false document. Any person who signs a document he or she knows is false in any material respect and knows that the document is to be delivered to the secretary of state for filing is guilty of a misdemeanor and, upon conviction thereof, shall be fined not more than one thousand dollars or confined in the county or regional jail not more than one year, or both.

Delaware

PAGE 1

The First State

I, JEFFREY W. BULLOCK, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "ANTERO RESOURCES APPALACHIAN CORPORATION", CHANGING ITS NAME FROM "ANTERO RESOURCES APPALACHIAN CORPORATION" TO "ANTERO RESOURCES CORPORATION", FILED IN THIS OFFICE ON THE TENTH DAY OF JUNE, A.D. 2013, AT 9:37 O'CLOCK A.M.

A FILED COPY OF THIS CERTIFICATE HAS BEEN FORWARDED TO THE NEW CASTLE COUNTY RECORDER OF DEEDS.

4520810 8100

130754186



You may verify this certificate online
at corp.delaware.gov/authver.shtml


Jeffrey W. Bullock, Secretary of State
AUTHENTICATION: 0496546

DATE: 06-10-13

AMENDMENT TO THE
AMENDED AND RESTATED
CERTIFICATE OF INCORPORATION
OF
ANTERO RESOURCES APPALACHIAN CORPORATION

Antero Resources Appalachian Corporation (the "Corporation"), a corporation organized and existing under the laws of the State of Delaware, hereby certifies as follows:

1. The original Certificate of Incorporation of the Corporation was filed under the name Antero Resources Barnett Corporation with the filing of the original Certificate of Incorporation of the Corporation with the Secretary of State of the State of Delaware on March 18, 2008.


2. This Amendment to the Amended and Restated Certificate of Incorporation has been duly adopted and approved in accordance with Sections 242 of the General Corporation Law of the State of Delaware.

3. Article FIRST of the Amended and Restated Certificate of Incorporation is hereby amended to read in its entirety as follows:

FIRST. The name of the Corporation is Antero Resources Corporation.

IN WITNESS WHEREOF, the Corporation has caused this Certificate of Amendment to be executed by its duly authorized officer on the 10th day of June, 2013.


ANTERO RESOURCES APPALACHIAN CORPORATION

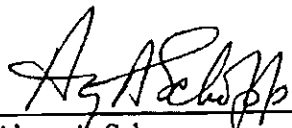By: 
Name: Alwyn A. Schopp
Title: Vice President of Accounting &
Administration / Treasurer

Attachment D

Process Flow Diagram

- * LINE HEATERS (10)
 - LH001 EP-LH001
 - LH002 EP-LH002
 - LH003 EP-LH003
 - LH004 EP-LH004
 - LH005 EP-LH005
 - LH006 EP-LH006
 - LH007 EP-LH007
 - LH008 EP-LH008
 - LH009 EP-LH009
 - LH010 EP-LH010
- 3-PHASE GPU HEATERS (10)
 - GPU001 EP-GPU001
 - GPU002 EP-GPU002
 - GPU003 EP-GPU003
 - GPU004 EP-GPU004
 - GPU005 EP-GPU005
 - GPU006 EP-GPU006
 - GPU007 EP-GPU007
 - GPU008 EP-GPU008
 - GPU009 EP-GPU009
 - GPU010 EP-GPU010
- LOW PRESSURE VRU/ COMPRESSOR ENGINES (1)
 - ENG004 EP-ENG004
- HIGH PRESSURE VRU/ COMPRESSOR ENGINES (3)
 - ENG001 EP-ENG001
 - ENG002 EP-ENG002
 - ENG003 EP-ENG003
- CONDENSATE TANKS (8)
 - TANKCOND001
 - TANKCOND002
 - TANKCOND003
 - TANKCOND004
 - TANKCOND005
 - TANKCOND006
 - TANKCOND007
 - TANKCOND008
- PRODUCED WATER TANKS (4)
 - TANKPW001
 - TANKPW002
 - TANKPW003
 - TANKPW004
- ENCLOSED COMBUSTORS (3)
 - EC001 EP-EC001
 - EC002 EP-EC002
 - EC003 EP-EC003

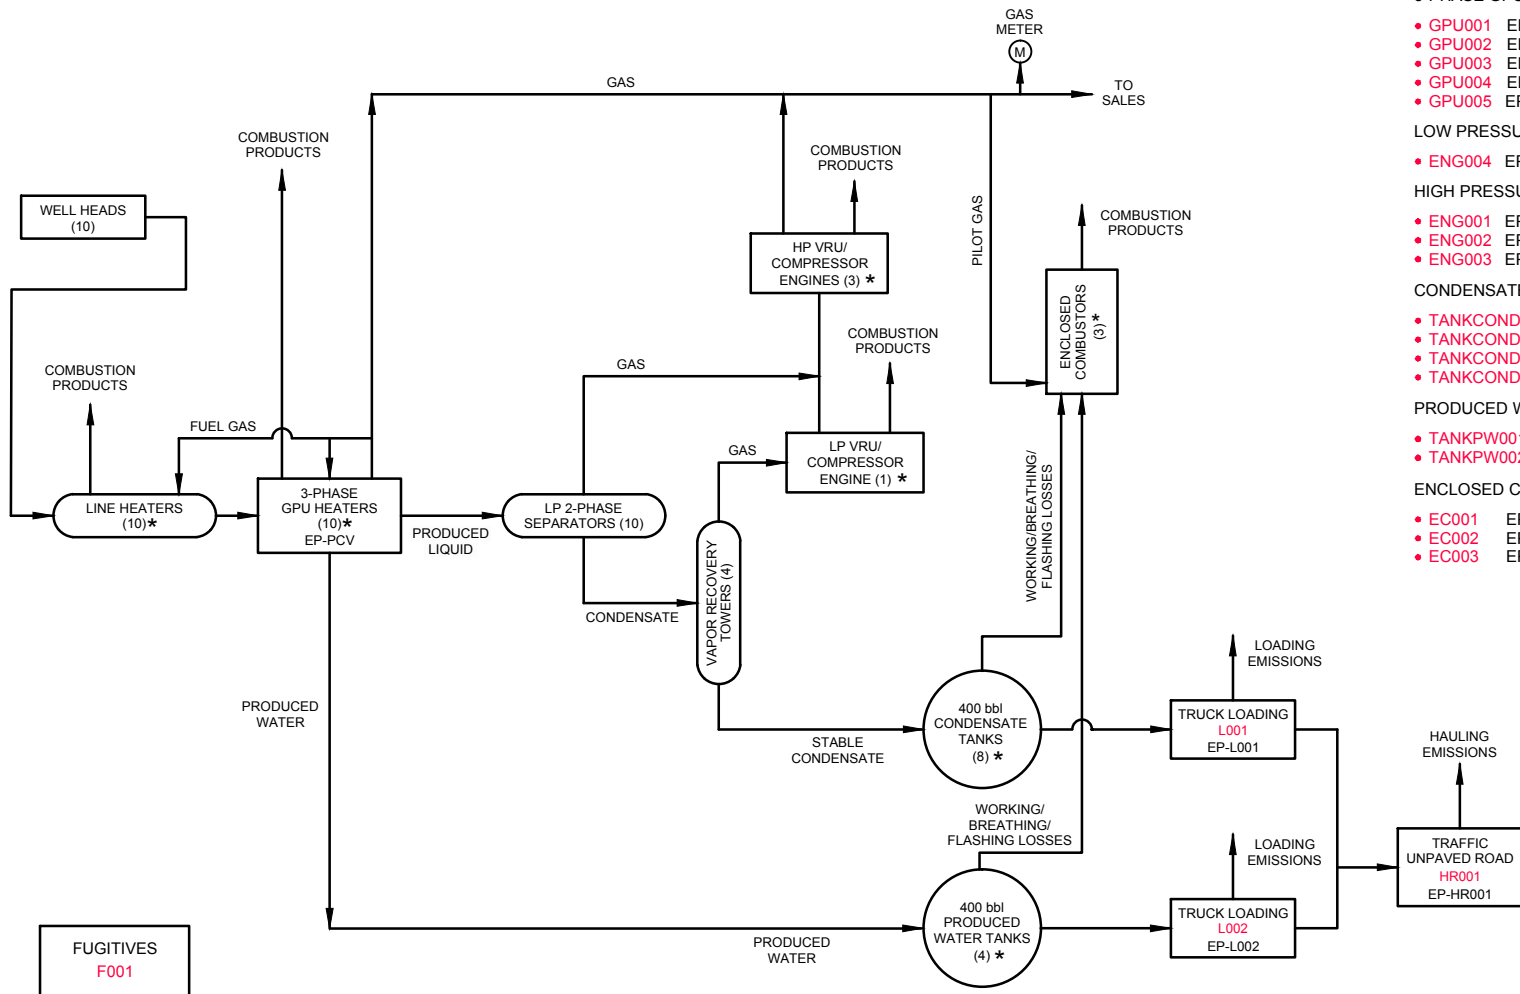

Attachment D
**PROCESS FLOW DIAGRAM - ANTERO RESOURCES
 STRICKLING WELL PAD**
Doddridge County, West Virginia



Attachment E

Process Description

Attachment E

Process Description

Strickling Well Pad

Antero Resources Corporation

Doddridge County, West Virginia

A mixture of condensate, water, and entrained gas from the condensate and gas wells enters the facility through a series of line heaters (LH001-010) and gas production units (GPU001-GPU010). GPUs are 3-phase separators where the gas, condensate, and produced water are separated. The line heaters and GPUs are fueled by a slip stream of the separated gas.

The gas from the three phase separators is metered and sent to the sales gas pipeline. The water flow to the produced water storage tanks (TANKPW001-004). The condensate is sent to two phase low pressure separators where gas is separated. The gas is routed to the high pressure VRU driven by gas fueled engines (ENG001-003), compressed, metered and sent to the sales gas line. The condensate from the two phase separators then flows to the vapor recovery towers (VRT001-004) where gas is further separated. Gas from the VRTs is recovered via a low pressure VRU driven by gas fueled engine (ENG004), compressed, metered and sent to the sales gas line through the high pressure compressors. The condensate from the VRTs flows to the condensate storage tanks (TANKSCOND001-008). The line heaters are only used during the first several months from start of production and will be removed once production has normalized.


The facility has eight (8) tanks (TANKCOND001-008) on site to store condensate and four (4) tanks (TANKPW001-004) to store produced water prior to removal from the site. The flashing, working and breathing losses from the tanks are routed to four enclosed combustors (EC001-003) to control the emissions. The enclosed combustors that will be used to control emissions are designed to achieve a VOC destruction efficiency of 98 percent.

Condensate and produced water are transported off site on an as needed basis via tanker truck. Truck loading connections are in place to pump condensate (L001) and produced water (L002) from the storage tanks into tanker trucks. Emissions from the loading operations are vented to the atmosphere.

Emissions from the facility's emission sources were calculated using the extended condensate from Central 2H well in Jonathan Davis Well Pad and gas analysis from Hiley 2H well in Diane Davis Well Pad. The extended condensate analysis is considered representative of the materials from Strickling Well Pad, being in the same Marcellus rock formation.

Attachment F

Plot Plan

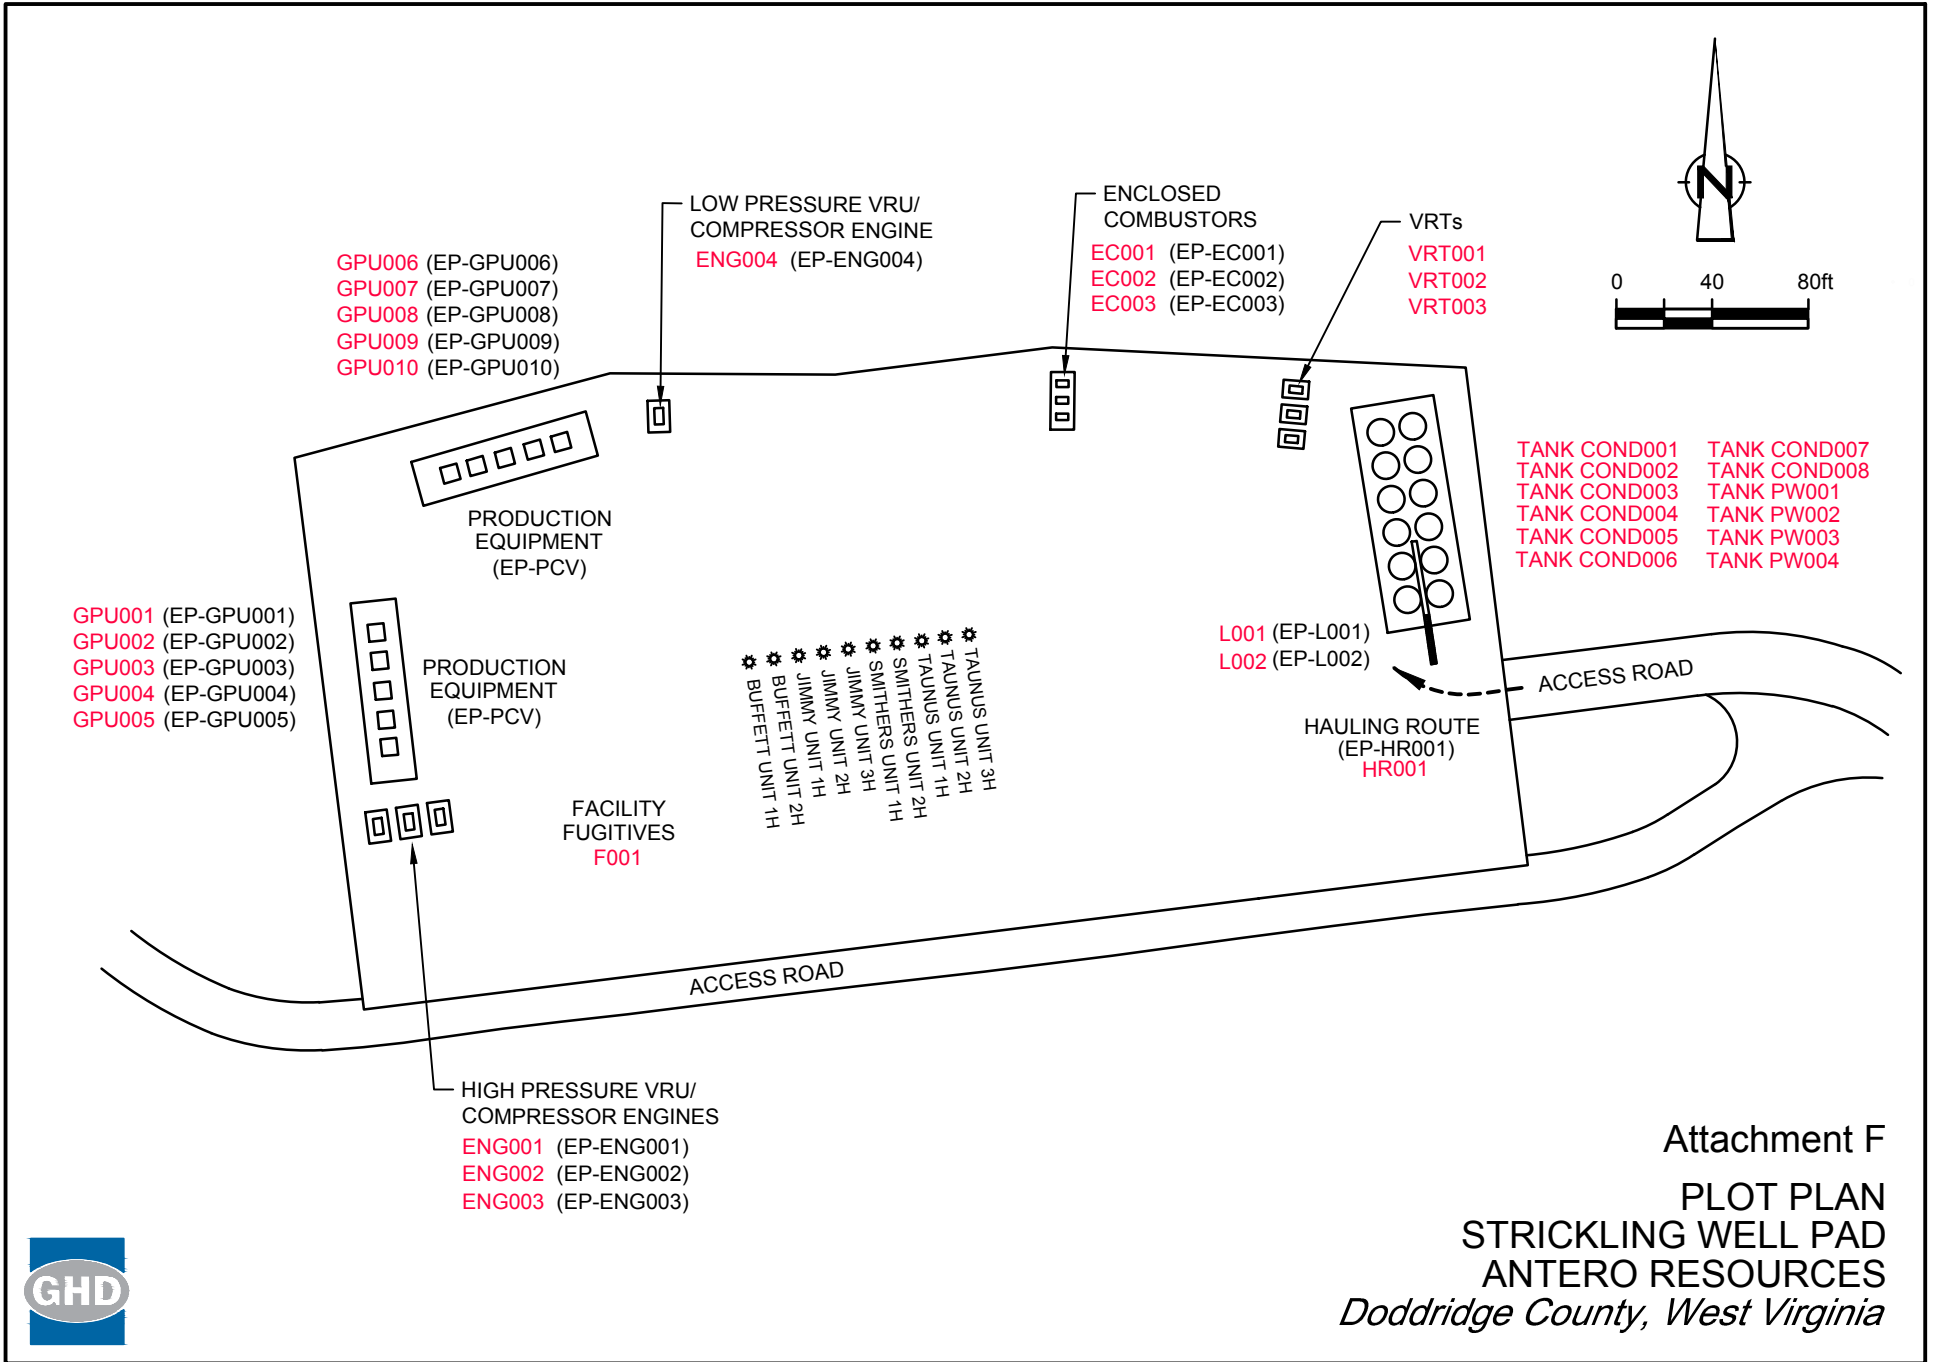


Attachment F
 PLOT PLAN
 STRICKLING WELL PAD
 ANTERO RESOURCES
 Doddridge County, West Virginia



Attachment G

Area Map

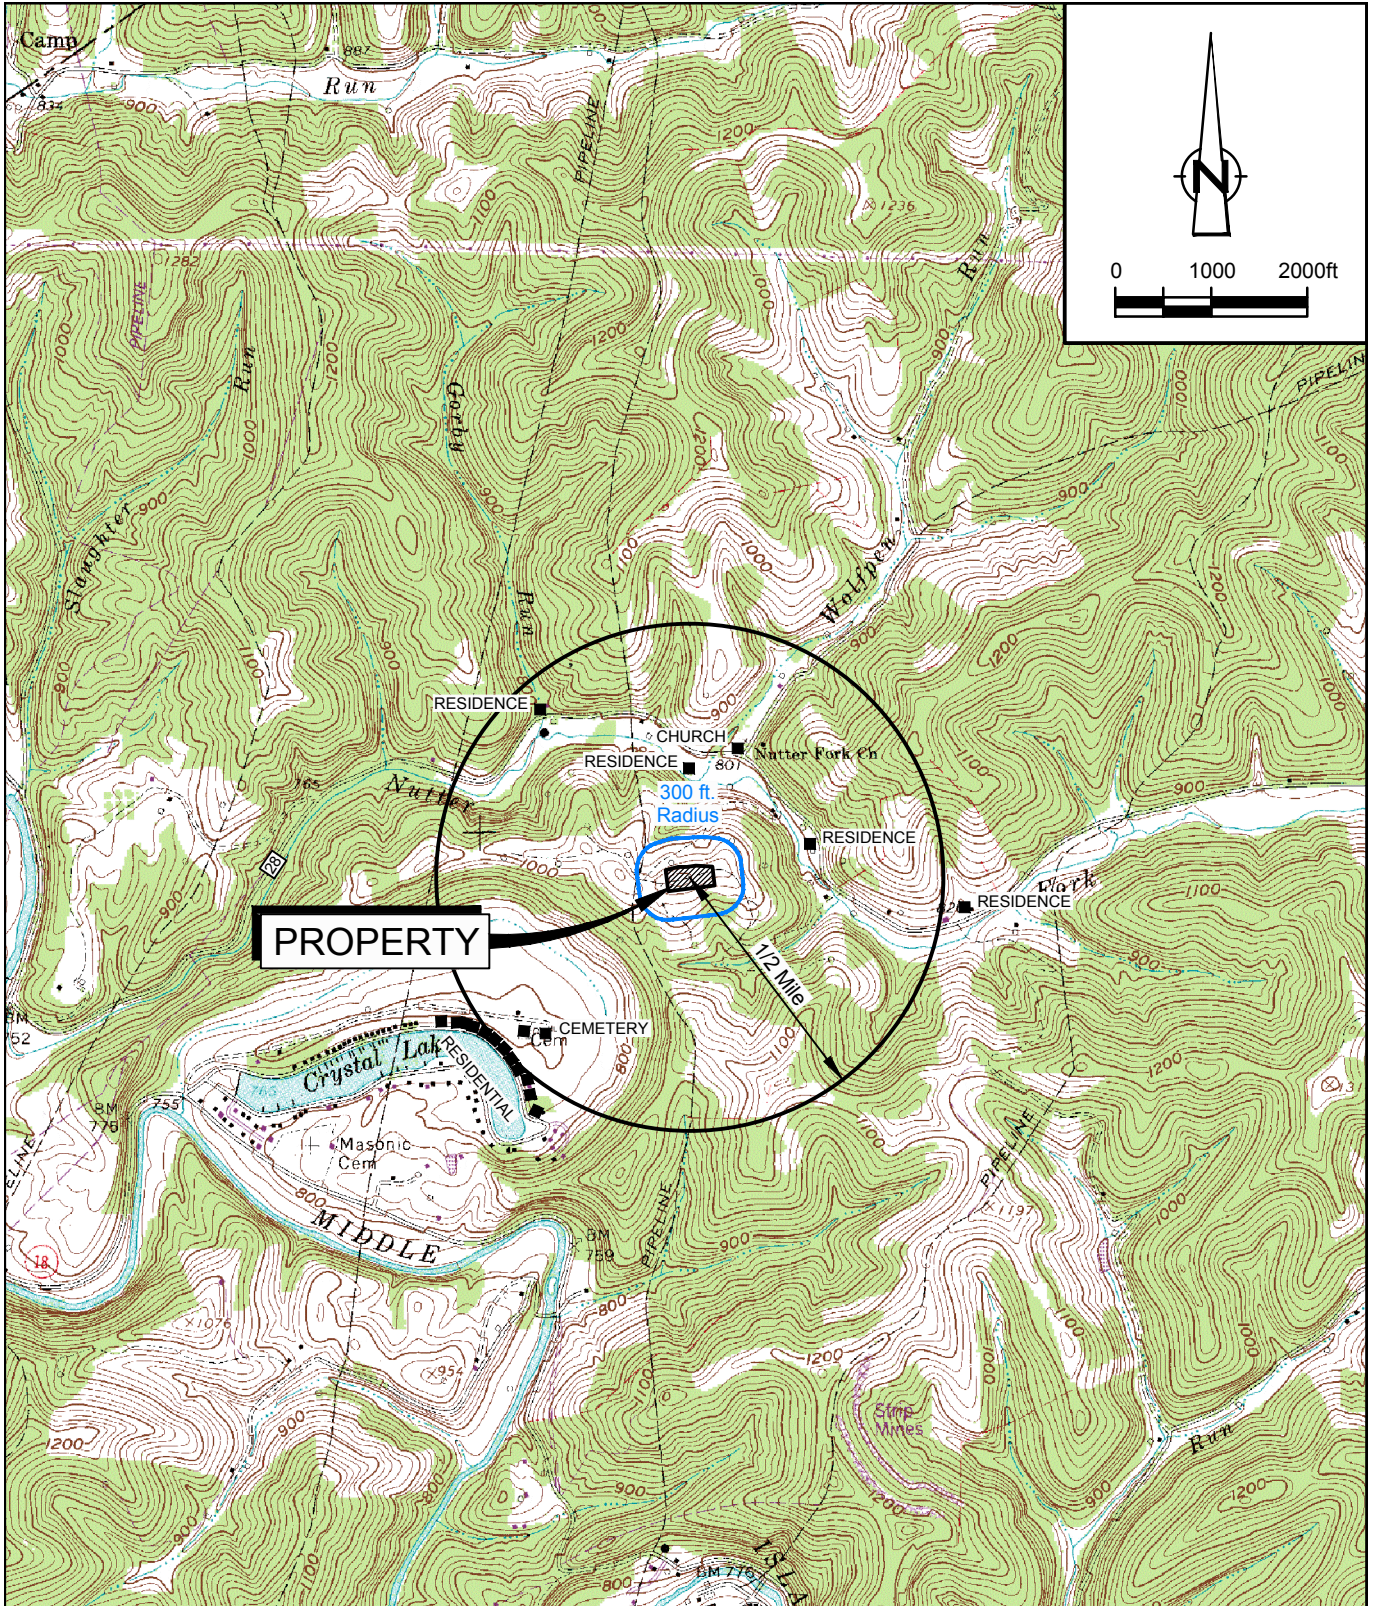

SOURCE: USGS QUADRANGLE MAP;
WEST UNION, WEST VIRGINIA

SITE COORDINATES: 39.33218, -80.78376
SITE ELEVATION: 1065 ft AMSL



Attachment G
AREA MAP
STRICKLING WELL PAD
ANTERO RESOURCES
Doddridge County, West Virginia

Attachment H

G70-C Section Applicability Form

ATTACHMENT H – G70-D SECTION APPLICABILITY FORM

**General Permit G70-D Registration¹
Section Applicability Form**

General Permit G70-D was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, centrifugal compressors, reciprocating compressors, reciprocating internal combustion engines (RICEs), tank truck loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-D allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

GENERAL PERMIT G70-D APPLICABLE SECTIONS	
<input checked="" type="checkbox"/> Section 5.0	Gas Well Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water ¹
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input checked="" type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO/OOOOa and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input type="checkbox"/> Section 11.0	Pneumatic Pump Affected Facility (NSPS, Subpart OOOOa)
<input checked="" type="checkbox"/> Section 12.0	Fugitive Emissions GHG and VOC Standards (NSPS, Subpart OOOOa)
<input checked="" type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck/Rail Car Loading ²
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units ³

1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subparts OOOO or OOOOa control requirements or the applicable control device requirements of Section 8.

2 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.

3 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

Attachment I

Emission Units/ ERD Table

ATTACHMENT I – EMISSION UNITS / EMISSION REDUCTION DEVICES (ERD) TABLE

Include ALL emission units and air pollution control devices /ERDs that will be part of this permit application review. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Emission Unit ID ¹	Emission Point ID ²	Emission Unit Description	Year Installed	Manufac. Date ³	Design Capacity	Type ⁴ and Date of Change	Control Device(s) ⁵	ERD (s) ⁶
GPU001-006	EP-GPU001-006	Gas Production Unit Heater	2018		1.5 MMBtu/hr	New	N/A	
GPU007-010	EP-GPU007-010	Gas Production Unit Heater	2018		1.5 MMBtu/hr	New		
LH001 -010	EP-LH001 -010	Line Heater	2018		2.0 MMBtu/hr	New	N/A	
F001	F001	Fugitives	2018		N/A	New	N/A	
TANKCOND001-008	EP-EC001, EP-EC002, EP-EC003	Condensate Tank F/W/B	2018		400 bbl each	New	EP-EC001, EP-EC002, EP-EC003	
TANKCOND009-010	EP-EC001, EP-EC002, EP-EC003	Condensate Tank F/W/B	NA		400 bbl each	Removal- 2017	EP-EC001, EP-EC002, EP-EC003	
TANKPW001-002	EP-EC001, EP-EC002, EP-EC003	PW Tank F/W/B	2018		400 bbl each	New	EP-EC001, EP-EC002, EP-EC003	
TANKPW003-004	EP-EC001, EP-EC002, EP-EC003	PW Tank F/W/B	2018		400 bbl each	New	EP-EC001, EP-EC002, EP-EC003	
L001	EP-L001	Loading (Condensate)	2018		10800 gal/hr 34,339,200 gal/yr	New	N/A	
L002	EP-L002	Loading (Produced Water)	2018		10080 gal/hr 91,980,000 gal/yr	New	N/A	
HR001	EP-HR001	Haul Road	2018		Tanker Trucks Condensate: 4543 trips per year Tanker Trucks PW: 19910 trips per year Pick Up Truck: 730 trips per year	New	N/A	
EC001	EP-EC001	Enclosed Combustor	2018		12 MMBtu/hr	New	N/A	
EC002	EP-EC002	Enclosed Combustor	2018		12 MMBtu/hr	New	N/A	
EC003	EP-EC003	Enclosed Combustor	2018		12 MMBtu/hr	New	N/A	
PCV	EP-PCV	Pneumatic CV	2018		6.6 scf/day/PCV	New	N/A	
ENG001	EP-ENG001	Compressor Engine	NA	2013	24 HP	Removal-2017	Non-Selective Catalytic Reduction	
ENG001-003	EP-ENG001-003	High Pressure VRU Compressor Engine	2018	2015	76 HP	New	Non-Selective Catalytic Reduction	
ENG004	ENG004	Low Pressure VRU Compressor Engine	2018	2015	76 HP	New	Non-Selective Catalytic Reduction	

1 For Emission Units (or Sources) use the following numbering system: 15, 25, 35, ... or other appropriate designation.

2 For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

3 When required by rule.

4 New, modification, removal, existing.

5 For Control Devices use the following numbering system: 1C, 2C, 3C, ... or other appropriate designation.

6 For ERDs use the following numbering system: 1D, 2D, 3D, ... or other appropriate designation.

Attachment J

Fugitive Emissions Summary Sheet

ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions , etc.
Use extra pages for each associated source or equipment if necessary.

Source/Equipment:

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections		<input checked="" type="checkbox"/> Infrared (FLIR) cameras		<input type="checkbox"/> Other (please describe)		<input type="checkbox"/> None required	
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)				
					VOC	HAP	GHG (methane)	GHG (CO2e)	
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	500	EPA	gas	2.540	0.335	14.373	359.332	
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	520	EPA	liquid	11.987	1.322	0.165	4.133	
Connections (Not sampling)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	590	EPA	gas	0.133	0.018	0.754	18.845	
Flanges	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	130	EPA	gas	0.057	0.008	0.324	8.097	

¹ Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e. g. pigging operations, equipment blowdowns, pneumatic controllers, etc.)

Please indicate if there are any closed vent bypasses (include component)

Specify all equipment used in the closed vent system (e. g. VRU, ERD, thief hatches, tanker truck loading, etc.)

Attachment K

Gas Well Affected Facility Data Sheet

ATTACHMENT K – GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

API Number	Date of Flowback	Date of Well Completion	Green Completion and/or Combustion Device	Subject to OOOO or OOOOa?
	9/4/2018	4/23/2018	Green	OOOOa
47-017-06625-00	9/9/2018	5/2/2018	Green	OOOOa
47-017-06624-00	9/14/2018	5/12/2018	Green	OOOOa
	9/20/2018	5/23/2018	Green	OOOOa
	9/26/2018	6/4/2018	Green	OOOOa
	10/1/2018	6/16/2018	Green	OOOOa
47-017-06790-00	9/26/2018	6/28/2018	Green	OOOOa
47-017-06662-00	9/19/2018	7/11/2018	Green	OOOOa
	9/13/2018	7/24/2018	Green	OOOOa
	9/6/2018	8/7/2018	Green	OOOOa

Note: If future wells are planned and no API number is available please list as PLANNED.

If there are existing wells that commenced construction prior to August 23, 2011, please acknowledge as existing.

This is the same API (American Petroleum Institute) well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number application without the state code (047).

Every oil and gas well permitted in West Virginia since 1929 has been issued an API number. This API is used by agencies to identify and track oil and gas wells.

The API number has the following format: 047-001-00001

Where,

047 = State code. The state code for WV is 047.

001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).

00001 = Well number. Each well will have a unique well number.

Attachment L

Storage Vessel Data Sheet

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for each new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water. (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name	Tanks	2. Tank Name:	Condensate Tank 001-08
---------------------------	-------	---------------	------------------------

3. Emission Unit ID number:	TANKCOND001-008	4. Emission Point ID number.	EP-EC001, EP-EC002, EP-EC003
-----------------------------	-----------------	------------------------------	------------------------------

5. Date Installed , Modified or Relocated (for existing tanks) 2018 Was the tank manufactured after August 23, 2011 and on or before September 18, 2015? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Was the tank manufactured after September 18, 2015? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other <input type="checkbox"/> Relocation
---	---

- 7A. Description of Tank Modification (if applicable)
- 7B. Will more than one material be stored in this tank? If so, a separate form must be completed for each material.
 Yes No
- 7C. Was USEPA Tanks simulation software utilized?
 Yes No
- If Yes, please provide the appropriate documentation and items 8-42 below are not required.*

TANK INFORMATION

8. Design Capacity (specify barrels or gallons). Use the internal cross-sectional area multiplied by internal height. 400bbbls			
9A. Tank Internal Diameter (ft): 12	9B. Tank Internal Height (or Length) (ft):		20
10A. Maximum Liquid Height (ft): 18	10B. Average Liquid Height (ft):		10
11A. Maximum Vapor Space Height (ft): 18	11B. Average Vapor Space Height (ft):		10
12. Nominal Capacity (specify barrels or gallons). This is also known as “working volume” and considers design liquid levels and overflow valve heights.: 400bbbls			
13A. Maximum annual throughput (gal/yr):	34339200	13B. Maximum daily throughput (gal/day):	94080
14. Number of Turnovers per year (annual net throughput/maximum tank liquid volume):	256	15. Maximum tank fill rate (gal/min)	151.2
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading			
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			

If yes, (A) What is the volume expansion capacity of the system (gal)?
(B) What are the number of transfers into the system per year?

18. Type of tank (check all that apply):
- Fixed Roof vertical horizontal flat roof cone roof dome roof other (describe)
 - External Floating Roof pontoon roof double deck roof
 - Domed External (or Covered) Floating Roof
 - Internal Floating Roof vertical column support self-supporting
 - Variable Vapor Space lifter roof diaphragm
 - Pressurized spherical cylindrical
 - other

ATTACHMENT L – STORAGE VESSEL DATA SHEET

PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply:

- Does Not Apply
- Inert Gas Blanket of
- Vent to Vapor Combustion Device (vapor combustors, flares, thermal oxidizers, enclosed combustors)
- Conservation Vent (psig)

Vacuum Setting	Pressure Setting
----------------	------------------
- Emergency relief Valve (psig)

Vacuum Setting	Pressure Setting
----------------	------------------
- Thief Hatch Weighted Yes No

Complete appropriate Air Pollution Control Device Sheet

20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).

Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emission Loss		'Estimation Method
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
<i>Please see Table 6 and Table 7</i>									

TANK CONSTRUCTION & OPERATION INFORMATION

21. Tank Shell Construction:

- Riveted Gunite lined Epoxy-coated Other (describe): Steel

21A. Shell Color: Green	21B. Roof Color: Green	21C. Year Last Painted 2018
-------------------------	------------------------	-----------------------------

22. Shell Condition (if metal and unlined):

- No Rust Light Rust Dense Rust Not applicable

22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?
---	-------------------------------------	--

23. Operating Pressure Range (psig): 0 psig, atmospheric

Must be listed for tanks using VRUs with closed vent system

24. Is the tank a Vertical Fixed Roof Tank? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft): NA	24B. If yes, for cone roof, provide slop (ft/ft): NA
--	--	--

25. Complete the following section for **Floating Roof Tanks** Does Not Apply

25A. Year Internal Floaters Installed:

25B. Primary Seal Type:	<input type="checkbox"/> Metallic (mechanical) shoe seal	<input type="checkbox"/> Liquid mounted resilient seal
	<input type="checkbox"/> Vapor mounted resilient seal	<input type="checkbox"/> Other (describe):

25C. Is the Floating Roof equipped with a Secondary Seal? Yes No

25D. If YES, how is the secondary seal mounted? (check one)

- Shoe Rim Other (describe)

25E. Is the Floating Roof equipped with a weather shield? Yes No

25F. Describe deck fittings

26. Complete the following section for Internal Floating Roof Tanks Does not apply

26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded	26B. For bolted decks, provide deck construction
---	--

26C. Deck seam:
 5 ft. wide 6 ft. wide 7 ft. wide 5 x 7.5 ft wide 5 x 12 ft wide Other (describe)

26D. Deck seam length (ft)	26E. Area of deck (ft ²)	26F. For column supported tanks: Number of columns:	26G. For column supported tanks, Diameter of each column:
----------------------------	--------------------------------------	--	---

27. Closed Vent System with VRU Yes No

28. Closed Vent System with Enclosed Combustor? Yes No

ATTACHMENT L – STORAGE VESSEL DATA SHEET

SITE INFORMATION

29. Provide the city and state on which the data in this section are based.: West Union, WV			
30. Daily Average Ambient Temperature (°F):	72.10	31. Annual Average Maximum Temperature (°F):	75.94
32. Annual Average Minimum Temperature (°F):	46.56	33. Average Wind Speed (miles/hr): 18.5 mph	
34. Annual Average Solar Insulation Factor (BTU/(ft ² ·day))	1030.235999	35. Atmospheric Pressure (psia): 14.8 (based off local conditions, could not find annual)	

LIQUID INFORMATION

36. Average daily temperature range of bulk liquid (F):	72.10	36A. Minimum (°F):	46.56	36B. Maximum (°F)	75.94
37. Average operating pressure range of tank (psig):	atmosphere	37A. Minimum (psig)	0	37B. Maximum (psig)	atmosphere
38A. Minimum Liquid Surface Temperature (°F)	46.56	38B. Corresponding Vapor Pressure (psia)	1.8280		
39A. Average Liquid Surface Temperature (°F)	72.10	39B. Corresponding Vapor Pressure (psia)	3.0683		
40A. Maximum Liquid Surface Temperature (°F)	75.94	40B. Corresponding Vapor Pressure (psia)	3.3028		

41. Provide the following for each liquid or gas to be stored in tank. Add additional pages if necessary.

41A. Material Name or Composition	Condensate		
41B. CAS Number	mix of HC		
41C. Liquid Density (lb/gal)	5.4900		
41D. Liquid Molecular Weight (lb/lb-mole)	83.00		
41E. Vapor Molecular Weight (lb/lb-mole)	43.1440		
Maximum Vapor Pressure	3.3028		
41F. True (psia)			
41G. Reid (psia)	4.41		
Months Storage per Year	year round		
41H. From - To			
Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations	psig; F		
42.			

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for each new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water. (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name Tanks	2. Tank Name: Produced Water Tank 001-004
3. Emission Unit ID number: TANKPW001-004	4. Emission Point ID number. EP-EC001, EP-EC002, EP-EC003
5. Date Installed, Modified or Relocated (for existing tanks) 2017	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other <input type="checkbox"/> Relocation
Was the tank manufactured after August 23, 2011 and on or before September 18, 2015? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
Was the tank manufactured after September 18, 2015? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
7A. Description of Tank Modification (if applicable)	
7B. Will more than one material be stored in this tank? If so, a separate form must be completed for each material. <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	

If Yes, please provide the appropriate documentation and items 8-42 below are not required.

TANK INFORMATION

8. Design Capacity (specify barrels or gallons). Use the internal cross-sectional area multiplied by internal height. 400bbbls			
9A. Tank Internal Diameter (ft): 12	9B. Tank Internal Height (or Length) (ft):		20
10A. Maximum Liquid Height (ft): 18	10B. Average Liquid Height (ft):		10
11A. Maximum Vapor Space Height (ft): 18	11B. Average Vapor Space Height (ft):		10
12. Nominal Capacity (specify barrels or gallons). This is also known as "working volume" and considers design liquid levels and overflow valve heights.: 400bbbls			
13A. Maximum annual throughput (gal/yr):	91980000	13B. Maximum daily throughput (gal/day):	252000
14. Number of Turnovers per year (annual net throughput/maximum tank liquid volume):	1369	15. Maximum tank fill rate (gal/min)	151.2
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading			
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?			
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input checked="" type="checkbox"/> vertical <input type="checkbox"/> horizontal <input checked="" type="checkbox"/> flat roof <input type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical			

ATTACHMENT L – STORAGE VESSEL DATA SHEET

PRESSURE/VACUUM CONTROL DATA

19. Check as many as apply:

- Does not apply Rupture Disc (psig)
- Inert Gas Blanket Carbon Adsorption
- Vent to Vapor Combustion Device (vapor combustors, flares, thermal oxidizers, enclosed combustors)
- Conservation Vent (psig)

Vacuum Setting	Pressure Setting
----------------	------------------
- Emergency relief Valve (psig)

Vacuum Setting	Pressure Setting
----------------	------------------
- Thief Hatch Weighted Yes No

Complete appropriate Air Pollution Control Device Sheet

20. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).

Material Name	Flashing Loss		Breathing Loss		Working Loss		Total Emission Loss		1 Estimation Method
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
<i>Please see Table 6 and Table 7</i>									

TANK CONSTRUCTION & OPERATION INFORMATION

21. Tank Shell Construction:

- Riveted Gunitite lined Epoxy-coated Other(describe): Steel

21A. Shell Color: Green 21B. Roof Color: Green 21C. Year Last Painted: 2018

22. Shell Condition (if metal and unlined):

- No Rust Light Rust Dense Rust Not applicable

22A. Is the tank heated? 22B. If yes, operating temperature: 22C. If yes, how is heat provided to tank?

Yes No

23. Operating Pressure Range (psig): 0 psig, atmospheric
Must be listed for tanks using VRUs with closed vent system

24. Is the tank a Vertical Fixed Roof Tank? 24A. If yes, for dome roof provide radius (ft): NA 24B. If yes, for cone roof, provide slop (ft/ft): NA

Yes No

25. Complete the following section for **Floating Roof Tanks** Does Not Apply

25A. Year Internal Floaters Installed:

25B. Primary Seal Type: Metallic (mechanical) shoe seal Liquid mounted resilient
 Vapor mounted resilient seal Other (describe):

25C. Is the Floating Roof equipped with a Secondary Seal? Yes No

25D. If YES, how is the secondary seal mounted? (check one)
 Shoe Rim Other(describe):

25E. Is the Floating Roof equipped with a weather shield? Yes No

25F. Describe deck fittings

26. Complete the following section for Internal Floating Roof Tanks Does not apply

26A. Deck Type: Bolted Welded 26B. For bolted decks, provide deck construction

26C. Deck seam:
 5 ft. wide 6 ft. wide 7 ft. wide 5 x 7.5 ft. wide 5 x 12 ft. wide Other (describe)

26D. Deck seam length (ft) 26E. Area of deck (ft²) 26F. For column supported tanks: Number of columns: 26G. For column supported tanks, Diameter of each column:

27. Closed Vent System with VRU Yes No

28. Closed Vent System with Enclosed Combustor? Yes No

ATTACHMENT L – STORAGE VESSEL DATA SHEET

SITE INFORMATION			
29. Provide the city and state on which the data in this section are based.: West Union, WV			
30. Daily Average Ambient Temperature (°F):	72.10	31. Annual Average Maximum Temperature (°F):	75.94
32. Annual Average Minimum Temperature (°F):	46.56	33. Average Wind Speed (miles/hr): 5.9 mph	
34. Annual Average Solar Insulation Factor (BTU/(ft ² -day))	1030.236	35. Atmospheric Pressure (psia): 14.8 (based off local conditions, could not find annual)	
LIQUID INFORMATION			
36. Average daily temperature range of bulk liquid (F):	72.10	36A. Minimum (°F):	46.56
		36B. Maximum (°F)	75.94
37. Average operating pressure range of tank (psig):	atmosphere	37A. Minimum (psig)	0
		37B. Maximum (psig)	atmosphere
38A. Minimum Liquid Surface Temperature (°F)	46.56	38B. Corresponding Vapor Pressure (psia)	0.2282
39A. Average Liquid Surface Temperature (°F)	72.10	39B. Corresponding Vapor Pressure (psia)	0.4529
40A. Maximum Liquid Surface Temperature (°F)	75.94	40B. Corresponding Vapor Pressure (psia)	0.4993
41. Provide the following for <u>each</u> liquid or gas to be stored in tank. Add additional pages if necessary.			
41A. Material Name or Composition	Produced Water		
41B. CAS Number	mix of HC and water		
41C. Liquid Density (lb/gal)	8.3300		
41D. Liquid Molecular Weight (lb/lb-mole)	18.57		
41E. Vapor Molecular Weight (lb/lb-mole)	18.5666		
Maximum Vapor Pressure	0.4993		
41F. True (psia)			
41G. Reid (psia)	1.0340		
Months Storage per Year	year round		
41H. From - To			
Final maximum gauge pressure and temperature prior to transfer into tank used as inputs into flashing emission calculations	246 psig; 70 F		
42.			

Attachment M
Natural Gas Fired Fuel Burning Unit(s)
Data Sheet

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO
40CFR60 SUBPART DC
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID#	Emission Point ID#	Emission Unit Description (Manufacturer, model#)	Year Installed/Modified	Type and Date of Change	Maximum Design Heat Input (MMBTU/hr)	Fuel Heating Value (BTU/scf)
GPU001	EP-GPU001	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU002	EP-GPU002	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU003	EP-GPU003	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU004	EP-GPU004	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU005	EP-GPU005	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU006	EP-GPU006	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU007	EP-GPU007	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU008	EP-GPU008	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU009	EP-GPU009	Gas Production Unit Heater	2018	New	1.5	1206.904
GPU010	EP-GPU010	Gas Production Unit Heater	2018	New	1.5	1206.904
LH001	EP-LH001	Line Heater	2018	New	2	1206.904
LH002	EP-LH002	Line Heater	2018	New	2	1206.904
LH003	EP-LH003	Line Heater	2018	New	2	1206.904
LH004	EP-LH004	Line Heater	2018	New	2	1206.904
LH005	EP-LH005	Line Heater	2018	New	2	1206.904
LH006	EP-LH006	Line Heater	2018	New	2	1206.904
LH007	EP-LH007	Line Heater	2018	New	2	1206.904
LH008	EP-LH008	Line Heater	2018	New	2	1206.904
LH009	EP-LH009	Line Heater	2018	New	2	1206.904
LH010	EP-LH010	Line Heater	2018	New	2	1206.904

1. Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.

2. Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

3. New, modification, removal.

4. Enter design heat input capacity in MMBtu/hr.

5. Enter the fuel heating value in BTU/standard cubic foot.

Attachment N

Internal Combustion Engine Data Sheet


ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*


Emission Unit ID#		ENG001		ENG001-004			
Engine Manufacturer/Model		Engine (Kubota DG972-E2)		Ford MSG425 2.5L Engine			
Manufacturers Rated bhp/rpm		24 HP @ 3600 rpm		76 HP @ 3200 rpm			
Source Status		REM		NS			
Date Installed/ Modified/ Removed/ Relocated		NA		2018			
Engine Manufacturer/ Reconstruction Date		2013		2015			
Check all applicable Federal Rules for the engine (include EPA Certification of Conformity if applicable)		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJJ <input checked="" type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJJ <input checked="" type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources	
Engine Type		4SRB		4SRB			
APCD Type		NSCR		NSCR			
Fuel Type		RG		RG			
H2S (gr/ 100 scf)		0		0			
Operating bhp/rpm		16.5 HP @ 2400 rpm		50 HP @ 2300 rpm			
BSFC (BTU/bhp-hr)		9677		8328			
Hourly Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)		193 ft ³ /hr gal/hr		345.00 ft ³ /hr gal/hr		ft ³ /hr gal/hr	
Fuel Usage or Hours of Operation Metered		1.6907 MMft ³ /yr gal/yr		3.022 MMft ³ /yr gal/yr		MMft ³ /yr gal/yr	
Calculation Methodology	Pollutant	Hourly PTE (lb/hr)	Annual PTE (tons/year)	Hourly PTE (lb/hr)	Annual PTE (tons/year)	Hourly PTE (lb/hr)	Annual PTE (tons/year)
MD	NOx	0.3158	1.3831	0.2501	1.0953		
MD	CO	5.6445	24.7228	1.6505	7.2293		
AP	VOC	0.0069	0.0301	0.0749	0.3282		
AP	SO2	0.0001	0.0006	0.0015	0.0065		
AP	PM10	0.0022	0.0097	0.0241	0.1053		
AP	Formaldehyde	0.0048	0.0209	0.0519	0.2273		
AP	Total HAPs	0.0053	0.0234	0.0581	0.2545		
OT	GHG (CO2e)	26.8821	117.7436	293.0329	1283.4842		

Installation Drawings

Front End View

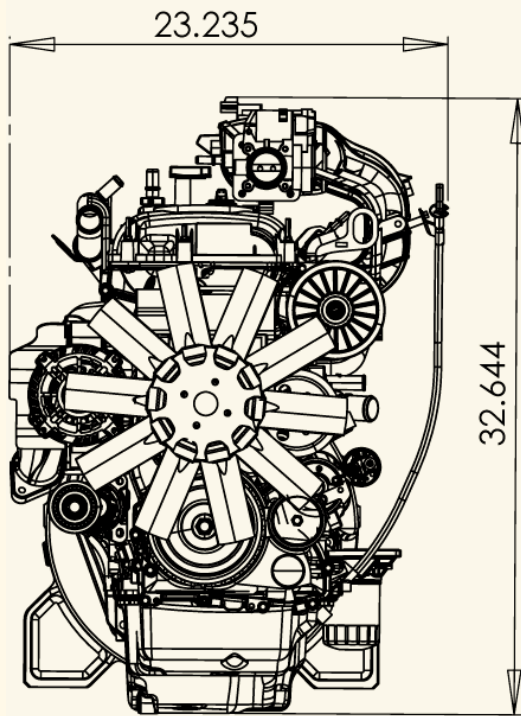


Left Side View

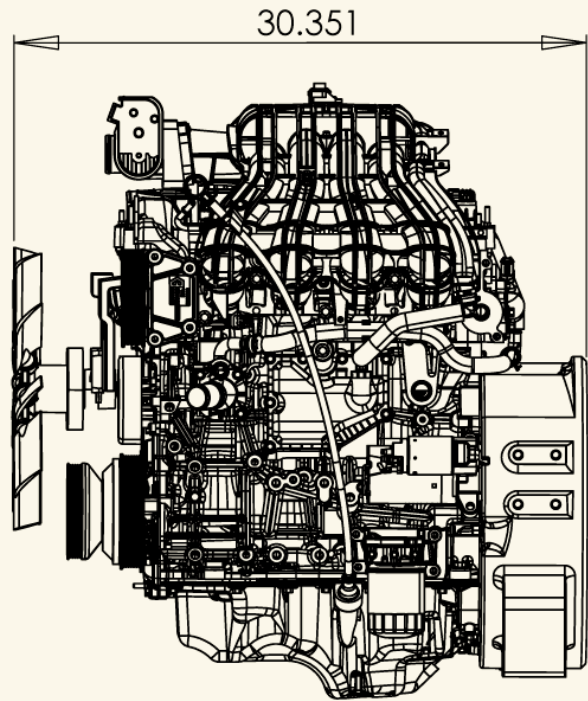


Power Curves (corrected per SAE J1349)

Gasoline

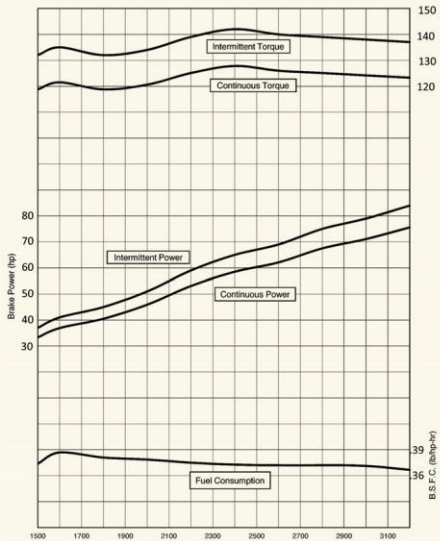


Engine Speed (RPM)

Natural Gas

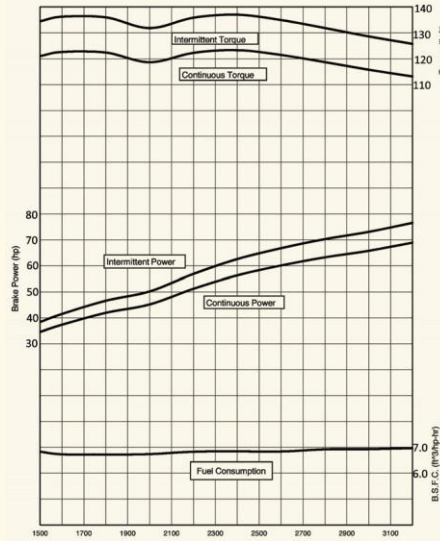

Engine Speed (RPM)


Liquefied Petroleum Gas

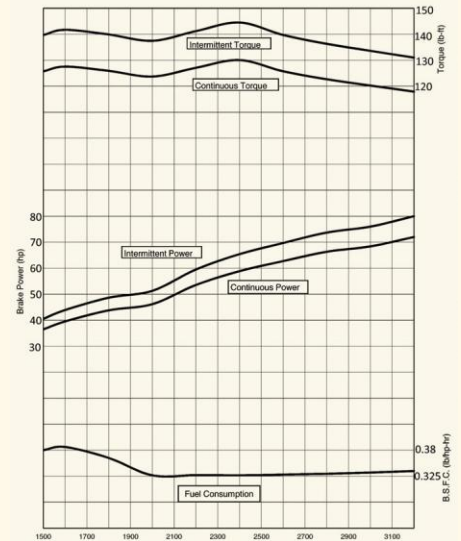

Engine Speed (RPM)



Powertrain Assemblies
& Components
Provided By Ford
Component Sales

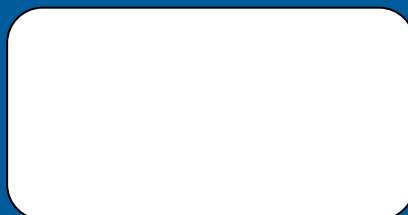

MSG-425 EFI

2.5 Liter 4-Cylinder



Options

Engine Cooling Fans

- 15" (381mm) diameter suction
- 15" (381mm) diameter pusher

Flywheels

- 10" (254mm) SAE over-center clutch
- flat face flywheel

Flywheel Housings

- SAE #4

Exhaust Manifold

- rear dump down

Power Steering Pump

Wiring Harnesses

Discrete Speed Switch

Variable Speed Hand Throttle

Variable Speed Foot Pedal

Engine Mounts

- Automotive with insulators
- Open power unit

Electronic Instrument Panel, Gauges

Three Way Catalyst / Muffler Standard

Transmissions

6R80 electronic shift

C6 Mechanical

Emissions Information

California Air Resources Board (CARB)

Environmental Protection Agency (EPA)

Emission Certified Packages Available.

Warranty

Contact Engine Distributors, Inc
for warranty details.



Powertrain Assemblies
& Components
Provided By Ford
Component Sales

Specifications

Engine Type	I-4
Bore and Stroke	3.5"x3.93" (89mm x 100mm)
Displacement	2.5L Liter (152.5 CID)
Compression Ratio	9.7:1
Oil Capacity	7 qts. including filter
Net Weight	351 Lbs. with accessories (159 Kgs.)
Dimensions	L 30.3" x W 23.3" x H 32.6" (769 mm x 589 mm x 828 mm)

GASOLINE (corrected per SAE J1349)

Unleaded 87 or 89 octane		
Intermittent Power	84 [HP] @ 3200rpm	(62 [kW] @ 3200rpm)
Continuous power	75 [HP] @ 3200rpm	(56 [kW] @ 3200rpm)
Intermittent Torque	137 [ft-lbs] @ 3200rpm	(185 [N-m] @ 3200rpm)
Continuous Torque	123 [ft-lbs] @ 3200rpm	(166 [N-m] @ 3200rpm)

NATURAL GAS (corrected per SAE J1349)

Fuel Specification	1050 BTU/FT3	
Intermittent Power	76 [HP] @ 3200rpm	(56 [kW] @ 3200rpm)
Continuous power	68 [HP] @ 3200rpm	(50 [kW] @ 3200rpm)
Intermittent Torque	125 [ft-lbs] @ 3200rpm	(169 [N-m] @ 3200rpm)
Continuous Torque	113 [ft-lbs] @ 3200rpm	(153 [N-m] @ 3200rpm)

LIQUEFIED PETROLEUM GAS (corrected per SAE J1349)

Fuel Specification	HD-5	
Intermittent Power	80 [HP] @ 3200rpm	(59 [kW] @ 3200rpm)
Continuous power	72 [HP] @ 3200rpm	(53 [kW] @ 3200rpm)
Intermittent Torque	131 [ft-lbs] @ 3200rpm	(177 [N-m] @ 3200rpm)
Continuous Torque	118 [ft-lbs] @ 3200rpm	(160 [N-m] @ 3200rpm)

Standard Features / Benefits

Set-for-life valvetrain

Deep skirted, ribbed cylinder block casting for rigidity

Aluminum AA319 cylinder block cast with the Cosworth process,
including cast-in-place iron cylinder liners.

Chain driven dual camshafts with automatic tensioning system

Structural front cover and oil pan

Alternate fuel ready valvetrain components

Individual coil on plug electronic ignition

Cast aluminum camshaft cover to ensure warp-free sealing

Sintered metal connecting rods

Nodular iron crankshaft, featuring five main bearings,
eight counterweights

Broadband knock sensor, calibrated for individual cylinder use

Gasoline Sequential Port Fuel Injection

Closed loop fuel control for all fuels

Electronic engine management system with built-in engine
protection against detonation, high coolant temperature, low oil
pressure, over speed shutdown and starter lockout

Next generation governing - discrete speeds, variable speeds,
drive by wire - using the highest quality components.

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapters 1 and 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-14-012;

IT IS ORDERED AND RESOLVED: That the following new large spark-ignition engines and emission control systems produced by the manufacturer are certified for use in off-road equipment as described below. Production engines shall be in all material respects the same as those for which certification is granted.

MODEL YEAR	ENGINE FAMILY NAME	ENGINE DISPLACEMENT (liters)	FUEL TYPE
2015	FEDIB02.5MSG	2.5	Gasoline, LPG, CNG, Gasoline-LPG Dual Fuel
DURABILITY HOURS	SPECIAL FEATURES & EMISSION CONTROL SYSTEMS		TYPICAL EQUIPMENT USAGE
5000	Three-Way Catalytic Converter, Heated Oxygen Sensor, Sequential Multiport Fuel Injection (Gas), Gaseous Fuel Mixer (LPG, CNG)		Forklift, Aerial Lift, Generator, Compressor, Pump, Other Industrial Equipment
ENGINE MODELS (rated power in kilowatt, kW)		MSG425-DF (64.3 kW), MSG425-GAS (64.3 kW), MSG425-LPG (59.8 kW), MSG425-LP VAPOR (59.8 kW), MSG425-NG (57.3 kW)	

The following are the hydrocarbon plus oxides of nitrogen (HC+NOx) and carbon monoxide (CO) exhaust certification emission standards (Title 13, California Code of Regulations, (13 CCR) Section 2433(b)(1)) and certification emission levels for this engine family in grams per kilowatt-hour (g/kW-hr). Engines within this engine family shall have closed crankcases in conformance with 13 CCR Section 2433(b)(3).

(g/kW-hr)	HC+NOx	CO
Exhaust Standards	0.8	20.6
Certification Levels	0.5	3.3

The following is the evaporative hydrocarbon emission standard (13 CCR Section 2433(b)(4)) and certification emission level for this engine family in grams per gallon of fuel tank capacity (g/gallon).

Evaporative Certification Method	HC Certification Level (g/gallon)	HC Certification Standard (g/gallon)
Design Based	N/A	0.2

BE IT FURTHER RESOLVED: That for the listed engines for the aforementioned model-year, the manufacturer has submitted, and the Executive Officer hereby approves, the information and materials to demonstrate certification compliance with 13 CCR Section 2433(c) (certification and test procedures), 13 CCR Section 2434 (emission control labels), and 13 CCR Sections 2435 and 2436 (emission control system warranty).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

This Executive Order is only granted to the engine family and model-year listed above. Engines in this family that are produced for any other model-year are not covered by this Executive Order.

Executed at El Monte, California on this 14th day of November 2014.

FOR Annette Hebert, Chief
 Emissions Compliance, Automotive Regulations and Science Division




UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
2015 MODEL YEAR
CERTIFICATE OF CONFORMITY
WITH THE CLEAN AIR ACT

OFFICE OF TRANSPORTATION
AND AIR QUALITY
ANN ARBOR, MICHIGAN 48105

Certificate Issued To: Engine Distributors, Inc.
(U.S. Manufacturer or Importer)
Certificate Number: FEDIB02.5MSG-002

Effective Date:
12/09/2014
Expiration Date:
12/31/2015


Byron J. Bunker, Division Director
Compliance Division

Issue Date:
12/09/2014
Revision Date:
N/A

Manufacturer: Engine Distributors, Inc.
Engine Family: FEDIB02.5MSG
Certification Type: Mobile and Stationary
Fuel : LPG/Propane
Gasoline (up to and including 10% Ethanol)
Natural Gas (CNG/LNG)
Emission Standards : NMHC + NOx (g/kW-hr) : 0.8
HC + NOx (g/kW-hr) : 0.8
CO (g/kW-hr) : 20.6
NMHC + NOx (g/kW-hr) : 0.8
HC + NOx (g/kW-hr) : 0.8
CO (g/kW-hr) : 20.6
Emergency Use Only : N


Pursuant to Section 213 of the Clean Air Act (42 U.S.C. section 7547) and 40 CFR Part 60, 40 CFR Part 1048, 1065, 1068, and 60 (stationary only and combined stationary and mobile) and subject to the terms and conditions prescribed in those provisions, this certificate of conformity is hereby issued with respect to the test engines which have been found to conform to applicable requirements and which represent the following nonroad engines, by engine family, more fully described in the documentation required by 40 CFR Part 60, 40 CFR Part 1048 and produced in the stated model year.

This certificate of conformity covers only those new nonroad spark-ignition engines which conform in all material respects to the design specifications that applied to those engines described in the documentation required by 40 CFR Part 60, 40 CFR Part 1048 and which are produced during the model year stated on this certificate of the said manufacturer, as defined in 40 CFR Part 60, 40 CFR Part 1048. This certificate of conformity does not cover nonroad engines imported prior to the effective date of the certificate.


It is a term of this certificate that the manufacturer shall consent to all inspections described in 40 CFR 1068.20 and authorized in a warrant or court order. Failure to comply with the requirements of such a warrant or court order may lead to revocation or suspension of this certificate for reasons specified in 40 CFR Part 60, 40 CFR Part 1048. It is also a term of this certificate that this certificate may be revoked or suspended or rendered void *ab initio* for other reasons specified in 40 CFR Part 60, 40 CFR Part 1048.

This certificate does not cover large nonroad engines sold, offered for sale, or introduced, or delivered for introduction, into commerce in the U.S. prior to the effective date of the certificate.


Gasoline

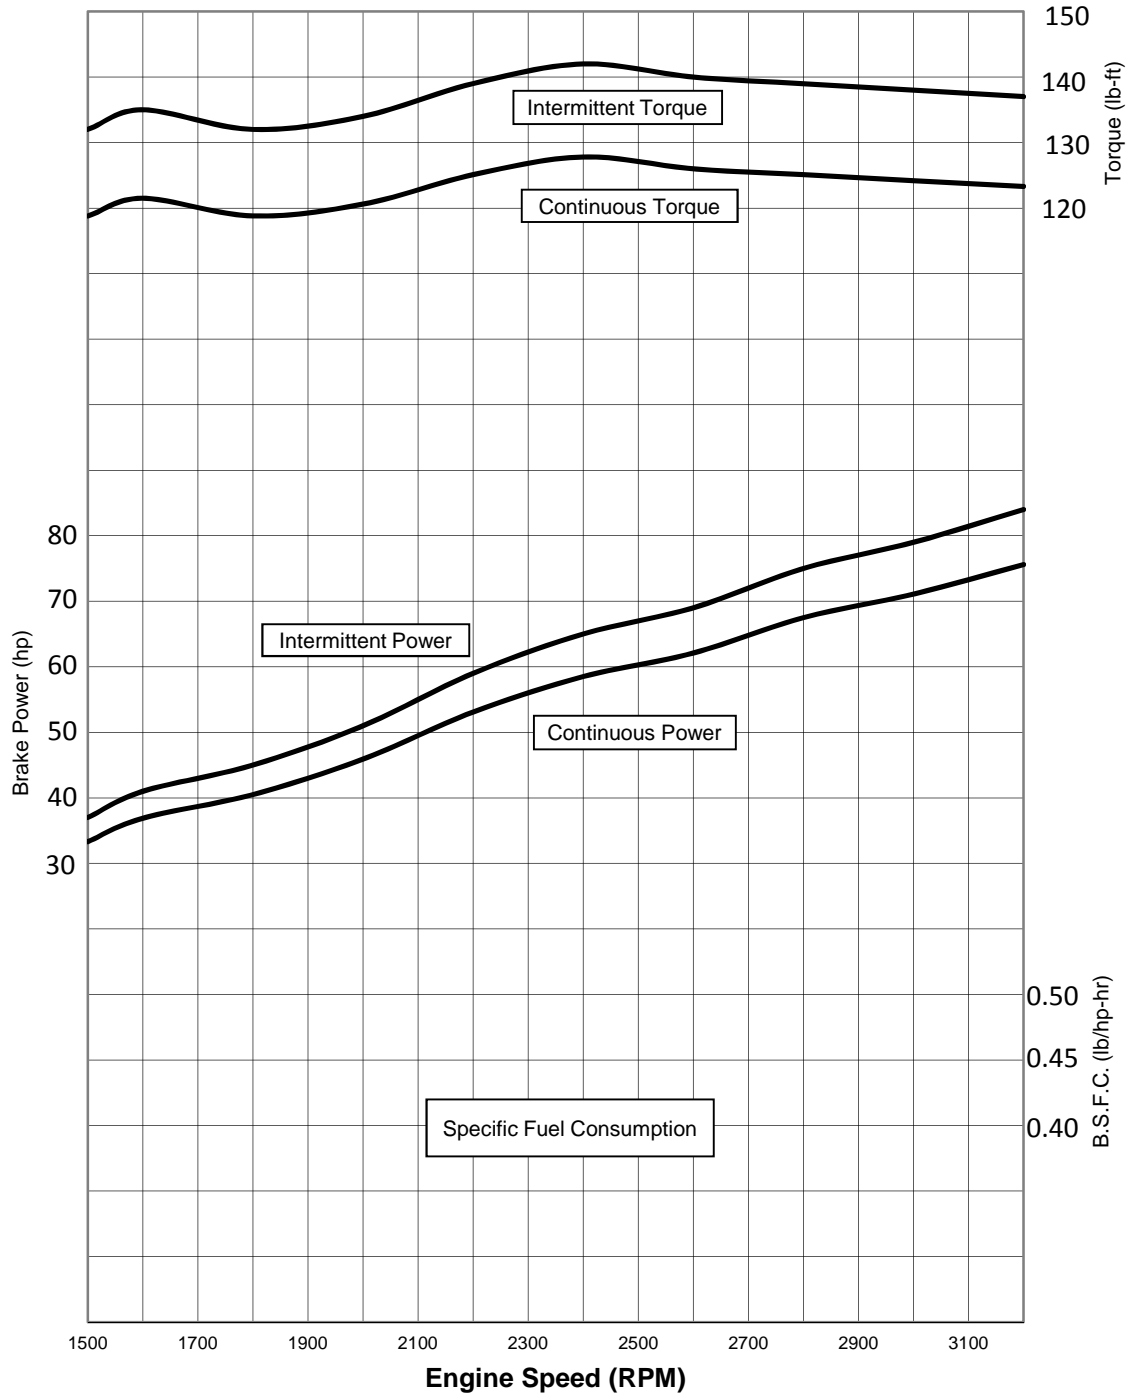

LP

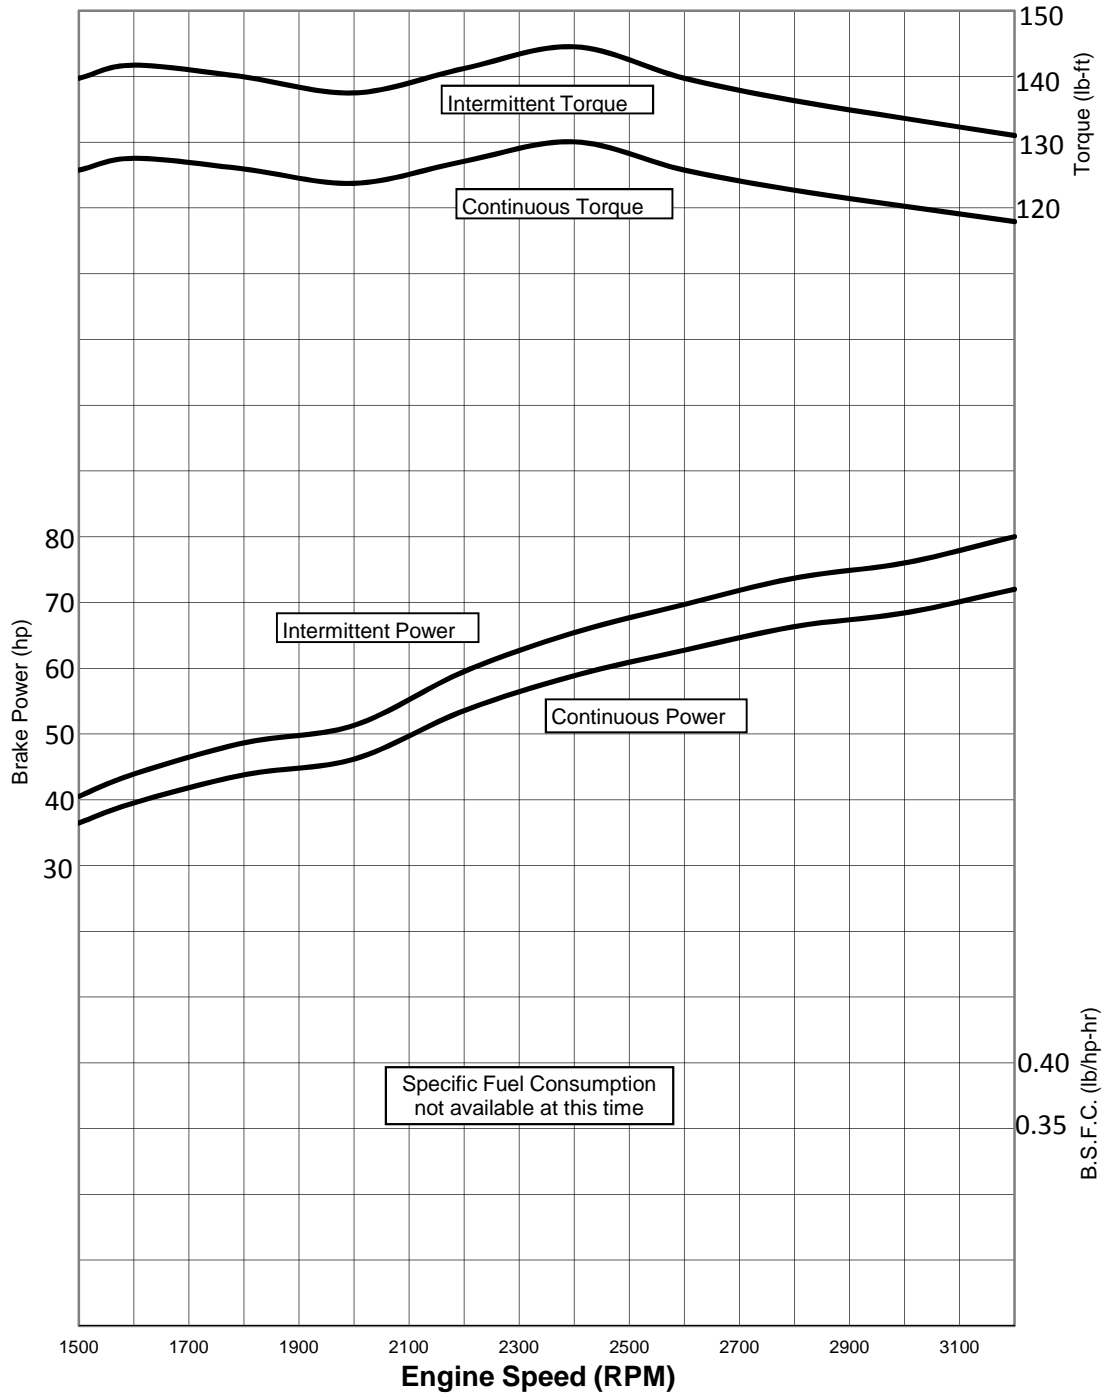

NG

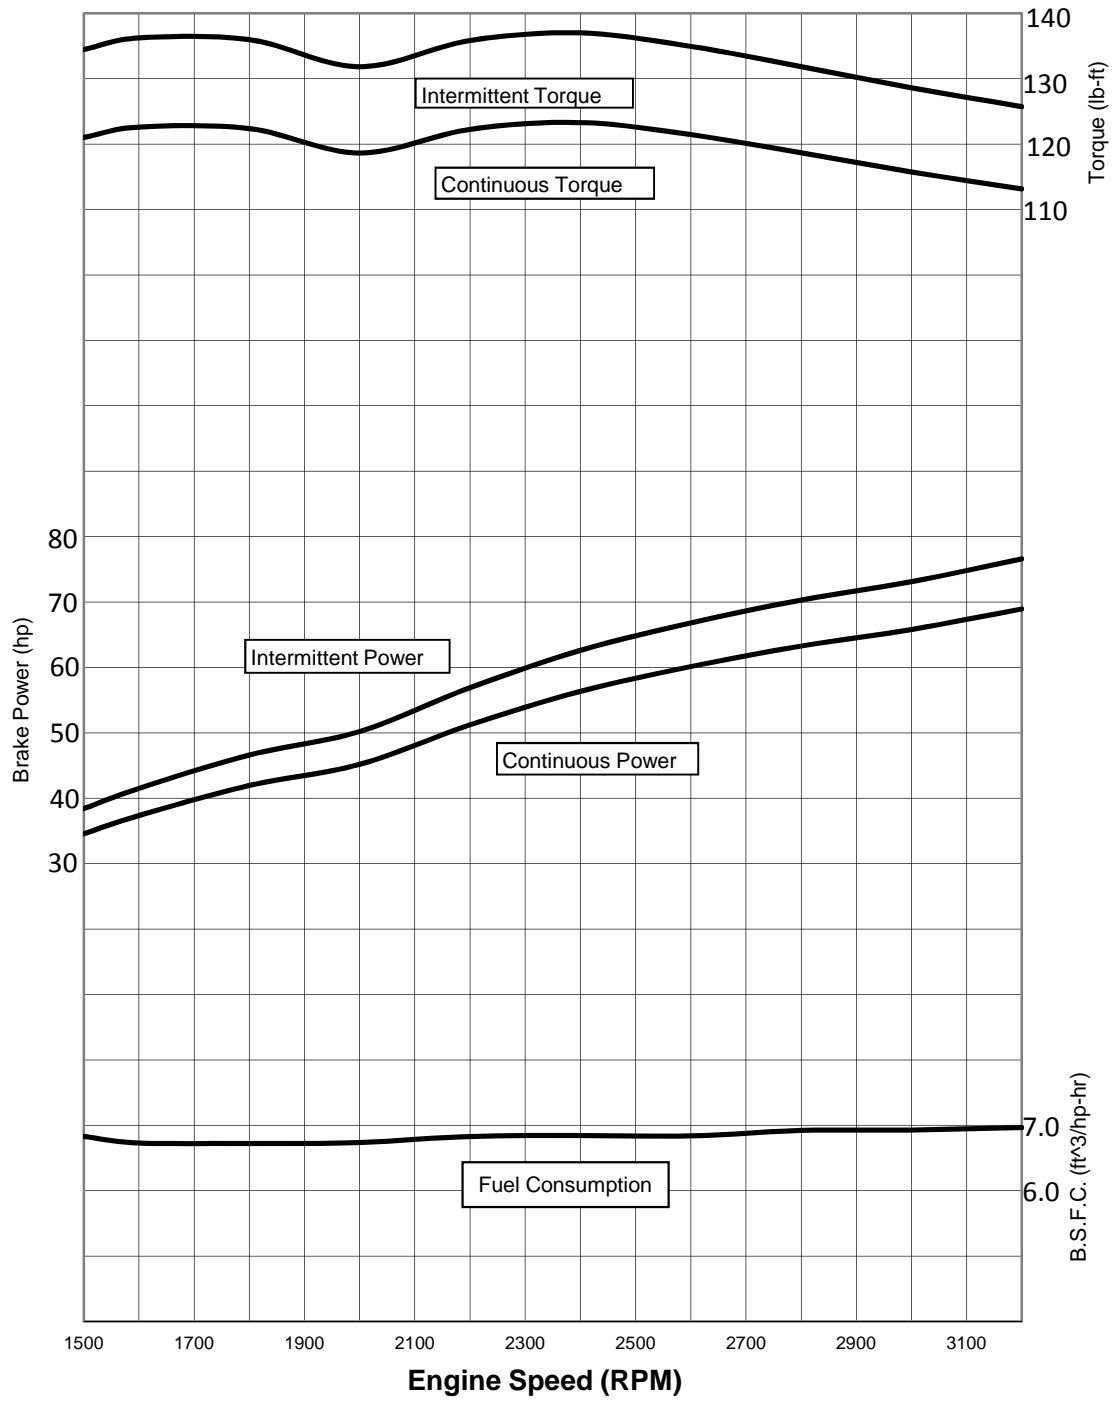

Attachment O

Tanker Truck Loading Data Sheet

ATTACHMENT O – TANKER TRUCK LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks. Use extra pages if necessary.

Truck Loadout Collection Efficiencies

The following applicable capture efficiencies of a truck loadout are allowed:

- For tanker trucks passing the MACT level annual leak test – 99.2%
- For tanker trucks passing the NSPS level annual leak test – 98.7%
- For tanker trucks not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: L001, L002	Emission Point ID#: EP-L001, EP-L002	Year Installed/ Modified: 2018
-------------------------------	--------------------------------------	-----------------------------------

Emission Unit Description: **Condensate Loading, Produced Water Loading**

Loading Area Data

Number of Pumps: **2** Number of Liquids Loaded: **2** Max number of trucks loading at one time: **2**

Are Tanker trucks pressure tested for leaks at this any other location? Yes No Not Required
 If Yes, Please Describe: Tank trucks are pressure tested for leaks at the location of the leak testing company. Trucks are tested using EPA Method 27-internal vapor valve test and issued certification that DOT requirements are met.

Provide description of closed vent system and any bypasses

Are any of the following truck loadout systems utilized? **No**
 Closed System to Tanker Truck passing a MACT level annual leak test?
 Closed System to Tanker Truck passing a NSPS level annual leak test?
 Closed System to Tanker Truck not passing an annual leak test and has vapor return?

Projected Maximum Operating Schedule (for rack or transfer point as a whole)

Time	Jan - Mar	Apr - Jun	Jul - Sept	Oct - Dec
Hours/day	19	19	19	19
Days/week	7	7	7	7

Bulk Liquid Data (use extra pages as necessary)

Liquid Name	Condensate	Produced Water	
Max. Daily Throughput (1000 gal/day)	94.08	252.00	
Max. Annual Throughput (1000 gal/yr)	34339.20	91980.00	
Loading Method	BF	BF	
Max. Fill Rate (gal/min)	151.2	151.2	
Average Fill Time (min/loading)	50	50	
Max. Bulk Liquid Temperature (F)	72.1	72.1	
True Vapor Pressure	3.1	0.5	
Cargo Vessel Condition	U	U	
Control Equipment or Method	None	None	
Max. Collection Efficiency (%)	0	0	
Max. Control Efficiency (%)	0	0	
Max VOC Emission Rate	Loading (lb/hr)	12.3264	0.0012
	Annual (ton/yr)	20.9959	0.0053
Max HAP Emission Rate	Loading (lb/hr)	1.0200	1.60E-05
	Annual (ton/yr)	1.7374	7.30E-05
Estimation Method	Promax	Promax	

- 1 BF Bottom Fill SP Splash Fill SUB Submerged Fill
- 2 At maximum bulk liquid temperature
- 3 B Ballasted Vessel C Cleaned U Uncleaned (dedicated servi O Other (describe)
- 4 List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)
- CA Carbon Adsorption VB Dedicated Vapor Balance (closed system)
- ECD Enclosed Combustion Device F Flare
- TO Thermal Oxidization or Incineration
- 5 EPA EPA Emission Factor in AP-42 MB Material Balance
- TM Test Measurement based upon test data submittal O Other (describe)

Attachment Q

Pneumatic Controllers Data Sheet

**ATTACHMENT Q – PNEUMATIC CONTROLLERS
DATA SHEET**

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list approximate number.

Attachment R

Pneumatic Pump Data Sheet

**ATTACHMENT R – PNEUMATIC PUMP
DATA SHEET**

Are there any natural gas-driven diaphragm pumps located at a well site that commenced construction, modification or reconstruction after September 18, 2015?

Yes No

Please list.

Source ID #	Date	Pump Make/Model	Pump Size

Attachment S
Air Pollution Control Device – Emission
Reduction Device Sheets

ATTACHMENT S – AIR POLLUTION CONTROL DEVICE / EMISSION REDUCTION DEVICE SHEETS

Complete the applicable air pollution control device sheet s for each flare, vapor combustor, thermal oxidizer, condenser, adsorption system, vapor recovery unit , BTEX Eliminator, Reboiler with and without Glow Plug, etc. at the facility. Use extra pages if necessary.

Emissions calculations must be performed using the most conservative control device efficiency.

The following five (5) rows are only to be completed if registering an alternative air pollution control device.

Emission Unit ID:	NA	Make/Model:	NA
Primary Control Device ID:	NA	Make/Model	NA
Control Efficiency (%):	NA	APCD/ERD Data Sheet Completed	<input type="checkbox"/> Yes <input type="checkbox"/> No
Secondary Control Device ID:	NA	Make/Model	NA
Control Efficiency (%):	NA	APCD/ERD Data Sheet Completed	<input type="checkbox"/> Yes <input type="checkbox"/> No

VAPOR COMBUSTION (Including Enclosed Combustors)

General Information

Control Device ID#:	EC001-003	Installation Date: <input checked="" type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Maximum Rated Total Flow Capacity		Maximum Design Heating Input (from mfg. spec sheet)	Design Heat Content
5458 scfh	131000 scfd	12.0 MMBTU/hr	2300 BTU/scf

Control Device Information

Type of Vapor Combustion Control?			
<input checked="" type="checkbox"/> Enclosed Combustion Device		<input type="checkbox"/> Elevated Flare	
<input type="checkbox"/> Thermal Oxidizer		<input type="checkbox"/> Ground Flare	
Manufacturer:	Cimarron	Hours of operation per year?	8760
Model:	48" HV ECD		

List the emission units whose emissions are controlled by this vapor control device (Emission Point ID# NA)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
TANKCOND001-008	Condensate Tanks		
TANKPW001-004	Produced Water Tanks		

If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.

Assist Type (Flares only)	Flare height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input checked="" type="checkbox"/> Non	25 feet	3.33 feet	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Provide determination

Waste Gas Information

Maximum Waste Gas Flow Rate	Heat Value of Waste Gas Stream	Exit Velocity of the Emission Stream
55.28 (scfm)	2,092.29 BTU/ft ³	0.1058 (ft/s)

Please see Attachment S, Tables 6 & 7 for VOC composition/ characteristics of the waste gas stream to be burned.

Pilot Gas Information

Number of Pilot Lights	Fuel Flow Rate to Pilot Flame per Pilot	Heat Input per Pilot	Will automatic re-ignition be used?
3	17 scfh	20517 BTU/hr	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

If automatic re-ignition is used, please describe the method.


Flame Rectification, a thermocouple equivalent

Is pilot flame equipped with a monitor to detect the presence of the flame?	If Yes, What type?
<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	<input type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input checked="" type="checkbox"/> Other: Flame Ionization Rod

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate).*


Additional information attached? Yes No Manufacturer's specs sheet

Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11 (b) and performance testing.

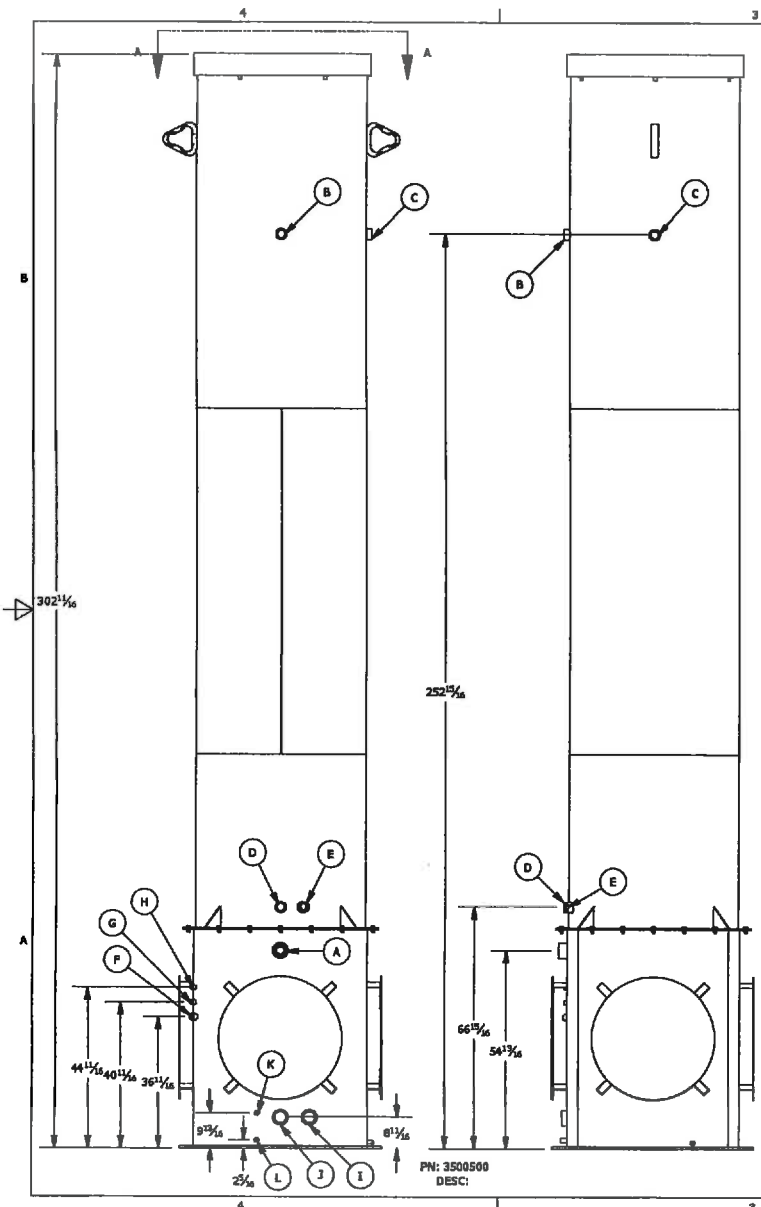

**48" DIA x 302 5/8" HEIGHT, 88 ORIFICES
EMISSION CONTROL DEVICE**

- * >98% TVOC DRE, CERTIFIED USEPA 40 CFR 60, APPENDIX A, SOURCE EMISSIONS TEST METHODS REFERENCED. MEETS ALL EPA & CDPHE REGULATIONS.
- * DESTROYS OIL/CONDENSATE PRODUCTION TANK VAPORS W/ NO VISIBLE FLAME.
- * EXCELLENT OPACITY AND SMOKELESS OPERATION.
- * RELIABLE AND CUSTOMIZABLE IGNITION.
- * VERY LOW CAPITAL AND OPERATING COST.
- * EASY TO OPERATE AND MAINTAIN.
- * FIELD TESTED TO DESTROY UP TO 119.5 MDSCFD (131 MCFD) @ 10 oz/in²; 2300 BTU/CF WASTE GAS (SG 1.45)
- * STRUCTURE CERTIFIED FOR 90 MPH 3-SEC WIND GUST PER ASCE 7-05 & IBC 2006 STANDARDS. HIGHER WIND LOAD RATED STRUCTURES AVAILABLE.

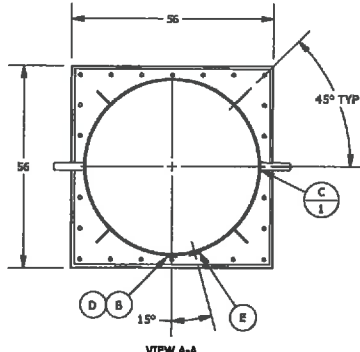

PN: 3500500
DESC:

SCHEDULE OF NOZZLES			
MARK	QTY	DESCRIPTION	SERVICE
A	1	3" HALF COUPLING	2000# BURNER WASTE GAS IN
B	1	2" FULL COUPLING	3000# FLOW TEST/AUTOMATION
C	1	2" FULL COUPLING	3000# FLOW TEST/AUTOMATION
D	1	2" FULL COUPLING	3000# SIGHT GLASS
E	1	2" FULL COUPLING	3000# MANUAL LIGHTING
F	1	1" FULL COUPLING	3000# PILOT GAS IN
G	1	1/2" FULL COUPLING	3000# IGNITOR CABLE
H	1	1/2" FULL COUPLING	3000# AUTOMATION
I	1	3" HALF COUPLING	3000# DRIP TANK WASTE GAS IN
J	1	3" HALF COUPLING	3000# DRIP TANK WASTE GAS OUT
K	1	1/2" FULL COUPLING	3000# AUTOMATION
L	1	1/2" FULL COUPLING	3000# LIQUID DRAIN

- UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS AND SHARP CORNERS.
 2. COR. RAD .03
 3. DO NOT SCALE DRAWING.
 4. ALL DIMENSIONS ARE IN INCHES.
 5. MACHINE FIN.
 6. FABRICATION AND SHARP CORNERS.
 - .X = ± 0.25
 - .XX = ± 0.125
 - .XXX = ± 0.06
 - ANGLES ± 3°
 7. MACHINE
 - .X = ± 0.030
 - .XX = ± 0.015
 - .XXX = ± 0.005
 - ANGLES ± 1/2°
 - CONTRICTY WITHIN 0.010 TIR

APPROVED FOR A.S.M.E CODE, SECTION VIII DIV 1
ED, ADDENDA BY, DATE

CIMARRON
Energy Inc.

TITLE:
48" HIGH VOLLUME BCD

DATE: _____ WO No.: _____ SHEET: 1 OF 1

DRAWN BY: TDS | REV. | DRAW NO.: 3500500

Attachment T

Emissions Calculations

Table 1

**Facility Information
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Oil and Gas Site General Information

Administrative Information	
Company Name	Antero Resources Corporation
Facility/Well Name	Strickling Well Pad
Nearest City/Town	West Union
API Number/SIC Code	1311
Latitude/Longitude	39.332189, -80.78376
County	Doddridge County

Technical Information	
Max Condensate Site Throughput (bbl/day):	2,240
Max Produced Water Site Throughput (bbl/day):	6,000
Are there any sour gas streams at this site?	No
Is this site currently operational/producing?	No

Equipment/Processes at Site	
Equipment/Process Types	How many for this site?
Fugitives	10
IC Engines	4
Gas Production Unit Heaters	10
Line Heaters	10
Condensate Tanks	8
Produced Water Tanks	4
Loading Jobs	2
Vapor Recovery Towers	4
Enclosed Combustors	3

Table 2

**Uncontrolled/Controlled Emissions Summary
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Emission Source	VOC		NO _x		CH ₄		CO _{2e}		CO		SO ₂		PM _{2.5}		PM ₁₀		Lead		Total HAPs		Benzene		Xylenes		Formaldehyde			
	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)	(lbs/hr)	(ton/yr)		
UNCONTROLLED (Fugitives, Storage Tanks, Engine, Gas Production Unit Heaters, Line Heaters)																												
Fugitive Emissions (Component Count, PCV and Hauling) ¹	3.4265	15.0081			3.9415	17.2636	98.539	431.60						1.7928	10.7267					0.3928	1.7203	0.0026	0.0113	6.76E-02	2.96E-01			
Flashing, Working and Breathing (F/W/B) Losses ²	194.0534	849.9539			29.8949	130.9398	749.2027	3281.5078												16.8476	73.7925	0.0888	0.3888	0.2818	1.2343			
VRU Engine Emissions ³	0.0749	0.3282	0.2501	1.0953	0.5823	2.5503	293.0329	1283.4842	1.6505	7.2293	0.0015	0.0065	0.0241	0.1053	0.0241	0.1053			0.0581	0.2545	0.0040	0.0175	0.0005	0.0022	0.0519	0.2273		
Gas Production Unit Heater Emissions ⁴	0.0684	0.2994	1.2428	5.4437	0.0667	0.2921	1,491.42	6,532.42	1.0440	4.5727	0.0075	0.0327	0.0945	0.4137	0.0945	0.4137	6.21E-06	2.72E-05	0.023	0.102	2.61E-05	1.14E-04			0.0009	0.0041		
Line Heater Emissions ⁴	0.0911	0.3992	1.6571	7.2582			1,988.56	8,709.89	1.3920	6.0969	0.0099	0.0435	0.1259	0.5516	0.1259	0.5516	8.29E-06	3.63E-05	0.031	0.137	3.48E-05	1.52E-04			0.0012	0.0054		
TOTALS:	197.7143	865.9888	3.1501	13.7973	34.4854	151.0459	4620.7530	20238.8981	4.0865	17.8989	0.0189	0.0827	0.2444	1.0707	2.0373	11.7974	1.45E-05	6.35E-05	17.3531	76.0065	0.0954	0.4179	0.3499	1.5327	0.0541	0.2368		
UNCONTROLLED (Truck Loading Emissions)																												
Truck Loading Emissions ⁵	12.3275	21.0012			0.0995	0.2794	2.5591	7.1581												1.0200	1.7375	0.0029	4.90E-03	0.0087	0.0149			
CONTROLLED EMISSIONS																												
Enclosed Combustor Emissions (from F/W/B losses) ⁶	3.8813	17.0003	2.4531	10.7446	0.6538	2.8637	969.1297	4244.7882	11.1643	48.8996	3.06E-05	0.0001	0.0192	0.0841	0.0256	0.1121	1.68E-06	7.38E-06	0.3370	1.4763	0.0018	0.0078	0.0056	0.0247	3.83E-06	1.68E-05		
Controlled Fugitive Emissions from Hauling														0.8964	5.3634													
TOTALS:	3.881	17.000	2.453	10.745	0.654	2.864	969.130	4244.788	11.164	48.900	3.06E-05	1.34E-04	0.019	0.084	0.922	5.475	1.68E-06	7.38E-06	0.337	1.476	1.78E-03	7.78E-03	5.64E-03	0.025	3.83E-06	1.68E-05		
POTENTIAL TO EMIT⁷	7.5423	54.0365	5.6032	24.5418	5.2442	23.2452	4840.6800	21209.3366	15.2508	66.7984	0.0189	0.0829	0.2636	1.1548	1.1664	6.5462	1.62E-05	7.09E-05	0.8425	5.4277	0.0084	0.0418	0.0738	0.3379	0.0541	0.2369		
POTENTIAL TO EMIT (Excluding Fugitives)	4.1158	39.0283	5.6032	24.5418	1.3028	5.9816	4742.1412	20777.7364	15.2508	66.7984	0.0189	0.0829	0.2636	1.1548	0.2700	1.1828	1.62E-05	7.09E-05	0.4497	3.7074	0.0058	0.0305	0.0061	0.0417	0.0541	0.2369		

Enter any notes here:	1 - See Tables 4 and 5 for fugitive emission calculations; Table 12 for PM emissions from hauling.
	2 - See Tables 6 and 7 for tanks emission calculations
	3 - See Table 13 for engine emissions
	4 - See Table 9 for gas production unit heater and line heater emission calculations
	5 - The maximum emission was calculated based on tank truck capacity of 180 barrels and actual fill rate of 45 minutes per tank truck. At a production rate of 2240 barrels per day, VOC emissions would be 12.3275 pounds per hour when there are truck loading activities. Average hourly VOC emissions from truck loading is 4.7948 pound per hour.
	6 - See Table 10 and 11 for enclosed combustion emission calculations.
	7 - The hourly potential to emit is the sum of emissions from gas production unit heaters, line heaters, engine, storage tanks, enclosed combustors, and fugitives. Does not include emissions from loading (see footnote 5). The total TPY PTE is the sum of all emissions. PM 10 TPY is the sum of uncontrolled hauling and other PM10 sources.

Table 3

**Permits Summary
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Pollutant		Emissions		Threshold Exceeded?		
		Uncontrolled	Controlled	Threshold	Uncontrolled	Controlled
VOC	lbs/hr	197.7143	7.5423	6	Yes	
	tons/yr	886.9900	54.0365	10	Yes	Yes
NO _x	lbs/hr	3.1501	5.6032	6		
	tons/yr	13.7973	24.5418	10	Yes	Yes
CH ₄	lbs/hr	34.4854	5.2442			
	tons/yr	151.3213	23.2452			
CO	lbs/hr	4.0865	15.2508	6		Yes
	tons/yr	17.8989	66.7984	10	Yes	Yes
SO ₂	lbs/hr	0.0189	0.0189	6		
	tons/yr	0.0827	0.0829	10		
PM _{2.5}	lbs/hr	0.2444	0.2636	6		
	tons/yr	1.0707	1.1548	10		
PM ₁₀	lbs/hr	2.0373	1.1664	6		
	tons/yr	11.7974	6.5462	10	Yes	
Lead	lbs/hr	1.45E-05	1.62E-05	6		
	tons/yr	6.35E-05	7.09E-05	10		
Total HAPs	lbs/hr	17.3531	0.8425	2	Yes	
	tons/yr	77.7440	5.4277	5	Yes	Yes
Total TAPs	lbs/hr	0.1495	0.0625	1.14		
n-Hexane	lbs/hr	16.3784	0.6477			
	tons/yr	73.4308	4.5301			
Toluene	lbs/hr	0.3245	0.0298			
	tons/yr	1.4382	0.1475			
Ethylbenzene	lbs/hr	0.1505	0.0285			
	tons/yr	0.6665	0.1323			
Xylenes	lbs/hr	0.3499	0.0738			
	tons/yr	1.5475	0.3379			
Benzene	lbs/hr	0.0954	0.0084			
	tons/yr	0.4228	0.0418			

Enter any notes here:	<p>1. Emissions are based on 98% Enclosed Combustor DRE operating 100% of the time.</p> <p>2. Please see Attachment J - Fugitive Emissions Data Summary Sheet and Attachment T - Emission Points Summary Sheet for sitewide sources and breakdown of emission quantities.</p>
------------------------------	---

Table 4

Fugitive Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation

VOC Type:	Condensate VOC
Emission Type:	Steady State (continuous)

Gas Weight Fraction From Analysis:	VOC frac	0.117
	Benzene frac	0.000
	Toluene	0.000
	Ethylbenzene	0.000
	Xylenes	0.000
	n-Hexane	0.015
	HAPs	0.015
	Methane	0.663

Gas					
Number	Component	Pollutant	Emission Factor (kg/hr of THC per component)	kg/hr	lb/yr
500	Valves	Gas VOC	0.004500	0.26	5,079.41
		Non VOC	0.004500	1.99	38,282.59
		HAPs	0.004500	0.03	670.30
		CO2e	0.004500	37.29	718,664.18
590	Connectors	VOC	0.000200	0.01	266.39
		Non-VOC	0.000200	0.10	2,007.71
		HAPs	0.000200	0.00	35.15
		CO2e	0.000200	1.96	37,689.94
130	Flanges	VOC	0.000390	0.01	114.46
		Non-VOC	0.000390	0.04	862.63
		HAPs	0.000390	0.00	15.10
		CO2e	0.000390	0.840281	16193.899594
Total VOCs:				0.28	5460.25
Total THC:				2.42	46613.19
Total CH4:				1.60	30901.92

Light Liquid Weight Fraction From Analysis:	VOC frac	0.957
	Benzene frac	0.001
	Toluene	0.008
	Ethylbenzene	0.009
	Xylenes	0.024
	n-hexane	0.064
	HAPs	0.106
	Methane	0.013

Light Liquid					
Number	Component	Pollutant	Emission Factor (kg/hr of THC per component)	kg/hr	lb/yr
520	Valves	Light Liquid VOC	0.002500	1.24	23,973.84
		Light Liquid Non-VOC	0.002500	0.06	1,079.76
		Light Liquid HAPs	0.002500	0.14	2,643.29
		CO2e	0.002500	0.43	8266.09
Total VOC:				1.24	23,973.84
Total THC:				1.30	25,053.60
Total CH4:				0.02	330.64

Fugitive Total Emissions			
	Annual Emissions (lb/yr)	Annual Emissions (lb/hr)	Annual Emissions (tpy)
VOC	29,434.09	3.36	14.72
Ethylbenzene		0.03	0.11
Toluene		0.02	0.10
Xylenes		0.07	0.30
n-Hexane		0.27	1.16
TAPs (Benzene)		0.00	0.01
HAPs		0.38	1.68
CH ₄ ³		3.57	15.62
CO _{2e}	780,814.12	89.13	390.41

Enter Notes Here:	Fugitive emissions based on an estimated component count
	Global Warming Potentials from EPA site
	Reference to Emission factors used:
	<ol style="list-style-type: none"> 1. Emission factors are for oil and gas production facilities (not refineries) come from the EPA's "Protocol for Equipment Leak Emission Estimates" November 1995, EPA 4531, R-95-017, Table 2-4. 2. Percent of speciated VOCs used in fugitive calculations are based on the total hydrocarbons, not of the total sample. 3. CH₄ emissions are based on percent of CH4 of the total hydrocarbons

Table 5

**Pneumatic Control Valve Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Number of PCVs	40
Bleed Rate (scf/day/PCV)	6.6
Total Bleed Rate (scf/day)	264

Component	Mol%	Molecular Weight (lb/lb-mole)	Component Flow (scf/day)	Component Moles (lb-moles)	Component Emissions		
					(lbs/day)	(lbs/hr)	(tons/year)
H2S	0.00E+00	34.08	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Nitrogen	0.4085	14.01	1.07844	2.84E-03	0.04	1.66E-03	0.01
Carbon Dioxide	0.1743	44.01	0.460152	1.21E-03	0.05	2.22E-03	9.74E-03
Methane	80.8909	16.04	213.551976	0.56	9.03	0.38	1.65
Ethane	14.3137	30.07	37.788168	0.10	2.99	0.12	0.55
Propane	2.2213	44.1	5.864232	0.02	0.68	0.03	0.12
Isobutane	0.4547	58.12	1.200408	3.16E-03	0.18	0.01	0.03
n-Butane	0.7773	58.12	2.052072	5.41E-03	0.31	0.01	0.06
Isopentane	0.2153	72.15	0.568392	1.50E-03	0.11	4.50E-03	0.02
n-Pentane	0.1929	72.15	0.509256	1.34E-03	0.10	4.03E-03	0.02
2-Methylpentane	0.00E+00	86.18	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
3-Methylpentane	0.00E+00	86.18	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
n-Hexane	0.3511	86.18	0.926904	2.44E-03	0.21	0.01	0.04
Methylcyclopentane	0.00E+00	84.16	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Benzene	0.00E+00	78.11	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
2-Methylhexane	0.00E+00	100.2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
3-Methylhexane	0.00E+00	100.2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Heptane	0.00E+00	100.21	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Methylcyclohexane	0.00E+00	98.186	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Toluene	0.00E+00	92.14	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Octane	0.00E+00	114.23	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Ethylbenzene	0.00E+00	106.17	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
m & p-Xylene	0.00E+00	106.16	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
o-Xylene	0.00E+00	106.16	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Nonane	0.00E+00	128.2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
C10+	0.00E+00	174.28	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

	lb/hr	tpy
VOC Emissions	0.0665	0.2911
Benzene Emissions	0.00E+00	0.00E+00
Toluene Emissions	0.00E+00	0.00E+00
Ethylbenzene Emissions	0.00E+00	0.00E+00
Xylene Emissions	0.00E+00	0.00E+00
n-Hexane Emissions	0.0088	0.0384
HAPs Emissions	0.0088	0.0384
TAPs Emissions	0.00E+00	0.00E+00
CH ₄ Emissions	0.3761	1.6473
CO _{2e} emissions	9.4048	41.1931

Enter any notes here:	<p>1. PCV bleed rate obtained from the user manual for PCV http://issuu.com/rmcprocesscontrols/docs/mizer-pilot-operation--parts---installation-manual</p> <p>2. Emissions per hour= Mol % x no. of PCV x bleed rate x MW / 379.48 / 24</p>
------------------------------	--

Table 6

Uncontrolled Flashing Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation

# Hours Operational	8760
---------------------	------

	Condensate Tank Flashing Losses			Produced Water Tank Flashing Losses		
	Vapor Mass Fraction wt%	Flashing Losses		Vapor Mass Fraction wt%	Flashing Losses	
		lbs/hr	tpy		lbs/hr	tpy
Water	0.0930	0.2204	0.9654	2.4288	1.0622	4.6526
H2S	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Nitrogen	0.0006	0.0015	0.0065	0.2674	0.1170	0.5122
Carbon Dioxide	0.1346	0.3189	1.3969	3.3361	1.4591	6.3907
Methane	1.9592	4.6432	20.3371	57.4283	25.1167	110.0110
Ethane	28.3908	67.2861	294.7130	25.7783	11.2743	49.3815
Propane	22.5134	53.3566	233.7018	4.1565	1.8179	7.9622
Isobutane	8.0933	19.1810	84.0129	3.6414	1.5926	6.9756
n-Butane	15.6375	37.0608	162.3264	1.6694	0.7301	3.1980
Isopentane	5.9184	14.0266	61.4365	0.4091	0.1789	0.7838
n-Pentane	5.8249	13.8050	60.4657	0.1550	0.0678	0.2969
2-Methylpentane	1.0387	2.4617	10.7820	0.0374	0.0164	0.0716
3-Methylpentane	0.6772	1.6048	7.0292	0.0592	0.0259	0.1134
n-Hexane	5.9092	14.0048	61.3409	0.1041	0.0455	0.1995
Methylcyclopentane	0.2327	0.5514	2.4152	0.0335	0.0146	0.0641
Benzene	0.0269	0.0637	0.2790	0.0442	0.0193	0.0846
2-Methylhexane	0.6299	1.4928	6.5386	0.0162	0.0071	0.0311
3-Methylhexane	0.4947	1.1725	5.1354	0.0154	0.0067	0.0295
Heptane	0.8570	2.0311	8.8964	0.0113	0.0049	0.0216
Methylcyclohexane	0.4577	1.0846	4.7507	0.0655	0.0286	0.1255
Toluene	0.0920	0.2181	0.9553	0.1431	0.0626	0.2741
Octane	0.7017	1.6631	7.2844	0.0038	0.0017	0.0074
Ethylbenzene	0.0382	0.0904	0.3961	0.0577	0.0252	0.1105
m & p-Xylene	0.0418	0.0990	0.4335	0.0584	0.0256	0.1120
o-Xylene	0.0456	0.1080	0.4729	0.0726	0.0317	0.1390
Nonane	0.1364	0.3232	1.4158	0.0008	0.0004	0.0016
C10+	0.0548	0.1299	0.5688	0.0064	0.0028	0.0122
Total VOCs	69.422	164.53	720.6	10.761	4.7064	20.6142
Total CO _{2e}		116.40	509.8		629.38	2,756.7
CH ₄		4.64	20.34		25.12	110.01
Total TAPs (Benzene)		0.0637	0.2790		0.0193	0.0846
Toluene		0.2181	0.9553		0.0626	0.2741
Ethylbenzene		0.0904	0.3961		0.0252	0.1105
Xylenes		0.2069	0.9064		0.0573	0.2510
n-Hexane		14.005	61.341		0.0455	0.1995
Total HAPs		14.584	63.878		0.2100	0.9197
Total	100.00	237.00	1,038.1	100.00	43.736	191.56

Enter any notes here:	Vapor mass fractions and Flashing losses from Promax output
-----------------------	---

Table 7

Uncontrolled Working and Breathing Losses
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation

Condensate Tank Information	
Number of Tanks	8
Maximum Working Losses (lbs/hr)	14.6350
Maximum Breathing Losses (lbs/hr)	23.1350
# Hours Operational	8760

	Condensate Tank W/B Losses						
	Vapor Mass Fraction wt%	Working Losses		Breathing Losses		Max W/B Losses	
		lbs/hr	tpy	lbs/hr	tpy	lbs/hr	tpy
H2S	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Nitrogen	0.0000	1.96E-06	8.59E-06	0.0000	0.0000	0.0000	0.0000
Carbon Dioxide	0.1013	0.0148	0.0649	0.0234	0.1027	0.0383	0.1676
Methane	0.3329	0.0487	0.2134	0.0770	0.3373	0.1257	0.5507
Ethane	33.8586	4.9552	21.7038	7.8332	34.3094	12.7884	56.0132
Propane	22.9906	3.3647	14.7372	5.3189	23.2967	8.6836	38.0339
Isobutane	7.9483	1.1632	5.0950	1.8388	8.0541	3.0021	13.1491
n-Butane	14.9997	2.1952	9.6149	3.4702	15.1994	5.6654	24.8143
Isopentane	5.2021	0.7613	3.3346	1.2035	5.2714	1.9648	8.6060
n-Pentane	5.0673	0.7416	3.2482	1.1723	5.1348	1.9139	8.3830
2-Methylpentane	0.9066	0.1327	0.5811	0.2097	0.9186	0.3424	1.4997
3-Methylpentane	0.5907	0.0864	0.3786	0.1366	0.5985	0.2231	0.9771
n-Hexane	5.2994	0.7756	3.3970	1.2260	5.3699	2.0016	8.7669
Methylcyclopentane	0.1838	0.0269	0.1178	0.0425	0.1862	0.0694	0.3040
Benzene	0.0152	2.23E-03	0.0097	0.0035	0.0154	0.0057	0.0252
2-Methylhexane	0.1491	2.18E-02	0.0956	0.0345	0.1511	0.0563	0.2466
3-Methylhexane	0.4288	0.0628	0.2749	0.0992	0.4345	0.1620	0.7094
Heptane	0.7104	0.1040	0.4554	0.1644	0.7199	0.2683	1.1753
Methylcyclohexane	0.3887	0.0569	0.2492	0.0899	0.3939	0.1468	0.6430
Toluene	0.0529	7.75E-03	3.39E-02	0.0122	0.0536	0.0200	0.0876
Octane	0.5639	0.0825	0.3615	0.1305	0.5714	0.2130	0.9329
Ethylbenzene	0.0233	3.41E-03	1.49E-02	0.0054	0.0236	0.0088	0.0386
m & p-Xylene	0.0234	3.43E-03	1.50E-02	0.0054	0.0237	0.0088	0.0387
o-Xylene	0.0231	3.38E-03	0.0148	0.0053	0.0234	0.0087	0.0382
Nonane	0.1069	0.0156	0.0685	0.0247	0.1083	0.0404	0.1768
C10+	0.0329	4.82E-03	0.0211	0.0076	0.0333	0.0124	0.0544
Total VOCs	65.707	9.6162	42.119	15.2014	66.5819	24.8176	108.701
Total CO _{2e}		1.2327	5.3993	1.9487	8.5353	3.1814	13.935
CH ₄		0.0487	0.2134	0.0770	0.3373	0.1257	0.5507
Total TAPs (Benzene)		2.23E-03	9.75E-03	0.0035	0.0154	0.0057	0.0252
Toluene		7.75E-03	3.39E-02	0.0122	0.0536	0.0200	0.0876
Ethylbenzene		3.41E-03	1.49E-02	0.0054	0.0236	0.0088	0.0386
Xylenes		6.81E-03	0.0298	0.0108	0.0471	0.0176	0.0770
n-Hexane		0.7756	3.3970	1.2260	5.3699	2.0016	8.7669
Total HAPs		0.7958	3.4854	1.2579	5.5098	2.0537	8.9952
Total	100.00	14.6350	64.1011	23.1350	101.3314	37.7700	165.432

Table 7

Uncontrolled Working and Breathing Losses
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation

Produced Water Tank Information	
Number of Tanks	4
Maximum Working Losses (lbs/hr)	0.2842
Maximum Breathing Losses (lbs/hr)	0.0168

	Produced Water Tank W/B Losses						
	Vapor Mass Fraction wt%	Working Losses		Breathing Losses		Max W/B Losses	
		lbs/hr	tpy	lbs/hr	tpy	lbs/hr	tpy
Water	90.6855	0.2577	1.1287	0.0152	0.0667	0.2729	1.1954
H2S	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Nitrogen	0.0052	1.48E-05	6.47E-05	8.73E-07	3.83E-06	1.57E-05	6.86E-05
Carbon Dioxide	4.4302	0.0126	0.0551	0.0007	0.0033	0.0133	0.0584
Methane	3.1089	0.0088	0.0387	0.0005	0.0023	0.0094	0.0410
Ethane	1.6733	0.0048	0.0208	0.0003	0.0012	0.0050	0.0221
Propane	0.0422	1.20E-04	0.0005	7.08E-06	3.10E-05	1.27E-04	0.0006
Isobutane	0.0494	1.41E-04	6.15E-04	8.30E-06	3.64E-05	1.49E-04	6.52E-04
n-Butane	0.0038	1.08E-05	4.75E-05	6.41E-07	2.81E-06	1.15E-05	5.03E-05
Isopentane	0.0002	6.98E-07	3.06E-06	4.12E-08	1.81E-07	7.39E-07	3.24E-06
n-Pentane	0.0000	7.55E-08	3.31E-07	4.46E-09	1.95E-08	8.00E-08	3.50E-07
2-Methylpentane	3.58E-06	1.02E-08	4.46E-08	6.02E-10	2.63E-09	1.08E-08	4.72E-08
3-Methylpentane	1.27E-05	3.60E-08	1.58E-07	2.13E-09	9.32E-09	3.81E-08	1.67E-07
n-Hexane	3.48E-06	9.90E-09	4.33E-08	5.85E-10	2.56E-09	1.05E-08	4.59E-08
Methylcyclopentane	8.61E-06	2.45E-08	1.07E-07	1.45E-09	6.33E-09	2.59E-08	1.13E-07
Benzene	6.88E-04	1.96E-06	8.57E-06	1.16E-07	5.06E-07	2.07E-06	9.07E-06
2-Methylhexane	9.34E-08	2.65E-10	1.16E-09	1.57E-11	6.87E-11	2.81E-10	1.23E-09
3-Methylhexane	3.50E-07	9.95E-10	4.36E-09	5.88E-11	2.57E-10	1.05E-09	4.61E-09
Heptane	8.12E-08	2.31E-10	1.01E-09	1.36E-11	5.97E-11	2.44E-10	1.07E-09
Methylcyclohexane	5.44E-06	1.55E-08	6.78E-08	9.14E-10	4.00E-09	1.64E-08	7.18E-08
Toluene	4.82E-04	1.37E-06	6.00E-06	8.09E-08	3.54E-07	1.45E-06	6.35E-06
Octane	3.43E-09	9.74E-12	4.27E-11	5.76E-13	2.52E-12	1.03E-11	4.52E-11
Ethylbenzene	5.90E-05	1.68E-07	7.34E-07	9.90E-09	4.34E-08	1.77E-07	7.77E-07
m & p-Xylene	3.76E-05	1.07E-07	4.68E-07	6.31E-09	2.76E-08	1.13E-07	4.96E-07
o-Xylene	7.24E-05	2.06E-07	9.01E-07	1.22E-08	5.33E-08	2.18E-07	9.55E-07
Nonane	2.29E-10	6.52E-13	2.86E-12	3.85E-14	1.69E-13	6.91E-13	3.03E-12
C10+	6.03E-09	1.71E-11	7.50E-11	1.01E-12	4.43E-12	1.81E-11	7.95E-11
Total VOCs	0.0971	2.76E-04	0.0012	1.63E-05	7.14E-05	2.92E-04	0.0013
Total CO _{2e}		0.2335	1.0225	0.0138	0.0604	0.2472	1.0829
CH ₄		0.0088	0.0387	0.0005	0.0023	0.0094	0.0410
Total TAPs (Benzene)		1.96E-06	8.57E-06	1.16E-07	5.06E-07	2.07E-06	9.07E-06
Toluene		1.37E-06	6.00E-06	8.09E-08	3.54E-07	1.45E-06	6.35E-06
Ethylbenzene		1.68E-07	7.34E-07	9.90E-09	4.34E-08	1.77E-07	7.77E-07
Xylenes		3.13E-07	1.37E-06	1.85E-08	8.09E-08	3.31E-07	1.45E-06
n-Hexane		9.90E-09	4.33E-08	5.85E-10	2.56E-09	1.05E-08	4.59E-08
Total HAPs		3.82E-06	1.67E-05	2.25E-07	9.87E-07	4.04E-06	1.77E-05
Total	100.00	0.2842	1.2447	0.0168	0.0735	0.3010	1.3182

Enter any notes here:	Vapor mass fractions, working losses and breathing losses from Promax output
------------------------------	--

Table 8

**Loading Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Annual Loading	Oil Truck Loading	Water Truck Loading
RVP	4.41	1.0340
Annual Average Temp (F)	72.1	72.1
S (saturation factor)	0.6	0.6
P (true vapor pressure)	3.07	0.45
M (MW of vapor)	43.14	18.57
Collection Efficiency (%)	0.00	0.00
Total Hydrocarbon Loading Loss (lb/10 ³ gal)*	1.86	0.12
Maximum Throughput (gallons/hr)**	10,080	10,080
Average Throughput (gallons/yr)	34,339,200	91,980,000
Total Hydrocarbon Loading Emissions (lbs/hr)	18.76	1.19
Total Hydrocarbon Loading Emissions (tpy)	31.95	5.44

	Condensate Tank Loading Losses			Produced Water Tank Loading Losses		
	Vapor Mass Fraction wt%	Loading Losses lbs/hr	Loading Losses tpy	Vapor Mass Fraction wt%	Loading Losses lbs/hr	Loading Losses tpy
H2S	0.0000	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Nitrogen	0.0000	2.51E-06	4.28E-06	0.0052	6.20E-05	2.83E-04
Carbon Dioxide	0.1013	0.0190	3.24E-02	4.4302	5.28E-02	2.41E-01
Methane	0.3329	0.0624	1.06E-01	3.1089	3.70E-02	1.69E-01
Ethane	33.8586	6.3517	10.8191	1.6733	1.99E-02	9.10E-02
Propane	22.9906	4.3129	7.35E+00	0.0422	5.02E-04	2.29E-03
Isobutane	7.9483	1.4911	2.54E+00	0.0494	5.89E-04	2.69E-03
n-Butane	14.9997	2.8139	4.79E+00	0.0038	4.55E-05	2.07E-04
Isopentane	5.2021	0.9759	1.66E+00	0.0002	2.93E-06	1.34E-05
n-Pentane	5.0673	0.9506	1.62E+00	0.0000	3.17E-07	1.44E-06
2-Methylpentane	0.9066	0.1701	2.90E-01	3.58E-06	4.27E-08	1.95E-07
3-Methylpentane	0.5907	0.1108	1.89E-01	1.27E-05	1.51E-07	6.89E-07
n-Hexane	5.2994	0.9941	1.69E+00	3.48E-06	4.15E-08	1.89E-07
Methylcyclopentane	0.1838	0.0345	5.87E-02	8.61E-06	1.03E-07	4.68E-07
Benzene	0.0152	0.0029	4.86E-03	0.0007	8.20E-06	3.74E-05
2-Methylhexane	0.1491	0.0280	4.76E-02	9.34E-08	1.11E-09	5.08E-09
3-Methylhexane	0.4288	0.0804	1.37E-01	3.50E-07	4.17E-09	1.90E-08
Heptane	0.7104	0.1333	2.27E-01	8.12E-08	9.68E-10	4.42E-09
Methylcyclohexane	0.3887	0.0729	1.24E-01	5.44E-06	6.49E-08	2.96E-07
Toluene	0.0529	0.0099	1.69E-02	0.0005	5.74E-06	2.62E-05
Octane	0.5639	0.1058	1.80E-01	3.43E-09	4.09E-11	1.86E-10
Ethylbenzene	0.0233	0.0044	7.45E-03	5.90E-05	7.03E-07	3.21E-06
m & p-Xylene	0.0234	0.0044	7.48E-03	3.76E-05	4.48E-07	2.04E-06
o-Xylene	0.0231	0.0043	7.38E-03	7.24E-05	8.63E-07	3.94E-06
Nonane	0.1069	0.0201	3.42E-02	2.29E-10	2.73E-12	1.25E-11
C10+	0.0329	0.0062	1.05E-02	6.03E-09	7.18E-11	3.28E-10
Total VOCs	65.7071	12.3264	20.9959	0.0971	1.16E-03	5.28E-03
Total CH ₄		0.0624	0.1064		0.0370	0.1690
Total CO _{2e}		1.5801	2.6915		0.9790	4.4665
Total TAPs (Benzene)		0.0029	4.86E-03		8.20E-06	3.74E-05
Toluene		0.0099	1.69E-02		5.74E-06	2.62E-05
Ethylbenzene		0.0044	7.45E-03		7.03E-07	3.21E-06
Xylenes		0.0087	1.49E-02		1.31E-06	5.98E-06
n-Hexane		0.9941	1.69E+00		4.15E-08	1.89E-07
Total HAPs		1.0200	1.74E+00		1.60E-05	7.30E-05
Total	100.0000	18.7596	31.9538	100.0000	1.1917	5.4369

Enter any notes here

Vapor mass fractions and loading losses from Promax output
 *Using equation $L_i = 12.46 \cdot SPM/T$ from AP-42, Chapter 5, Section 5.2-4
 MW was obtained by Promax; RVP was taken from laboratory reports
 Annual Average Temp (F) obtained from Charleston, WV (preset in Promax)
 S (saturation factor) is based on submerged loading, dedicated service as it was most representative
 True vapor pressure (TVP) equation from AP-42, Chapter 7, Figure 7.1-13a
 ** Maximum throughput in gallons per hour obtained from actual transfer rate of 180 barrels condensate in 45 minutes and 110 barrels produced water in 27.5 minutes. (10,080 gal/hr = 180 bbl / 45 min x 42 gal/bbl x 60 min/hr)
 Loading emissions are vented to the atmosphere.

Table 9

**Gas Production Unit Heater and Line Heater Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Gas Production Unit Heater Emissions

Number of Units	10
GPU Heater Rating (MMBtu/hr)	1.50
Operating hours/year	8760
Fuel Heat Value (Btu/scf)	1,206.9040

Pollutant	Emission Factors (lb/MMscf)	lb/hr	tpy
NOx	100	1.243	5.444
CO	84	1.044	4.573
CO ₂	120,000	1491.419	6532.417
Lead	0.0005	6.21E-06	2.72E-05
N ₂ O	2.2	0.027	0.120
PM (Total)	7.6	0.094	0.414
SO ₂	0.6	0.007	0.033
TOC	11	0.137	0.599
Methane	2.3	0.029	0.125
VOC	5.5	0.068	0.299
HAPS			
2-Methylnaphthalene	2.40E-05	2.98E-07	1.31E-06
Benzene	2.10E-03	2.61E-05	1.14E-04
Dichlorobenzene	1.20E-03	1.49E-05	6.53E-05
Fluoranthene	3.00E-06	3.73E-08	1.63E-07
Fluorene	2.80E-06	3.48E-08	1.52E-07
Formaldehyde	7.50E-02	9.32E-04	4.08E-03
Hexane	1.80E+00	2.24E-02	9.80E-02
Naphthalene	6.10E-04	7.58E-06	3.32E-05
Phenanthrene	1.70E-05	2.11E-07	9.25E-07
Toluene	3.40E-03	4.23E-05	1.85E-04

	lb/hr	tpy
TOTAL Uncontrolled VOC	0.159	0.699
TOTAL Uncontrolled HAPS	0.055	0.239
TOTAL Uncontrolled TAPs (Benzene)	6.09E-05	2.67E-04
TOTAL Uncontrolled Toluene	9.86E-05	4.32E-04
TOTAL Uncontrolled Hexane	0.052	0.229
TOTAL Uncontrolled TAPs (Formaldehyde)	0.002	0.010
TOTAL CH ₄	0.067	0.292
TOTAL CO _{2e} Emissions	3,500.66	15,332.88

Enter any notes here:
All Emission Factors based off AP-42 Sec 1.4 Natural Gas Combustion

Line Heater Emissions

Number of Units	10
Line Heater Rating (MMBtu/hr)	2.00
Operating hours/year	8760
Fuel Heat Value (Btu/scf)	1,206.9040

Pollutant	Emission Factors (lb/MMscf)	lb/hr	tpy
NOx	100	1.657	7.258
CO	84	1.392	6.097
CO ₂	120,000	1988.559	8709.889
Lead	0.0005	8.29E-06	3.63E-05
N ₂ O	2.2	0.036	0.160
PM (Total)	7.6	0.126	0.552
SO ₂	0.6	0.010	0.044
TOC	11	0.182	0.798
Methane	2.3	0.038	0.167
VOC	5.5	0.091	0.399
HAPS			
2-Methylnaphthalene	2.40E-05	3.98E-07	1.74E-06
Benzene	2.10E-03	3.48E-05	1.52E-04
Dichlorobenzene	1.20E-03	1.99E-05	8.71E-05
Fluoranthene	3.00E-06	4.97E-08	2.18E-07
Fluorene	2.80E-06	4.64E-08	2.03E-07
Formaldehyde	7.50E-02	1.24E-03	5.44E-03
Hexane	1.80E+00	2.98E-02	1.31E-01
Naphthalene	6.10E-04	1.01E-05	4.43E-05
Phenanthrene	1.70E-05	2.82E-07	1.23E-06
Toluene	3.40E-03	5.63E-05	2.47E-04

Table 10

**Enclosed Combustor Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

General Information	
Unit Name:	EC001, EC002, EC003

Pollutant	Emission Factor (lb/MMscf)
NOx	100
CO	84
PM10	7.6
PM2.5	5.7
SO ₂	0.6
CO ₂	120,000
VOC	5.5
benzene	2.10E-03
Hexane	1.80E+00
Toluene	3.40E-03
Formaldehyde	7.50E-02
N ₂ O	2.20
Lead	5.00E-04

Pollutant	Emission Factor ² (lb/MMBtu)
NO _x	0.068
CO	0.31

Constants	
Btu/MMBtu	1,000,000
scf/MMscf	1,000,000
lb/ton	2,000
H ₂ S molecular wei	34.08
SO ₂ molecular	64.06
seconds/hour	3,600
inches/ft	12

Destruction Efficiency	
VOC percent destruction efficiency (%)	98
H ₂ S percent destruction efficiency (%)	98

Enclosed Combustor operating hours	8760
No. of Enclosed Combustors	3
Maximum Design Heat Input Per Enclosed Combustor (MMBtu/hr)	12

Stream Information							
	1	2	3	4	5	6	Total
Stream Sent to Enclosed/Vapor Combustor (Enter Name of Each Stream Here)	pilot(s)	added fuel stream(s)	Oil Tank Flash Emissions	Water Tank Flash Emissions	Oil Tank W/B Emissions	Water Tank W/B Emissions	-
Maximum Expected Hourly Volumetric Flow Rate of Stream (scf/hr)	51	--	2,084.58	893.91	332.21	6.15	3,367.85
Maximum Expected Annual Volumetric Flow Rate of Stream (scf/yr)	446,760.00	--	18,260,898.92	7,830,668.88	2,910,194.45	53,886.08	29,502,408.34
Heating Content (Btu/ft3)	1,207		2,482.40	1,180.48	2,455.96	102.65	2,092.29

Mass Flow Rates of the Vapors Sent to this Control Device, Hourly Basis (lb/hr)							
	1	2	3	4	5	6	Total
Stream Sent to Enclosed Combustor/Vapor Combustor	pilot(s)	added fuel stream(s)	Oil Tank Flash Emissions	Water Tank Flash Emissions	Oil Tank W/B Emissions	Water Tank W/B Emissions	-
H2S	-	-	0.000	0.000	0.000	0.000	0.000
Total VOC	-	-	164.529	4.706	24.818	0.000	194.05
Benzene	-	-	0.064	0.019	0.006	0.000	0.089
Toluene	-	-	0.218	0.063	0.020	0.000	0.301
Ethylbenzene	-	-	0.090	0.025	0.009	0.000	0.124
Xylenes	-	-	0.207	0.057	0.018	0.000	0.282
n-Hexane	-	-	14.005	0.046	2.002	0.000	16.052
HAPs	-	-	14.584	0.210	2.054	0.000	16.848
Total Mass Flow	-	-	236.999	43.736	37.770	0.301	318.806
Mass Flow Rates of the Vapors Sent to this Control Device, Annual Basis (tpy)							
H2S	-	-	0.000	0.000	0.000	0.000	0.000
Total VOC	-	-	720.637	20.614	108.701	0.001	849.954
Benzene	-	-	0.279	0.085	0.025	0.000	0.389
Toluene	-	-	0.955	0.274	0.088	0.000	1.317
Ethylbenzene	-	-	0.396	0.111	0.039	0.000	0.545
Xylenes	-	-	0.906	0.251	0.077	0.000	1.234
n-Hexane	-	-	61.341	0.199	8.767	0.000	70.307
HAP	-	-	63.878	0.920	8.995	0.000	73.793
Total Mass Flow	-	-	1038.056	191.562	165.432	1.318	1396.369

Table 10

**Enclosed Combustor Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Controlled Emissions							
Hourly (lb/hr)							
	1	2	3	4	5	6	Total
Stream Sent to Enclosed Combustor/Vapor Combustor	pilot(s)	added fuel stream(s)	Oil Tank Flash Emissions	Water Tank Flash Emissions	Oil Tank W/B Emissions	Water Tank W/B Emissions	-
NOx	0.005	-	2.448				2.45
CO	0.004	-	11.160				11.16
PM2.5	0.000	-	0.012	0.005	0.002	0.000	0.02
PM10	0.000	-	0.016	0.007	0.003	0.000	0.03
H2S	0.000	-	0.000	0.000	0.000	0.000	0.00
SO ₂	0.000	-	0.000	0.000	0.000	0.000	0.00
CO ₂	6.120	-	-	-	-	-	6.12
Total VOC	0.000	-	3.291	0.094	0.496	0.000	3.88
Benzene	0.000	-	0.001	0.000	0.000	0.000	0.00
Toluene	0.000	-	0.004	0.001	0.000	0.000	0.01
Ethylbenzene	0.000	-	0.002	0.001	0.000	0.000	0.00
Xylenes	0.000	-	0.004	0.001	0.000	0.000	0.01
n-Hexane	0.000	-	0.280	0.001	0.040	0.000	0.32
HAP	0.000	-	0.292	0.004	0.041	0.000	0.34
N ₂ O	0.000	-	0.005	0.002	0.001	0.000	0.01
Lead	0.000	-	0.000	0.000	0.000	0.000	0.00
Formaldehyde	0.000	-	-	-	-	-	0.00
Annual (tpy)							
	1	2	3	4	5	6	Total
Stream Sent to Enclosed Combustor/Vapor Combustor	pilot(s)	added fuel stream(s)	Oil Tank Flash Emissions	Water Tank Flash Emissions	Oil Tank W/B Emissions	Water Tank W/B Emissions	-
NOx	0.022	-	10.722				10.74
CO	0.019	-	48.881				48.90
PM2.5	0.001	-	0.052	0.022	0.008	0.000	0.08
PM10	0.002	-	0.069	0.030	0.011	0.000	0.11
H ₂ S	0.000	-	0.000	0.000	0.000	0.000	0.00
SO ₂	0.000	-	0.000	0.000	0.000	0.000	0.00
CO ₂	26.806	-	-	-	-	-	26.81
Total VOC	0.001	-	14.413	0.412	2.174	0.000	17.00
Benzene	0.000	-	0.006	0.002	0.001	0.000	0.01
Toluene	0.000	-	0.019	0.005	0.002	0.000	0.03
Ethylbenzene	0.000	-	0.008	0.002	0.001	0.000	0.01
Xylenes	0.000	-	0.018	0.005	0.002	0.000	0.02
n-Hexane	0.000	-	1.227	0.004	0.175	0.000	1.41
HAP	0.000	-	1.278	0.018	0.180	0.000	1.48
N ₂ O	0.000	-	0.020	0.009	0.003	0.000	0.03
Lead	0.000	-	0.000	0.000	0.000	0.000	0.00
Formaldehyde	0.000	-	-	-	-	-	0.00

Enclosed Combustor/Vapor Combustor Total Emissions		
	Hourly Emissions (lb/hr)	Annual Emissions (tpy)
Total VOC	3.88	17.00
NOx	2.453	10.745
CO	11.164	48.900
PM2.5	0.019	0.084
PM10	0.026	0.112
H ₂ S	1.63E-05	7.13E-05
SO ₂	3.06E-05	1.34E-04
Benzene (TAPs)	1.78E-03	7.78E-03
Toluene	6.01E-03	2.63E-02
Ethylbenzene	2.49E-03	1.09E-02
Xylenes	5.64E-03	0.025
Hexanes	0.321	1.407
Formaldehyde (TAPs)	3.83E-06	1.68E-05
HAPs	0.34	1.48
CH ₄	0.65	2.86
CO ₂ e	969.13	4244.79
N ₂ O	0.007	0.032
Lead	1.68E-06	7.38E-06

Enter any notes here as needed

1. Emission Factors from AP-42 Tables 1.4-1, 1.4-2, and 1.4.3
 2. Emission Factors from AP-42 Tables 13.5-1 and 13.5-2 for industrial flares

Table 11

**Enclosed Combustor GHG Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Enclosed Combustor CO₂ and CH₄ Emissions

Components	Mole fraction of oil flash gas constituents ^a	Volume of oil flash gas sent to Enclosed Combustor scf/year	Mole fraction of water flash gas constituents ^a	Volume of water flash gas sent to Enclosed Combustor scf/year	Mole fraction of oil tank vapors constituents ^a	Volume of oil tank vapor sent to Enclosed Combustor scf/year	Mole fraction of water tank vapors constituents ^a	Volume of water tank vapors sent to Enclosed Combustor scf/year	Component volume of gas sent to Enclosed Combustor scf/year	Number of carbon atoms	Combustion Efficiency	Combusted CO ₂ Volume ^b scf/year	Uncombusted CO ₂ and CH ₄ Volume ^b scf/year	Volume GHGs Emitted scf/year
CO ₂	0.001	18,260,899	0.0156	7,830,669	0.0010	2,910,194	0.019	53,886	150,297	1	0	--	150,297	71,345,706
Methane	0.054	18,260,899	0.7354	7,830,669	0.0090	2,910,194	0.036	53,886	6,764,182	1	0.98	6,628,898	135,284	135,284
Ethane	0.414	18,260,899	0.1761	7,830,669	0.4868	2,910,194	0.010	53,886	10,351,820	2	0.98	20,289,568	--	
Propane	0.224	18,260,899	0.0194	7,830,669	0.2254	2,910,194	0.000	53,886	4,892,963	3	0.98	14,385,310	--	
i-Butane	0.061	18,260,899	0.0129	7,830,669	0.0591	2,910,194	0.000	53,886	1,387,207	4	0.98	5,437,850	--	
n-Butane	0.118	18,260,899	0.0059	7,830,669	0.1116	2,910,194	0.000	53,886	2,524,034	4	0.98	9,894,213	--	
Pentane	0.071	18,260,899	0.0016	7,830,669	0.0615	2,910,194	0.000	53,886	1,494,175	5	0.98	7,321,459	--	
Hexane	0.039	18,260,899	0.0005	7,830,669	0.0341	2,910,194	0.000	53,886	811,030	6	0.98	4,768,857	--	
Benzene	0.000	18,260,899	0.0001	7,830,669	0.0001	2,910,194	0.000	53,886	3,908	6	0.98	22,980	--	
Heptanes	0.010	18,260,899	0.0002	7,830,669	0.0065	2,910,194	0.000	53,886	200,633	7	0.98	1,376,344	--	
Toluene	0.000	18,260,899	0.0003	7,830,669	0.0002	2,910,194	0.000	53,886	11,214	7	0.98	76,927	--	
Octane	0.005	18,260,899	0.0001	7,830,669	0.0038	2,910,194	0.000	53,886	98,780	8	0.98	774,438	--	
Ethyl benzene	0.000	18,260,899	0.0001	7,830,669	0.0001	2,910,194	0.000	53,886	4,026	8	0.98	31,567	--	
Xylenes	0.000	18,260,899	0.0003	7,830,669	0.0002	2,910,194	0.000	53,886	9,118	8	0.98	71,487	--	
Nonane	0.000	18,260,899	0.0000	7,830,669	0.0004	2,910,194	0.000	53,886	9,572	9	0.98	84,427	--	
Decane plus	0.000	18,260,899	0.0000	7,830,669	0.0001	2,910,194	0.000	53,886	3,172	10	0.98	31,084	--	
Subtotal												71,195,409	--	

Pollutant	Volume Emitted scf/year	Density of GHG ^c lb/scf	Conversion Factor lb/ton	GWF	Emissions ^c	
					lbs/hr	(tons/yr)
CO ₂	71,345,706	0.12	2000	1	944.46	4,136.73
CH ₄	135,284	0.04	2000	25	0.65	2.86
CO₂e Emissions					960.8	4208.31

GHG Emissions Summary

Notes

a Flashing/Working/Breathing Losses from ProMax output reports

b 40 CFR 98.233 (n)(4): Eqns: W-19, W-20 and W-21

c 40 CFR 98.233(v) Eqn W-36 - density at 60°F and 14.7 psia

Table 12

**Haul Road Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

	PM	PM10
Particle Size Multiplier (k)	0.8	0.36
Silt Content of Road Surface Material (s) (%)	5.1	5.1
Days per Year with Precipitation > 0.01 in (p)	150	150
Control Efficiency for Watering ¹ (%)	50	50

Tanker Truck Trip Calculation	
Condensate Production (bbl/day)	2,240
PW Production (bbl/day)	6,000
Condensate Truck Capacity (bbl)	180
PW Truck Capacity (bbl)	110

Pick Up Truck Trip Calculation	
No of Trips Per day	2
Trips Per Year	730

	# of Wheels	Mean Vehicle Weight (W) (tons)	Mean Vehicle Speed (S) (mph)	Miles Per Trip (miles)	Maximum Trips per Hour	Maximum Trips per Year	Vehicle Miles Travelled		PM (lbs/VMT)	PM10 (lbs/VMT)
							(miles/hr)	(miles/year)		
Tanker Trucks Condensate	10	40	10	0.5100	1	4543	0.5100	2316.9300	3.8175	1.7179
Tanker Trucks PW	10	40	10	0.5100	1	19910	0.5100	10154.1000	3.8175	1.7179
Pick Up Truck	4	3	10	0.2600	1	730	0.2600	189.8000	0.3467	0.1560

	Uncontrolled Emissions						Controlled Emissions					
	PM			PM10			PM			PM10		
	(lbs/hr)	(lbs/year)	(tpy)	(lbs/hr)	(lbs/year)	(tpy)	(lbs/hr)	(lbs/year)	(tpy)	(lbs/hr)	(lbs/year)	(tpy)
Tanker Trucks Condensate	1.9469	8844.9484	4.4225	0.8761	3980.2268	1.9901	0.9735	4422.4742	2.2112	0.4381	1990.1134	0.9951
Tanker Trucks PW	1.9469	38763.5752	19.3818	0.8761	17443.6088	8.7218	0.9735	19381.7876	9.6909	0.4381	8721.8044	4.3609
Pick Up Truck	0.0901	65.7998	0.0329	0.0406	29.6099	0.0148	0.0451	32.8999	0.0164	0.0203	14.8050	0.0074
Total Emissions	3.9840	47,674.3234	23.8372	1.7928	21,453.4455	10.7267	1.9920	23,837.1617	11.9186	0.8964	10,726.7228	5.3634

Enter any notes here:	1 EPA, AP-42, Volume I, Section 13.2.2 Unpaved Roads (11/06); assume 2:1 moisture ratio Section 13.2.2 Unpaved Roads (11/06) Source: Attachment L, Fugitive Emissions from Unpaved Haul Roads, Rev 03/2007, West Virginia Department of Environmental Protection
------------------------------	---

Table 13

**Vapor Recovery Unit Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Ford MSG425 2.5L Engine

Power (hp) ¹	76
Fuel consumption (lbs/BHP-hr) ¹	0.3864
Heat Content of Fuel (Btu/scf)	1206.904
Density of NG (lb/scf)	0.056
Operating Hours/year	8760
No. of Engines	4

Pollutant	Emission Factors		lb/hr	tpy
	(g/hp-hr)	(lb/MMBtu)		
NOx ²	0.3731		0.2501	1.0953
CO ²	2.4627		1.6505	7.2293
CO ₂		110.000	278.4762	1,219.73
PM _{2.5}		9.500E-03	0.0241	0.1053
PM ₁₀		9.500E-03	0.0241	0.1053
PM (Total)		9.910E-03	0.0251	0.1099
SO ₂		5.880E-04	0.0015	0.0065
TOC		0.358	0.9063	3.9697
Methane		0.230	0.5823	2.5503
VOC ³		0.0296	0.0749	0.3282
HAPS				
Benzene		0.0016	0.0040	0.0175
Ethylbenzene		2.48E-05	6.28E-05	2.75E-04
Formaldehyde		0.0205	0.0519	0.2273
Naphthalene		9.71E-05	2.46E-04	0.0011
Toluene		5.58E-04	0.0014	0.0062
Xylene		1.95E-04	4.94E-04	0.0022

	lb/hr	tpy
TOTAL Uncontrolled VOC	0.0749	0.3282
TOTAL Uncontrolled NOx	0.2501	1.0953
TOTAL Uncontrolled HAPs	0.0581	0.2545
TOTAL Uncontrolled TAPs (Benzene)	0.0040	0.0175
TOTAL Uncontrolled Toluene	0.0014	0.0062
TOTAL Uncontrolled Ethylbenzene	0.0001	0.0003
TOTAL Uncontrolled Xylene	0.0005	0.0022
TOTAL Uncontrolled TAPs (Formaldehyde)	0.0519	0.2273
TOTAL CH ₄ Emissions	0.5823	2.5503
TOTAL CO _{2e} Emissions	293.0329	1283.4842

Enter Any Notes Here:

- Engines were manufactured in 2015 for MSG-425. Engine ratings were taken from manufacturer engine specifications. Please see copies of manufacturer engine specifications in Appendix N.
- Emission factors used for the 76 HP engine NOX and CO emissions are certification levels indicated on MSG-425 CARB document. See MSG-425 CARB document in Appendix N.
- Emission factors for all other contaminants including VOCs were obtained from AP-42, Section 3.2 "Natural Gas-fired Reciprocating Engines", Table 3.2-3.
- Hours of operation was calculated based on the 100% operation of the VRU.

Table 14

**Change in Regulated Air Pollutants Emissions
Strickling Well Pad
Doddridge County, West Virginia
Antero Resources Corporation**

Pollutant	Potential Emissions		Previous Permit Application Emissions		Change in Emissions	
	Hourly PTE	Yearly PTE	Hourly PTE	Yearly PTE	Hourly PTE	Yearly PTE
PM _{2.5}	0.2636	1.1548	0.0669	0.2930	1.97E-01	0.8618
PM ₁₀	1.1664	6.5462	0.9665	1.5615	0.1999	4.9847
VOC (uncontrolled)	197.7143	886.9900	83.5301	366.3583	114.1842	520.6317
CO	15.2508	66.7984	6.3938	28.0048	8.8570	38.7936
NO _x	5.6032	24.5418	1.2078	5.2903	4.3954	19.2515
SO ₂	0.0189	0.0829	0.0045	0.0196	1.44E-02	6.33E-02
Pb	1.62E-05	7.09E-05	4.46E-06	1.95E-05	1.17E-05	5.14E-05
HAPs	0.8425	5.4277	0.2642	1.1589	0.5783	4.2688
TAPs	0.0625	0.2787	0.0075	0.0330	5.50E-02	0.2457

Notes:

1. Change in emissions due to the increased production and the addition of four wells, four GPU Heaters, two produced water tanks, two enclosed combustors, ten Line Heaters, three HP Ford VRU engines, one LP Ford VRU engine, four VRTs; Removal of Kubota Engine and two condensate water tanks.



Bryan Research & Engineering, Inc.

ProMax[®] 4.0

Copyright © 2002-2016 BRE Group, Ltd. All Rights Reserved.

Simulation Report

Project: Antero Promax Model- VRT.pmx

Licensed to GHD Limited and Affiliates


Client Name: Antero Resource
Location: Doddridge County, WV
Job: Strickling Well Pad

ProMax Filename: C:\Users\ychen1\Documents\Drafts\082715- ANTERO\05-ProMax Report\VRT\Antero Promax Model- VRT.pmx
ProMax Version: 4.0.16071.0
Simulation Initiated: 4/29/2017 7:22:09 PM

Bryan Research & Engineering, Inc.

Chemical Engineering Consultants
P.O. Box 4747 Bryan, Texas 77805
Office: (979) 776-5220
FAX: (979) 776-4818
<mailto:sales@bre.com>
<http://www.bre.com/>

Report Navigator can be activated via the ProMax Navigator Toolbar.
An asterisk (*), throughout the report, denotes a user specified value.
A question mark (?) after a value, throughout the report, denotes an extrapolated or approximate value.

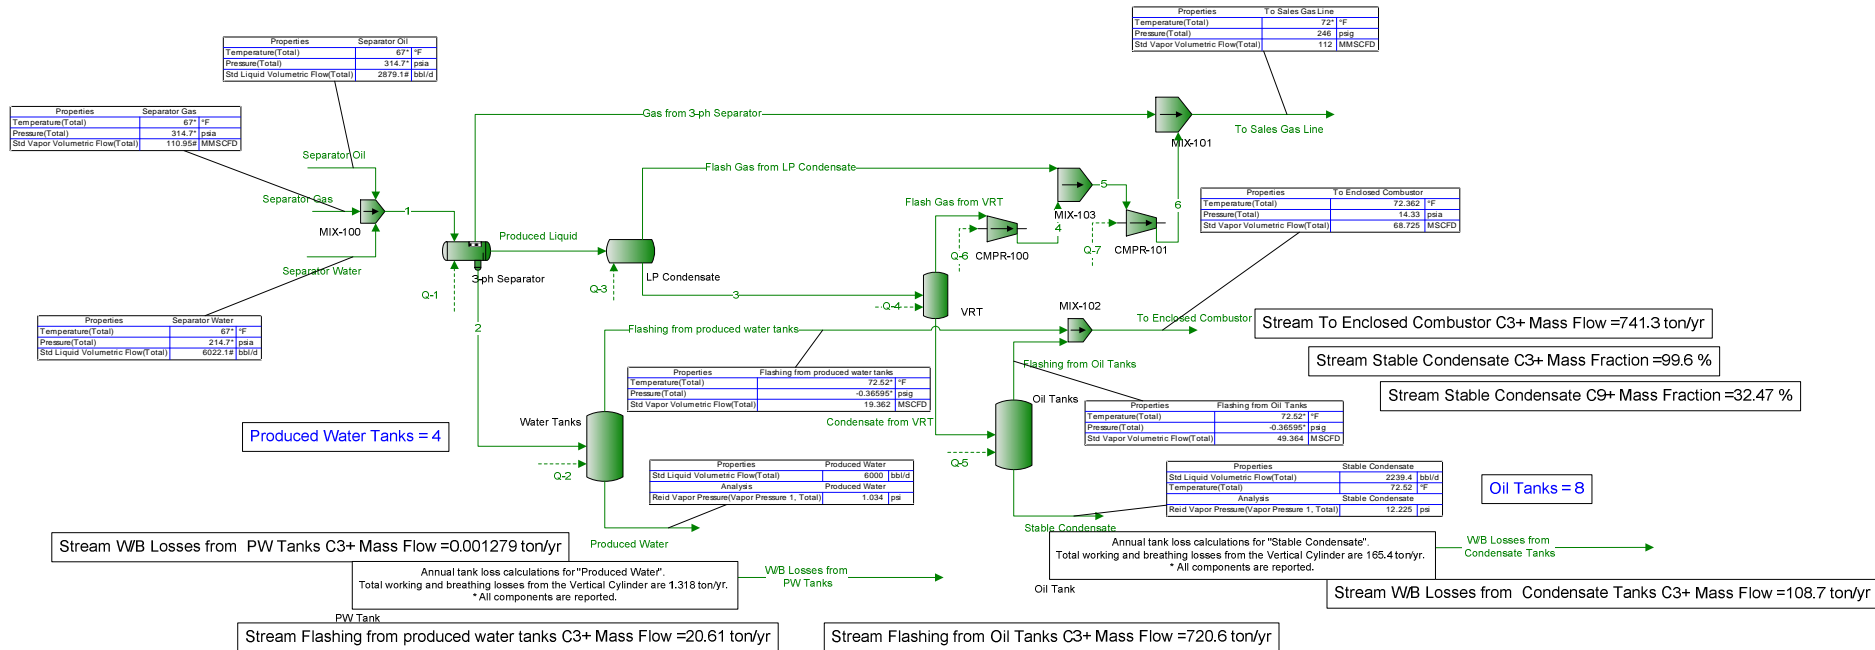

FESCO, Ltd.
1100 FESCO Avenue - Alice, Texas 78332

For: Antero Resources Appalachian Corp.
 1625 17th Street
 Denver, Colorado 80202

Sample: Central No. 2H
 Separator Hydrocarbon Liquid
 Sampled @ 300 psig & 70 °F

Date Sampled: 09/20/13

Job Number: 35821.002

CHROMATOGRAPH EXTENDED ANALYSIS - GPA 2186-M

COMPONENT	MOL %	LIQ VOL %	WT %
Nitrogen	0.015	0.004	0.005
Carbon Dioxide	0.026	0.011	0.014
Methane	6.886	2.920	1.331
Ethane	8.322	5.569	3.014
Propane	8.761	6.040	4.653
Isobutane	2.532	2.073	1.772
n-Butane	7.165	5.652	5.015
2,2 Dimethylpropane	0.118	0.113	0.102
Isopentane	4.261	3.899	3.702
n-Pentane	5.583	5.064	4.851
2,2 Dimethylbutane	0.243	0.254	0.252
Cyclopentane	0.000	0.000	0.000
2,3 Dimethylbutane	0.401	0.411	0.416
2 Methylpentane	2.739	2.845	2.843
3 Methylpentane	1.887	1.927	1.958
n-Hexane	4.725	4.862	4.904
Heptanes Plus	<u>46.337</u>	<u>58.355</u>	<u>65.167</u>
Totals:	100.000	100.000	100.000

Characteristics of Heptanes Plus:

Specific Gravity -----	0.7352	(Water=1)
°API Gravity -----	60.96	@ 60°F
Molecular Weight -----	116.8	
Vapor Volume -----	19.98	CF/Gal
Weight -----	6.13	Lbs/Gal

Characteristics of Total Sample:

Specific Gravity -----	0.6584	(Water=1)
°API Gravity -----	83.42	@ 60°F
Molecular Weight -----	83.0	
Vapor Volume -----	25.17	CF/Gal
Weight -----	5.49	Lbs/Gal

Base Conditions: 14.850 PSI & 60 °F

Certified: FESCO, Ltd. - Alice, Texas

Analyst: XG
 Processor: JCdjv
 Cylinder ID: T-3044

 David Dannhaus 361-661-7015

TANKS DATA INPUT REPORT

COMPONENT	Mol %	LiqVol %	Wt %
Carbon Dioxide	0.026	0.011	0.014
Nitrogen	0.015	0.004	0.005
Methane	6.886	2.920	1.331
Ethane	8.322	5.569	3.014
Propane	8.761	6.040	4.653
Isobutane	2.532	2.073	1.772
n-Butane	7.282	5.765	5.118
Isopentane	4.261	3.899	3.702
n-Pentane	5.583	5.064	4.851
Other C-6's	5.270	5.438	5.470
Heptanes	12.718	14.211	15.025
Octanes	14.320	17.030	18.719
Nonanes	6.129	8.438	9.360
Decanes Plus	9.786	15.535	17.888
Benzene	0.097	0.068	0.091
Toluene	0.708	0.593	0.786
E-Benzene	0.715	0.690	0.914
Xylenes	1.865	1.790	2.384
n-Hexane	4.725	4.862	4.904
2,2,4 Trimethylpentane	<u>0.000</u>	<u>0.000</u>	<u>0.000</u>
Totals:	100.000	100.000	100.000

Characteristics of Total Sample:

Specific Gravity -----	0.6584 (Water=1)
°API Gravity -----	83.42 @ 60°F
Molecular Weight-----	83.0
Vapor Volume -----	25.17 CF/Gal
Weight -----	5.49 Lbs/Gal

Characteristics of Decanes (C10) Plus:

Specific Gravity -----	0.7581 (Water=1)
Molecular Weight-----	151.8

Characteristics of Atmospheric Sample:

°API Gravity -----	68.98 @ 60°F
Reid Vapor Pressure (ASTM D-5191)-----	4.41 psi

QUALITY CONTROL CHECK			
	Sampling Conditions	Test Samples	
Cylinder Number	-----	T-3044*	T-1105
Pressure, PSIG	300	246	238
Temperature, °F	70	70	70

* Sample used for analysis

TOTAL EXTENDED REPORT

COMPONENT	Mol %	LiqVol %	Wt %
Nitrogen	0.015	0.004	0.005
Carbon Dioxide	0.026	0.011	0.014
Methane	6.886	2.920	1.331
Ethane	8.322	5.569	3.014
Propane	8.761	6.040	4.653
Isobutane	2.532	2.073	1.772
n-Butane	7.165	5.652	5.015
2,2 Dimethylpropane	0.118	0.113	0.102
Isopentane	4.261	3.899	3.702
n-Pentane	5.583	5.064	4.851
2,2 Dimethylbutane	0.243	0.254	0.252
Cyclopentane	0.000	0.000	0.000
2,3 Dimethylbutane	0.401	0.411	0.416
2 Methylpentane	2.739	2.845	2.843
3 Methylpentane	1.887	1.927	1.958
n-Hexane	4.725	4.862	4.904
Methylcyclopentane	0.750	0.664	0.760
Benzene	0.097	0.068	0.091
Cyclohexane	0.855	0.728	0.866
2-Methylhexane	3.019	3.512	3.643
3-Methylhexane	2.570	2.952	3.101
2,2,4 Trimethylpentane	0.000	0.000	0.000
Other C-7's	1.170	1.328	1.398
n-Heptane	4.355	5.028	5.256
Methylcyclohexane	3.005	3.023	3.554
Toluene	0.708	0.593	0.786
Other C-8's	8.306	10.150	11.026
n-Octane	3.008	3.857	4.139
E-Benzene	0.715	0.690	0.914
M & P Xylenes	0.802	0.779	1.026
O-Xylene	1.062	1.011	1.358
Other C-9's	4.456	6.081	6.775
n-Nonane	1.673	2.356	2.585
Other C-10's	3.766	5.649	6.408
n-decane	0.826	1.268	1.415
Undecanes(11)	2.552	3.927	4.518
Dodecanes(12)	1.336	2.221	2.591
Tridecanes(13)	0.741	1.321	1.563
Tetradecanes(14)	0.329	0.627	0.752
Pentadecanes(15)	0.124	0.253	0.307
Hexadecanes(16)	0.056	0.123	0.151
Heptadecanes(17)	0.026	0.061	0.075
Octadecanes(18)	0.012	0.028	0.035
Nonadecanes(19)	0.006	0.015	0.019
Eicosanes(20)	0.002	0.005	0.006
Heneicosanes(21)	0.001	0.003	0.004
Docosanes(22)	0.001	0.002	0.002
Tricosanes(23)	0.000	0.001	0.002
Tetracosanes(24)	0.000	0.001	0.001
Pentacosanes(25)	0.000	0.001	0.001
Hexacosanes(26)	0.000	0.001	0.001
Heptacosanes(27)	0.000	0.001	0.001
Octacosanes(28)	0.000	0.001	0.001
Nonacosanes(29)	0.000	0.001	0.002
Triacotanes(30)	0.001	0.002	0.003
Hentriacotanes Plus(31+)	<u>0.005</u>	<u>0.022</u>	<u>0.031</u>
Total	100.000	100.000	100.000



FESCO, Ltd.
1100 Fesco Avenue - Alice, Texas 78332

For: Antero Resources Appalachian Corp.
 1625 17th Street
 Denver, Colorado 80202

Date Sampled: 09/20/13

Date Analyzed: 10/02/13

Sample: Central No. 2H

Job Number: J35821

FLASH LIBERATION OF HYDROCARBON LIQUID		
	Separator HC Liquid	Stock Tank
Pressure, psig	300	0
Temperature, °F	70	70
Gas Oil Ratio (1)	-----	365
Gas Specific Gravity (2)	-----	1.408
Separator Volume Factor (3)	1.2406	1.000

STOCK TANK FLUID PROPERTIES	
Shrinkage Recovery Factor (4)	0.8060
Oil API Gravity at 60 °F	68.98
Reid Vapor Pressure, psi (5)	4.41

Quality Control Check			
	Sampling Conditions	Test Samples	
Cylinder No.	-----	T-3044*	T-1105
Pressure, psig	300	246	238
Temperature, °F	70	70	70

(1) - Scf of flashed vapor per barrel of stock tank oil

(2) - Air = 1.000

(3) - Separator volume / Stock tank volume

(4) - Fraction of first stage separator liquid

(5) - Absolute pressure at 100 deg F

Analyst: _____ M. G.

* Sample used for flash study

Base Conditions: 14.85 PSI & 60 °F

Certified: FESCO, Ltd. - Alice, Texas

 David Dannhaus 361-661-7015

FESCO, Ltd.
1100 Fesco Ave. - Alice, Texas 78332

For: Antero Resources Appalachian Corp.
 1625 17th Street
 Denver, Colorado 80202

Sample: Central No. 2H
 Gas Evolved from Hydrocarbon Liquid Flashed
 From 300 psig & 70 °F to 0 psig & 70 °F

Date Sampled: 09/20/13

Job Number: 35821.001

CHROMATOGRAPH EXTENDED ANALYSIS - SUMMATION REPORT

COMPONENT	MOL%	GPM
Hydrogen Sulfide*	< 0.001	
Nitrogen	0.053	
Carbon Dioxide	0.107	
Methane	23.624	
Ethane	26.392	7.114
Propane	22.728	6.311
Isobutane	4.750	1.567
n-Butane	10.798	3.431
2-2 Dimethylpropane	0.127	0.049
Isopentane	3.304	1.218
n-Pentane	3.382	1.236
Hexanes	2.805	1.165
Heptanes Plus	<u>1.930</u>	<u>0.855</u>
Totals	100.000	22.945

Computed Real Characteristics Of Heptanes Plus:

Specific Gravity ----- 3.556 (Air=1)
 Molecular Weight ----- 101.39
 Gross Heating Value ----- 5420 BTU/CF

Computed Real Characteristics Of Total Sample:

Specific Gravity ----- 1.408 (Air=1)
 Compressibility (Z) ----- 0.9845
 Molecular Weight ----- 40.14
 Gross Heating Value
 Dry Basis ----- 2354 BTU/CF
 Saturated Basis ----- 2314 BTU/CF

*Hydrogen Sulfide tested in laboratory by: Stained Tube Method (GPA 2377)

Results: <0.013 Gr/100 CF, <0.2 PPMV or <0.001 Mol %

Base Conditions: 14.850 PSI & 60 Deg F

Certified: FESCO, Ltd. - Alice, Texas

Analyst: MR
 Processor: ANB
 Cylinder ID: CYL-1

David Dannhaus 361-661-7015

**CHROMATOGRAPH EXTENDED ANALYSIS
TOTAL REPORT**

COMPONENT	MOL %	GPM	WT %
Hydrogen Sulfide*	< 0.001		< 0.001
Nitrogen	0.053		0.037
Carbon Dioxide	0.107		0.117
Methane	23.624		9.441
Ethane	26.392	7.114	19.772
Propane	22.728	6.311	24.970
Isobutane	4.750	1.567	6.879
n-Butane	10.798	3.431	15.637
2,2 Dimethylpropane	0.127	0.049	0.228
Isopentane	3.304	1.218	5.939
n-Pentane	3.382	1.236	6.080
2,2 Dimethylbutane	0.117	0.049	0.251
Cyclopentane	0.000	0.000	0.000
2,3 Dimethylbutane	0.166	0.069	0.356
2 Methylpentane	0.881	0.369	1.892
3 Methylpentane	0.543	0.223	1.166
n-Hexane	1.098	0.455	2.358
Methylcyclopentane	0.079	0.027	0.166
Benzene	0.022	0.006	0.043
Cyclohexane	0.125	0.043	0.262
2-Methylhexane	0.233	0.109	0.582
3-Methylhexane	0.233	0.107	0.582
2,2,4 Trimethylpentane	0.000	0.000	0.000
Other C7's	0.228	0.100	0.564
n-Heptane	0.296	0.138	0.739
Methylcyclohexane	0.195	0.079	0.477
Toluene	0.043	0.015	0.099
Other C8's	0.271	0.127	0.744
n-Octane	0.068	0.035	0.194
Ethylbenzene	0.002	0.001	0.005
M & P Xylenes	0.022	0.009	0.058
O-Xylene	0.003	0.001	0.008
Other C9's	0.076	0.039	0.239
n-Nonane	0.014	0.008	0.045
Other C10's	0.018	0.011	0.063
n-Decane	0.002	0.001	0.007
Undecanes (11)	<u>0.000</u>	<u>0.000</u>	<u>0.000</u>
Totals	100.000	22.945	100.000

Computed Real Characteristics Of Total Sample:

Specific Gravity -----	1.408	(Air=1)
Compressibility (Z) -----	0.9845	
Molecular Weight -----	40.14	
Gross Heating Value		
Dry Basis -----	2354	BTU/CF
Saturated Basis -----	2314	BTU/CF

Gas Analytical

Report Date: Jun 8, 2016 8:11a

Client:	Antero Resources	Date Sampled:	Jun 3, 2016
Client Code:	9569	Analysis Date:	Jun 6, 2016 11:57a
Site:	Hiley Unit 2H	Collected By:	Doug Lipscomb
Field No:	9998	Date Effective:	Jun 3, 2016 12:00a
Meter:		Sample Pressure (PSI):	201.4
Source Laboratory	Clarksburg (Bridgeport), WV	Sample Temp (°F):	63
Lab File No:	X_CH1-12112.CHR	Field H2O:	No Test
Sample Type:	Spot	Field H2S:	No Test
Reviewed By:			
Analysis Status:	good		

Component	Mol %	Gal/MSCF
Methane	80.8909	
Ethane	14.3137	3.8050
Propane	2.2213	0.6106
I-Butane	0.4547	0.1485
N-Butane	0.7773	0.2446
I-Pentane	0.2153	0.0786
N-Pentane	0.1929	0.0698
Nitrogen	0.4085	
Oxygen	<MDL	
Carbon Dioxide	0.1743	
Hexanes+	0.3511	0.1442
TOTAL	100.0000	5.1014

Analytical Results at Base Conditions (Real)	
BTU/SCF (Dry):	1,206.8951 BTU/ft ³
BTU/SCF (Saturated):	1,186.7210 BTU/ft ³
PSIA:	14.696 PSI
Temperature (°F):	60.0 °F
Z Factor (Dry):	0.99683
Z Factor (Saturated):	0.99643

Analytical Results at Contract Conditions (Real)	
BTU/SCF (Dry):	1,206.9040 BTU/ft ³
BTU/SCF (Saturated):	1,186.7763 BTU/ft ³
PSIA:	14.730 PSI
Temperature (°F):	60.0 °F
Z Factor (Dry):	0.99682
Z Factor (Saturated):	0.99643

Calculated Specific Gravities		
Ideal Gravity:	0.6833	Real Gravity: 0.6852
Molecular Wt:	19.7893	lb/lbmol

Gross Heating Values are Based on:
GPA 2145-09, 2172
Compressibility is Calculated using AGA-8.

Source	Date	Notes

Attachment U

Facility-wide Emissions Summary Sheet(s)

ATTACHMENT U – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	NOx		CO		VOC		SO2		PM10		PM2.5		CH ₄		GHG (CO ₂ e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
EP-HR001									0.8964	5.3634						
EP-PCV					0.0665	0.2911							0.3761	1.6473	9.4048	41.1931
F001					3.3601	14.7170							3.5654	15.6163	89.1340	390.4071
EP-L001					12.3264	20.9959							0.0624	0.1064	1.5801	2.6915
EP-L002					1.16E-03	5.28E-03							0.0370	0.1690	0.9790	4.4665
EP-ENG001-004(emissions per EPN)	0.0625	0.2738	0.4126	1.8073	0.0187	0.0821	0.0004	0.0016	0.0060	0.0263	0.0060	0.0263	0.1456	0.6376	73.2582	320.8710
GPU001-006(emissions per EPN)	0.1243	0.5444	0.1044	0.4573	0.0068	0.0299	0.0007	0.0033	0.0094	0.0414	0.0094	0.0414	0.0029	0.0125	149.1419	653.2417
EP-LH001 -010(emissions per EPN)	0.1657	0.7258	0.1392	0.6097	0.0091	0.0399	0.0010	0.0044	0.0126	0.0552	0.0126	0.0552	0.0038	0.0167	198.8559	870.9889
EP-EC001 -003(emissions per EPN)	0.8177	3.5815	3.7214	16.2999	1.2938	5.6668	0.0000	0.0000	0.0085	0.0374	0.0064	0.0280	0.2179	0.9546	323.0432	1414.9294
TOTAL	5.6032	24.5418	15.2508	66.7984	4.1158	39.0283	0.0189	0.0829	0.2700	1.1828	0.2636	1.1548	1.3028	5.9816	4742.1412	20777.7364

Annual emissions shall be based on 8760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above

ATTACHMENT U – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID#	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
EP-HR001														
EP-PCV			0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.0088	0.0384	0.0088	0.0384
F001			0.0026	0.0113	0.0223	0.0976	0.0259	0.1136	0.0676	0.2962	0.2656	1.1631	0.3840	1.6819
EP-L001			2.85E-03	4.86E-03	9.93E-03	1.69E-02	4.37E-03	7.45E-03	0.009	1.49E-02	0.994	1.693	1.020	1.737
EP-L002			8.20E-06	3.74E-05	5.74E-06	2.62E-05	7.03E-07	3.21E-06	1.31E-06	5.98E-06	4.15E-08	1.89E-07	1.60E-05	7.30E-05
EP-ENG001-004(emissions per EPN)	0.0130	0.0568	0.0010	0.0044	0.0004	0.0015	1.57E-05	6.87E-05	0.0001	0.0005			0.0145	0.0636
GPU001-006(emissions per EPN)	0.0001	0.0004	2.61E-06	1.14E-05	4.23E-06	1.85E-05			0.00E+00	0.00E+00	0.0022	0.0098	0.0023	0.0102
EP-LH001 -010(emissions per EPN)	0.0001	0.0005	3.48E-06	1.52E-05	5.63E-06	2.47E-05			0.00E+00	0.00E+00	0.0030	0.0131	0.0031	0.0137
EP-EC001 -003(emissions per EPN)	1.28E-06	5.58E-06	5.92E-04	2.59E-03	2.00E-03	8.78E-03	8.30E-04	3.63E-03	1.88E-03	8.23E-03	1.07E-01	4.69E-01	1.12E-01	4.92E-01
TOTAL	0.0541	0.2369	0.0058	0.0305	0.0075	0.0499	0.0026	0.0186	0.0061	0.0417	0.3733	3.3285	0.4497	3.7074

Annual emissions shall be based on 8760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above

Attachment V
Class I Legal Advertisement

Attachment V

**Air Quality Permit Notice
Notice of Application
Strickling Well Pad
Antero Resources Corporation
Doddridge County, West Virginia**

Notice is given that Antero Resources Corporation has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a G70-D General Permit Modification for an Oil and Natural Gas Production facility located at 2110 Nutter Fork , in Doddridge County, West Virginia.

The latitude and longitude coordinates are: 39.332189 and -80.78376

The applicant estimates the increased potential to discharge the following Regulated Air Pollutants will be:

Pollutants	TOTALS (tpy):
NO _x	24.5418
CO	66.7984
PM _{2.5}	1.1548
PM ₁₀	1.1828
VOC	39.0283
SO ₂	0.0829
CO _{2e}	20777.7364
CH ₄	5.9816
Formaldehyde	0.2369
Benzene	0.0305
Toluene	0.0499
Ethylbenzene	0.0186
Xylenes	0.0417
Hexane	3.3285
Total HAPs	3.7074

Proposed new equipment will be installed by March 01, 2018 and the facility is expected to begin the operations by September 01, 2018. Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57th Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the __ day of _____, 2017

By: Antero Resources Corporation
Barry Schatz
Senior Environmental & Regulatory Manager
1615 Wynkoop Street
Denver, CO 80202

www.ghd.com

