



SWN Production Company, LLC  
 P O Box 12359  
 Spring, Texas 77391-2359  
 www.swn.com

## GLADYS BRIGGS

---

### Modification

1	CHK	9/24/2013	R13-3071	NA	NA
2	CM	2/16/2017	G70-D MOD: ADD 4 GPU, 1 ENG, 2 LH; REM 2 TANKS	JPH	2/16/2017
<b>REV</b>	<b>BY</b>	<b>DATE</b>	<b>DESCRIPTION</b>	<b>FACILITIES REVIEWED</b>	<b>DATE</b>

## TABLE OF CONTENTS

TABLE OF CONTENTS.....	1
INTRODUCTION.....	1
Proposed Emissions .....	1
REGULATORY DISCUSSION .....	2
APPLICATION FOR GENERAL PERMIT REGISTRATION.....	6
ATTACHMENT A: SINGLE SOURCE DETERMINATION .....	9
ATTACHMENT C: BUSINESS REGISTRATION CERTIFICATE.....	12
ATTACHMENT D: PROCESS FLOW DIAGRAM .....	14
ATTACHMENT E: PROCESS DESCRIPTION .....	16
ATTACHMENT F: PLOT PLAN.....	17
ATTACHMENT G: AREA MAPS .....	19
ATTACHMENT H: G70-D SECTION APPLICABILITY FORM .....	22
ATTACHMENT I: EMISSIONS UNITS/ERD TABLE.....	24
ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET .....	26
ATTACHMENT K: GAS WELL AFFECTED FACILITY DATA SHEET .....	30
ATTACHMENT L: STORAGE VESSELS DATA SHEET .....	32
ATTACHMENT M: NATURAL GAS FIRED FUEL BURNING UNITS DATA SHEET .....	40
ATTACHMENT N: INTERNAL COMBUSTION ENGINE DATA SHEETS .....	45
ATTACHMENT O: TANKER TRUCK LOADING DATA SHEET.....	54
ATTACHMENT Q: PNEUMATIC CONTROLLERS DATA SHEET .....	58
ATTACHMENT R: PNEUMATIC PUMP DATA SHEET.....	60
ATTACHMENT S: AIR POLLUTION CONTROL DEVICE/EMISSION REDUCTION DEVICES SHEETS.....	62

ATTACHMENT T: EMISSIONS CALCULATIONS.....	67
ATTACHMENT U: FACILITY-WIDE EMISSION SUMMARY SHEETS .....	111
ATTACHMENT V: CLASS II LEGAL ADVERTISEMENT .....	114

## INTRODUCTION

SWN Production Company, LLC (SWN), submits this G70-D General Permit Application for the Gladys Briggs Pad. The facility currently operated under Permit No. R13-3071, issued on September 24, 2013. With this application, SWN requests authorization to operate under the General Permit G70-D for Oil and Natural Gas Production Facilities. Included with this application are changes in the emission estimates for the emission sources at the facility. The changes are summarized below:

- Four (4) wells have been added to the equipment representation.
- One (1) 145-hp Caterpillar G3306 NA compressor engine has been added to the equipment representation.
- Four (4) 1.0-mmBtu/hr natural gas-fired GPU burners (EU-GPU2 – EU-GPU5) have been added to the equipment representation.
- Three (3) 1.5-mmBtu/hr natural gas-fired line heaters (EU-LH2 – EU-LH4) have been added to the equipment representation.
- One (1) 400-bbl condensate tank and one (1) 400-bbl produced water tank that were previously authorized have been removed from the equipment representation.
- The condensate throughput estimate has been revised from 10 bbl/d to 107 bbl/d.
- The produced water throughput estimate has been revised from 100 bbl/d to 1,498 bbl/d.
- Truck loading emissions have been revised based on the change in condensate and produced water composition and throughput.
- A vapor combustor has been added to the equipment representation.
- Fugitive component counts have been revised based on the equipment changes.
- Fugitive haulroad estimates have been revised based on the change in condensate and produced water throughput.
- Greenhouse gas emissions have been revised based on the current Global Warming Potential multipliers.

Note that other small storage tanks may be present on site (i.e., methanol, lube oil) but are considered de minimis sources per Table 45-13B and are listed on the application form.

### Proposed Emissions

Emissions calculations for the project are presented in Attachment T. A fuel heating value of 905 Btu/scf was used to calculate emissions from natural gas-fired equipment. Actual heating

value may vary (generally 905 - 1,300) but using a lower heating value in the emissions calculations provides a more conservative (higher) estimate of fuel use.

Emissions from the Caterpillar engine were calculated with manufacturer data when available and AP-42/EPA emissions factors for the remaining pollutants.

Condensate and produced water tank emissions and loading emissions were calculated using ProMax process simulation software. Tank emissions are routed to a vapor combustor with 100% capture efficiency and 98% destruction efficiency. Loading emissions are routed to a vapor combustor with 70% capture efficiency and 98% destruction efficiency.

Fugitive emissions were calculated with a component count by equipment type from a similar facility, and representative extended gas and liquids analyses. Fugitive haul road emissions were calculated using EPA/AP-42 methodologies.

Greenhouse gas emissions were calculated with the latest EPA factors and manufacturer data when available. Documents used as references for the emissions calculations including manufacturer specification sheets, gas and liquids analyses, and process simulation results are attached.

## **REGULATORY DISCUSSION**

### **STATE**

#### **45 CSR 13 - PERMITS FOR CONSTRUCTION, MODIFICATION, RELOCATION AND OPERATION OF STATIONARY SOURCES OF AIR POLLUTANTS, NOTIFICATION REQUIREMENTS, ADMINISTRATIVE UPDATES, TEMPORARY PERMITS, GENERAL PERMITS, AND PROCEDURES FOR EVALUATION:**

The facility requests to operate under the General Permit G70-D. Emissions of carbon monoxide and volatile organic compounds are less than 80 tons per year (TPY). Oxides of nitrogen emissions are less than 50 TPY and particulate matter 10/2.5 and sulfur dioxide emissions are each less than 20 TPY. Also, the facility will have less than 8 TPY for each hazardous air pollutant (HAP) and less than 20 tons for total HAP. This project qualifies as a Class II Administrative Update since the increase in emissions of each regulated air pollutant will be less than six (6) pounds per hour (pph) or ten (10) TPY and the increase in aggregate HAP emissions will be less than two (2) pph or five (5) TPY. The regulation impacts will not change.

**45 CSR 22 - AIR QUALITY MANAGEMENT FEE PROGRAM:**

The facility will be required to maintain a valid Certificate to Operate on the premises.

**45 CSR 30 - REQUIREMENTS FOR OPERATING PERMITS:**

Emissions from the facility do not exceed major source thresholds; therefore, this rule does not apply.

**FEDERAL**

**40 CFR PART 60 SUBPART KB—STANDARDS OF PERFORMANCE FOR VOLATILE ORGANIC LIQUID STORAGE VESSELS (INCLUDING PETROLEUM LIQUID STORAGE VESSELS) FOR WHICH CONSTRUCTION, RECONSTRUCTION, OR MODIFICATION COMMENCED AFTER JULY 23, 1984**

The affected facility to which this Subpart applies is each storage vessel with a capacity greater than or equal to 75 cubic meters (m<sup>3</sup>) that is used to store volatile organic liquids (VOL) for which construction, reconstruction, or modification is commenced after July 23, 1984. The tanks at this facility were constructed after the effective date of this Subpart but are less than 75 m<sup>3</sup> (which equals approximately 471 bbl); therefore, this Subpart does not apply.

**40 CFR PART 60 SUBPART KKK - STANDARDS OF PERFORMANCE FOR STATIONARY FOR EQUIPMENT LEAKS OF VOC FROM ONSHORE NATURAL GAS PROCESSING PLANTS:**

The facility is not considered an affected source (natural gas processing plant) and is therefore not subject to this Subpart.

**40 CFR PART 60 SUBPART IIII - STANDARDS OF PERFORMANCE FOR STATIONARY COMPRESSION IGNITION INTERNAL COMBUSTION ENGINES:**

The facility does not contain the affected source (diesel-fired engine) and is therefore not subject to this Subpart.

**40 CFR PART 60 SUBPART JJJJ - STANDARDS OF PERFORMANCE FOR STATIONARY SPARK IGNITION INTERNAL COMBUSTION ENGINES:**

The proposed 145-hp, four-stroke, rich-burn natural gas-fired flash gas compressor engine is assumed to have been constructed after the June 12, 2006 effective date and manufactured after July 1, 2008; therefore, it will be subject to this Subpart. Although final selection of the engine has not yet been made, it is presumed that the engine was manufactured after January

1, 2011 and is therefore subject to Stage 2 emission limitations under this Subpart. SWN will comply with all applicable requirements.

**40 CFR PART 60 SUBPART OOOO - STANDARDS OF PERFORMANCE FOR CRUDE OIL AND NATURAL GAS PRODUCTION, TRANSMISSION, AND DISTRIBUTION:**

The emission sources affected by this Subpart include well completions, pneumatic controllers, equipment leaks from natural gas processing plants, sweetening units at natural gas processing plants, reciprocating compressors, centrifugal compressors and storage vessels which are constructed, modified or reconstructed after August 23, 2011 and before September 18, 2015.

The existing gas well located at this production pad was drilled during the effective date of this rule; therefore, it is an affected source subject to the applicable provisions of this Subpart.

Pneumatic controllers affected by this Subpart include continuous bleed, natural gas-driven pneumatic controllers with a natural gas bleed rate greater than 6 SCFH. No pneumatic devices with a continuous bleed greater than 6 SCFH are installed or in service at this facility.

Storage vessels affected by this Subpart include those with VOC emissions greater than 6 TPY. Emissions from the storage vessels at this facility are less than 6 TPY each.

**40 CFR PART 60 SUBPART OOOOA - STANDARDS OF PERFORMANCE FOR CRUDE OIL AND NATURAL GAS FACILITIES FOR WHICH CONSTRUCTION, MODIFICATION, OR RECONSTRUCTION COMMENCED AFTER SEPTEMBER 18, 2015:**

The emission sources affected by this Subpart include well completions, centrifugal compressors, reciprocating compressors, pneumatic controllers, storage vessels, fugitive sources at well sites, fugitive sources at compressor stations, pneumatic pumps, equipment leaks from natural gas processing plants and sweetening units at natural gas processing plants which are constructed, modified or reconstructed after September 18, 2015.

The four new gas wells located at this production pad will be completed after the effective date of this Subpart and are subject to the compliance requirements.

**40 CFR PART 63 SUBPART HH - NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES FROM OIL AND NATURAL GAS PRODUCTION FACILITIES:**

The site is a minor (area) source of hazardous air pollutants. This Subpart applies to affected emission points that are located at facilities that are major and area sources of HAP, and either

process, upgrade, or store hydrocarbon liquids prior to custody transfer or that process, upgrade, or store natural gas prior to entering the natural gas transmission and storage source category. For purposes of this Subpart natural gas enters the natural gas transmission and storage source category after the natural gas processing plant, if present. The facility is a minor (area) source of HAP; however, there is no triethylene glycol (TEG) dehydration unit present at the facility and therefore this Subpart does not apply.

**40 CFR PART 63 SUBPART HHH - NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES FROM NATURAL TRANSMISSION AND STORAGE FACILITIES:**

The facility is not a natural gas transmission and storage facility and is therefore not subject to this Subpart.

**40 CFR PART 63 SUBPART ZZZZ - NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES FROM STATIONARY RECIPROCATING INTERNAL COMBUSTION ENGINES - AREA SOURCE:**

The original rule, published on February 26, 2004, initially affected new (constructed or reconstructed after December 19, 2002) reciprocating internal combustion engines (RICE) with a site-rating greater than 500 brake horsepower (HP) located at a major source of HAP emissions. On January 18, 2008, EPA published an amendment that promulgated standards for RICE constructed or reconstructed after June 12, 2006 with a site rating less than or equal to 500 HP located at major sources, and for engines constructed and reconstructed after June 12, 2006 located at area sources. On August 10, 2010, EPA published another amendment that promulgated standards for existing (constructed or reconstructed before June 12, 2006) RICE at area sources and existing RICE (constructed or reconstructed before June 12, 2006) with a site rating of less than or equal to 500 HP at major sources.

Owners and operators of new or reconstructed engines at area sources must meet the requirements of Subpart ZZZZ by complying with either 40 CFR Part 60 Subpart IIII (for CI engines) or 40 CFR Part 60 Subpart JJJJ (for SI engines). Based on emission calculations, this facility is a minor source of HAP. The 145-hp, four-stroke, rich-burn natural gas-fired flash gas compressor engine is considered a new engine manufactured after January 1, 2011 and will meet the requirements of this Subpart by complying with requirements under NSPS Subpart JJJJ.



SWN Production Company, LLC  
Gladys Briggs Pad  
February 2017

---

## **APPLICATION FOR GENERAL PERMIT REGISTRATION**



west virginia department of environmental protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25 4
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-D GENERAL PERMIT REGISTRATION APPLICATION

PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION,
RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF
NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- CONSTRUCTION CLASS I ADMINISTRATIVE UPDATE
MODIFICATION CLASS II ADMINISTRATIVE UPDATE
RELOCATION

SECTION 1. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office): SWN Production Company, LLC

Federal Employer ID No. (FEIN): 26-4388727

Applicant's Mailing Address: 10000 Energy Drive

City: Spring State: TX ZIP Code: 77389

Facility Name: Gladys Briggs Pad

Operating Site Physical Address: 560 Briggs Lane
If none available, list road, city or town and zip of facility.

City: Cameron Zip Code: 26033 County: Marshall

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):
Latitude: 39.76787
Longitude: -80.61593

SIC Code: 1311 DAQ Facility ID No. (For existing facilities)
NAICS Code: 211111 051 - 00158

CERTIFICATION OF INFORMATION

This G70-D General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. Any administratively incomplete or improperly signed or unsigned G70-D Registration Application will be returned to the applicant. Furthermore, if the G70-D forms are not utilized, the application will be returned to the applicant. No substitution of forms is allowed.

I hereby certify that Carla Suszkowski is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-D General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: Carla Suszkowski
Name and Title: Carla Suszkowski Phone: 832-796-1000 Fax: 405-849-3102
Email: Carla\_Suszkowski@SWN.com Date: 2-20-17

If applicable:
Authorized Representative Signature:
Name and Title: Phone: Fax:
Email: Date:

If applicable:
Environmental Contact
Name and Title: Clay Murrel Phone: 304-884-1715 Fax:
Email: Clay\_Murrel@SWN.com Date:

**OPERATING SITE INFORMATION**

Briefly describe the proposed new operation and/or any change(s) to the facility: This application proposes to remove one (1) 400-bbl condensate tank and (1) 400-bbl produced water tank and to add one (1) Caterpillar G3306 NA engine (EU-ENG1), four (4) 1.0-mmBtu/hr natural gas-fired GPU burners (EU-GPU2 - EU-GPU5), three (3) 1.5-mmBtu/hr line heaters (EU-LH2 – EU-LH4), and one (1) 8-mmBtu/hr vapor combustor (APC-COMB) with pilot (EU-PILOT). Emissions from the condensate and produced water storage tanks, haul road, and fugitive sources have been revised to reflect the process change.

Directions to the facility: From Interstate 470 in Wheeling, WV, take exit 2 (Bethlehem). Turn left after exiting onto CR 91/1 if traveling west bound on Interstate 470. Turn right onto CR 91/1 if traveling east bound on Interstate 470. Travel 0.46 miles to SR 88 and bear right at the stop light onto SR 88 South. (Ridgecrest Road). Travel 8.27 miles on CR 88 to the intersection of SR 88 and US 250 and turn left onto SR 250 towards Cameron, WV. Upon arriving in Cameron on US 250, continue to travel south on US 250 for 3.44 miles to the intersection of US 250 and CR 94 (Fish Ridge Road) and turn right onto CR 94. (Begin the 3.44 mile distance to CR 94 from the intersection of CR 25/2 (Loudenville Road) and US 250 in Cameron.) Travel 0.736 miles on CR 94 to the intersection of CR 94 and CR 96 (Reid Ridge Road). Turn right to stay on CR 94 (Fish Ridge). Travel 2.773 miles further on CR 94 to future well pad entrance on right.

**ATTACHMENTS AND SUPPORTING DOCUMENTS**

**I have enclosed the following required documents:**

Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22).

- Check attached to front of application.
- I wish to pay by electronic transfer. Contact for payment (incl. name and email address):
- I wish to pay by credit card. Contact for payment (incl. name and email address):
  
- \$500 (Construction, Modification, and Relocation)                       \$300 (Class II Administrative Update)
- \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ, OOOO and/or OOOOa <sup>1</sup>
- \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH <sup>2</sup>

<sup>1</sup> Only one NSPS fee will apply.

<sup>2</sup> Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ.

*NSPS and NESHAP fees apply to new construction or if the source is being modified.*

- Responsible Official or Authorized Representative Signature (if applicable)
- Single Source Determination Form (**must be completed**) – Attachment A
- Siting Criteria Waiver (if applicable) – Attachment B                       Current Business Certificate – Attachment C
- Process Flow Diagram – Attachment D                                       Process Description – Attachment E
- Plot Plan – Attachment F     Area Map – Attachment G
- G70-D Section Applicability Form – Attachment H                       Emission Units/ERD Table – Attachment I
- Fugitive Emissions Summary Sheet – Attachment J
- Gas Well Affected Facility Data Sheet (if applicable) – Attachment K
- Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L
- Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPUs, Heater Treaters, In-Line Heaters if applicable) – Attachment M
- Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N
- Tanker Truck/Rail Car Loading Data Sheet (if applicable) – Attachment O
- Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P
- Pneumatic Controllers Data Sheet – Attachment Q
- Pneumatic Pump Data Sheet – Attachment R
- Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment S
- Emission Calculations (please be specific and include all calculation methodologies used) – Attachment T
- Facility-wide Emission Summary Sheet(s) – Attachment U
- Class I Legal Advertisement – Attachment V
- One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments

**ATTACHMENT A: SINGLE SOURCE DETERMINATION**

## ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

*“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL 3).*

The Source Determination Rule for the oil and gas industry was published in the Federal Register on June 3, 2016 and will become effective on August 2, 2016. EPA defined the term “adjacent” and stated that equipment and activities in the oil and gas sector that are under common control will be considered part of the same source if they are located on the same site or on sites that share equipment and are within ¼ mile of each other.

Is there equipment and activities in the same industrial grouping (defined by SIC code)?

Yes  No

Is there equipment and activities under the control of the same person/people?


Yes  No

Is there equipment and activities located on the same site or on sites that share equipment and are within ¼ mile of each other?







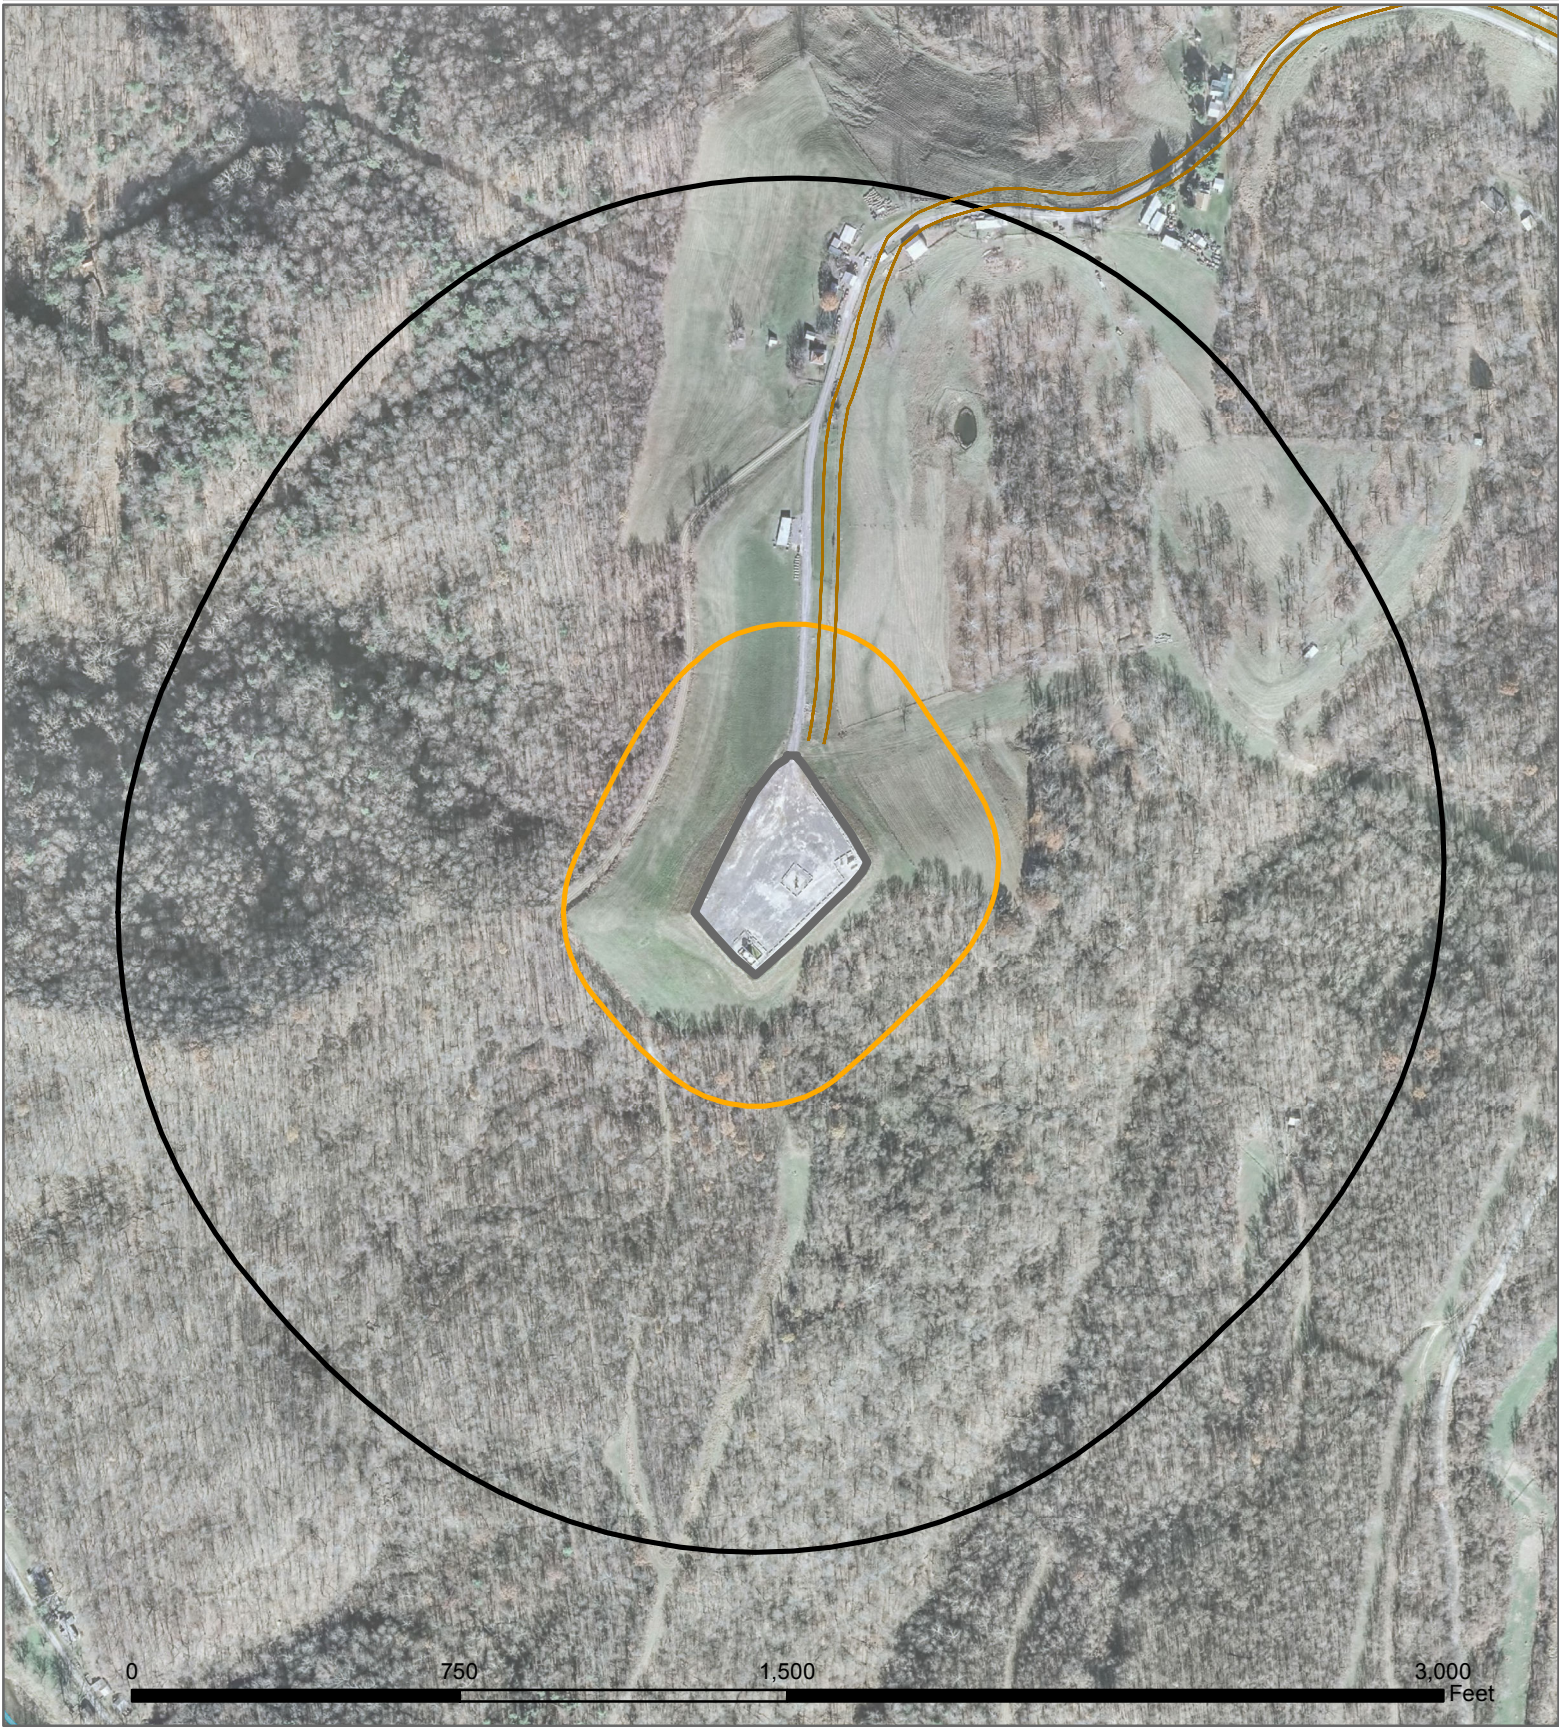


Yes  No



# Proximity Map



**Gladys Briggs Pad**  
 NAD83 UTM Zone 17N  
 532.894 4,401.987 Kilometers  
 -80.615927 39.767872 Decimal Degrees

-  Schools
-  Residential Structures
-  Rivers and Lakes
-  Briggs 300ft
-  Briggs Quarter Mile
-  Compressor Stations
-  Processing Plant
-  Power Plant
-  Hospital



**ATTACHMENT C: BUSINESS REGISTRATION CERTIFICATE**

**WEST VIRGINIA  
STATE TAX DEPARTMENT  
BUSINESS REGISTRATION  
CERTIFICATE**

ISSUED TO:  
**SWN PRODUCTION COMPANY, LLC  
5400D BIG TYLER RD  
CHARLESTON, WV 25313-1103**

BUSINESS REGISTRATION ACCOUNT NUMBER: **2307-3731**

This certificate is issued on: **12/8/2014**

This certificate is issued by: **[Signature]**  
the West Virginia State Tax Commissioner,  
in accordance with Chapter 11, Article 12, of the West Virginia Code.

The person or organization identified on this certificate is registered  
to conduct business in the State of West Virginia at the location above.

This certificate is not transferrable and must be displayed at the location for which issued.

This certificate shall be permanent until cessation of the business for which the certificate of registration  
was granted, or until it is suspended, revoked or cancelled by the Tax Commissioner.


Change in name or change of location shall be considered a cessation of the business and a new  
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.  
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of  
this certificate displayed at every job site within West Virginia.

atL006 v.4  
L1180094016



**ATTACHMENT D: PROCESS FLOW DIAGRAM**

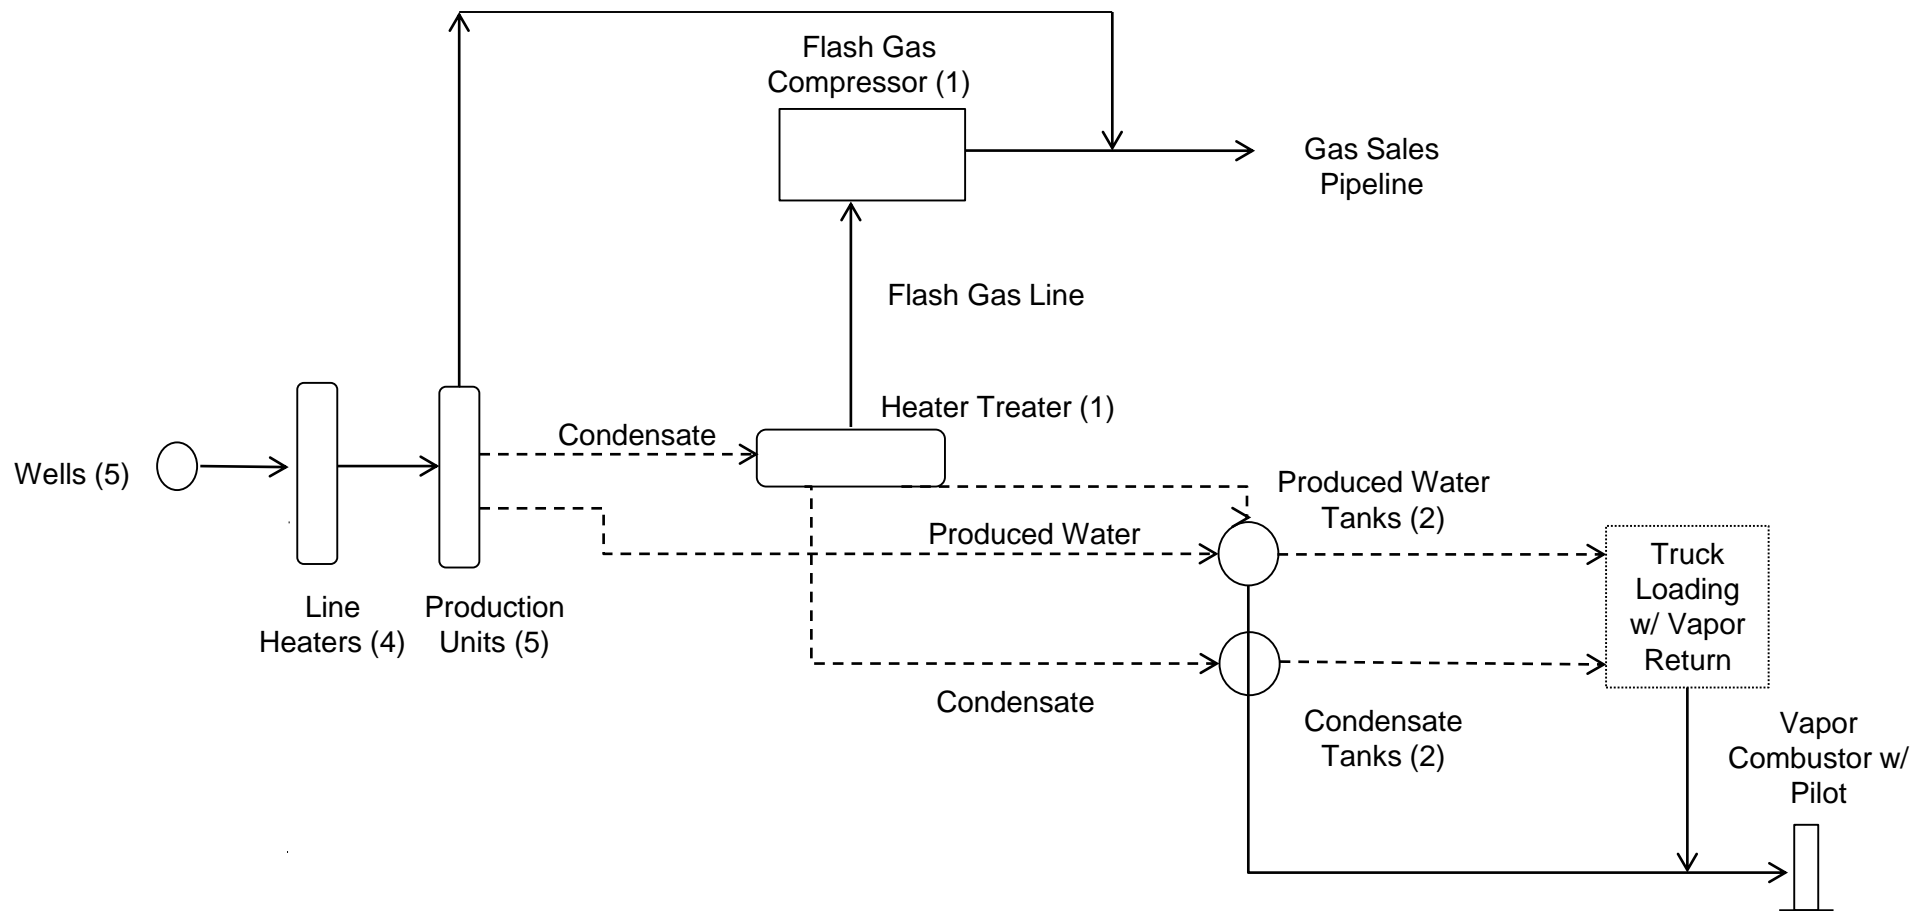

———— Gas/Vapor  
 - - - - - Liquids (Condensate and Produced Water)

**SWN Production Company, LLC**  
**Gladys Briggs Pad**  
 Attachment D: Process Flow Diagram  
 February 2017

*Note: Drawing is a depiction of general facility process and is not intended to represent facility and/or equipment layout.*

## **ATTACHMENT E: PROCESS DESCRIPTION**


The facility is an oil and natural gas exploration and production facility, responsible for the production of natural gas. Storage of condensate and produced water also occur on-site. A description of the facility process is as follows: Condensate, gas and water come from the five wellheads to the line heaters and then the production units, where the first stage of separation occurs. Produced water is sent from the production units to the produced water tanks. Condensate and residual water are sent to the heater treater. The flash from the heater treater is captured via a natural gas-fired engine-driven flash gas compressor. Condensate and produced water from the heater treater are routed to the storage tanks.

The natural gas stream exits the facility for transmission via pipeline. Condensate and produced water are transported offsite via truck. Loading emissions are controlled with vapor return, which has at least 70% capture efficiency, routed to the vapor combustor for at least 98% destruction efficiency. Working, breathing and flashing vapors from the condensate and produced water storage tanks are routed to the vapor combustor to be burned with at least 98% combustion efficiency. The vapor combustor has one (1) natural gas-fired pilot to ensure a constant flame for combustion.

A process flow diagram reflecting facility operations is shown in Attachment D.

## **ATTACHMENT F: PLOT PLAN**


Please note that the simple plot plan provided is only a representation of production/emissions equipment to be installed. Actual location specifications and equipment placement are not to scale.

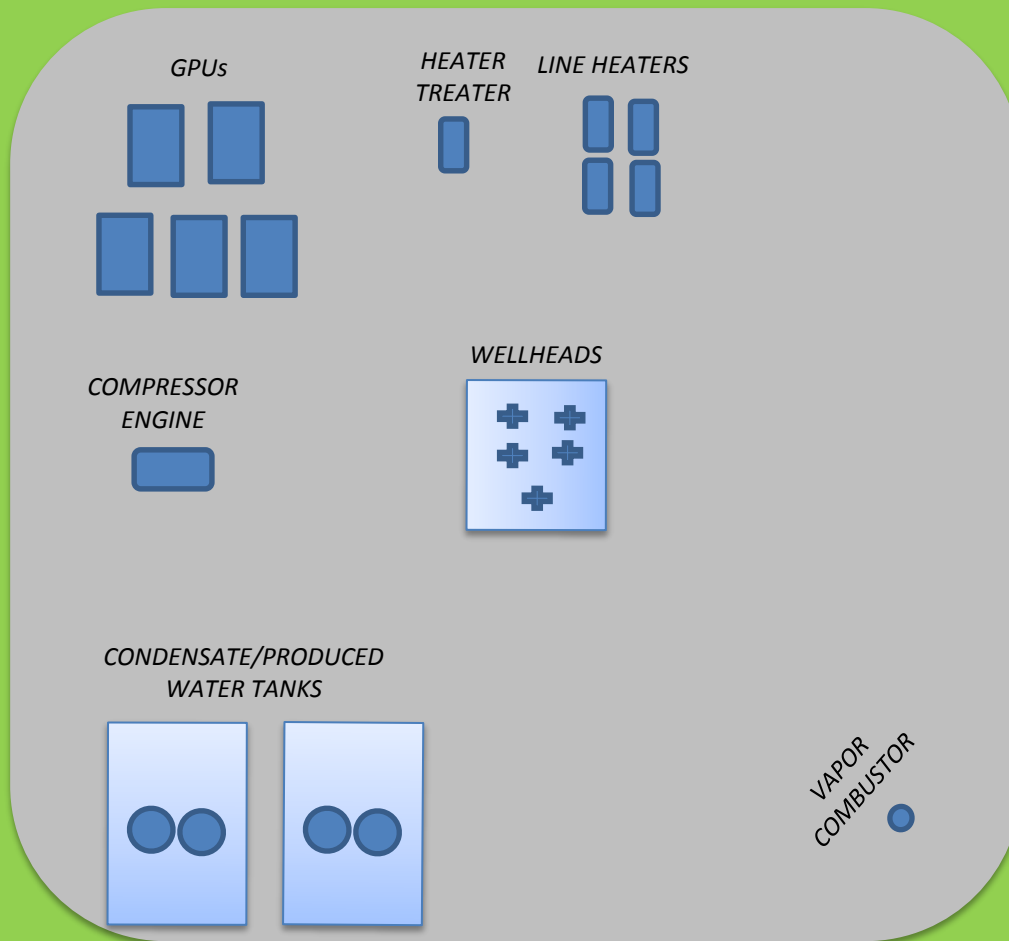



***NOTE: Image is only a representation of production/emissions equipment to be installed. Actual location specifications and equipment placement are not to scale.***

**SWN Production Company, LLC**  
**Gladys Briggs Pad**  
 Attachment F: Simple Plot Plan  
 February 2017

**ATTACHMENT G: AREA MAPS**

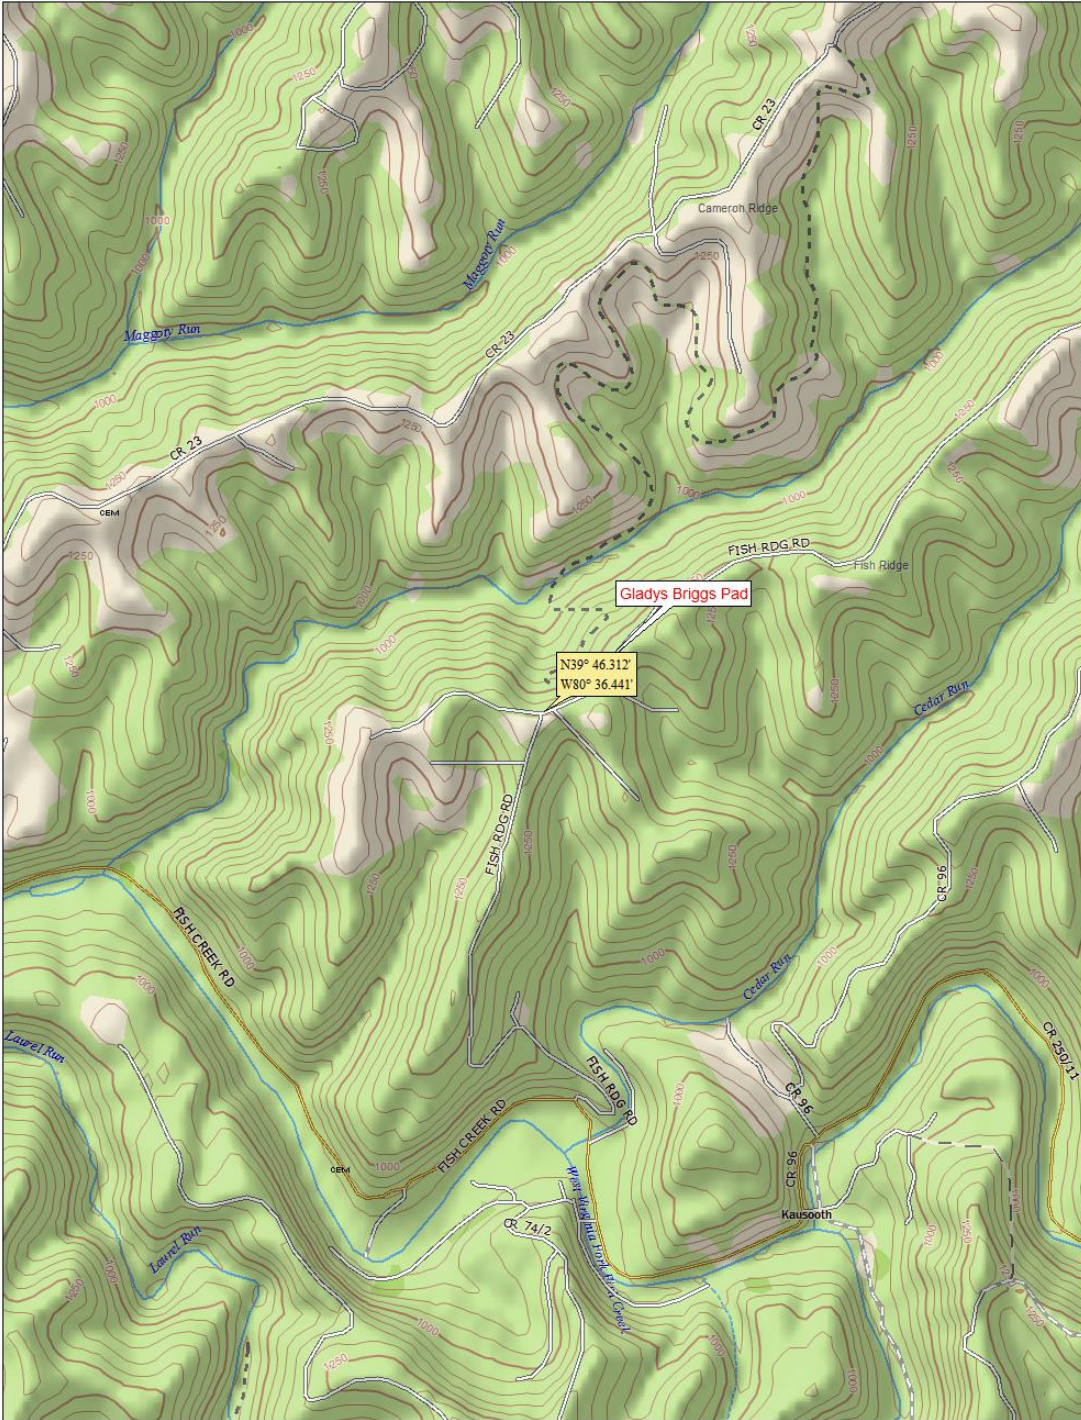


Data use subject to license.  
 © DeLorme. XMap® 7.  
 www.delorme.com



**SWN Production Company, LLC**  
**Gladys Briggs Pad**  
 Attachment G: Area Map  
 February 2017





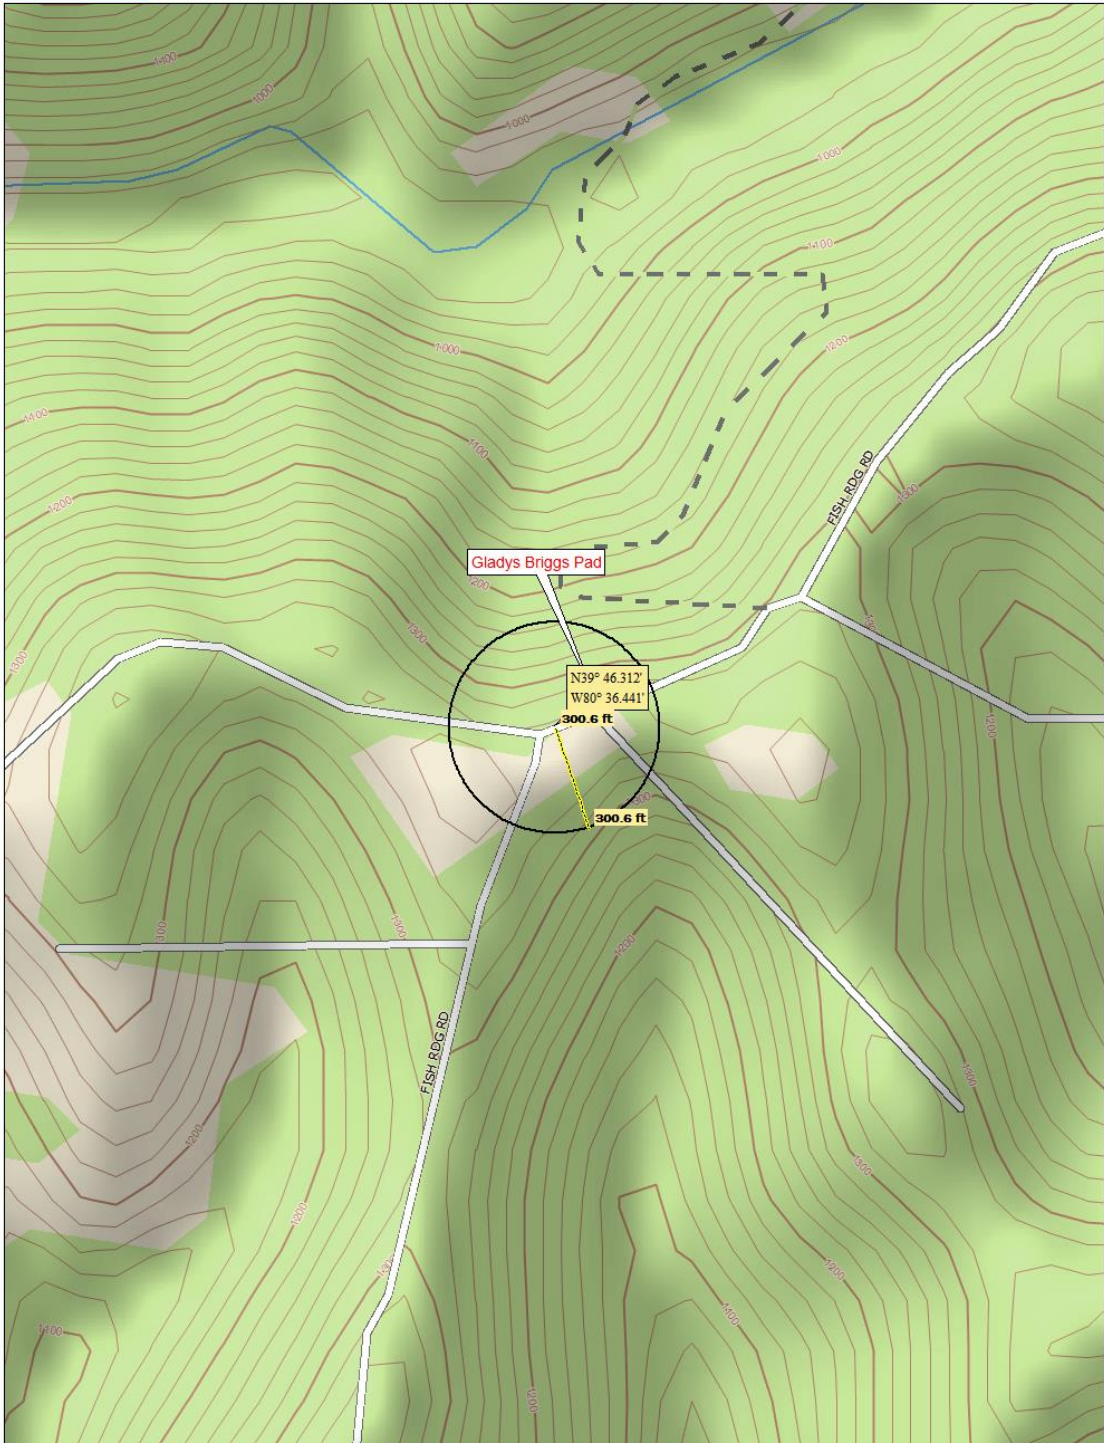

Data use subject to license.

© DeLorme. XMap® 7.

www.delorme.com



Data Zoom 15-3

**SWN Production Company, LLC**  
**Gladys Briggs Pad**  
Attachment G: Area Map with 300' Radius  
February 2017



**ATTACHMENT H: G70-D SECTION APPLICABILITY FORM**

**ATTACHMENT H – G70-D SECTION APPLICABILITY FORM**

**General Permit G70-D Registration  
Section Applicability Form**

General Permit G70-D was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, pneumatic pumps, reciprocating internal combustion engines (RICEs), tank truck/rail car loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-D allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

<b>GENERAL PERMIT G70-D APPLICABLE SECTIONS</b>	
<input checked="" type="checkbox"/> Section 5.0	Gas and Oil Well Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water <sup>1</sup>
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input checked="" type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO/OOOOa and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO/OOOOa)
<input type="checkbox"/> Section 11.0	Pneumatic Pump Affected Facility (NSPS, Subpart OOOOa)
<input type="checkbox"/> Section 12.0	Fugitive Emissions GHG and VOC Standards (NSPS, Subpart OOOOa)
<input checked="" type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck/Rail Car Loading <sup>2</sup>
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units <sup>3</sup>

1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subparts OOOO or OOOOa control requirements or the applicable control device requirements of Section 8.

2 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.

3 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

**ATTACHMENT I: EMISSIONS UNITS/ERD TABLE**

**ATTACHMENT I - EMISSION UNITS/EMISSION REDUCTION DEVICES (ERD) TABLE**

Include ALL emission units and air pollution control devices/ERDs that will be part of this permit application review. Do not include fugitive emission sources in this table. Deminimis storage tanks shall be listed in the Attachment L table. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Emission Unit ID <sup>1</sup>	Emission Point ID <sup>2</sup>	Emission Unit Description	Year Installed	Manufac. Date <sup>3</sup>	Design Capacity	Type <sup>4</sup> and Date of Change	Control Device(s) <sup>5</sup>	ERD(s) <sup>6</sup>
EU-ENG1	EP-ENG1	145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	TBD	1/1/2012	145-hp	New	NSCR	NSCR
EU-GPU1 to EU-GPU5	EP-GPU1 - EP-GPU5	Five (5) 1.0-mmBtu/hr GPU Burners	1 - 2013; 4 - TBD	N/A	1-mmBtu/hr	Existing; New	N/A	N/A
EU-HT1	EP-HT1	One (1) 0.5-mmBtu/hr Heater Treater	2013	N/A	0.5-mmBtu/hr	Existing	N/A	N/A
EU-LH1 to EU-LH5	EP-LH1 - EP-LH4	Five (5) 1.5-mmBtu/hr Line Heaters	1 - 2013; 3 - TBD	N/A	1.5-mmBtu/hr	Existing; New	N/A	N/A
EU-TANKS-COND	APC-COMB	Two (2) 400-bbl Condensate Tanks Routed to Vapor Combustor	2013	N/A	107-bbl/day	Modification	APC-COMB	APC-COMB
EU-TANKS-PW	APC-COMB	Two (2) 400-bbl Produced Water Tanks Routed to Vapor Combustor	2013	N/A	1,498-bbl/day	Modification	APC-COMB	APC-COMB
EU-LOAD-COND	EP-LOAD-COND	Condensate Truck Loading w/ Vapor Return Routed to Combustor	2013	N/A	1,640,479 gal/yr	Modification	APC-COMB	APC-COMB
EU-LOAD-PW	EP-LOAD-PW	Produced Water Truck Loading w/ Vapor Return Routed to Combustor	2013	N/A	22,968,632 gal/yr	Modification	APC-COMB	APC-COMB
APC-COMB	APC-COMB	One (1) 8.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	TBD	N/A	8-mmBtu/hr	New	N/A	N/A
EU-PILOT	APC-COMB	Vapor Combustor Pilot	TBD	N/A	50-scfh	New	N/A	N/A
EU-FUG	EP-FUG	Fugitive Emissions	2013	N/A	N/A	Modification	N/A	N/A
EU-HR	EP-HR	Fugitive Haul Road Emissions	2013	N/A	N/A	Modification	N/A	N/A

<sup>1</sup> For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation.

<sup>2</sup> For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

<sup>3</sup> When required by rule

<sup>4</sup> New, modification, removal, existing

<sup>5</sup> For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

<sup>6</sup> For ERDs use the following numbering system: 1D, 2D, 3D,... or other appropriate designation.

## **ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET**

Fugitive emissions at this site consist of haul road emissions, condensate and produced water loading operations, and equipment leaks.

## ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions, etc.  
Use extra pages for each associated source or equipment if necessary.

Source/Equipment: EU-FUG

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections		<input type="checkbox"/> Infrared (FLIR) cameras		<input type="checkbox"/> Other (please describe)		<input type="checkbox"/> None required	
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)				
					VOC	HAP	GHG (methane, CO <sub>2e</sub> )		
Pumps	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	82 – gas 55 - LL	EPA	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	0.62 – gas 1.26 – LL	0.01 – gas 0.09 - LL	55.71 – gas 0.76 - LL		
Safety Relief Valves	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	25	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.37	0.01	33.21		
Open Ended Lines	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Sampling Connections	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Connections (Not sampling)	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	214	EPA	<input type="checkbox"/> Gas <input checked="" type="checkbox"/> Liquid <input type="checkbox"/> Both	0.41	0.03	0.25		
Compressors	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	3	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.04	<0.01	3.99		
Flanges	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	310	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.20	<0.01	18.25		
Other <sup>1</sup>	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					

<sup>1</sup> Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e.g. pigging operations, equipment blowdowns, pneumatic controllers, etc.):  
Equipment leaks

Please indicate if there are any closed vent bypasses (include component):

N/A

Specify all equipment used in the closed vent system (e.g. VRU, ERD, thief hatches, tanker truck/rail car loading, etc.)

N/A

TABLE 2-4. OIL AND GAS PRODUCTION OPERATIONS AVERAGE EMISSION FACTORS (kg/hr/source)

Equipment Type	Service <sup>a</sup>	Emission Factor (kg/hr/source) <sup>b</sup>
Valves	Gas	4.5E-03
	Heavy Oil	8.4E-06
	Light Oil	2.5E-03
	Water/Oil	9.8E-05
Pump seals	Gas	2.4E-03
	Heavy Oil	NA
	Light Oil	1.3E-02
	Water/Oil	2.4E-05
Others <sup>c</sup>	Gas	8.8E-03
	Heavy Oil	3.2E-05
	Light Oil	7.5E-03
	Water/Oil	1.4E-02
Connectors	Gas	2.0E-04
	Heavy Oil	7.5E-06
	Light Oil	2.1E-04
	Water/Oil	1.1E-04
Flanges	Gas	3.9E-04
	Heavy Oil	3.9E-07
	Light Oil	1.1E-04
	Water/Oil	2.9E-06
Open-ended lines	Gas	2.0E-03
	Heavy Oil	1.4E-04
	Light Oil	1.4E-03
	Water/Oil	2.5E-04

<sup>a</sup>Water/Oil emission factors apply to water streams in oil service with a water content greater than 50%, from the point of origin to the point where the water content reaches 99%. For water streams with a water content greater than 99%, the emission rate is considered negligible.

<sup>b</sup>These factors are for total organic compound emission rates (including non-VOC's such as methane and ethane) and apply to light crude, heavy crude, gas plant, gas production, and off shore facilities. "NA" indicates that not enough data were available to develop the indicated emission factor.

<sup>c</sup>The "other" equipment type was derived from compressors, diaphragms, drains, dump arms, hatches, instruments, meters, pressure relief valves, polished rods, relief valves, and vents. This "other" equipment type should be applied for any equipment type other than connectors, flanges, open-ended lines, pumps, or valves.



**ATTACHMENT K: GAS WELL AFFECTED FACILITY DATA SHEET**

## ATTACHMENT K – GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

API Number	Date of Flowback	Date of Well Completion	Green Completion and/or Combustion Device	Subject to OOOO or OOOOa?
047-051-01586 (8H)	8/30/2013	8/16/2013	Green Completion	OOOO
047-051-01788 (6H)	TBD	TBD	Green Completion	OOOOa
047-051-01873 (205H)	TBD	TBD	Green Completion	OOOOa
047-051-01883 (10H)	TBD	TBD	Green Completion	OOOOa
047-051-01885 (210H)	TBD	TBD	Green Completion	OOOOa

*Note: If future wells are planned and no API number is available please list as PLANNED. If there are existing wells that commenced construction prior to August 23, 2011, please acknowledge as existing.*

*This is the same API (American Petroleum Institute) well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).*

*Every oil and gas well permitted in West Virginia since 1929 has been issued an API number. This API is used by agencies to identify and track oil and gas wells.*

*The API number has the following format: 047-001-00001*

*Where,*

- 047 = State code. The state code for WV is 047.*
- 001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).*
- 00001= Well number. Each well will have a unique well number.*

**ATTACHMENT L: STORAGE VESSELS DATA SHEET**

REPRESENTATIVE GAS ANALYSES

PROMAX PROCESS SIMULATION RESULTS

## ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water. (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

**The following information is REQUIRED:**

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
  - Temperature and pressure (inlet and outlet from separator(s))
  - Simulation-predicted composition
  - Molecular weight
  - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

*Additional information may be requested if necessary.*

**GENERAL INFORMATION (REQUIRED)**

1. Bulk Storage Area Name Condensate Storage	2. Tank Name Two (2) 400-bbl Condensate Storage Tanks
3. Emission Unit ID number EU-TANKS-COND	4. Emission Point ID number APC-COMB
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> 2013 Was the tank manufactured after August 23, 2011 and on or before September 18, 2015? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Was the tank manufactured after September 18, 2015? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	6. Type of change: <input type="checkbox"/> New construction <input type="checkbox"/> New stored material <input checked="" type="checkbox"/> Other <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> Quantity, throughput, and composition update.	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

1. Bulk Storage Area Name Produced Water Storage	2. Tank Name Two (2) 400-bbl Produced Water Storage Tanks
3. Emission Unit ID number EU-TANKS-PW	4. Emission Point ID number APC-COMB
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> 2013 Was the tank manufactured after August 23, 2011 and on or before September 18, 2015? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Was the tank manufactured after September 18, 2015? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	6. Type of change: <input type="checkbox"/> New construction <input type="checkbox"/> New stored material <input checked="" type="checkbox"/> Other <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> Quantity, throughput, and composition update.	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<b><i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i></b>	

## STORAGE TANK DATA TABLE

**List all deminimis storage tanks (i.e. lube oil, glycol, diesel etc.)**

Source ID # <sup>1</sup>	Status <sup>2</sup>	Content <sup>3</sup>	Volume <sup>4</sup>
EU-TANKS-LUBEOIL	NEW	Lube Oil	50 gal
EU-TANKS-METHANOL	NEW	Methanol	50 gal
EU-TANKS-METHANOL	EXIST	Methanol	50 gal
EU-TANKS-METHANOL	EXIST	Methanol	50 gal
EU-TANKS-METHANOL	EXIST	Methanol	50 gal
EU-TANKS-METHANOL	EXIST	Methanol	50 gal

1. Enter the appropriate Source Identification Numbers (Source ID #) for each storage tank located at the well site. Tanks should be designated T01, T02, T03, etc.
2. Enter storage tank Status using the following:  
     EXIST    Existing Equipment  
     NEW     Installation of New Equipment  
     REM     Equipment Removed
3. Enter storage tank content such as condensate, pipeline liquids, glycol (DEG or TEG), lube oil, diesel, mercaptan etc.
4. Enter the maximum design storage tank volume in gallons.

## TABLE 1-B

### COMPOSITIONAL ANALYSIS OF THE SEPARATOR GAS, OIL AND MATHEMATICALLY RECOMBINED WELLSTREAM THROUGH C<sub>11+</sub>

SEPARATOR GOR.....: 263132 Scf/Sep Bbl  
SEPARATOR PRESSURE.....: 353 psig  
SEPARATOR TEMPERATURE.....: 90 °F

Component	SEPARATOR GAS		SEPARATOR OIL		WELLSTREAM	
	Mole%	* GPM	Mole %	Liquid Volume %	Mole %	* GPM
Hydrogen Sulfide	0.000	0.000	0.000	0.000	0.000	0.000
Nitrogen	0.324	0.000	0.033	0.009	0.323	0.000
Carbon Dioxide	0.178	0.000	0.031	0.013	0.177	0.000
Methane	79.264	0.000	11.976	4.996	79.003	0.000
Ethane	13.533	3.649	8.481	5.583	13.513	3.644
Propane	4.099	1.137	7.323	4.960	4.112	1.141
Iso-butane	0.616	0.203	2.306	1.856	0.623	0.205
N-butane	0.991	0.315	5.338	4.140	1.008	0.320
2-2 Dimethylpropane	0.007	0.003	0.086	0.081	0.007	0.003
Iso-pentane	0.311	0.115	3.693	3.326	0.324	0.120
N-pentane	0.246	0.090	3.851	3.434	0.260	0.095
2-2 Dimethylbutane	0.014	0.006	0.248	0.255	0.015	0.006
Cyclopentane	0.006	0.002	0.000	0.000	0.006	0.002
2-3 Dimethylbutane	0.011	0.005	0.390	0.393	0.012	0.005
2 Methylpentane	0.075	0.031	2.022	2.065	0.083	0.035
3 Methylpentane	0.048	0.020	1.473	1.480	0.054	0.022
Other Hexanes	0.000	0.000	0.000	0.000	0.000	0.000
n-Hexane	0.080	0.033	2.941	2.976	0.091	0.038
Methylcyclopentane	0.006	0.002	0.246	0.215	0.007	0.002
Benzene	0.002	0.001	0.068	0.047	0.002	0.001
Cyclohexane	0.008	0.003	0.477	0.399	0.010	0.003
2-Methylhexane	0.024	0.011	2.076	2.375	0.032	0.015
3-Methylhexane	0.026	0.012	2.202	2.488	0.034	0.016
2,2,4 Trimethylpentane	0.000	0.000	0.000	0.000	0.000	0.000
Other Heptanes	0.027	0.012	1.826	1.957	0.034	0.015
n-Heptane	0.027	0.013	3.037	3.448	0.039	0.018
Methylcyclohexane	0.017	0.007	1.997	1.975	0.025	0.010
Toluene	0.005	0.002	0.617	0.509	0.007	0.002
Other C-8's	0.034	0.016	8.080	9.322	0.065	0.031
n-Octane	0.007	0.004	2.531	3.190	0.017	0.009
Ethylbenzene	0.000	0.000	0.676	0.642	0.003	0.001
M&P-Xylene	0.002	0.001	0.748	0.714	0.005	0.002
O-Xylene	0.000	0.000	1.229	1.150	0.005	0.002
Other C-9's	0.009	0.005	5.137	6.619	0.029	0.015
n-Nonane	0.001	0.001	1.697	2.352	0.008	0.004
Other C10's	0.001	0.001	5.177	7.331	0.021	0.012
n-Decane	0.000	0.000	0.983	1.485	0.004	0.002
Undecanes Plus	0.001	0.001	11.005	18.218	0.044	0.030
<b>TOTAL</b>	<b>100.000</b>	<b>5.696</b>	<b>100.000</b>	<b>100.000</b>	<b>100.000</b>	<b>5.825</b>

## TABLE 1-B

### COMPOSITIONAL ANALYSIS OF THE SEPARATOR GAS, OIL AND MATHEMATICALLY RECOMBINED WELLSTREAM THROUGH C<sub>11+</sub>

SEPARATOR GOR.....: 263132 Scf/Sep Bbl  
SEPARATOR PRESSURE.....: 353 psig  
SEPARATOR TEMPERATURE.....: 90 °F

UNDECANES PLUS (C <sub>11+</sub> ) FRACTION CHARACTERISTICS						
COMPONENT	Specific Gravity		Molecular Weight lb/lb-mole	Vapor Volume Scf/Gal	Gross Heating Value	
	°API	**			***	
<b>Gas</b>	N/A	0.8250	156.000	16.558	8,400	
<b>Oil</b>	43.041	0.8107	172.100	14.749	128,811	
<b>Wellstream</b>	N/A	0.8110	171.733	14.786	N/A	


TOTAL SAMPLE CHARACTERISTICS						
COMPONENT	Specific Gravity		Molecular Weight lb/lb-mole	Vapor Volume Scf/Gal	Gross Heating Value	
	°API	**			Dry ***	Saturated ***
<b>Gas</b>	N/A	0.7105	20.506	175.553	1,258	1,237
<b>Oil</b>	77.007	0.6786	87.027	24.415	N/A	114,910
<b>Wellstream</b>	N/A	0.7169	20.764	51.574	N/A	N/A

\* GPM (gallons per Mscf) determined at 14.85 psia and 60 °F

\*\* Gas specific gravity and wellstream specific gravity determined relative to air (SG=1.000).  
Oil specific gravity determined relative to water (SG=1.000).

\*\*\* Gross Heating Value units for gas (real basis) and oil are BTU/Scf and BTU/Gal, respectively.

SHAWN HARLAN PVT

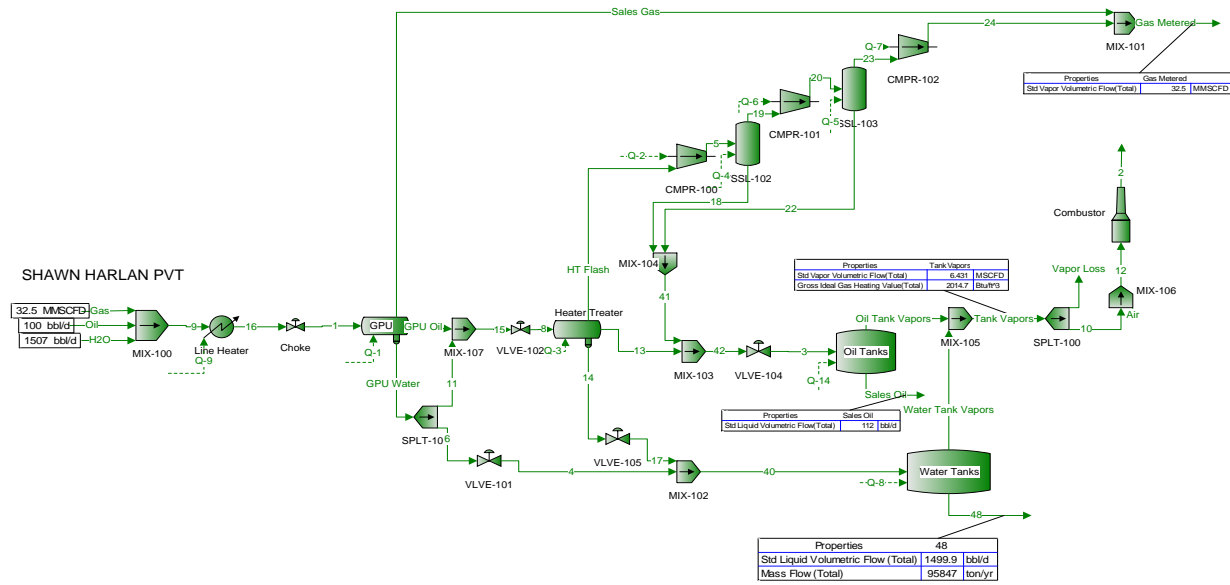

Annual tank loss calculations for "3".  
 Total working and breathing losses from the Vertical Cylinder are 4.216 ton/yr.  
 Flashing losses are 178.7 ton/yr.  
 Loading losses are 0.9362 ton/yr of loaded liquid.  
 \* Only Non-Exempt VOCs are reported.

Oil Tank Losses

Annual tank loss calculations for "40".  
 Total working and breathing losses from the Vertical Cylinder are 0.2467 ton/yr.  
 Flashing losses are 4.604 ton/yr.  
 Loading losses are 0.2185 ton/yr of loaded liquid.  
 \* Only Non-Exempt VOCs are reported.  
 Vapor adjusted to ensure mass balance

Water Tank Losses



Process Streams		Oil Tank Vapors	Tank Vapors	Water Tank Vapors
Composition		Solved	Solved	Solved
Phase: Vapor	Status: From Block: To Block:	Oil Tanks MIX-105	MIX-105 SPLT-100	Water Tanks MIX-105
Mass Flow		lb/h	lb/h	lb/h
H2S		0	0	0
N2		0.000766164	0.0114575	0.0106914
CO2		0.0467477	0.190762	0.144015
C1		0.799567	3.68985	2.89028
C2		3.50588	4.95031	1.44442
C3		5.25879	5.81923	0.560444
iC4		1.70461	1.78971	0.0850910
nC4		3.12720	3.32800	0.200804
2,2-Dimethylbutane		0.0385731	0.0391463	0.000573207
iC5		1.41819	1.47475	0.0565618
nC5		1.15835	1.18105	0.0226980
2,2-Dimethylpropane		0.0597790	0.0614629	0.00168392
Cyclopentane		0.0265055	0.0308770	0.00437148
2,3-Dimethylbutane		0.0633439	0.0652983	0.00195443
2-Methylpentane		0.417421	0.427653	0.0102316
3-Methylpentane		0.266483	0.281174	0.0146903
C6		0.435067	0.440875	0.00580770
Methylcyclopentane		0.0329406	0.0357369	0.00279631
Benzene		0.00972413	0.0147573	0.00503321
Cyclohexane		0.0429723	0.0499320	0.00695975
2-Methylhexane		0.140080	0.142168	0.00208887
3-Methylhexane		0.146579	0.149115	0.00253501
2,2,4-Trimethylpentane		0	0	0
C7		0.275891	0.278573	0.00268175
Methylcyclohexane		0.0926306	0.100597	0.00796672
Toluene		0.0245258	0.0376842	0.0131584
C8		0.176006	0.176867	0.000861356
Ethylbenzene		0.00441294	0.00674415	0.00233121
m-Xylene		0.00664541	0.0102254	0.00357997
o-Xylene		0.00683872	0.0106324	0.00379371
C9		0.0333841	0.0335153	0.000131242
C10		0.00859201	0.00860346	1.14467E-05
C11		0.00194285	0.00194505	2.20498E-06
C12		0.000449781	0.000451481	1.69973E-06
C13		0.000111941	0.000112974	1.03340E-06
C14		3.92081E-05	3.99584E-05	7.50328E-07
C15		5.11571E-06	5.31650E-06	2.00795E-07
C16		1.10781E-06	1.21017E-06	1.02362E-07
C17		2.56038E-07	3.05246E-07	4.92077E-08
C18		6.34792E-08	8.31008E-08	1.96217E-08
C19		1.96976E-08	2.80643E-08	8.36661E-09
C20		2.62511E-09	3.95273E-09	1.32763E-09
C21		8.95495E-10	1.36333E-09	4.67831E-10
C22		2.76729E-10	4.19270E-10	1.42542E-10
C23		5.16967E-11	7.76487E-11	2.59522E-11
C24		1.19312E-11	1.79015E-11	5.97048E-12
C25		5.61311E-12	8.33171E-12	2.71887E-12
C26		2.16826E-12	3.19227E-12	1.02437E-12
C27		2.61230E-13	3.82905E-13	1.21861E-13
C28		2.44794E-13	3.55243E-13	1.10912E-13
C29		8.43441E-14	0	0
C30		5.38936E-13	7.71570E-13	2.39538E-13
H2O		0.267634	0.424072	0.157266
Oxygen		0	0	0

Process Streams		Oil Tank Vapors	Tank Vapors	Water Tank Vapors
Properties		Status: Solved	Solved	Solved
Phase: Vapor		From Block: Oil Tanks	MIX-105	Water Tanks
		To Block: MIX-105	SPLT-100	MIX-105
Property	Units			
Temperature	°F	80	79.9124	80
Pressure	psig	0.5	0.5	0.5
Mole Fraction Vapor	%	100	100	100
Mole Fraction Light Liquid	%	0	0	0
Mole Fraction Heavy Liquid	%	0	0	0
Molecular Weight	lb/lbmol	43.9676	35.7804	21.7603
Mass Density	lb/ft <sup>3</sup>	0.117285	0.0949279	0.0573272
Molar Flow	lbmol/h	0.445753	0.706068	0.260361
Mass Flow	lb/h	19.5987	25.2634	5.66553
Vapor Volumetric Flow	ft <sup>3</sup> /h	167.103	266.132	98.8280
Liquid Volumetric Flow	gpm	20.8336	33.1801	12.3214
Std Vapor Volumetric Flow	MMSCFD	0.00405975	0.00643060	0.00237127
Std Liquid Volumetric Flow	sgpm	0.0780897	0.109856	0.0317681
Compressibility		0.983618	0.989140	0.995955
Specific Gravity		1.51808	1.23540	0.751323
API Gravity				
Enthalpy	Btu/h	-21667.8?	-31591.7?	-9929.57?
Mass Enthalpy	Btu/lb	-1105.57?	-1250.49?	-1752.63?
Mass Cp	Btu/(lb*°F)	0.411070?	0.423827?	0.469104?
Ideal Gas CpCv Ratio		1.12449	1.15175	1.24268
Dynamic Viscosity	cP	0.00850985	0.00918283	0.0106625
Kinematic Viscosity	cSt	4.52959	6.03895	11.6112
Thermal Conductivity	Btu/(h*ft*°F)	0.0109984?	0.0128927?	0.0168555?
Surface Tension	lbf/ft			
Net Ideal Gas Heating Value	Btu/ft <sup>3</sup>	2265.09	1847.08	1131.11
Net Liquid Heating Value	Btu/lb	19381.2	19437.0	19627.1
Gross Ideal Gas Heating Value	Btu/ft <sup>3</sup>	2462.93	2014.81	1247.27
Gross Liquid Heating Value	Btu/lb	21088.3	21215.6	21652.9

**ATTACHMENT M: NATURAL GAS FIRED FUEL BURNING UNITS DATA SHEET**

AP-42 EMISSION FACTORS

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO  
40CFR60 SUBPART DC  
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID# <sup>1</sup>	Emission Point ID# <sup>2</sup>	Emission Unit Description (manufacturer, model #)	Year Installed/Modified	Type <sup>3</sup> and Date of Change	Maximum Design Heat Input (MMBTU/hr) <sup>4</sup>	Fuel Heating Value (BTU/scf) <sup>5</sup>
EU-GPU1	EP-GPU1	Gas Production Unit Burner	2013	Existing	1.0	905
EU-GPU2	EP-GPU2	Gas Production Unit Burner	TBD	New	1.0	905
EU-GPU3	EP-GPU3	Gas Production Unit Burner	TBD	New	1.0	905
EU-GPU4	EP-GPU4	Gas Production Unit Burner	TBD	New	1.0	905
EU-GPU5	EP-GPU5	Gas Production Unit Burner	TBD	New	1.0	905
EU-HT1	EP-HT1	Heater Treater	2013	Existing	0.5	905
EU-LH1	EP-LH1	Line Heater	2013	Existing	1.5	905
EU-LH2	EP-LH2	Line Heater	TBD	New	1.5	905
EU-LH3	EP-LH3	Line Heater	TBD	New	1.5	905
EU-LH4	EP-LH4	Line Heater	TBD	New	1.5	905

<sup>1</sup> Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.

<sup>2</sup> Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

<sup>3</sup> New, modification, removal

<sup>4</sup> Enter design heat input capacity in MMBtu/hr.

<sup>5</sup> Enter the fuel heating value in BTU/standard cubic foot.

Table 1.4-1. EMISSION FACTORS FOR NITROGEN OXIDES (NO<sub>x</sub>) AND CARBON MONOXIDE (CO)  
FROM NATURAL GAS COMBUSTION<sup>a</sup>

Combustor Type (MMBtu/hr Heat Input) [SCC]	NO <sub>x</sub> <sup>b</sup>		CO	
	Emission Factor (lb/10 <sup>6</sup> scf)	Emission Factor Rating	Emission Factor (lb/10 <sup>6</sup> scf)	Emission Factor Rating
Large Wall-Fired Boilers (>100) [1-01-006-01, 1-02-006-01, 1-03-006-01]				
Uncontrolled (Pre-NSPS) <sup>c</sup>	280	A	84	B
Uncontrolled (Post-NSPS) <sup>c</sup>	190	A	84	B
Controlled - Low NO <sub>x</sub> burners	140	A	84	B
Controlled - Flue gas recirculation	100	D	84	B
Small Boilers (<100) [1-01-006-02, 1-02-006-02, 1-03-006-02, 1-03-006-03]				
Uncontrolled	100	B	84	B
Controlled - Low NO <sub>x</sub> burners	50	D	84	B
Controlled - Low NO <sub>x</sub> burners/Flue gas recirculation	32	C	84	B
Tangential-Fired Boilers (All Sizes) [1-01-006-04]				
Uncontrolled	170	A	24	C
Controlled - Flue gas recirculation	76	D	98	D
Residential Furnaces (<0.3) [No SCC]				
Uncontrolled	94	B	40	B

<sup>a</sup> Reference 11. Units are in pounds of pollutant per million standard cubic feet of natural gas fired. To convert from lb/10<sup>6</sup> scf to kg/10<sup>6</sup> m<sup>3</sup>, multiply by 16. Emission factors are based on an average natural gas higher heating value of 1,020 Btu/scf. To convert from lb/10<sup>6</sup> scf to lb/MMBtu, divide by 1,020. The emission factors in this table may be converted to other natural gas heating values by multiplying the given emission factor by the ratio of the specified heating value to this average heating value. SCC = Source Classification Code. ND = no data. NA = not applicable.

<sup>b</sup> Expressed as NO<sub>2</sub>. For large and small wall fired boilers with SNCR control, apply a 24 percent reduction to the appropriate NO<sub>x</sub> emission factor. For tangential-fired boilers with SNCR control, apply a 13 percent reduction to the appropriate NO<sub>x</sub> emission factor.

<sup>c</sup> NSPS=New Source Performance Standard as defined in 40 CFR 60 Subparts D and Db. Post-NSPS units are boilers with greater than 250 MMBtu/hr of heat input that commenced construction modification, or reconstruction after August 17, 1971, and units with heat input capacities between 100 and 250 MMBtu/hr that commenced construction modification, or reconstruction after June 19, 1984.

TABLE 1.4-3. EMISSION FACTORS FOR SPECIATED ORGANIC COMPOUNDS FROM NATURAL GAS COMBUSTION<sup>a</sup>

CAS No.	Pollutant	Emission Factor (lb/10 <sup>6</sup> scf)	Emission Factor Rating
91-57-6	2-Methylnaphthalene <sup>b,c</sup>	2.4E-05	D
56-49-5	3-Methylchloranthrene <sup>b,c</sup>	<1.8E-06	E
	7,12-Dimethylbenz(a)anthracene <sup>b,c</sup>	<1.6E-05	E
83-32-9	Acenaphthene <sup>b,c</sup>	<1.8E-06	E
203-96-8	Acenaphthylene <sup>b,c</sup>	<1.8E-06	E
120-12-7	Anthracene <sup>b,c</sup>	<2.4E-06	E
56-55-3	Benz(a)anthracene <sup>b,c</sup>	<1.8E-06	E
71-43-2	Benzene <sup>b</sup>	2.1E-03	B
50-32-8	Benzo(a)pyrene <sup>b,c</sup>	<1.2E-06	E
205-99-2	Benzo(b)fluoranthene <sup>b,c</sup>	<1.8E-06	E
191-24-2	Benzo(g,h,i)perylene <sup>b,c</sup>	<1.2E-06	E
205-82-3	Benzo(k)fluoranthene <sup>b,c</sup>	<1.8E-06	E
106-97-8	Butane	2.1E+00	E
218-01-9	Chrysene <sup>b,c</sup>	<1.8E-06	E
53-70-3	Dibenzo(a,h)anthracene <sup>b,c</sup>	<1.2E-06	E
25321-22-6	Dichlorobenzene <sup>b</sup>	1.2E-03	E
74-84-0	Ethane	3.1E+00	E
206-44-0	Fluoranthene <sup>b,c</sup>	3.0E-06	E
86-73-7	Fluorene <sup>b,c</sup>	2.8E-06	E
50-00-0	Formaldehyde <sup>b</sup>	7.5E-02	B
110-54-3	Hexane <sup>b</sup>	1.8E+00	E
193-39-5	Indeno(1,2,3-cd)pyrene <sup>b,c</sup>	<1.8E-06	E
91-20-3	Naphthalene <sup>b</sup>	6.1E-04	E
109-66-0	Pentane	2.6E+00	E
85-01-8	Phenanathrene <sup>b,c</sup>	1.7E-05	D

TABLE 1.4-3. EMISSION FACTORS FOR SPECIATED ORGANIC COMPOUNDS FROM NATURAL GAS COMBUSTION (Continued)

CAS No.	Pollutant	Emission Factor (lb/10 <sup>6</sup> scf)	Emission Factor Rating
74-98-6	Propane	1.6E+00	E
129-00-0	Pyrene <sup>b, c</sup>	5.0E-06	E
108-88-3	Toluene <sup>b</sup>	3.4E-03	C

<sup>a</sup> Reference 11. Units are in pounds of pollutant per million standard cubic feet of natural gas fired. Data are for all natural gas combustion sources. To convert from lb/10<sup>6</sup> scf to kg/10<sup>6</sup> m<sup>3</sup>, multiply by 16. To convert from lb/10<sup>6</sup> scf to lb/MMBtu, divide by 1,020. Emission Factors preceded with a less-than symbol are based on method detection limits.

<sup>b</sup> Hazardous Air Pollutant (HAP) as defined by Section 112(b) of the Clean Air Act.

<sup>c</sup> HAP because it is Polycyclic Organic Matter (POM). POM is a HAP as defined by Section 112(b) of the Clean Air Act.

<sup>d</sup> The sum of individual organic compounds may exceed the VOC and TOC emission factors due to differences in test methods and the availability of test data for each pollutant.

**ATTACHMENT N: INTERNAL COMBUSTION ENGINE DATA SHEETS**

ENGINE SPECIFICATION SHEETS

AP-42 AND EPA EMISSION FACTORS



## ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*

Emission Unit ID# <sup>1</sup>		EU-ENG1					
Engine Manufacturer/Model		Caterpillar G3306 NA					
Manufacturers Rated bhp/rpm		145-hp/1,800-rpm					
Source Status <sup>2</sup>		NS					
Date Installed/ Modified/Removed/Relocated <sup>3</sup>		TBD					
Engine Manufactured /Reconstruction Date <sup>4</sup>		01/01/2012					
Check all applicable Federal Rules for the engine (include EPA Certificate of Conformity if applicable) <sup>5</sup>		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources	
		Engine Type <sup>6</sup>		4SRB			
APCD Type <sup>7</sup>		NSCR					
Fuel Type <sup>8</sup>		PQ					
H <sub>2</sub> S (gr/100 scf)		Negligible					
Operating bhp/rpm		145-hp/1,800-rpm					
BSFC (BTU/bhp-hr)		8,625					
Hourly Fuel Throughput		1,382	ft <sup>3</sup> /hr gal/hr		ft <sup>3</sup> /hr gal/hr		ft <sup>3</sup> /hr gal/hr
Annual Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)		12.11	MMft <sup>3</sup> /yr gal/yr		MMft <sup>3</sup> /yr gal/yr		MMft <sup>3</sup> /yr gal/yr
Fuel Usage or Hours of Operation Metered		Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>	Yes <input type="checkbox"/>	No <input type="checkbox"/>	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Calculation Methodology <sup>9</sup>	Pollutant <sup>10</sup>	Hourly PTE (lb/hr) <sup>11</sup>	Annual PTE (tons/year) <sup>11</sup>	Hourly PTE (lb/hr) <sup>11</sup>	Annual PTE (tons/year) <sup>11</sup>	Hourly PTE (lb/hr) <sup>11</sup>	Annual PTE (tons/year) <sup>11</sup>
MD	NO <sub>x</sub>	0.32	1.40				
MD	CO	0.64	2.80				
MD	VOC	0.22	0.98				
AP	SO <sub>2</sub>	<0.01	<0.01				
AP	PM <sub>10</sub>	0.01	0.05				
MD	Formaldehyde	0.09	0.38				
AP	Total HAPs	0.10	0.44				
MD and EPA	GHG (CO <sub>2</sub> e)	155.19	679.73				

1 Enter the appropriate Source Identification Number for each natural gas-fueled reciprocating internal combustion engine/generator engine located at the well site. Multiple engines should be designated CE-1, CE-2, CE-3 etc. Generator engines should be designated GE-1, GE-2, GE-3 etc. Microturbine generator engines should be designated MT-1, MT-2, MT-3 etc. If more than three (3) engines exist, please use additional sheets.

2 Enter the Source Status using the following codes:

NS	Construction of New Source (installation)	ES	Existing Source
MS	Modification of Existing Source	RS	Relocated Source
REM	Removal of Source		

- 3 Enter the date (or anticipated date) of the engine's installation (construction of source), modification, relocation or removal.
- 4 Enter the date that the engine was manufactured, modified or reconstructed.
- 5 Is the engine a certified stationary spark ignition internal combustion engine according to 40CFR60 Subpart IIII/JJJJ? If so, the engine and control device must be operated and maintained in accordance with the manufacturer's emission-related written instructions. You must keep records of conducted maintenance to demonstrate compliance, but no performance testing is required. If the certified engine is not operated and maintained in accordance with the manufacturer's emission-related written instructions, the engine will be considered a non-certified engine and you must demonstrate compliance as appropriate.

**Provide a manufacturer's data sheet for all engines being registered.**

- 6 Enter the Engine Type designation(s) using the following codes:  

2SLB Two Stroke Lean Burn	4SRB Four Stroke Rich Burn
4SLB Four Stroke Lean Burn	
- 7 Enter the Air Pollution Control Device (APCD) type designation(s) using the following codes:  

A/F Air/Fuel Ratio	IR Ignition Retard
HEIS High Energy Ignition System	SIPC Screw-in Precombustion Chambers
PSC Prestratified Charge	LEC Low Emission Combustion
NSCR Rich Burn & Non-Selective Catalytic Reduction	OxCat Oxidation Catalyst
SCR Lean Burn & Selective Catalytic Reduction	
- 8 Enter the Fuel Type using the following codes:  

PQ Pipeline Quality Natural Gas	RG Raw Natural Gas /Production Gas	D Diesel
---------------------------------	------------------------------------	----------
- 9 Enter the Potential Emissions Data Reference designation using the following codes. Attach all reference data used.  

MD Manufacturer's Data	AP AP-42	
GR GRI-HAPCalc™	OT Other	(please list)
- 10 Enter each engine's Potential to Emit (PTE) for the listed regulated pollutants in pounds per hour and tons per year. PTE shall be calculated at manufacturer's rated brake horsepower and may reflect reduction efficiencies of listed Air Pollution Control Devices. Emergency generator engines may use 500 hours of operation when calculating PTE. PTE data from this data sheet shall be incorporated in the *Emissions Summary Sheet*.
- 11 PTE for engines shall be calculated from manufacturer's data unless unavailable.

**Engine Air Pollution Control Device**  
**(Emission Unit ID# APC-NSCR-ENG-1 use extra pages as necessary)**

Air Pollution Control Device Manufacturer's Data Sheet included?  
 Yes  No

NSCR                                       SCR                                       Oxidation Catalyst

Provide details of process control used for proper mixing/control of reducing agent with gas stream:

Manufacturer: N/A	Model #: N/A
-------------------	--------------

Design Operating Temperature: 1,101 °F	Design gas volume: 678 scfm
--	-----------------------------

Service life of catalyst:	Provide manufacturer data? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
---------------------------	--

Volume of gas handled:            acfm at            °F	Operating temperature range for NSCR/Ox Cat: From 600 °F to 1,250 °F
---	---

Reducing agent used, if any:	Ammonia slip (ppm):
------------------------------	---------------------

Pressure drop against catalyst bed (delta P):            inches of H<sub>2</sub>O

Provide description of warning/alarm system that protects unit when operation is not meeting design conditions:

Is temperature and pressure drop of catalyst required to be monitored per 40CFR63 Subpart ZZZZ?  
 Yes  No

How often is catalyst recommended or required to be replaced (hours of operation)?

How often is performance test required?  
 Initial  
 Annual  
 Every 8,760 hours of operation  
 Field Testing Required  
 No performance test required. If so, why (please list any maintenance required and the applicable sections in NSPS/GACT,

# G3306 NA

GAS COMPRESSION APPLICATION

## GAS ENGINE SITE SPECIFIC TECHNICAL DATA



ENGINE SPEED (rpm): 1800  
 COMPRESSION RATIO: 10.5:1  
 JACKET WATER OUTLET (°F): 210  
 COOLING SYSTEM: JW+OC  
 IGNITION SYSTEM: MAG  
 EXHAUST MANIFOLD: WC  
 COMBUSTION: Catalyst  
 EXHAUST O2 EMISSION LEVEL %: 0.5  
 SET POINT TIMING: 30.0

FUEL SYSTEM: LPG IMPCO  
 WITH CUSTOMER SUPPLIED AIR FUEL RATIO CONTROL

**SITE CONDITIONS:**  
 FUEL: Nat Gas  
 FUEL PRESSURE RANGE (psig): 1.5-10.0  
 FUEL METHANE NUMBER: 84.8  
 FUEL LHV (Btu/scf): 905  
 ALTITUDE (ft): 500  
 MAXIMUM INLET AIR TEMPERATURE (°F): 77  
 NAMEPLATE RATING: 145 bhp@1800rpm

RATING	NOTES	LOAD	MAXIMUM RATING	SITE RATING AT MAXIMUM INLET AIR TEMPERATURE		
			100%	100%	75%	50%
ENGINE POWER	(1)	bhp	145	145	109	72
INLET AIR TEMPERATURE		°F	77	77	77	77

ENGINE DATA						
FUEL CONSUMPTION (LHV)	(2)	Btu/bhp-hr	7775	7775	8318	9509
FUEL CONSUMPTION (HHV)	(2)	Btu/bhp-hr	8625	8625	9227	10548
AIR FLOW	(3)(4)	lb/hr	922	922	739	556
AIR FLOW WET (77°F, 14.7 psia)	(3)(4)	scfm	208	208	167	125
INLET MANIFOLD PRESSURE	(5)	in Hg(abs)	26.2	26.2	21.8	17.6
EXHAUST STACK TEMPERATURE	(6)	°F	1101	1101	1067	1037
EXHAUST GAS FLOW (@ stack temp, 14.5 psia)	(7)(4)	ft3/min	678	678	532	393
EXHAUST GAS MASS FLOW	(7)(4)	lb/hr	978	978	784	590

EMISSIONS DATA						
NOx (as NO2)	(8)	g/bhp-hr	13.47	13.47	12.15	9.76
CO	(8)	g/bhp-hr	13.47	13.47	11.44	9.56
THC (mol. wt. of 15.84)	(8)	g/bhp-hr	2.20	2.20	2.49	3.22
NMHC (mol. wt. of 15.84)	(8)	g/bhp-hr	0.33	0.33	0.37	0.48
NMNEHC (VOCs) (mol. wt. of 15.84)	(8)(9)	g/bhp-hr	0.22	0.22	0.25	0.32
HCHO (Formaldehyde)	(8)	g/bhp-hr	0.27	0.27	0.31	0.33
CO2	(8)	g/bhp-hr	485	485	525	601
EXHAUST OXYGEN	(10)	% DRY	0.5	0.5	0.5	0.5

HEAT REJECTION						
HEAT REJ. TO JACKET WATER (JW)	(11)	Btu/min	6049	6049	5237	4455
HEAT REJ. TO ATMOSPHERE	(11)	Btu/min	751	751	602	459
HEAT REJ. TO LUBE OIL (OC)	(11)	Btu/min	990	990	857	729

HEAT EXCHANGER SIZING CRITERIA			
TOTAL JACKET WATER CIRCUIT (JW+OC)	(12)	Btu/min	7842

**CONDITIONS AND DEFINITIONS**

Engine rating obtained and presented in accordance with ISO 3046/1, adjusted for fuel, site altitude and site inlet air temperature.  
 100% rating at maximum inlet air temperature is the maximum engine capability for the specified fuel at site altitude and maximum site inlet air temperature.  
 Max. rating is the maximum capability for the specified fuel at site altitude and reduced inlet air temperature.  
 Lowest load point is the lowest continuous duty operating load allowed. No overload permitted at rating shown.

For notes information consult page three.

**Prepared For:**

Jason Stinson  
 MIDCON COMPRESSION, LP

**MANUFACTURED ON OR AFTER 1/1/2011**

**INFORMATION PROVIDED BY CATERPILLAR**

Engine: G3306 NA  
 Horsepower: 145  
 RPM: 1800  
 Compression Ratio: 10.5:1  
 Exhaust Flow Rate: 678 CFM  
 Exhaust Temperature: 1101 °F  
 Reference: DM5053-07  
 Fuel: Natural Gas  
 Annual Operating Hours: 8760

**Uncontrolled Emissions**

NOx: 13.47 g/bhp-hr  
 CO: 13.47 g/bhp-hr  
 THC: 2.20 g/bhp-hr  
 NMHC: 0.33 g/bhp-hr  
 NMNEHC: 0.22 g/bhp-hr  
 HCHO: 0.27 g/bhp-hr  
 Oxygen: 0.50 %

**POST CATALYST EMISSIONS**

NOx: <1.0 g/bhp-hr  
 CO: <2.0 g/bhp-hr  
 VOC: <0.7 g/bhp-hr

**CONTROL EQUIPMENT**

**Catalytic Converter**

Model: **EAH-1200T-0404F-21CEE**  
 Catalyst Type: NSCR, Precious group metals  
 Manufacturer: EMIT Technologies, Inc.  
 Element Size: Round 12 x 3.5  
 Catalyst Elements: 1  
 Housing Type: 2 Element Capacity  
 Catalyst Installation: Accessible Housing  
 Construction: 10 gauge Carbon Steel  
 Sample Ports: 6 (0.5" NPT)  
 Inlet Connections: 4" Flat Face Flange  
 Outlet Connections: 4" Flat Face Flange  
 Configuration: End In / End Out  
 Silencer: Integrated  
 Silencer Grade: Hospital  
 Insertion Loss: 35-40 dBA

**Air Fuel Ratio Controller**

Model: **ENG-S-075-T**  
 Manufacturer: EMIT Technologies, Inc.  
 Description: EDGE NG Air Fuel Ratio Controller  
 4-Wire Narrowband O2 Sensor  
 Digital Power Valve  
 O2 Sensor Weldment  
 Wiring Harness  
 (2) 25' Type K Thermocouple  
 Digital Power Valve Size: 0.75" NPT

Table 3.2-3. UNCONTROLLED EMISSION FACTORS FOR 4-STROKE RICH-BURN  
 ENGINES<sup>a</sup>  
 (SCC 2-02-002-53)

Pollutant	Emission Factor (lb/MMBtu) <sup>b</sup> (fuel input)	Emission Factor Rating
Criteria Pollutants and Greenhouse Gases		
NO <sub>x</sub> <sup>c</sup> 90 - 105% Load	2.21 E+00	A
NO <sub>x</sub> <sup>c</sup> <90% Load	2.27 E+00	C
CO <sup>c</sup> 90 - 105% Load	3.72 E+00	A
CO <sup>c</sup> <90% Load	3.51 E+00	C
CO <sub>2</sub> <sup>d</sup>	1.10 E+02	A
SO <sub>2</sub> <sup>e</sup>	5.88 E-04	A
TOC <sup>f</sup>	3.58 E-01	C
Methane <sup>g</sup>	2.30 E-01	C
VOC <sup>h</sup>	2.96 E-02	C
PM10 (filterable) <sup>i,j</sup>	9.50 E-03	E
PM2.5 (filterable) <sup>j</sup>	9.50 E-03	E
PM Condensable <sup>k</sup>	9.91 E-03	E
Trace Organic Compounds		
1,1,2,2-Tetrachloroethane <sup>l</sup>	2.53 E-05	C
1,1,2-Trichloroethane <sup>l</sup>	<1.53 E-05	E
1,1-Dichloroethane	<1.13 E-05	E
1,2-Dichloroethane	<1.13 E-05	E
1,2-Dichloropropane	<1.30 E-05	E
1,3-Butadiene <sup>l</sup>	6.63 E-04	D
1,3-Dichloropropene <sup>l</sup>	<1.27 E-05	E
Acetaldehyde <sup>l,m</sup>	2.79 E-03	C
Acrolein <sup>l,m</sup>	2.63 E-03	C
Benzene <sup>l</sup>	1.58 E-03	B
Butyr/isobutyraldehyde	4.86 E-05	D
Carbon Tetrachloride <sup>l</sup>	<1.77 E-05	E

Table 3.2-3. UNCONTROLLED EMISSION FACTORS FOR 4-STROKE RICH-BURN ENGINES  
(Concluded)

Pollutant	Emission Factor (lb/MMBtu) <sup>b</sup> (fuel input)	Emission Factor Rating
Chlorobenzene <sup>1</sup>	<1.29 E-05	E
Chloroform <sup>1</sup>	<1.37 E-05	E
Ethane <sup>n</sup>	7.04 E-02	C
Ethylbenzene <sup>1</sup>	<2.48 E-05	E
Ethylene Dibromide <sup>1</sup>	<2.13 E-05	E
Formaldehyde <sup>1,m</sup>	2.05 E-02	A
Methanol <sup>1</sup>	3.06 E-03	D
Methylene Chloride <sup>1</sup>	4.12 E-05	C
Naphthalene <sup>1</sup>	<9.71 E-05	E
PAH <sup>1</sup>	1.41 E-04	D
Styrene <sup>1</sup>	<1.19 E-05	E
Toluene <sup>1</sup>	5.58 E-04	A
Vinyl Chloride <sup>1</sup>	<7.18 E-06	E
Xylene <sup>1</sup>	1.95 E-04	A

<sup>a</sup> Reference 7. Factors represent uncontrolled levels. For NO<sub>x</sub>, CO, and PM-10, “uncontrolled” means no combustion or add-on controls; however, the factor may include turbocharged units. For all other pollutants, “uncontrolled” means no oxidation control; the data set may include units with control techniques used for NO<sub>x</sub> control, such as PCC and SCR for lean burn engines, and PSC for rich burn engines. Factors are based on large population of engines. Factors are for engines at all loads, except as indicated. SCC = Source Classification Code. TOC = Total Organic Compounds. PM10 = Particulate Matter ≤ 10 microns (μm) aerodynamic diameter. A “<” sign in front of a factor means that the corresponding emission factor is based on one-half of the method detection limit.

<sup>b</sup> Emission factors were calculated in units of (lb/MMBtu) based on procedures in EPA Method 19. To convert from (lb/MMBtu) to (lb/10<sup>6</sup> scf), multiply by the heat content of the fuel. If the heat content is not available, use 1020 Btu/scf. To convert from (lb/MMBtu) to (lb/hp-hr) use the following equation:

$$\text{lb/hp-hr} = (\text{lb/MMBtu}) (\text{heat input, MMBtu/hr}) (1/\text{operating HP, 1/hp})$$

<sup>c</sup> Emission tests with unreported load conditions were not included in the data set.

<sup>d</sup> Based on 99.5% conversion of the fuel carbon to CO<sub>2</sub>. CO<sub>2</sub> [lb/MMBtu] = (3.67)(%CON)(C)(D)(1/h), where %CON = percent conversion of fuel carbon to CO<sub>2</sub>,

C = carbon content of fuel by weight (0.75), D = density of fuel, 4.1 E+04 lb/10<sup>6</sup> scf, and h = heating value of natural gas (assume 1020 Btu/scf at 60°F).

<sup>e</sup> Based on 100% conversion of fuel sulfur to SO<sub>2</sub>. Assumes sulfur content in natural gas of 2,000 gr/10<sup>6</sup> scf.

<sup>f</sup> Emission factor for TOC is based on measured emission levels from 6 source tests.

<sup>g</sup> Emission factor for methane is determined by subtracting the VOC and ethane emission factors from the TOC emission factor.

<sup>h</sup> VOC emission factor is based on the sum of the emission factors for all speciated organic compounds. Methane and ethane emissions were not measured for this engine category.

<sup>i</sup> No data were available for uncontrolled engines. PM10 emissions are for engines equipped with a PCC.

<sup>j</sup> Considered  $\leq 1 \mu\text{m}$  in aerodynamic diameter. Therefore, for filterable PM emissions, PM10(filterable) = PM2.5(filterable).

<sup>k</sup> No data were available for condensable emissions. The presented emission factor reflects emissions from 4SLB engines.

<sup>l</sup> Hazardous Air Pollutant as defined by Section 112(b) of the Clean Air Act.

<sup>m</sup> For rich-burn engines, no interference is suspected in quantifying aldehyde emissions. The presented emission factors are based on FTIR and CARB 430 emissions data measurements.

<sup>n</sup> Ethane emission factor is determined by subtracting the VOC emission factor from the NMHC emission factor.



**ATTACHMENT O: TANKER TRUCK LOADING DATA SHEET**

## ATTACHMENT O – TANKER TRUCK/RAIL CAR LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks/rail cars. Use extra pages if necessary.

### ***Truck/Rail Car Loadout Collection Efficiencies***

The following applicable capture efficiencies of a truck/rail car loadout are allowed:

- For tanker trucks/rail cars passing the MACT level annual leak test – 99.2%
- For tanker trucks/rail cars passing the NSPS level annual leak test – 98.7%
- For tanker trucks/rail cars not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking/rail car company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: EU-LOAD-COND	Emission Point ID#: EP-LOAD-COND/APC-COMB	Year Installed/Modified: 2013		
Emission Unit Description: Condensate Truck Loading Emissions				
<b>Loading Area Data</b>				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks/rail cars loading at one (1) time: 1		
Are tanker trucks/rail cars pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. Vapors are collected and routed to a vapor combustor.				
Are any of the following truck/rail car loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck/rail car passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car passing a NSPS level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car not passing an annual leak test and has vapor return?				
<b>Projected Maximum Operating Schedule (for rack or transfer point as a whole)</b>				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	24	24	24	24
Days/week	5	5	5	5
<b>Bulk Liquid Data (use extra pages as necessary)</b>				
Liquid Name	Condensate			
Max. Daily Throughput (1000 gal/day)	4.49			
Max. Annual Throughput (1000 gal/yr)	1,640.48			
Loading Method <sup>1</sup>	SUB			
Max. Fill Rate (gal/min)	125			
Average Fill Time (min/loading)	Approx. 60			
Max. Bulk Liquid Temperature (°F)	Refer to Promax			
True Vapor Pressure <sup>2</sup>	Refer to Promax			
Cargo Vessel Condition <sup>3</sup>	U			
Control Equipment or Method <sup>4</sup>	O = Vapor Return/ Combustion Controls			

Max. Collection Efficiency (%)	70%		
Max. Control Efficiency (%)	98%		
Max.VOC Emission Rate	Loading (lb/hr)	4.94	
	Annual (ton/yr)	0.89	
Max.HAP Emission Rate	Loading (lb/hr)	0.35	
	Annual (ton/yr)	0.06	
Estimation Method <sup>5</sup>	O = Promax process simulation		

Emission Unit ID#: EU-LOAD-PW	Emission Point ID#: EP-LOAD-PW/APC-COMB	Year Installed/Modified: 2013		
Emission Unit Description: Produced Water Loading Emissions				
<b>Loading Area Data</b>				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks/rail cars loading at one (1) time: 1		
Are tanker trucks/rail cars pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. Vapors are collected and routed to a vapor combustor.				
Are any of the following truck/rail car loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck/rail car passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car passing a NSPS level annual leak test? <input type="checkbox"/> Closed System to tanker truck/rail car not passing an annual leak test and has vapor return?				
<b>Projected Maximum Operating Schedule (for rack or transfer point as a whole)</b>				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	24	24	24	24
Days/week	5	5	5	5
<b>Bulk Liquid Data (use extra pages as necessary)</b>				
Liquid Name	Produced Water			
Max. Daily Throughput (1000 gal/day)	62.93			
Max. Annual Throughput (1000 gal/yr)	22,968.63			
Loading Method <sup>1</sup>	SUB			
Max. Fill Rate (gal/min)	125			
Average Fill Time (min/loading)	Approx. 60			
Max. Bulk Liquid Temperature (°F)	Refer to Promax			
True Vapor Pressure <sup>2</sup>	Refer to Promax			
Cargo Vessel Condition <sup>3</sup>	U			
Control Equipment or Method <sup>4</sup>	O = Vapor Return/ Combustion Controls			
Max. Collection Efficiency (%)	70%			
Max. Control Efficiency (%)	98%			
Max.VOC Emission Rate	Loading (lb/hr)	0.08		
	Annual (ton/yr)	0.21		
	Loading (lb/hr)	0.01		

Max.HAP Emission Rate	Annual (ton/yr)	0.01		
Estimation Method <sup>5</sup>		O = Promax process simulation		

- 1    BF    Bottom Fill    SP    Splash Fill    SUB    Submerged Fill  
 2    At maximum bulk liquid temperature  
 3    B    Ballasted Vessel    C    Cleaned    U    Uncleaned (dedicated service)  
      O    Other (describe)  
 4    List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets)  
      CA    Carbon Adsorption    VB    Dedicated Vapor Balance (closed system)  
      ECD    Enclosed Combustion Device    F    Flare  
      TO    Thermal Oxidization or Incineration  
 5    EPA    EPA Emission Factor in AP-42    MB    Material Balance  
      TM    Test Measurement based upon test data submittal    O    Other (describe)

**ATTACHMENT Q: PNEUMATIC CONTROLLERS DATA SHEET**

**ATTACHMENT Q – PNEUMATIC CONTROLLERS  
DATA SHEET**

**Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?**

Yes     No

Please list approximate number.

**Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after September 18, 2015?**

Yes     No

Please list approximate number.

**Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011, and on or before September 18, 2015?**

Yes     No

Please list approximate number.

**Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after September 18, 2015?**

Yes     No

Please list approximate number.

**ATTACHMENT R: PNEUMATIC PUMP DATA SHEET**

**ATTACHMENT R – PNEUMATIC PUMP  
DATA SHEET**

**Are there any natural gas-driven diaphragm pumps located at a well site that  
commenced construction, modification or reconstruction after September 18,  
2015?**

Yes     No

Please list.

Source ID #	Date	Pump Make/Model	Pump Size



**ATTACHMENT S: AIR POLLUTION CONTROL DEVICE/EMISSION REDUCTION  
DEVICES SHEETS**

VAPOR COMBUSTION  
AP-42 EMISSION FACTORS

**ATTACHMENT S – AIR POLLUTION CONTROL DEVICE /  
EMISSION REDUCTION DEVICE SHEETS**

Complete the applicable air pollution control device sheets for each flare, vapor combustor, thermal oxidizer, condenser, adsorption system, vapor recovery unit, BTEX Eliminator, Reboiler with and without Glow Plug, etc. at the facility. Use extra pages if necessary.

Emissions calculations must be performed using the most conservative control device efficiency.

*The following five (5) rows are only to be completed if registering an alternative air pollution control device.*

Emission Unit ID:	Make/Model:
Primary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No
Secondary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No

## VAPOR COMBUSTION (Including Enclosed Combustors)

### General Information

Control Device ID#: APC-COMB	Installation Date: TBD <input checked="" type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Maximum Rated Total Flow Capacity 2,966.67 scfh                      71,200 scfd	Maximum Design Heat Input (from mfg. spec sheet) 8 MMBTU/hr	Design Heat Content 2,682 BTU/scf

### Control Device Information

Type of Vapor Combustion Control?		
<input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Thermal Oxidizer	<input type="checkbox"/> Elevated Flare	<input type="checkbox"/> Ground Flare
Manufacturer: MRW Technologies Model: TBF-4.0-25-71200	Hours of operation per year? 8,760	

List the emission units whose emissions are controlled by this vapor control device (Emission Point ID# APC-COMB)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
EU-TANKS-COND	Condensate Tanks	EU-LOAD-COND	Condensate Truck Loading
EU-TANKS-PW	Produced Water Tanks	EU-LOAD-PW	Produced Water Truck Loading

*If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.*

Assist Type (Flares only)	Flare Height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input checked="" type="checkbox"/> Non	25 feet	4 feet	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Provide determination.

### Waste Gas Information

Maximum Waste Gas Flow Rate 49 (scfm)	Heat Value of Waste Gas Stream 2,682 BTU/ft <sup>3</sup>	Exit Velocity of the Emissions Stream (ft/s)
--	---	---

*Provide an attachment with the characteristics of the waste gas stream to be burned.*

### Pilot Gas Information

Number of Pilot Lights 1	Fuel Flow Rate to Pilot Flame per Pilot 50 scfh	Heat Input per Pilot 45,250 BTU/hr	Will automatic re-ignition be used? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
-----------------------------	--	---------------------------------------	--

If automatic re-ignition is used, please describe the method. If the pilot flame is lost, the control system will automatically attempt to relight the pilot. If the re-ignition attempt fails, the pilot solenoid valve will automatically close and a local remote alarm signal will be generated to indicate loss of pilot flame.

Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	If Yes, what type? <input type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input checked="" type="checkbox"/> Other: flame rod
---	---

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate).*

Additional information attached? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11(b) and performance testing.
--



---

**Tank Battery Combustor Specification Sheet**  
**MRW Technologies, Inc.**  
**Combustor Model Number: TBF-4.0-25-71200**

Expected Destruction Removal Efficiency (DRE):	98% or Greater of Non-Methane Hydrocarbons
Unit Size:	4.0-foot Diameter 25-Foot Overall Height
Design Heat Input:	8 MMBTU/HR
Design Flow Rates:	71,200 SCFD
Design Heat Content:	2682 BTU/SCF
Waste Gas Flame Arrestor:	Enardo
Pilot Type:	MRW Electric Ignition
Pilot Operation (Continuous/Intermittent):	Continuous
Pilot Fuel Consumption:	50 SCFH or Less
Pilot Monitoring Device:	Flame Rod
Automatic Re-Ignition:	Included
Remote Alarm Indication:	Included

**Description of Control Scheme:**

The Combustor pilot is monitored via flame rod. If the pilot flame is lost, the control system will automatically attempt to relight the pilot. If the re-ignition attempt fails, the pilot solenoid valve will automatically close and a local & remote alarm signal will be generated to indicate loss of pilot flame.

Since flares do not lend themselves to conventional emission testing techniques, only a few attempts have been made to characterize flare emissions. Recent EPA tests using propylene as flare gas indicated that efficiencies of 98 percent can be achieved when burning an offgas with at least 11,200 kJ/m<sup>3</sup> (300 Btu/ft<sup>3</sup>). The tests conducted on steam-assisted flares at velocities as low as 39.6 meters per minute (m/min) (130 ft/min) to 1140 m/min (3750 ft/min), and on air-assisted flares at velocities of 180 m/min (617 ft/min) to 3960 m/min (13,087 ft/min) indicated that variations in incoming gas flow rates have no effect on the combustion efficiency. Flare gases with less than 16,770 kJ/m<sup>3</sup> (450 Btu/ft<sup>3</sup>) do not smoke.

Table 13.5-1 presents flare emission factors, and Table 13.5-2 presents emission composition data obtained from the EPA tests.<sup>1</sup> Crude propylene was used as flare gas during the tests. Methane was a major fraction of hydrocarbons in the flare emissions, and acetylene was the dominant intermediate hydrocarbon species. Many other reports on flares indicate that acetylene is always formed as a stable intermediate product. The acetylene formed in the combustion reactions may react further with hydrocarbon radicals to form polyacetylenes followed by polycyclic hydrocarbons.<sup>2</sup>

In flaring waste gases containing no nitrogen compounds, NO is formed either by the fixation of atmospheric nitrogen (N) with oxygen (O) or by the reaction between the hydrocarbon radicals present in the combustion products and atmospheric nitrogen, by way of the intermediate stages, HCN, CN, and OCN.<sup>2</sup> Sulfur compounds contained in a flare gas stream are converted to SO<sub>2</sub> when burned. The amount of SO<sub>2</sub> emitted depends directly on the quantity of sulfur in the flared gases.

Table 13.5-1 (English Units). EMISSION FACTORS FOR FLARE OPERATIONS<sup>a</sup>

EMISSION FACTOR RATING: B

Component	Emission Factor (lb/10 <sup>6</sup> Btu)
Total hydrocarbons <sup>b</sup>	0.14
Carbon monoxide	0.37
Nitrogen oxides	0.068
Soot <sup>c</sup>	0 - 274

<sup>a</sup> Reference 1. Based on tests using crude propylene containing 80% propylene and 20% propane.

<sup>b</sup> Measured as methane equivalent.

<sup>c</sup> Soot in concentration values: nonsmoking flares, 0 micrograms per liter (µg/L); lightly smoking flares, 40 µg/L; average smoking flares, 177 µg/L; and heavily smoking flares, 274 µg/L.

**ATTACHMENT T: EMISSIONS CALCULATIONS**

**SWN Production Company, LLC  
Gladys Briggs Pad  
Summary of Criteria Air Pollutant Emissions**

Equipment	Unit ID	Emission Point ID	NOx		CO		Total VOC <sup>1</sup>		SO <sub>2</sub>		PM Total	
			lb/hr	TPY	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	EP-ENG1	0.32	1.40	0.64	2.80	0.22	0.98	<0.01	<0.01	0.02	0.11
Five (5) 1.0-mmBtu/hr GPU Burners	EU-GPU1 to EU-GPU5	EP-GPU1 - EP-GPU5	0.55	2.42	0.46	2.03	0.03	0.13	<0.01	0.01	0.04	0.18
One (1) 0.5-mmBtu/hr Heater Treater	EU-HT1	EP-HT1	0.06	0.24	0.05	0.20	<0.01	0.01	<0.01	<0.01	<0.01	0.02
Four (4) 1.5-mmBtu/hr Line Heaters	EU-LH1 to EU-LH4	EP-LH1 - EP-LH4	0.66	2.90	0.56	2.44	0.04	0.16	<0.01	0.02	0.05	0.22
Two (2) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	APC-COMB	-	-	-	-	-	-	-	-	-	-
Two (2) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	APC-COMB	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	EP-LOAD-COND	-	-	-	-	0.20	0.89	-	-	-	-
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	EP-LOAD-PW	-	-	-	-	0.05	0.21	-	-	-	-
One (1) 8.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB	APC-COMB	1.10	4.84	2.20	9.65	0.86	3.79	-	-	0.02	0.10
Vapor Combustor Pilot	EU-PILOT	APC-COMB	<0.01	0.02	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Fugitive Emissions	EU-FUG	EP-FUG	-	-	-	-	0.66	2.91	-	-	-	-
Fugitive Haul Road Emissions	EU-HR	EP-HR	-	-	-	-	-	-	-	-	3.71	12.19
<b>Total Allowable Emissions =</b>			<b>2.70</b>	<b>11.82</b>	<b>3.91</b>	<b>17.15</b>	<b>2.07</b>	<b>9.09</b>	<b>0.01</b>	<b>0.04</b>	<b>3.85</b>	<b>12.82</b>
<b>Current Permit Allowable Emissions =</b>			<b>0.34</b>	<b>1.48</b>	<b>0.28</b>	<b>1.22</b>	<b>3.90</b>	<b>17.06</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>0.60</b>	<b>1.97</b>
<b>Net Allowable Emissions =</b>			<b>2.36</b>	<b>10.34</b>	<b>3.63</b>	<b>15.93</b>	<b>(1.82)</b>	<b>(7.97)</b>	<b>0.01</b>	<b>0.03</b>	<b>3.26</b>	<b>10.85</b>

Notes:

<sup>1</sup> Total VOC includes all constituents heavier than Propane (C3+), including hazardous air pollutants (HAP). Speciated HAP presented in following table.

SWN Production Company, LLC  
 Gladys Briggs Pad  
 Summary of Hazardous Air Pollutants

Equipment	Unit ID	Estimated Emissions (lb/hr)									
		Acetalde- hyde	Acrolein	Benzene	Ethyl- benzene	Formalde- hyde	Methanol	n-Hexane	Toluene	Xylenes	Total HAP
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	<0.01	<0.01	<0.01	<0.01	0.09	<0.01	-	<0.01	<0.01	0.10
Five (5) 1.0-mmBtu/hr GPU Burners	EU-GPU1 to EU- GPU5	-	-	<0.01	-	<0.01	-	0.01	<0.01	-	0.01
One (1) 0.5-mmBtu/hr Heater Treater	EU-HT1	-	-	<0.01	-	<0.01	-	<0.01	<0.01	-	<0.01
Four (4) 1.5-mmBtu/hr Line Heaters	EU-LH1 to EU- LH4	-	-	<0.01	-	<0.01	-	0.01	<0.01	-	0.01
Two (2) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS- COND	-	-	-	-	-	-	-	-	-	-
Two (2) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD- COND	-	-	<0.01	<0.01	-	-	0.01	<0.01	0.01	0.01
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	-	-	<0.01	<0.01	-	-	<0.01	<0.01	<0.01	<0.01
One (1) 8.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB	-	-	<0.01	0.01	-	-	0.03	0.01	0.02	0.06
Vapor Combustor Pilot	EU-PILOT	-	-	<0.01	-	<0.01	-	<0.01	<0.01	-	<0.01
Fugitive Emissions	EU-FUG	-	-	<0.01	<0.01	-	-	0.02	<0.01	0.01	0.03
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-
<b>Total Allowable Emissions =</b>		<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>0.09</b>	<b>&lt;0.01</b>	<b>0.07</b>	<b>0.01</b>	<b>0.04</b>	<b>0.24</b>
<b>Current Permit Allowable Emissions =</b>		<b>0.00</b>	<b>0.00</b>	<b>&lt;0.01</b>	<b>0.03</b>	<b>&lt;0.01</b>	<b>0.00</b>	<b>0.12</b>	<b>0.03</b>	<b>0.10</b>	<b>0.28</b>
<b>Net Allowable Emissions =</b>		<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>(0.02)</b>	<b>0.09</b>	<b>0.00</b>	<b>(0.05)</b>	<b>(0.01)</b>	<b>(0.06)</b>	<b>(0.04)</b>

Continued on Next Page



SWN Production Company, LLC  
 Gladys Briggs Pad  
 Summary of Hazardous Air Pollutants (Continued)

Equipment	Unit ID	Estimated Emissions (TPY)									
		Acetalde- hyde	Acrolein	Benzene	Ethyl- benzene	Formalde- hyde	Methanol	n-Hexane	Toluene	Xylenes	Total HAP
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	0.02	0.01	0.01	<0.01	0.38	0.02	-	<0.01	<0.01	0.44
Five (5) 1.0-mmBtu/hr GPU Burners	EU-GPU1 to EU- GPU5	-	-	<0.01	-	<0.01	-	0.04	<0.01	-	0.05
One (1) 0.5-mmBtu/hr Heater Treater	EU-HT1	-	-	<0.01	-	<0.01	-	<0.01	<0.01	-	<0.01
Four (4) 1.5-mmBtu/hr Line Heaters	EU-LH1 to EU- LH4	-	-	<0.01	-	<0.01	-	0.05	<0.01	-	0.05
Two (2) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS- COND	-	-	-	-	-	-	-	-	-	-
Two (2) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD- COND	-	-	<0.01	0.01	-	-	0.03	0.01	0.02	0.06
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	-	-	<0.01	<0.01	-	-	0.01	<0.01	0.01	0.01
One (1) 8.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB	-	-	<0.01	0.03	-	-	0.11	0.03	0.09	0.27
Vapor Combustor Pilot	EU-PILOT	-	-	<0.01	-	<0.01	-	<0.01	<0.01	-	<0.01
Fugitive Emissions	EU-FUG	-	-	<0.01	0.02	-	-	0.08	0.01	0.04	0.15
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-
<b>Total Allowable Emissions =</b>		<b>0.02</b>	<b>0.01</b>	<b>0.01</b>	<b>0.06</b>	<b>0.38</b>	<b>0.02</b>	<b>0.32</b>	<b>0.05</b>	<b>0.17</b>	<b>1.04</b>
<b>Current Permit Allowable Emissions =</b>		<b>0.00</b>	<b>0.00</b>	<b>0.01</b>	<b>0.14</b>	<b>0.01</b>	<b>0.00</b>	<b>0.53</b>	<b>0.11</b>	<b>0.42</b>	<b>1.22</b>
<b>Net Allowable Emissions =</b>		<b>0.02</b>	<b>0.01</b>	<b>0.00</b>	<b>(0.08)</b>	<b>0.37</b>	<b>0.02</b>	<b>(0.21)</b>	<b>(0.06)</b>	<b>(0.25)</b>	<b>(0.18)</b>

SWN Production Company, LLC  
 Gladys Briggs Pad  
 Summary of Greenhouse Gas Emissions - Metric Tons per Year (Tonnes)

Equipment	Unit ID	Carbon Dioxide (CO <sub>2</sub> )		Methane (CH <sub>4</sub> )		Methane (CH <sub>4</sub> ) as CO <sub>2</sub> Eq.		Nitrous Oxide (N <sub>2</sub> O)		Nitrous Oxide (N <sub>2</sub> O) as CO <sub>2</sub> Eq.		Total CO <sub>2</sub> + CO <sub>2</sub> Eq. <sup>1</sup>	
		lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	155.04	616.04	<0.01	0.01	0.07	0.27	<0.01	<0.01	0.08	0.33	155.19	616.64
Five (5) 1.0-mmBtu/hr GPU Burners	EU-GPU1 to EU-GPU5	584.89	2,324.02	0.01	0.04	0.28	1.09	<0.01	<0.01	0.33	1.31	585.489751880	2,326.42
One (1) 0.5-mmBtu/hr Heater Treater	EU-HT1	58.49	232.40	<0.01	<0.01	0.03	0.11	<0.01	<0.01	0.03	0.13	58.55	232.64
Four (4) 1.5-mmBtu/hr Line Heaters	EU-LH1 to EU-LH4	701.86	2,788.83	0.01	0.05	0.33	1.31	<0.01	0.01	0.39	1.57	702.59	2,791.71
Two (2) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	-	-	-	-	-	-	-	-	-	-	-	-
Two (2) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	<0.01	<0.01	<0.01	0.01	0.06	0.24	-	-	-	-	0.06	0.24
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	<0.01	<0.01	0.03	0.14	0.86	3.41	-	-	-	-	0.86	3.41
One (1) 8.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB	935.82	3,718.44	0.02	0.07	0.44	1.75	<0.01	0.01	0.53	2.09	936.78	3,722.28
Vapor Combustor Pilot	EU-PILOT	5.29	21.03	<0.01	<0.01	<0.01	0.01	<0.01	<0.01	<0.01	0.01	5.30	21.05
Fugitive Emissions	EU-FUG	0.01	0.02	1.02	4.07	25.60	101.72	-	-	-	-	25.61	101.75
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-	-	-
<b>Total Allowable Emissions =</b>		<b>2,441.39</b>	<b>9,700.79</b>	<b>1.11</b>	<b>4.40</b>	<b>27.67</b>	<b>109.93</b>	<b>&lt;0.01</b>	<b>0.02</b>	<b>1.37</b>	<b>5.43</b>	<b>2,470.42</b>	<b>9,816.14</b>

Notes:  
<sup>1</sup> CO<sub>2</sub> Equivalent = Pollutant times GWP multiplier. 40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier (100-Year Time Horizon): CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298  
<sup>2</sup> Per API Compendium (2009) Chapter 5: Because most of the CH<sub>4</sub> and CO<sub>2</sub> emissions from storage tanks occur as a result of flashing (which is controlled by the combustor in this case), working and breathing loss emissions of these gases are very small in production and virtually non-existent in the downstream segments. Therefore, GHG emissions from the condensate and produced water tanks are assumed to be negligible.

SWN Production Company, LLC  
 Gladys Briggs Pad  
 Summary of Greenhouse Gas Emissions - Short Tons per Year (Tons)

Equipment	Unit ID	Carbon Dioxide (CO <sub>2</sub> )		Methane (CH <sub>4</sub> )		Methane (CH <sub>4</sub> ) as CO <sub>2</sub> Eq.		Nitrous Oxide (N <sub>2</sub> O)		Nitrous Oxide (N <sub>2</sub> O) as CO <sub>2</sub> Eq.		Total CO <sub>2</sub> + CO <sub>2</sub> Eq. <sup>1</sup>	
		lb/hr	tons/yr <sup>2</sup>	lb/hr	tons/yr <sup>2</sup>	lb/hr	tons/yr	lb/hr	tons/yr <sup>2</sup>	lb/hr	tons/yr	lb/hr	tons/yr
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	155.04	679.06	<0.01	0.01	0.07	0.30	<0.01	<0.01	0.08	0.36	155.19	679.73
Five (5) 1.0-mmBtu/hr GPU Burners	EU-GPU1 to EU-GPU5	584.89	2,561.80	0.01	0.05	0.28	1.21	<0.01	<0.01	0.33	1.44	585.49	2,564.44
One (1) 0.5-mmBtu/hr Heater Treater	EU-HT1	58.49	256.18	<0.01	<0.01	0.03	0.12	<0.01	<0.01	0.03	0.14	58.55	256.44
Four (4) 1.5-mmBtu/hr Line Heaters	EU-LH1 to EU-LH4	701.86	3,074.16	0.01	0.06	0.33	1.45	<0.01	0.01	0.39	1.73	702.59	3,077.33
Two (2) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	-	-	-	-	-	-	-	-	-	-	-	-
Two (2) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	<0.01	<0.01	<0.01	0.01	0.06	0.27	-	-	-	-	0.06	0.27
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	<0.01	<0.01	0.03	0.15	0.86	3.76	-	-	-	-	0.86	3.76
One (1) 8.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB	935.82	4,098.88	0.02	0.08	0.44	1.93	<0.01	0.01	0.53	2.30	936.78	4,103.11
Vapor Combustor Pilot	EU-PILOT	5.29	23.18	<0.01	<0.01	<0.01	0.01	<0.01	<0.01	<0.01	0.01	5.30	23.21
Fugitive Emissions	EU-FUG	0.01	0.03	1.02	4.49	25.60	112.13	-	-	-	-	25.61	112.16
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-	-	-
<b>Total Allowable Emissions =</b>		<b>2,441.39</b>	<b>10,693.29</b>	<b>1.11</b>	<b>4.85</b>	<b>27.67</b>	<b>121.17</b>	<b>&lt;0.01</b>	<b>0.02</b>	<b>1.37</b>	<b>5.98</b>	<b>2,470.42</b>	<b>10,820.44</b>

Notes:

<sup>1</sup> CO<sub>2</sub> Equivalent = Pollutant times GWP multiplier. 40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier (100-Year Time Horizon): CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298

<sup>2</sup> EPA and API GHG calculation methodologies calculate emissions in metric tons (tonnes). These values have been converted to short tons for consistency with permitting threshold units.

<sup>3</sup> Per API Compendium (2009) Chapter 5: Because most of the CH<sub>4</sub> and CO<sub>2</sub> emissions from storage tanks occur as a result of flashing (which is controlled by the combustor in this case), working and breathing loss emissions of these gases are very small in production and virtually non-existent in the downstream segments. Therefore, GHG emissions from the condensate and produced water tanks are assumed to be negligible.

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Engine Emissions Calculations - Criteria Air Pollutants**

**Equipment Information**

Unit ID: **EU-ENG1**  
 Emission Point ID: EP-ENG1  
 Make: Caterpillar  
 Model: G3306 NA  
 Design Class: 4S-RB  
 Controls: NSCR  
 Horsepower (hp): 145  
 Fuel Use (Btu/hp-hr): 8,625  
 Fuel Use (scfh): 1,382  
 Annual Fuel Use (mmscf): 12.11  
 Fuel Use (mmBtu/hr): 1.25  
 Exhaust Flow (acfm): 678  
 Exhaust Temp (°F): 1,101  
 Serial Number: TBD  
 Manufacture Date: After 1/1/2011  
 Operating Hours: 8,760  
 Fuel Heating Value (Btu/scf): 905

**Uncontrolled Manufacturer Emission Factors <sup>1</sup>**

NOx (g/hp-hr): 13.47  
 CO (g/hp-hr): 13.47  
 NMNEHC/VOC (g/hp-hr): 0.22

**Post-Catalyst Emission Factors**

NOx Control Eff. % 92.58%  
 CO Control Eff. % 85.15%  
  
 NOx (g/hp-hr): 1.00  
 CO (g/hp-hr): 2.00  
 NMNEHC/VOC (g/hp-hr): 0.70

**Uncontrolled Criteria Air Pollutant Emissions**

Unit ID: **EU-ENG1**

<b>Pollutant</b>	<b>lb/hr</b>	<b>TPY</b>
NOx	4.31	18.86
CO	4.31	18.86
NMNEHC/VOC (does not include HCHO)	0.07	0.31
SO <sub>2</sub>	<0.01	<0.01
PM <sub>10/2.5</sub>	0.01	0.05
PM <sub>COND</sub>	0.01	0.05
PM <sub>TOT</sub>	0.02	0.11

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Engine Emissions Calculations - Criteria Air Pollutants (Continued)**

**Proposed Criteria Air Pollutant Emissions<sup>2</sup>**

Unit ID: **EU-ENG1**

<b>Pollutant</b>	<b>lb/hr</b>	<b>TPY</b>
NO <sub>x</sub>	0.32	1.40
CO	0.64	2.80
NMNEHC/VOC (does not include HCHO)	0.22	0.98
SO <sub>2</sub>	<0.01	<0.01
PM <sub>10/2.5</sub>	0.01	0.05
PM <sub>COND</sub>	0.01	0.05
PM <sub>TOT</sub>	0.02	0.11

**AP-42 Emission Factors (lb/mmBtu)<sup>2</sup>**

**4S-RB**

<b>Pollutant</b>	<b>3.2-3 (7/00)</b>
SO <sub>2</sub>	5.88E-04
PM <sub>10/2.5</sub>	9.50E-03
PM <sub>COND</sub>	9.91E-03
PM <sub>TOT</sub>	1.94E-02

Notes:

<sup>1</sup> Post-catalyst emission factors based on catalyst manufacturer data and/or NSPS Subpart JJJJ limits, if applicable.

<sup>2</sup> Per AP-42, all particulate matter (PM) from combustion of natural gas (total, condensable and filterable PM) is presumed <1 micrometer in diameter.

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Engine Emissions Calculations - Hazardous Air Pollutants**

**Equipment Information**

Unit ID: **EU-ENG1**  
 Emission Point ID: EP-ENG1  
 Make: Caterpillar  
 Model: G3306 NA  
 Design Class: 4S-RB  
 Controls: NSCR  
 Horsepower (hp): 145  
 Fuel Use (Btu/hp-hr): 8,625  
 Fuel Use (scfh): 1,382  
 Annual Fuel Use (mmscf): 12.11  
 Fuel Use (mmBtu/hr): 1.25  
 Exhaust Flow (acfm): 678  
 Exhaust Temp (°F): 1,101  
 Operating Hours: 8,760

**Manufacturer Formaldehyde Factor**

Pre-Control (g/hp-hr): 0.27

**Proposed HAP Emissions<sup>1</sup>**

Unit ID: **EU-ENG1**

Pollutant	lb/hr	TPY
Acetaldehyde	<0.01	0.02
Acrolein	<0.01	0.01
Benzene	<0.01	0.01
Ethylbenzene	<0.01	<0.01
Formaldehyde	0.09	0.38
Methanol	<0.01	0.02
Toluene	<0.01	<0.01
Xylenes	<0.01	<0.01
<b>Total HAPs =</b>	<b>0.10</b>	<b>0.44</b>

**AP-42 Emission Factors (lb/mmBtu)**

**4S-RB**

Pollutant	3.2-3 (7/00)
Acetaldehyde	2.79E-03
Acrolein	2.63E-03
Benzene	1.58E-03
Ethylbenzene	2.18E-05
Methanol	3.06E-03
Toluene	5.58E-04
Xylenes	1.95E-04

Notes:

<sup>1</sup> For conservative estimate, no reduction taken for any HAP.

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Engine Emissions Calculations - Greenhouse Gases**

**Equipment Information**

Unit ID: **EU-ENG1**  
 Emission Point ID: EP-ENG1  
 Make: Caterpillar  
 Model: G3306 NA  
 Design Class: 4S-RB  
 Controls: NSCR  
 Horsepower (hp): 145  
 Fuel Use (Btu/hp-hr): 8,625  
 Fuel Use (scfh): 1,382  
 Fuel Use (mmBtu/hr): 1.25  
 Exhaust Flow (acfm): 678  
 Exhaust Temp (°F): 1,101  
 Operating Hours: 8,760

**Manufacturer data used to calculate CO<sub>2</sub> emissions (g/hp-hr):**  
 485

**Greenhouse Gas (GHG) Emissions<sup>1</sup>**

Unit ID: **EU-ENG1**

<b>Pollutant</b>	<b>lb/hr</b>	<b>tonnes/yr</b>
CO <sub>2</sub>	155.04	616.04
CH <sub>4</sub>	<0.01	0.01
N <sub>2</sub> O	<0.01	<0.01
CH <sub>4</sub> as CO <sub>2</sub> e	0.07	0.27
N <sub>2</sub> O as CO <sub>2</sub> e	0.08	0.33
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>155.19</b>	<b>616.64</b>

**40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)<sup>2</sup>**

Methane (CH <sub>4</sub> )	1.00E-03
Nitrous Oxide (N <sub>2</sub> O)	1.00E-04

Notes:

<sup>1</sup> Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

<sup>2</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Gas Production Unit Burner Emissions Calculations - Criteria Air Pollutants**

**Equipment Information**

Unit ID: **EU-GPU1 - EU-GPU5 (EACH)**  
 Emission Point ID: EP-GPU1 - EP-GPU5  
 Description: Gas Production Unit Burner  
 Number of Units: 5  
 Burner Design (mmBtu/hr): 1.0  
 Fuel HHV (Btu/scf): 905  
 Annual Fuel Use (mmscf): 9.68  
 Annual Operating Hours: 8,760

**Criteria Air Pollutant Emissions**

Unit ID: **EU-GPU1 - EU-GPU5 (EACH)**      **EU-GPU1 - EU-GPU5 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
NO <sub>x</sub>	0.11	0.48	0.55	2.42
CO	0.09	0.41	0.46	2.03
VOC	0.01	0.03	0.03	0.13
SO <sub>2</sub>	<0.01	<0.01	<0.01	<0.01
PM <sub>10/2.5</sub>	0.01	0.03	0.03	0.14
PM <sub>COND</sub>	<0.01	0.01	<0.01	<0.05
PM <sub>TOT</sub>	0.01	0.04	0.04	0.18

**AP-42 Emission Factors for Units <100 mmBtu/hr (lb/mmscf)<sup>1</sup>**

Pollutant	1.4-1, -2 (7/98)
NO <sub>x</sub>	100.0
CO	84.0
VOC	5.5
SO <sub>2</sub>	0.6
PM <sub>10/2.5</sub>	5.7
PM <sub>COND</sub>	1.9
PM <sub>TOT</sub>	7.6

Notes:

<sup>1</sup> All PM (total, condensable and filterable) is assumed to be <1 micrometer in diameter. Total PM is the sum of filterable PM and condensable PM.



**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Gas Production Unit Burner Emissions Calculations - Hazardous Air Pollutants**

**Equipment Information**

Unit ID: **EU-GPU1 - EU-GPU5 (EACH)**  
 Emission Point ID: EP-GPU1 - EP-GPU5  
 Description: Gas Production Unit Burner  
 Number of Units: 5  
 Burner Design (mmBtu/hr): 1.0  
 Fuel HHV (Btu/scf): 905  
 Annual Fuel Use (mmscf): 9.68  
 Annual Operating Hours: 8,760

**Hazardous Air Pollutant Emissions**

Unit ID: **EU-GPU1 - EU-GPU5 (EACH)**      **EU-GPU1 - EU-GPU5 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
n-Hexane	<0.01	0.01	<0.01	<0.04
Formaldehyde	<0.01	<0.01	<0.01	<0.01
Benzene	<0.01	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01	<0.01
<b>Total HAPs =</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>&lt;0.01</b>	<b>0.05</b>

**AP-42 Emission Factors (lb/mmscf)**

Pollutant	1.4-3 (7/98)
n-Hexane	1.80E+00
Formaldehyde	7.50E-02
Benzene	2.10E-03
Toluene	3.40E-03

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Gas Production Unit Burner Emissions Calculations - Greenhouse Gases**

**Equipment Information**

Unit ID:	<b><u>EU-GPU1 - EU-GPU5 (EACH)</u></b>
Emission Point ID:	EP-GPU1 - EP-GPU5
Description:	Gas Production Unit Burner
Number of Units:	5
Burner Design (mmBtu/hr):	1.0
Fuel HHV (Btu/scf):	905
Annual Fuel Use (mmscf):	9.68
Annual Operating Hours:	8,760

**Greenhouse Gas (GHG) Emissions<sup>1</sup>**

Unit ID: **EU-GPU1 - EU-GPU5 (EACH)**      **EU-GPU1 - EU-GPU5 (TOTAL)**

Pollutant	lb/hr	tonnes/yr	lb/hr	tonnes/yr
CO <sub>2</sub>	116.98	464.80	584.89	2,324.02
CH <sub>4</sub>	<0.01	0.01	<0.01	<0.04
N <sub>2</sub> O	<0.01	<0.01	<0.01	<0.01
CH <sub>4</sub> as CO <sub>2</sub> e	0.06	0.22	0.28	1.09
N <sub>2</sub> O as CO <sub>2</sub> e	0.07	0.26	0.33	1.31
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>117.10</b>	<b>465.28</b>	<b>585.49</b>	<b>2,326.42</b>

**40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)<sup>2</sup>**

Carbon Dioxide (CO <sub>2</sub> )	53.06
Methane (CH <sub>4</sub> )	1.00E-03
Nitrous Oxide (N <sub>2</sub> O)	1.00E-04

Notes:

<sup>1</sup> Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

<sup>2</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Heater Treater Emissions Calculations - Criteria Air Pollutants**

**Equipment Information**

Unit ID: **EH-HT1**  
 Emission Point ID: EP-HT1  
 Description: Heater Treater  
 Number of Units: 1  
 Burner Design (mmBtu/hr): 0.5  
 Fuel HHV (Btu/scf): 905  
 Annual Fuel Use (mmscf): 4.84  
 Annual Operating Hours: 8,760

**Criteria Air Pollutant Emissions**

Unit ID: **EH-HT1**

Pollutant	lb/hr	TPY
NOx	0.06	0.24
CO	0.05	0.20
VOC	<0.01	0.01
SO <sub>2</sub>	<0.01	<0.01
PM <sub>10/2.5</sub>	<0.01	0.01
PM <sub>COND</sub>	<0.01	<0.01
PM <sub>TOT</sub>	<0.01	0.02

**AP-42 Emission Factors for Units <100 mmBtu/hr (lb/mmscf)<sup>1</sup>**

Pollutant	1.4-1, -2 (7/98)
NOx	100.0
CO	84.0
VOC	5.5
SO <sub>2</sub>	0.6
PM <sub>10/2.5</sub>	5.7
PM <sub>COND</sub>	1.9
PM <sub>TOT</sub>	7.6

Notes:

<sup>1</sup> All PM (total, condensable and filterable) is assumed to be <1 micrometer in diameter. Total PM is the sum of filterable PM and condensable PM.

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Heater Treater Emissions Calculations - Hazardous Air Pollutants**

**Equipment Information**

Unit ID: **EH-HT1**  
 Emission Point ID: EP-HT1  
 Description: Heater Treater  
 Number of Units: 1  
 Burner Design (mmBtu/hr): 0.5  
 Fuel HHV (Btu/scf): 905  
 Annual Fuel Use (mmscf): 4.84  
 Annual Operating Hours: 8,760

**Hazardous Air Pollutant Emissions**

Unit ID: **EH-HT1**

Pollutant	lb/hr	TPY
n-Hexane	<0.01	<0.01
Formaldehyde	<0.01	<0.01
Benzene	<0.01	<0.01
Toluene	<0.01	<0.01
<b>Total HAPs =</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>

**AP-42 Emission Factors (lb/mmscf)**

Pollutant	1.4-3 (7/98)
n-Hexane	1.80E+00
Formaldehyde	7.50E-02
Benzene	2.10E-03
Toluene	3.40E-03

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Heater Treater Emissions Calculations - Greenhouse Gases**

**Equipment Information**

Unit ID:	<b><u>EH-HT1</u></b>
Emission Point ID:	EP-HT1
Description:	Heater Treater
Number of Units:	1
Burner Design (mmBtu/hr):	0.5
Fuel HHV (Btu/scf):	905
Annual Fuel Use (mmscf):	4.84
Annual Operating Hours:	8,760

**Greenhouse Gas (GHG) Emissions<sup>1</sup>**

Unit ID: **EH-HT1**

Pollutant	lb/hr	tonnes/yr
CO <sub>2</sub>	58.49	232.40
CH <sub>4</sub>	<0.01	<0.01
N <sub>2</sub> O	<0.01	<0.01
CH <sub>4</sub> as CO <sub>2</sub> e	0.03	0.11
N <sub>2</sub> O as CO <sub>2</sub> e	0.03	0.13
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>58.55</b>	<b>232.64</b>

**40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)<sup>2</sup>**

Carbon Dioxide (CO <sub>2</sub> )	53.06
Methane (CH <sub>4</sub> )	1.00E-03
Nitrous Oxide (N <sub>2</sub> O)	1.00E-04

Notes:

<sup>1</sup> Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

<sup>2</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Line Heater and Stabilizer Heater Emissions Calculations - Criteria Air Pollutants**

**Equipment Information**

Unit ID: **EU-LH1 - EU-LH4 (EACH)**  
 Emission Point ID: EP-LH1 - EP-LH4  
 Description: Heater  
 Number of Units: 4  
 Burner Design (mmBtu/hr): 1.5  
 Fuel HHV (Btu/scf): 905  
 Annual Fuel Use (mmscf): 14.52  
 Annual Operating Hours: 8,760

**Criteria Air Pollutant Emissions**

Unit ID: **EU-LH1 - EU-LH4 (EACH)**      **EU-LH1 and EU-LH4 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
NO <sub>x</sub>	0.17	0.73	0.66	2.90
CO	0.14	0.61	0.56	2.44
VOC	0.01	0.04	0.04	0.16
SO <sub>2</sub>	<0.01	<0.01	<0.01	0.02
PM <sub>10/2.5</sub>	0.01	0.04	0.04	0.17
PM <sub>COND</sub>	<0.01	0.01	0.01	0.06
PM <sub>TOT</sub>	0.01	0.06	0.05	0.22

**AP-42 Emission Factors for Units <100 mmBtu/hr (lb/mmscf)<sup>1</sup>**

Pollutant	1.4-1, -2 (7/98)
NO <sub>x</sub>	100.0
CO	84.0
VOC	5.5
SO <sub>2</sub>	0.6
PM <sub>10/2.5</sub>	5.7
PM <sub>COND</sub>	1.9
PM <sub>TOT</sub>	7.6

Notes:

<sup>1</sup>All PM (total, condensable and filterable) is assumed to be <1 micrometer in diameter. Total PM is the sum of filterable PM and condensable PM.

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Line Heater Emissions Calculations - Hazardous Air Pollutants**

**Equipment Information**

Unit ID: **EU-LH1 - EU-LH4 (EACH)**  
 Emission Point ID: EP-LH1 - EP-LH4  
 Description: Heater  
 Number of Units: 4  
 Burner Design (mmBtu/hr): 1.5  
 Fuel HHV (Btu/scf): 905  
 Annual Fuel Use (mmscf): 14.52  
 Annual Operating Hours: 8,760

**Hazardous Air Pollutant Emissions**

Unit ID: **EU-LH1 - EU-LH4 (EACH)**                      **EU-LH1 and EU-LH4 (TOTAL)**

<b>Pollutant</b>	<b>lb/hr</b>	<b>TPY</b>	<b>lb/hr</b>	<b>TPY</b>
n-Hexane	<0.01	0.01	0.01	0.05
Formaldehyde	<0.01	<0.01	<0.01	<0.01
Benzene	<0.01	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01	<0.01
<b>Total HAPs =</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>0.01</b>	<b>0.05</b>

**AP-42 Emission Factors (lb/mmscf)**

<b>Pollutant</b>	<b>1.4-3 (7/98)</b>
n-Hexane	1.80E+00
Formaldehyde	7.50E-02
Benzene	2.10E-03
Toluene	3.40E-03

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Line Heater Emissions Calculations - Greenhouse Gases**

**Equipment Information**

Unit ID:	<b><u>EU-LH1 - EU-LH4 (EACH)</u></b>
Emission Point ID:	EP-LH1 - EP-LH4
Description:	Heater
Number of Units:	4
Burner Design (mmBtu/hr):	1.5
Fuel HHV (Btu/scf):	905
Annual Fuel Use (mmscf):	14.52
Annual Operating Hours:	8,760

**Greenhouse Gas (GHG) Emissions<sup>1</sup>**

Unit ID: **EU-LH1 - EU-LH4 (EACH)** **EU-LH1 and EU-LH4 (TOTAL)**

Pollutant	lb/hr	tonnes/yr	lb/hr	tonnes/yr
CO <sub>2</sub>	175.47	697.21	701.86	2788.83
CH <sub>4</sub>	<0.01	0.01	0.01	0.05
N <sub>2</sub> O	<0.01	<0.01	<0.01	0.01
CH <sub>4</sub> as CO <sub>2</sub> e	0.08	0.33	0.33	1.31
N <sub>2</sub> O as CO <sub>2</sub> e	0.10	0.39	0.39	1.57
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>175.65</b>	<b>697.93</b>	<b>702.59</b>	<b>2,791.71</b>

**40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)<sup>2</sup>**

Carbon Dioxide (CO <sub>2</sub> )	53.06
Methane (CH <sub>4</sub> )	1.00E-03
Nitrous Oxide (N <sub>2</sub> O)	1.00E-04

Notes:

<sup>1</sup> Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

<sup>2</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298



**SWN Production Company, LLC  
Gladys Briggs Pad  
Storage Tank Emissions - Criteria Air Pollutants**

**Tank Information**

Unit ID:	<u>EU-TANKS-COND</u>	<u>EU-TANKS-PW</u>
Emission Point ID:	APC-COMB	APC-COMB
Contents: <sup>1</sup>	Condensate	Produced Water
Number of Tanks: <sup>2</sup>	2	2
Capacity (bbl) - Per Tank:	400	400
Capacity (gal) - Per Tank:	16,800	16,800
<b>Total:</b>		
Throughput (bbl/yr):	39,059	546,872
Throughput (gal/yr):	1,640,479	22,968,632
Throughput (bbl/d):	107	1,498
<b>Per Tank:</b>		
Throughput (bbl/yr):	19,530	273436
Throughput (gal/yr):	820,239	11,484,316
Throughput (bbl/d):	53.51	749.14
Tank Flashing Emission Factor (lb/bbl):	6.9290	0.0090
Working Losses (lb/yr): <sup>3</sup>	2,837.70	30.76
Breathing Losses (lb/yr): <sup>3</sup>	564.92	1.67
Turnovers:	97.65	1,367.18
Tank Vapor Capture Efficiency:	100%	100%
Captured Vapors Routed to:	Vapor Combustor	Vapor Combustor

**Uncontrolled Storage Tank Emissions**

Unit ID:	<u>EU-TANKS-COND</u>		<u>EU-TANKS-PW</u>	
Emissions	lb/hr	TPY	lb/hr	TPY
Working Losses	0.65	2.84	0.01	0.03
Breathing Losses	0.13	0.56	<0.01	<0.01
Flashing Losses	40.80	178.70	1.05	4.60
<b>Total VOC =</b>	<b>41.58</b>	<b>182.10</b>	<b>1.06</b>	<b>4.64</b>
<b>Per Tank =</b>	<b>20.79</b>	<b>91.05</b>	<b>0.53</b>	<b>2.32</b>

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Storage Tank Emissions - Criteria Air Pollutants (Continued)**

**Controlled Storage Tank Emissions**

Unit ID:            **EU-TANKS-COND**                            **EU-TANKS-PW**

<b>Emissions</b>	<b>lb/hr</b>	<b>TPY</b>	<b>lb/hr</b>	<b>TPY</b>
Working Losses	0.01	0.06	<0.01	<0.01
Breathing Losses	<0.01	0.01	<0.01	<0.01
Flashing Losses	0.82	3.57	0.02	0.09
<b>Total VOC =</b>	<b>0.83</b>	<b>3.64</b>	<b>0.02</b>	<b>0.09</b>
<b>Per Tank =</b>	<b>0.42</b>	<b>1.82</b>	<b>0.01</b>	<b>0.05</b>

Notes:

<sup>1</sup> Produced water tanks assumed to contain 99% produced water and 1% condensate.

<sup>2</sup> SWN requests to combine working, breathing and flashing emissions from each tank type to be combined into one emissions point with a total throughput limit rather than an individual tank limit.

<sup>3</sup> Tank working, breathing, and flashing calculated using Promax process simulation. Reports located in Attachment L. Uncontrolled tank working/breathing/flashing emissions are routed to a vapor combustor with 100% capture efficiency.

SWN Production Company, LLC  
 Gladys Briggs Pad  
 Storage Tank Emissions - Hazardous Air Pollutants

Uncontrolled Storage Tank Emissions

Unit ID: **EU-TANKS-COND** **EU-TANKS-PW**

Pollutant	lb/hr	TPY	lb/hr	TPY
<b>Total VOC = <sup>1</sup></b>	<b>41.58</b>	<b>182.10</b>	<b>1.06</b>	<b>4.64</b>
n-Hexane	1.25	5.48	0.03	0.14
Benzene	0.03	0.11	<0.01	<0.01
Toluene	0.28	1.23	0.01	0.03
Ethylbenzene	0.35	1.55	0.01	0.04
Xylenes	1.04	4.54	0.03	0.12
<b>Total HAP =</b>	<b>2.95</b>	<b>12.91</b>	<b>0.08</b>	<b>0.33</b>

Controlled Storage Tank Emissions<sup>2</sup>

Unit ID: **EU-TANKS-COND** **EU-TANKS-PW**

Pollutant	lb/hr	TPY	lb/hr	TPY
<b>Total VOC = <sup>1</sup></b>	<b>0.83</b>	<b>3.64</b>	<b>0.02</b>	<b>0.09</b>
n-Hexane	0.03	0.11	<0.01	<0.01
Benzene	<0.01	<0.01	<0.01	<0.01
Toluene	0.01	0.02	<0.01	<0.01
Ethylbenzene	0.01	0.03	<0.01	<0.01
Xylenes	0.02	0.09	<0.01	<0.01
<b>Total HAP =</b>	<b>0.06</b>	<b>0.26</b>	<b>&lt;0.01</b>	<b>0.01</b>

**SWN Production Company, LLC  
Gladys Briggs Pad  
Storage Tank Emissions - Hazardous Air Pollutants (Continued)**

**Estimated HAP Composition (% by Weight)<sup>3</sup>**

<b>Pollutant</b>	<b>Wt%</b>
n-Hexane	3.007%
Benzene	0.063%
Toluene	0.675%
Ethylbenzene	0.852%
Xylenes	2.491%
<b>Total HAP =</b>	<b>7.087%</b>

Notes:

<sup>1</sup> VOC emissions calculated in Criteria Air Pollutant calculations.

<sup>2</sup> Uncontrolled tank working/breathing/flashing emissions are routed to a vapor combustor with 100% capture efficiency.

<sup>3</sup> Speciated liquids analysis located in Fugitive Emissions Calculations. HAP weight % calculated as % of total hydrocarbons in the sample. All HAP assumed to volatilize from liquids for most conservative emissions estimate.

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Condensate Truck Loading Emissions - Criteria and Hazardous Air Pollutants**

**Loading Information**

Unit ID: **EU-LOAD-COND**  
 Emission Point ID: APC-COMB  
 Fill Method: Submerged  
 Type of Service: Dedicated  
 Mode of Operation: Normal  
 Saturation Factor: 0.6  
 Throughput (1000 gal): 1,640.48  
 Control Type: Vapor Return/Combustion  
 Vapor Capture Efficiency: <sup>1</sup> 70%  
 Average Fill Rate (gal/hr): 7,500  
 Captured Vapors Routed to: Vapor Combustor

**Uncontrolled Loading Emissions<sup>2,4</sup>**

Pollutant	Max. lb/hr	Avg. lb/hr	TPY
<b>VOC<sup>3</sup> =</b>	<b>16.48</b>	<b>0.68</b>	<b>2.98</b>
n-Hexane	0.50	0.02	0.09
Benzene	0.01	<0.01	<0.01
Toluene	0.11	<0.01	0.02
Ethylbenzene	0.14	0.01	0.03
Xylenes	0.41	0.02	0.07
<b>Total HAP<sup>4</sup> =</b>	<b>1.17</b>	<b>0.05</b>	<b>0.21</b>

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Condensate Truck Loading Emissions - Criteria and Hazardous Air Pollutants (Continued)**

**Uncaptured Loading Emissions<sup>2</sup>**

<b>Pollutant</b>	<b>Max. lb/hr</b>	<b>Avg. lb/hr</b>	<b>TPY</b>
<b>VOC =</b>	<b>4.94</b>	<b>0.20</b>	<b>0.89</b>
n-Hexane	0.15	0.01	0.03
Benzene	<0.01	<0.01	<0.01
Toluene	0.03	<0.01	0.01
Ethylbenzene	0.04	<0.01	0.01
Xylenes	0.12	0.01	0.02
<b>Total HAP<sup>4</sup> =</b>	<b>0.35</b>	<b>0.01</b>	<b>0.06</b>

Notes:

<sup>1</sup> Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

<sup>2</sup> Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

<sup>3</sup> Loading losses calculated using Promax process simulation.

<sup>4</sup> Speciated liquids analysis located in Fugitive Emissions Calculations. HAP weight % calculated as % of total hydrocarbons in the sample. All HAP assumed to volatilize from liquids for most conservative emissions estimate.

<b>Pollutant</b>	<b>Wt%</b>
n-Hexane	3.007%
Benzene	0.063%
Toluene	0.675%
Ethylbenzene	0.852%
Xylenes	2.491%
<b>Total HAPs =</b>	<b>7.087%</b>

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Condensate Truck Loading Emissions - Greenhouse Gases**

**Loading Information**

Unit ID: **EU-LOAD-COND**  
 Emission Point ID: APC-COMB  
 Fill Method: Submerged  
 Type of Service: Dedicated  
 Mode of Operation: Normal  
 TOC Em. Factor (tonne/10<sup>6</sup> gal): <sup>1</sup> 0.91  
 Throughput (10<sup>6</sup> gal): 1.640  
 Control Type: Vapor Return/Combustion  
 Vapor Capture Efficiency: <sup>2</sup> 70.00%  
 Average Fill Rate (gal/hr): 7,500  
 Captured Vapors Routed to: Vapor Combustor

Input CH <sub>4</sub> from Promax =	2.1731%
Input CO <sub>2</sub> from Promax =	0.0154%

**Uncontrolled Loading Emissions<sup>3,4</sup>**

Pollutant	Max. lb/hr	Avg. lb/hr	tonnes/yr	tons/yr
CH <sub>4</sub>	0.33	0.01	0.03	0.04
CH <sub>4</sub> as CO <sub>2</sub> e	8.17	0.20	0.81	0.89
CO <sub>2</sub>	<0.01	<0.01	<0.01	<0.01
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>8.18</b>	<b>0.20</b>	<b>0.81</b>	<b>0.89</b>

**SWN Production Company, LLC  
Gladys Briggs Pad  
Condensate Truck Loading Emissions - Greenhouse Gases (Continued)**

**Uncaptured Loading Emissions<sup>3, 4</sup>**

<b>Pollutant</b>	<b>Max. lb/hr</b>	<b>Avg. lb/hr</b>	<b>tonnes/yr</b>	<b>tons/yr</b>
CH <sub>4</sub>	0.10	<0.01	0.01	0.01
CH <sub>4</sub> as CO <sub>2</sub> e	2.45	0.06	0.24	0.27
CO <sub>2</sub>	<0.01	<0.01	<0.01	<0.01
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>2.45</b>	<b>0.06</b>	<b>0.24</b>	<b>0.27</b>

**API Compendium Table 5-12**

<b>Loading Type</b>	<b>Emission Factor (tonne TOC/10<sup>6</sup> gal)</b>
Rail/Truck - Submerged Loading - Dedicated Normal Service	0.91
Rail/Truck - Submerged Loading - Vapor Balance Service	1.51
Rail/Truck - Splash Loading - Dedicated Normal Service	2.20
Rail/Truck - Splash Loading - Vapor Balance Service	1.51
Marine Loading - Ships/Ocean Barges	0.28
Marine Loading - Barges	0.45

Notes:

<sup>1</sup> API Compendium of Greenhouse Gas Emissions Methodologies for the Oil and Gas Industry, Table 5-12.

<sup>2</sup> Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

<sup>3</sup> Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

<sup>4</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25



**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Produced Water Truck Loading Emissions - Criteria and Hazardous Air Pollutants**

**Loading Information**

Unit ID: **EU-LOAD-PW**  
 Emission Point ID: APC-COMB  
 Fill Method: Submerged  
 Type of Service: Dedicated  
 Mode of Operation: Normal  
 Throughput (1000 gal): 22,968.63  
 Control Type: Vapor Return/Combustion  
 Vapor Capture Efficiency: <sup>1</sup> 70%  
 Average Fill Rate (gal/hr): 7,500  
 Captured Vapors Routed to: Vapor Combustor

**Uncontrolled Loading Emissions<sup>2</sup>**

Pollutant	Max. lb/hr	Avg. lb/hr	TPY
<b>VOC<sup>3</sup> =</b>	<b>0.27</b>	<b>0.16</b>	<b>0.70</b>
n-Hexane	0.01	<0.01	0.02
Benzene	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01
Ethylbenzene	<0.01	<0.01	0.01
Xylenes	0.01	<0.01	0.02
<b>Total HAP<sup>4</sup> =</b>	<b>0.02</b>	<b>0.01</b>	<b>0.05</b>

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Produced Water Truck Loading Emissions - Criteria and Hazardous Air Pollutants (Continued)**

**Uncaptured Loading Emissions<sup>2</sup>**

<b>Pollutant</b>	<b>Max. lb/hr</b>	<b>Avg. lb/hr</b>	<b>TPY</b>
<b>VOC<sup>3</sup> =</b>	<b>0.08</b>	<b>0.05</b>	<b>0.21</b>
n-Hexane	<0.01	<0.01	0.01
Benzene	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01
Ethylbenzene	<0.01	<0.01	<0.01
Xylenes	<0.01	<0.01	0.01
<b>Total HAP<sup>4</sup> =</b>	<b>0.01</b>	<b>&lt;0.01</b>	<b>0.01</b>

Notes:

<sup>1</sup> Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

<sup>2</sup> Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

<sup>3</sup> Loading losses calculated using Promax process simulation.

<sup>4</sup> Speciated liquids analysis located in Fugitive Emissions Calculations. HAP weight % calculated as % of total hydrocarbons in the sample. All HAP assumed to volatilize from liquids for most conservative emissions estimate.

<b>Pollutant</b>	<b>Wt%</b>
n-Hexane	3.007%
Benzene	0.063%
Toluene	0.675%
Ethylbenzene	0.852%
Xylenes	2.491%
<b>Total HAPs =</b>	<b>7.087%</b>

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Produced Water Truck Loading Emissions - Greenhouse Gases**

**Loading Information**

Unit ID: **EU-LOAD-PW**  
 Emission Point ID: APC-COMB  
 Fill Method: Submerged  
 Type of Service: Dedicated  
 Mode of Operation: Normal  
 TOC Em. Factor (tonne/10<sup>6</sup> gal): <sup>1</sup> 0.91  
 Throughput (10<sup>6</sup> gal): 22.969  
 Control Type: Vapor Return/Combustion  
 Vapor Capture Efficiency: <sup>2</sup> 70.00%  
 Average Fill Rate (gal/hr): 7,500  
 Captured Vapors Routed to: Vapor Combustor

Input CH <sub>4</sub> from Promax =	2.17%
Input CO <sub>2</sub> from Promax =	0.02%

**Uncontrolled Loading Emissions<sup>3,4</sup>**

Pollutant	Max. lb/hr	Avg. lb/hr	tonnes/yr	tons/yr
CH <sub>4</sub>	0.33	0.11	0.45	0.50
CH <sub>4</sub> as CO <sub>2</sub> e	8.17	2.86	11.36	12.52
CO <sub>2</sub>	<0.01	<0.01	<0.01	<0.01
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>8.18</b>	<b>2.86</b>	<b>11.36</b>	<b>12.52</b>

**SWN Production Company, LLC  
Gladys Briggs Pad  
Produced Water Truck Loading Emissions - Greenhouse Gases (Continued)**

**Uncaptured Loading Emissions<sup>3, 4</sup>**

<b>Pollutant</b>	<b>Max. lb/hr</b>	<b>Avg. lb/hr</b>	<b>tonnes/yr</b>	<b>tons/yr</b>
CH <sub>4</sub>	0.10	0.03	0.14	0.15
CH <sub>4</sub> as CO <sub>2</sub> e	2.45	0.86	3.41	3.76
CO <sub>2</sub>	<0.01	<0.01	<0.01	<0.01
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>2.45</b>	<b>0.86</b>	<b>3.41</b>	<b>3.76</b>

**API Compendium Table 5-12**

<b>Loading Type</b>	<b>Emission Factor (tonne TOC/10<sup>6</sup> gal)</b>
Rail/Truck - Submerged Loading - Dedicated Normal Service	0.91
Rail/Truck - Submerged Loading - Vapor Balance Service	1.51
Rail/Truck - Splash Loading - Dedicated Normal Service	2.20
Rail/Truck - Splash Loading - Vapor Balance Service	1.51
Marine Loading - Ships/Ocean Barges	0.28
Marine Loading - Barges	0.45

Notes:

<sup>1</sup> API Compendium of Greenhouse Gas Emissions Methodologies for the Oil and Gas Industry, Table 5-12.

<sup>2</sup> Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

<sup>3</sup> Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

<sup>4</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Tanks/Loading Vapor Combustor Emissions Calculations - Criteria and Hazardous Air Pollutants**

**Criteria and Hazardous Air Pollutant Emissions**

Unit ID	Pollutant	Emission Factors <sup>1</sup>	Total Captured Emissions <sup>2</sup>		Combustor Destruction Efficiency %	Total Controlled Emissions (Post-Capture and Combustion)	
			lb/hr	TPY		lb/hr	TPY
APC-COMB	NOx	0.138	-	-	-	1.10	4.84
	CO	0.2755	-	-	-	2.20	9.65
	PM	7.6	-	-	-	0.02	0.10
	VOC	Mass Balance	43.22	189.31	98.00%	0.86	3.79
	n-Hexane	Mass Balance	1.30	5.69	98.00%	0.03	0.11
	Benzene	Mass Balance	0.03	0.12	98.00%	<0.01	<0.01
	Toluene	Mass Balance	0.29	1.28	98.00%	0.01	0.03
	Ethylbenzene	Mass Balance	0.37	1.61	98.00%	0.01	0.03
	Xylenes	Mass Balance	1.08	4.71	98.00%	0.02	0.09

Notes:

<sup>1</sup> Although a vapor combustor is not considered a flare by design, the function is consistent in that it combusts a waste stream for the purpose of reducing emissions; therefore, flare emission factors for NOx and CO were used to provide the most accurate emissions estimates. Although the combustor is designed to be smokeless, PM emissions have been estimated using AP-42 Table 1.4-1 factor (lb/mmScf) for a conservative estimate.

Hours per Year: 8,760  
 Number of Combustors: 1

NOx and CO emission factors (lb/mmBtu): *TCEQ Air Permit Technical Guidance for Chemical Sources: Flares and Vapor Oxidizers*: High Btu waste streams (>1,000 Btu/scf) based on heat input to the combustor =

8.00 mmBtu/hr Total Heat Input

<sup>2</sup> Total captured emissions are based on 100% capture efficiency from storage tanks and 70% capture efficiency from truck loading with 98% destruction efficiency from the vapor combustor based on 8,760 hours of operation per year. Uncaptured vapors reported at loading emission units. Captured emissions from sources controlled by VOC combustor shown in following tables.

**SWN Production Company, LLC**

**Gladys Briggs Pad**

**Tanks/Loading Vapor Combustor Emissions Calculations - Criteria and Hazardous Air Pollutants (Continued)**

Source	Captured VOC Emissions	
	lb/hr	TPY
Condensate Storage Tanks	41.58	182.10
Produced Water Storage Tanks	1.06	4.64
Condensate Truck Loading	0.48	2.09
Produced Water Truck Loading	0.11	0.49
<b>Total VOC =</b>	<b>43.22</b>	<b>189.31</b>

Source	Captured HAP Emissions (lb/hr)				
	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes
Condensate Storage Tanks	1.25	0.03	0.28	0.35	1.04
Produced Water Storage Tanks	0.03	<0.01	0.01	0.01	0.03
Condensate Truck Loading	0.01	<0.01	<0.01	<0.01	0.01
Produced Water Truck Loading	<0.01	<0.01	<0.01	<0.01	<0.01
<b>Total HAP =</b>	<b>1.30</b>	<b>0.03</b>	<b>0.29</b>	<b>0.37</b>	<b>1.08</b>

Source	Captured HAP Emissions (TPY)				
	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes
Condensate Storage Tanks	5.48	0.11	1.23	1.55	4.54
Produced Water Storage Tanks	0.14	<0.01	0.03	0.04	0.12
Condensate Truck Loading	0.06	<0.01	0.01	0.02	0.05
Produced Water Truck Loading	0.01	<0.01	<0.01	<0.01	0.01
<b>Total HAP =</b>	<b>5.69</b>	<b>0.12</b>	<b>1.28</b>	<b>1.61</b>	<b>4.71</b>

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Tanks/Loading Vapor Combustor Emissions Calculations - Greenhouse Gases**

**Equipment Information**

Unit ID:	<b><u>APC-COMB</u></b>
Description:	Vapor Combustor
Number of Combustors:	1
Burner Design Capacity (mmBtu/hr):	8.00
Stream HHV (Btu/scf):	2,682
Annual Throughput (mmscf):	26.13
Annual Operating Hours:	8,760

**Greenhouse Gas (GHG) Emissions**

Pollutant	lb/hr	tonnes/yr	tons/yr
CO <sub>2</sub>	935.82	3,718.44	4,098.88
CH <sub>4</sub>	0.02	0.07	0.08
N <sub>2</sub> O	<0.01	0.01	0.01
CH <sub>4</sub> as CO <sub>2</sub> e	0.44	1.75	1.93
N <sub>2</sub> O as CO <sub>2</sub> e	0.53	2.09	2.30
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>	<b>936.78</b>	<b>3,722.28</b>	<b>4,103.11</b>

**40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)<sup>1</sup>**

Carbon Dioxide (CO <sub>2</sub> )	53.06
Methane (CH <sub>4</sub> )	1.00E-03
Nitrous Oxide (N <sub>2</sub> O)	1.00E-04

Notes:

<sup>1</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Vapor Combustor Pilot Emissions Calculations - Criteria Air Pollutants**

**Criteria Air Pollutant Emissions**

Unit ID	Pollutant	Emission Factors <sup>1</sup>	Emissions	
		(lb/mmscf)	lb/hr	TPY
EU-PILOT APC-COMB	NOx	100	<0.01	0.02
	CO	84	<0.01	0.02
	VOC	5.5	<0.01	<0.01
	SO <sub>2</sub>	0.6	<0.01	<0.01
	PM	7.6	<0.01	<0.01

905 Pilot Stream Heat Content (Btu/SCF)  
 8,760 Pilot Hours/Yr  
 50 Pilot Gas Flow Rate (SCFH)  
 45,250 Total Pilot Gas Fuel Use (Btu/hr)  
 0.44 Total Annual Fuel Use (MMSCF)

Notes:

<sup>1</sup> AP-42 Table 1.4-1, -2 (7/98)



**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Vapor Combustor Pilot Emissions Calculations - Hazardous Air Pollutants**

**Hazardous Air Pollutant Emissions**

Unit ID	Pollutant	Emission Factors <sup>1</sup>	Emissions	
		(lb/mmscf)	lb/hr	TPY
EU-PILOT APC-COMB	n-Hexane	1.8	<0.01	<0.01
	Formaldehyde	0.075	<0.01	<0.01
	Benzene	0.0021	<0.01	<0.01
	Toluene	0.0034	<0.01	<0.01
<b>Total HAPs =</b>			<b>&lt;0.01</b>	<b>&lt;0.01</b>

905 Pilot Stream Heat Content (Btu/SCF)  
 8,760 Pilot Hours/Yr  
 50 Pilot Gas Flow Rate (SCFH)  
 45,250 Total Pilot Gas Fuel Use (Btu/hr)  
 0.44 Total Annual Fuel Use (MMSCF)

Notes:

<sup>1</sup> AP-42 Table 1.4-3 (7/98)

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Vapor Combustor Pilot Emissions Calculations - Greenhouse Gases**

**Greenhouse Gas (GHG) Emissions**

Unit ID	Pollutant	Emissions		
		lb/hr	tonnes/yr	tons/yr
EU-PILOT APC-COMB	CO <sub>2</sub>	5.29	21.03	23.18
	CH <sub>4</sub>	<0.01	<0.01	<0.01
	N <sub>2</sub> O	<0.01	<0.01	<0.01
	CH <sub>4</sub> as CO <sub>2</sub> e	<0.01	0.01	0.01
	N <sub>2</sub> O as CO <sub>2</sub> e	<0.01	0.01	0.01
<b>Total CO<sub>2</sub> + CO<sub>2</sub>e =</b>		<b>5.30</b>	<b>21.05</b>	<b>23.21</b>

905 Pilot Stream Heat Content (Btu/SCF)  
 8,760 Pilot Hours/Yr  
 50 Pilot Gas Flow Rate (SCFH)  
 45,250 Total Pilot Gas Fuel Use (Btu/hr)  
 0.44 Total Annual Fuel Use (MMSCF)

**40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)<sup>1</sup>**

Carbon Dioxide (CO <sub>2</sub> )	53.06
Methane (CH <sub>4</sub> )	1.00E-03
Nitrous Oxide (N <sub>2</sub> O)	1.00E-04

Notes:

<sup>1</sup> CO<sub>2</sub>e = CO<sub>2</sub> equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO<sub>2</sub> = 1, CH<sub>4</sub> = 25, N<sub>2</sub>O = 298

**SWN Production Company, LLC  
Gladys Briggs Pad  
Fugitive Emissions Calculations - Criteria and Hazardous Air Pollutants and Greenhouse Gases**

**Equipment Information**

Source Type/Service	Number of Sources <sup>1</sup>	Em. Factor (lb/hr/source) <sup>2</sup>	Control Efficiency	TOC lb/hr	TOC TPY	VOC Wt %
Valves - Gas	82	9.92E-03	0.00%	0.81	3.56	17.47%
Flanges - Gas	310	8.60E-04	0.00%	0.27	1.17	17.47%
Compressor Seals - Gas	3	1.94E-02	0.00%	0.06	0.25	17.47%
Relief Valves - Gas	25	1.94E-02	0.00%	0.49	2.12	17.47%
Open-Ended Lines - Gas	0	4.41E-03	0.00%	0.00	0.00	17.47%
<b>Total TOC (Gas Components) =</b>				<b>1.62</b>	<b>7.11</b>	<b>-</b>
Valves - Light Oil	55	5.51E-03	0.00%	0.30	1.33	94.69%
Connectors - Light Oil	214	4.63E-04	0.00%	0.10	0.43	94.69%
Pump Seals - Light Oil	0	2.87E-02	0.00%	0.00	0.00	94.69%
Other - Light Oil	0	1.65E-02	0.00%	0.00	0.00	94.69%
<b>Total TOC (Liquid Components) =</b>				<b>0.40</b>	<b>1.76</b>	<b>-</b>

**VOC and Greenhouse Gas Emissions**

Source Type/Service	VOC			CH <sub>4</sub>		CO <sub>2</sub>	
	lb/hr	TPY	lb/yr	lb/hr	TPY	lb/hr	TPY
Valves - Gas	0.14	0.62	1,245.04	0.51	2.23	<0.01	0.01
Flanges - Gas	0.05	0.20	407.93	0.17	0.73	<0.01	<0.01
Compressor Seals - Gas	0.01	0.04	89.08	0.04	0.16	<0.01	<0.01
Relief Valves - Gas	0.08	0.37	742.30	0.30	1.33	<0.01	0.01
Open-Ended Lines - Gas	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Components in Gas Service =</b>	<b>0.28</b>	<b>1.24</b>	<b>2,484.35</b>	<b>1.01</b>	<b>4.45</b>	<b>0.01</b>	<b>0.03</b>
Valves - Light Oil	0.29	1.26	2,514.53	0.01	0.03	<0.01	<0.01
Connectors - Light Oil	0.09	0.41	821.84	<0.01	0.01	<0.01	<0.01
Pump Seals - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Components in Liquid Service =</b>	<b>0.38</b>	<b>1.67</b>	<b>3,336.38</b>	<b>0.01</b>	<b>0.04</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>
<b>Total (Gas + Liquid Components) =</b>	<b>0.66</b>	<b>2.91</b>	<b>5,820.73</b>	<b>1.02</b>	<b>4.49</b>	<b>0.01</b>	<b>0.03</b>

SWN Production Company, LLC  
 Gladys Briggs Pad  
 Fugitive Emissions Calculations (Continued)

**Hazardous Air Pollutant (HAP) Emissions (lb/hr)**

Source Type/Service	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes	2,2,4-Tri.	Total
Valves - Gas	<0.01	<0.01	<0.01	0.00	<0.01	0.00	<0.01
Flanges - Gas	<0.01	<0.01	<0.01	0.00	<0.01	0.00	<0.01
Compressor Seals - Gas	<0.01	<0.01	<0.01	0.00	<0.01	0.00	<0.01
Relief Valves - Gas	<0.01	<0.01	<0.01	0.00	<0.01	0.00	<0.01
Open-Ended Lines - Gas	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Components in Gas Service =</b>	<b>0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>0.00</b>	<b>&lt;0.01</b>	<b>0.00</b>	<b>0.01</b>
Valves - Light Oil	0.01	<0.01	<0.01	<0.01	0.01	0.00	0.02
Connectors - Light Oil	<0.01	<0.01	<0.01	<0.01	<0.01	0.00	0.01
Pump Seals - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Components in Liquid Service =</b>	<b>0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>0.00</b>	<b>0.03</b>
<b>Total (Gas + Liquid Components) =</b>	<b>0.02</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>0.00</b>	<b>0.03</b>

**Hazardous Air Pollutant (HAP) Emissions (TPY)**

Source Type/Service	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes	2,2,4-Tri.	Total
Valves - Gas	0.01	<0.01	<0.01	0.00	<0.01	0.00	0.01
Flanges - Gas	<0.01	<0.01	<0.01	0.00	<0.01	0.00	<0.01
Compressor Seals - Gas	<0.01	<0.01	<0.01	0.00	<0.01	0.00	<0.01
Relief Valves - Gas	0.01	<0.01	<0.01	0.00	<0.01	0.00	0.01
Open-Ended Lines - Gas	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Components in Gas Service =</b>	<b>0.02</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>0.00</b>	<b>&lt;0.01</b>	<b>0.00</b>	<b>0.03</b>
Valves - Light Oil	0.04	<0.01	0.01	0.01	0.03	0.00	0.09
Connectors - Light Oil	0.01	<0.01	<0.01	<0.01	0.01	0.00	0.03
Pump Seals - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Components in Liquid Service =</b>	<b>0.05</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>0.02</b>	<b>0.04</b>	<b>0.00</b>	<b>0.12</b>
<b>Total (Gas + Liquid Components) =</b>	<b>0.08</b>	<b>&lt;0.01</b>	<b>0.01</b>	<b>0.02</b>	<b>0.04</b>	<b>0.00</b>	<b>0.15</b>

**SWN Production Company, LLC  
 Gladys Briggs Pad  
 Fugitive Emissions Calculations (Continued)**

**Typical Component Count per Equipment Type based on Representative Facility<sup>3</sup>**

<b>Source Type/Service</b>	<b>WH</b>	<b>GPU</b>	<b>HT</b>	<b>LPT</b>	<b>FGC</b>	<b>OT</b>	<b>TT-O</b>
Valves - Gas	12	3	2	5	5	0	0
Flanges - Gas	37	15	9	24	33	3	2
Compressor Seals - Gas	0	0	0	0	3	0	0
Relief Valves - Gas	1	3	1	1	1	1	1
Open-Ended Lines - Gas	0	0	0	0	0	0	0
Valves - Light Oil	0	5	6	12	3	6	9
Connectors - Light Oil	0	20	24	48	12	24	30
Pump Seals - Light Oil	0	0	0	0	0	0	0
Other - Light Oil	0	0	0	0	0	0	0

<b>Equipment Type</b>	<b>WH</b>	<b>GPU</b>	<b>HT</b>	<b>LPT</b>	<b>FGC</b>	<b>OT</b>	<b>TT-O</b>
Number of Each Type On Pad =	5	5	1	0	1	2	1

SWN Production Company, LLC  
 Gladys Briggs Pad  
 Fugitive Emissions Calculations (Continued)

Speciated Gas Analysis<sup>4</sup>

Component	Molecular Weight	Mole %	Equiv. Wt. Basis	Weight %	HC Weight %	lb/hr	TPY
Hydrogen Sulfide	34.082	0.000%	0.000	0.000%	-	0.00	0.00
Carbon Dioxide	44.010	0.178%	0.078	0.382%	-	0.01	0.03
Nitrogen	28.013	0.324%	0.091	0.443%	-	0.01	0.03
Methane	16.042	79.264%	12.716	62.005%	62.521%	1.01	4.45
Ethane	30.069	13.533%	4.069	19.843%	20.008%	0.32	1.42
Propane	44.096	4.099%	1.807	8.814%	8.887%	0.14	0.63
i-Butane	58.122	0.616%	0.358	1.746%	1.760%	0.03	0.13
n-Butane	58.122	0.991%	0.576	2.809%	2.832%	0.05	0.20
i-Pentane	72.149	0.324%	0.234	1.140%	1.149%	0.02	0.08
n-Pentane	72.149	0.246%	0.177	0.865%	0.873%	0.01	0.06
n-Hexane	86.175	0.080%	0.069	0.336%	0.339%	0.01	0.02
Other Hexanes	86.175	0.162%	0.140	0.681%	0.686%	0.01	0.05
Heptanes (as n-Heptane)	100.202	0.121%	0.121	0.591%	0.596%	0.01	0.04
Benzene	78.114	0.002%	0.002	0.008%	0.008%	<0.01	<0.01
Toluene	92.141	0.005%	0.005	0.022%	0.023%	<0.01	<0.01
Ethylbenzene	106.167	0.000%	0.000	0.000%	0.000%	0.00	0.00
Xylenes	106.167	0.002%	0.002	0.010%	0.010%	<0.01	<0.01
2,2,4-Trimethylpentane	114.230	0.000%	0.000	0.000%	0.000%	0.00	0.00
Octanes (as n-Octane)	114.229	0.041%	0.047	0.228%	0.230%	<0.01	0.02
Nonanes (as n-Nonane)	128.255	0.010%	0.013	0.063%	0.063%	<0.01	<0.01
Decanes (as n-Decane)	142.282	0.002%	0.003	0.014%	0.014%	<0.01	<0.01
<b>TOTAL =</b>		<b>100.00%</b>	<b>20.51</b>	<b>100.00%</b>	<b>100.00%</b>	<b>1.64</b>	<b>7.17</b>
		<b>TOTAL HC =</b>	<b>20.34</b>	<b>TOTAL VOC =</b>	<b>17.47%</b>	<b>0.28</b>	<b>1.24</b>
				<b>TOTAL HAP =</b>	<b>0.38%</b>	<b>0.01</b>	<b>0.03</b>

SWN Production Company, LLC  
 Gladys Briggs Pad  
 Fugitive Emissions Calculations (Continued)

Speciated Liquids Analysis<sup>4</sup>

Component	Molecular Weight	Mole %	Equiv. Wt. Basis	Weight %	HC Weight %	lb/hr	TPY
Hydrogen Sulfide	34.082	0.000%	0.000	0.000%	-	0.00	0.00
Carbon Dioxide	44.010	0.031%	0.014	0.016%	-	<0.01	<0.01
Nitrogen	28.013	0.033%	0.009	0.011%	-	<0.01	<0.01
Methane	16.042	11.976%	1.921	2.279%	2.280%	0.01	0.04
Ethane	30.069	8.481%	2.550	3.025%	3.026%	0.01	0.05
Propane	44.096	7.323%	3.229	3.831%	3.832%	0.02	0.07
i-Butane	58.122	2.306%	1.340	1.590%	1.590%	0.01	0.03
n-Butane	58.122	5.338%	3.103	3.680%	3.681%	0.01	0.06
i-Pentane	72.149	3.779%	2.727	3.234%	3.235%	0.01	0.06
n-Pentane	72.149	3.851%	2.778	3.296%	3.297%	0.01	0.06
n-Hexane	86.175	2.941%	2.534	3.007%	3.007%	0.01	0.05
Other Hexanes	86.175	4.856%	4.185	4.964%	4.966%	0.02	0.09
Heptanes (as n-Heptane)	100.202	11.138%	11.160	13.239%	13.243%	0.05	0.23
Benzene	78.114	0.068%	0.053	0.063%	0.063%	<0.01	<0.01
Toluene	92.141	0.617%	0.569	0.674%	0.675%	<0.01	0.01
Ethylbenzene	106.167	0.676%	0.718	0.851%	0.852%	<0.01	0.02
Xylenes	106.167	1.977%	2.099	2.490%	2.491%	0.01	0.04
2,2,4-Trimethylpentane	114.230	0.000%	0.000	0.000%	0.000%	0.00	0.00
Octanes (as n-Octane)	114.229	10.611%	12.121	14.379%	14.383%	0.06	0.25
Nonanes (as n-Nonane)	128.255	6.834%	8.765	10.398%	10.400%	0.04	0.18
Decanes (as n-Decane)	142.282	17.165%	24.423	28.972%	28.980%	0.12	0.51
<b>TOTAL =</b>		<b>100.00%</b>	<b>84.30</b>	<b>100.00%</b>	<b>100.00%</b>	<b>0.40</b>	<b>1.76</b>
		<b>TOTAL HC =</b>	<b>84.27</b>	<b>TOTAL VOC =</b>	<b>94.69%</b>	<b>0.38</b>	<b>1.67</b>
				<b>TOTAL HAP =</b>	<b>7.09%</b>	<b>0.03</b>	<b>0.12</b>

Notes:

<sup>1</sup> Component counts taken by equipment type at representative facility and made site-specific according to the number of each equipment type at this site.

<sup>2</sup> Emission Factor Source: EPA-453/R-95-017. TOC multiplied by pollutant content of streams (weight %) to obtain pollutant emissions.

<sup>3</sup> Equipment Type Key: WH = Well Head, GPU = Gas Production Unit, HT = Heater Treater, LPT = Low-Pressure Tower, FGC = Flash Gas Compressor, OT = Oil Tank, TT-O = Tank Truck - Oil

<sup>4</sup> Analyses located in Attachment L.

**SWN Production Company, LLC  
Gladys Briggs Pad  
Fugitive Unpaved Haul Road Emissions Calculations**

**Facility Data<sup>1</sup>**

Vehicle Type	Light Vehicles (Pick-ups and Cars)	Medium Trucks (Service Trucks)	Heavy Trucks (Tanker Trucks) <sup>2</sup>
Average vehicle weight ((empty + full)/2) (tons)	2	15	23.5
Number of wheels per vehicle type (w)	4	10	18
Average number of round trips/day/vehicle type	4	2	8
Distance per round trip (miles/trip)	1.61	1.61	1.61
Vehicle miles travelled (miles/day)	6.81	3.40	13.62
Number of days operational (days/yr)	365	365	365
Vehicle miles travelled VMT (miles/yr)	2,485.18	1,242.59	4,970.37
Average vehicle speed S (mph)	10	10	10
Average number of round trips/hour/vehicle type	0.23	0.12	0.47
Average number of round trips/year/vehicle type	1,542	771	3,084
Estimated maximum number of round trips/hour/vehicle type	3	3	2
Estimated maximum number of round trips/day/vehicle type	6	4	10
Estimated maximum number of round trips/year/vehicle type	2,300	1,533	4,005

190 Average Tanker Volume (bbbl)  
7,980 Gallons Tanker Volume  
1,498 bwpd  
107 bopd  
8.45 Tanker Trucks per Day  
3,705 Length Leased Access Road (ft)  
550 Longest Pad Side (ft)  
8,510 Total Round Trip Feet

**Formula & Calculation Inputs**

$$E = k(s/12)^a * (W/3)^b * ((365-P) / 365)$$

where:

Days per year  
Annual average hours per day of road operations  
k = PM Particle Size Multiplier  
k = PM10 Particle Size Multiplier  
k = PM2.5 Particle Size Multiplier  
s = Surface Material Silt Content  
P = Number of days > 0.01 inch of rain  
a = PM Constant  
a = PM10 & PM2.5 Constant  
b = PM, PM10, & PM2.5 Constant  
Total hourly fleet vehicle miles travelled (miles/hr)  
Total annual fleet vehicle miles travelled (miles/yr)<sup>3</sup>  
Average wheels<sup>4</sup>  
Average vehicle weight of the fleet (W)<sup>5</sup>  
Moisture Ratio  
Control Efficiency (CF)

Reference : AP-42, Section 13.2.2 (11/06), Equation 1a and 2

Rate	Units	Comment
365		
18		
4.90	lb/VMT	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM)
1.50	lb/VMT	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM <sub>10</sub> )
0.15	lb/VMT	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM <sub>2.5</sub> )
3.9	%	State Default Data from AP-42 Data (1999 NEI Data)
150	days/year	AP-42 Section 13.2.2 (11/06), Figure 13.2.2-1
0.70	unitless	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM)
0.90	unitless	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM <sub>10</sub> & PM <sub>2.5</sub> )
0.45	unitless	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2
1.32	VMT/hr	
8,698.15	VMT/yr	
13		
16.1	tons	
1.00		Estimated based on 0.2% uncontrolled surface water content assuming no watering
0.00	%	Based on Moisture Ratio and Figure 13.2.2-2 Control

EPA - BID Document 13.2.2 - 1998

Continued on Next Page



SWN Production Company, LLC  
 Gladys Briggs Pad  
 Fugitive Unpaved Haul Road Emissions Calculations

Emission Calculations

Vehicle Type	Emission Factors			Control Efficiency (%)	Total Vehicle Miles Travelled		Uncontrolled Emission Rates			Uncontrolled Emission Rates		
	PM	PM <sub>10</sub>	PM <sub>2.5</sub>		(VMT/hr)	(VMT/yr)	Total PM	Total PM <sub>10</sub>	PM <sub>2.5</sub>	Total PM	Total PM <sub>10</sub>	PM <sub>2.5</sub>
	(lbs/VMT)	(lbs/VMT)	(lbs/VMT)				(lb/hr)	(lb/hr)	(lb/hr)	(tons/yr)	(tons/yr)	(tons/yr)
Light Vehicles	2.80	0.69	0.07	0.00	0.38	2,485.18	1.06	0.26	0.03	3.48	0.85	0.09
Medium Trucks	2.80	0.69	0.07	0.00	0.19	1,242.59	0.53	0.13	0.01	1.74	0.43	0.04
Heavy Trucks	2.80	0.69	0.07	0.00	0.76	4,970.37	2.12	0.52	0.05	6.96	1.70	0.17
<b>Total =</b>				<b>0.00</b>	<b>1.32</b>	<b>8,698.15</b>	<b>3.71</b>	<b>0.91</b>	<b>0.09</b>	<b>12.19</b>	<b>2.98</b>	<b>0.30</b>

Notes:

- 1) Facility vehicle data based on estimates, GP5.1 and AP-42 13.2.2-2 defaults for industrial unpaved roads
- 2) Tank trucker average vehicle weight as  $(W_{(empty)} + W_{(full)})/2 = (7 + 40)/2 = 23.7$  tons
- 3) Average vehicle miles travelled (VMT/yr) as (No. of round trip/vehicle \* No. of vehicles/type \* Roundtrip miles/trip) \* 365 days/yr \* No. of vehicle type)
- 4) Average wheels calculated as average of (No. of wheels per vehicle type \* No. of vehicle/type)
- 5) Average vehicle fleet calculated as (Average weight of vehicle type \* Percentage of each vehicle type on unpaved surface). Percentage of each vehicle type =  $VMT_{vehicle\ type}/VMT$
- 6) Minimum one-per-day average pick-up trucks and service trucks even if tanker not required every day.
- 7) Per EPA BID calculations, all emissions based on average trips. Estimated maximum hourly, daily and yearly trips provided for information only.

Calculation of Emission Factors (AP-42, 13.2.2)

Equation 1a:  $EF = k(s/12)^a (W/3)^b$  where *k*, *a*, and *b* are empirical constants and  
*EF* = size-specific emission factor (lb/VMT)  
*s* = surface material silt content %  
*W* = mean vehicle weight (tons)

Equation 2:  $EF_{ext} = EF * ((365 - P)/365)$  where:  
*EF<sub>ext</sub>* = annual size-specific emission factor extrapolated for natural mitigation, lb/VMT  
*EF* = emission factor from Equation 1a  
*P* = number of days in a year with at least 0.01 inches of precipitation

Calculation of Emissions

$E = EF_{ext} * VMT/yr * ((1 - CF)/100) * 1 \text{ ton}/2000 \text{ lbs}$  where:  
*E* = annual emissions (tons/yr)  
*EF<sub>ext</sub>* = annual size-specific emission factor extrapolated for natural mitigation, lb/VMT  
*CF* = control efficiency (%)

**ATTACHMENT U: FACILITY-WIDE EMISSION SUMMARY SHEETS**

**ATTACHMENT U – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET**

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID #	NO <sub>x</sub>		CO		VOC		SO <sub>2</sub>		PM <sub>10</sub>		PM <sub>2.5</sub>		CH <sub>4</sub>		GHG (CO <sub>2</sub> e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
EP-ENG1	0.32	1.40	0.64	2.80	0.22	0.98	<0.01	<0.01	0.02	0.11	0.02	0.11	<0.01	0.01	155.19	679.73
EP-GPU1 - EP-GPU5	0.55	2.42	0.46	2.03	0.03	0.13	<0.01	0.01	0.04	0.18	0.04	0.18	0.01	0.05	585.49	2564.44
EP-HT1	0.06	0.24	0.05	0.20	<0.01	0.01	<0.01	<0.01	<0.01	0.02	<0.01	0.02	<0.01	<0.01	58.55	256.44
EP-LH1 - EP-LH4	0.66	2.90	0.56	2.44	0.04	0.16	<0.01	0.02	0.05	0.22	0.05	0.22	0.01	0.06	702.59	3077.33
EP-LOAD-COND	-	-	-	-	0.20	0.89	-	-	-	-	-	-	<0.01	0.01	0.06	0.27
EP-LOAD-PW	-	-	-	-	0.05	0.21	-	-	-	-	-	-	0.03	0.15	0.86	3.76
APC-COMB	1.11	4.86	2.21	9.67	0.86	3.79	<0.01	<0.01	0.02	0.10	0.02	0.10	0.02	0.08	942.08	4,126.32
<b>TOTAL</b>	2.70	11.82	3.91	17.15	1.41	6.18	0.01	0.04	0.14	0.63	0.14	0.63	0.08	0.36	2,444.82	10,708.29

Annual emissions shall be based on 8,760 hours per year of operation for all emission units.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

*Note that the emissions from the APC-COMB includes uncombusted emissions from the tanks and loading operations, as well as combustor pilot emissions.*

**ATTACHMENT U – FACILITY-WIDE HAP CONTROLLED EMISSIONS SUMMARY SHEET**

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID #	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
EP-ENG1	0.09	0.38	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	0.10	0.44
EP-GPU1 - EP-GPU5	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	-	-	0.01	0.04	0.01	0.05
EP-HT1	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	-	-	<0.01	<0.01	<0.01	<0.01
EP-LH1 - EP-LH4	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	-	-	0.01	0.05	0.01	0.05
EP-LOAD-COND	-	-	<0.01	<0.01	<0.01	0.01	<0.01	0.01	0.01	0.02	0.01	0.03	0.01	0.06
EP-LOAD-PW	-	-	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	0.01	<0.01	0.01	<0.01	0.01
APC-COMB	<0.01	<0.01	<0.01	<0.01	0.01	0.03	0.01	0.03	0.02	0.09	0.03	0.11	0.06	0.27
<b>TOTAL</b>	0.09	0.38	<0.01	0.01	0.01	0.04	0.01	0.04	0.03	0.12	0.06	0.25	0.20	0.89

Annual emissions shall be based on 8,760 hours per year of operation for all emission units.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

*Note that the emissions from the APC-COMB includes uncombusted emissions from the tanks and loading operations, as well as combustor pilot emissions.*

## ATTACHMENT V: CLASS II LEGAL ADVERTISEMENT

Note: Affidavit of Publication will be submitted upon receipt by SWN from the publisher.

### AIR QUALITY PERMIT NOTICE Notice of Application

Notice is given that SWN Production Company, LLS. has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a G70-D General Permit Registration for a natural gas production facility (Gladys Briggs Pad) located in Marshall County, West Virginia. From Interstate 470 in Wheeling, WV, take exit 2 (Bethlehem). Turn left after exiting onto CR 91/1 if traveling west bound on Interstate 470. Turn right onto CR 91/1 if traveling east bound on Interstate 470. Travel 0.46 miles to SR 88 and bear right at the stop light onto SR 88 South. (Ridgecrest Road). Travel 8.27 miles on CR 88 to the intersection of SR 88 and US 250 and turn left onto SR 250 towards Cameron, WV. Upon arriving in Cameron on US 250, continue to travel south on US 250 for 3.44 miles to the intersection of US 250 and CR 94 (Fish Ridge Road) and turn right onto CR 94. (Begin the 3.44 mile distance to CR 94 from the intersection of CR 25/2 (Loudenville Road) and US 250 in Cameron.) Travel 0.736 miles on CR 94 to the intersection of CR 94 and CR 96 (Reid Ridge Road). Turn right to stay on CR 94 (Fish Ridge). Travel 2.773 miles further on CR 94 to future well pad entrance on right. Lat/Long: 39.767872, -80.615927.

The applicant estimates the potential to discharge the following Regulated Air Pollutants will be:

Nitrogen Oxides (NOx)	11.82 tons/yr
Carbon Monoxide (CO)	17.15 tons/yr
Volatile Organic Compounds (VOC)	9.09 tons/yr
Sulfur Dioxide (SO <sub>2</sub> )	0.04 tons/yr
Particulate Matter (PM)	12.82 tons/yr
Acetaldehyde	0.02 tons/yr
Acrolein	0.01 tons/yr
Benzene	0.01 tons/yr
Ethylbenzene	0.06 tons/yr
Formaldehyde	0.38 tons/yr
Methanol	0.02 tons/yr
n-Hexane	0.32 tons/yr
Toluene	0.05 tons/yr
Xylenes	0.15 tons/yr
Carbon Dioxide	10,693.29 tons/yr
Methane	4.85 tons/yr
Nitrous Oxide	0.02 tons/yr
CO <sub>2</sub> Equivalent	10,820.44 tons/yr

The change in equipment and operations is planned to begin on or about March 30, 2017. Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57<sup>th</sup> Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of

SWN Production Company, LLC  
Gladys Briggs Pad  
February 2017

---

publication of this notice. Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the 17<sup>th</sup> of February 2017

By: SWN Production Company, LLC  
Carla Suszkowski, P.E.  
Regulatory Manager – West Virginia Division  
10000 Energy Drive  
Spring, TX 77389